one
LIGHT

2027

Lighting Catalogue

one
LIGHT

Message from our CEO

We are proud to introduce the 2027 ONE Light Catalogue. Each new catalogue represents another step forward in expanding our range of products and improving the solutions we offer to our partners and customers. This catalogue reflects our continuous commitment to innovation, product development, and our goal of supporting lighting professionals worldwide with reliable and forward-thinking solutions.

A key strategy in our product development is the ongoing transition of many fittings to CCT Variable (CCT V), Power Variable (PV) and Beam Variable (BV) versions. These solutions allow installers and end users to select the desired colour temperature, wattage and beam angle during installation. This offers greater flexibility, simplifies the project planning process, and simultaneously reduces stock complexity.

In this edition of our catalogue, we present a number of new products alongside important upgrades to our existing product portfolio.

Among the key updates, we have:

- Expanded our magnetic range by introducing profiles and fittings in white finish, CCT Variable fittings and have upgraded DALI fittings to DT8 CCT Tunable. You can see these in Section 09 of our catalogue.
- Enhanced the flexibility of our magnetic lighting solutions by introducing the new Plug & Play system which can be found on pages 315-322 and the new FLAT system which can be found on pages 323-330.
- Introduced a new DALI 3-phase track as well as the DALI track spot 65670CTL. This is our first DALI DT8 tunable fitting for our new DALI 3-phase track.
- Increased our selection of drivers, emergency kits, sensors and included CCT Variable and Power Variable LED Lamps.
- and finally, we have continued to upgrade our existing products to CRI90 where possible.

The combination of our new products as well as upgrades to existing ones ensures that we are in the position to offer complete lighting solutions across a wide variety of projects.

In addition to the above, ONE Light continues to grow internationally. Alongside the construction of our new 10,000 m² consolidated warehouse and headquarters, we have expanded our global network by establishing partnerships with more than 25 new distributors worldwide, further strengthening our presence in over 65 countries.

Together with our partners, we remain committed to delivering innovative solutions, quality products and dependable service which is the foundation to build strong, long-term collaborations.

On behalf of the entire ONE Light team, I would like to sincerely thank you for your continued trust and support and look forward to our continued mutual success.

Yiotis Demetriou
CEO
ONE Light Ltd

"Do it with passion or forget it!"

The Company

Since 2011, ONE Light has been developing modern technical LED lighting solutions for retailers, wholesalers and distribution partners across more than 65 countries worldwide.

By combining contemporary design, reliable performance and competitive pricing, we help our partners succeed in a constantly evolving lighting market.

Warehouse

Our new 10,000 m² modern warehouse allows ONE Light to maintain 99% stock availability across the catalogue, enabling orders to be prepared for dispatch within 24 hours and ensuring reliable and efficient order preparation.

Graphics Department

Our graphics team develops all product packaging and catalogue materials in-house, ensuring a consistent and high-quality presentation of every ONE Light product. All photography is produced in our dedicated photo studio to maintain accuracy and visual excellence.

Technical Department

All ONE Light products undergo thorough testing to meet the technical performance and quality standards required by our international partners and markets.

Online Catalogue Order

Request the PDF version of our latest catalogue by filling in the application form on our website and explore the complete ONE Light product range.

I would like to receive the ONE Light catalogue:

Name *

Company Name

Company Website

Email address *

Tel No.

Country *

–

Profession *

- Lighting retailer (Shop)
- Lighting wholesaler / distributor
- Lighting installer / electrician
- Architect / Designer
- Private use
- Other

Type verification code *

5149

ORDER

B2B Partner Portal/e-shop

Everything you need to work with ONE Light, available instantly through our online platform.

Key Features

Our B2B portal provides quick access to essential tools, product information and resources, helping our partners manage projects, orders and technical documentation efficiently.

Available Through the B2B Portal

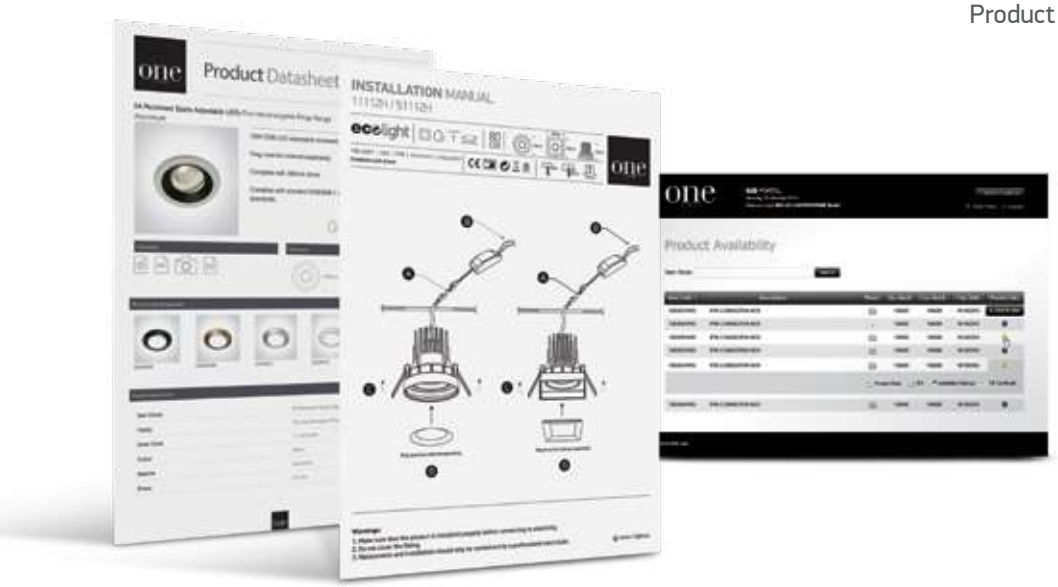

- Product availability & arrival dates
- Open orders
- Photos
- Product data sheets
- Installation manuals
- Photometric files
- CE certificates
- Account statements

B2B Orders/e-shop

Registered customers and distributors can easily place orders through our B2B online platform.

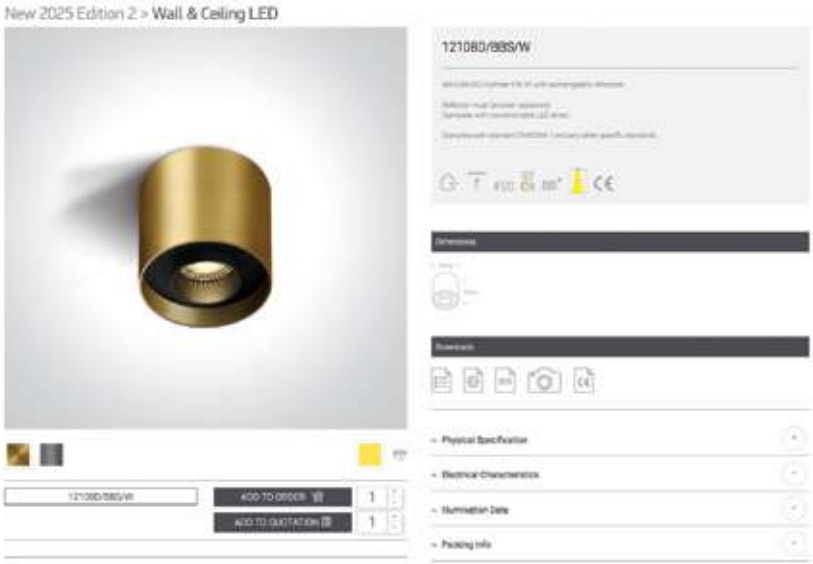

1

Select the product code and quantity, then add the item to your order.

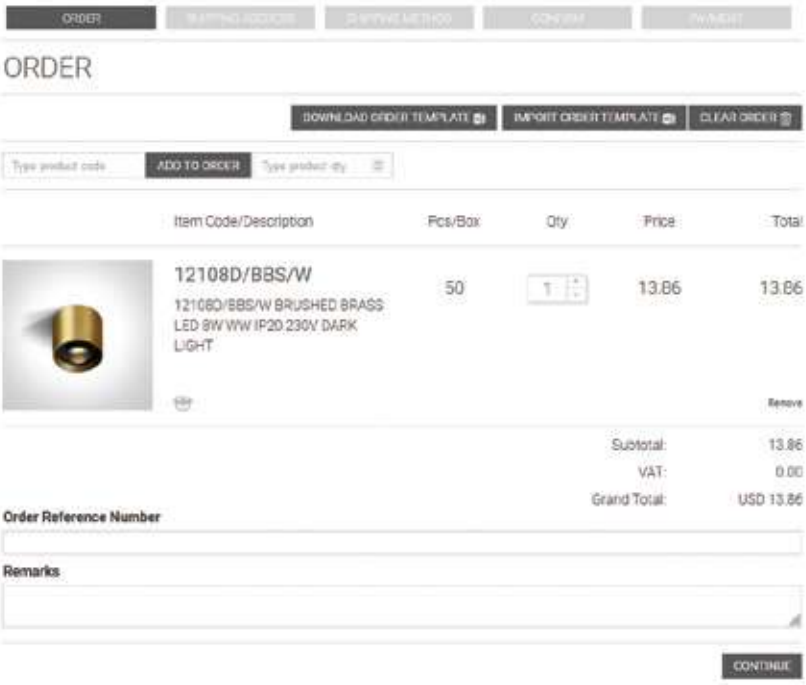

2

Review your order details before proceeding.

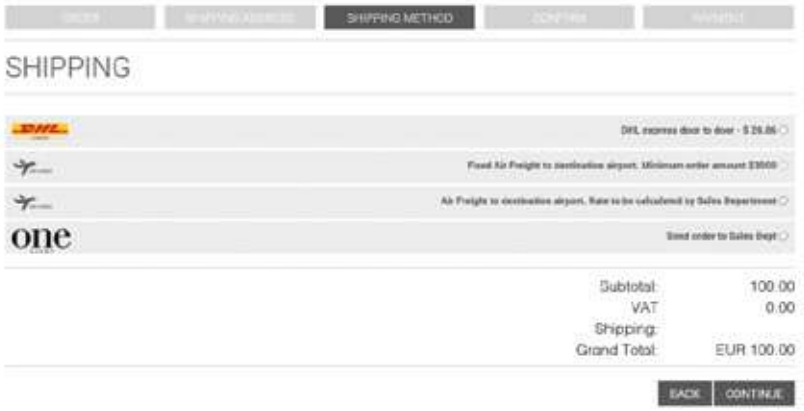

3

Choose your shipping method and payment option to complete the order.

B2B Quotations/e-shop

Registered partners can quickly create and manage quotations through our B2B online platform.

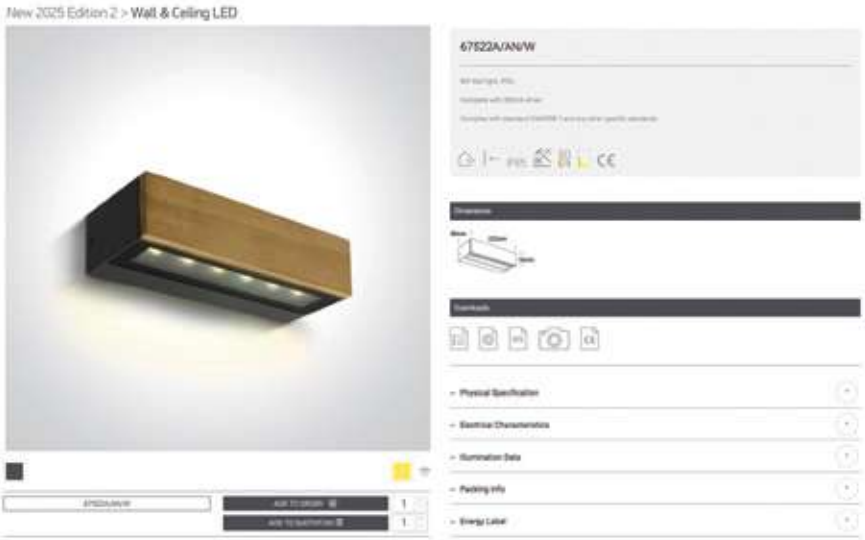

1

Select the product code and quantity, then add the item to your quotation.

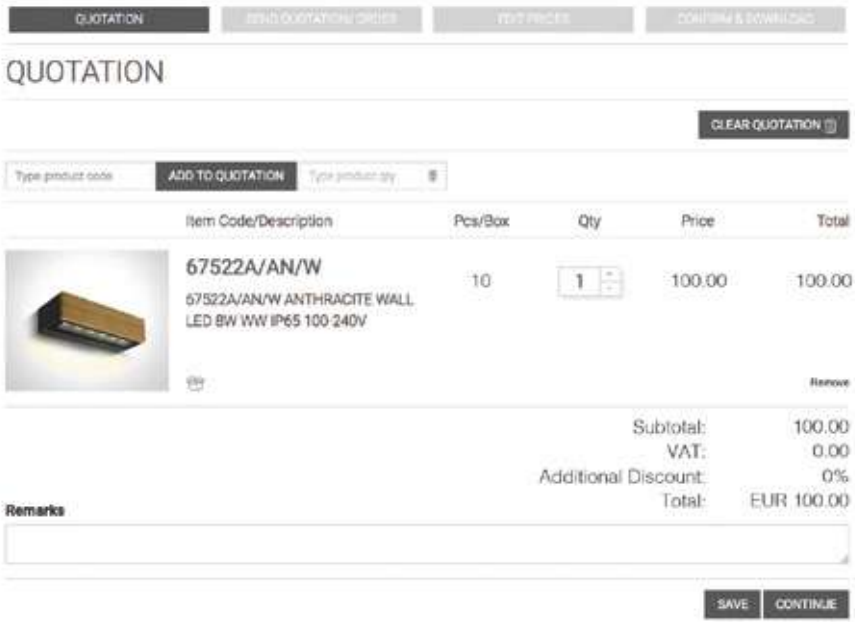

2

Review your quotation summary before proceeding.

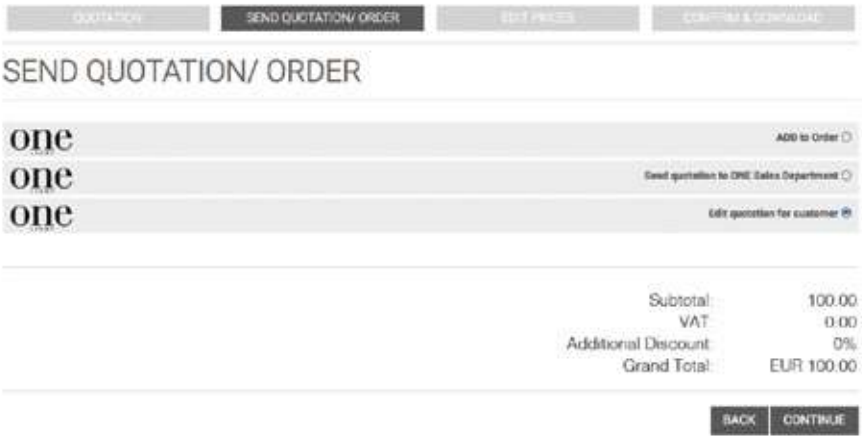

3

Choose from the following options:

1. Create an order from your quotation
2. Send the quotation to our sales department
3. Generate a quotation for your customer

Customer Quotations/e-shop

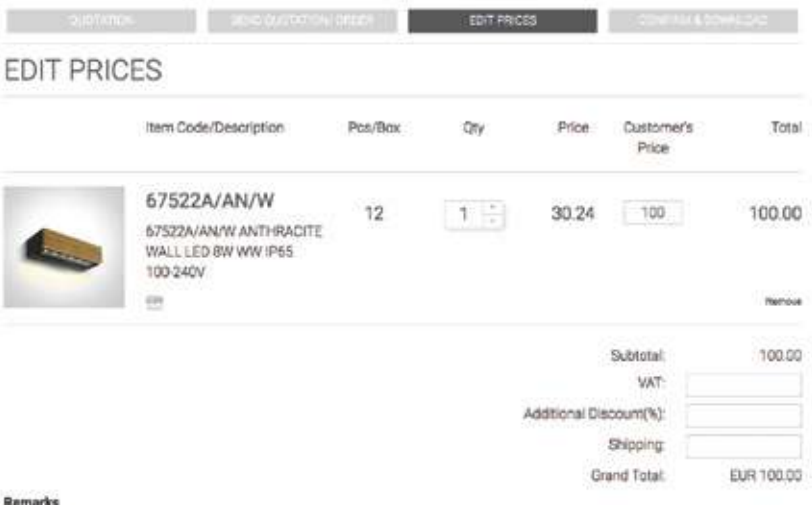

4

1. Select product codes and quantities
2. Add the items to your quotation
3. Adjust prices for your customers

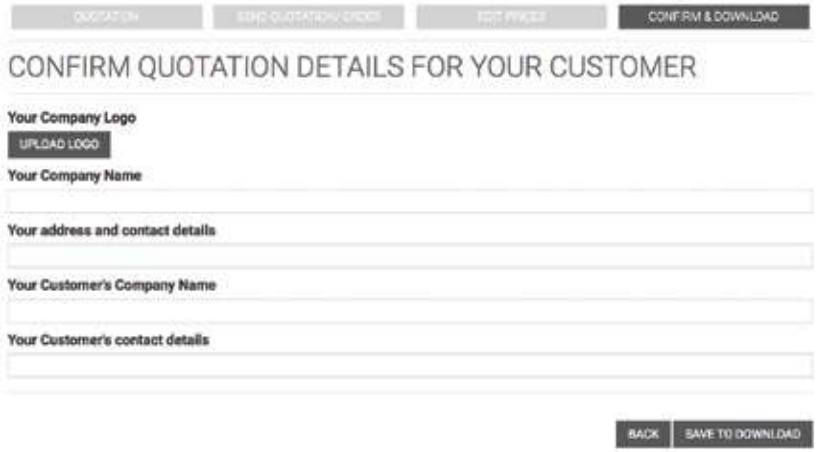

5

Upload your company logo and enter your customer's contact details to complete the quotation.

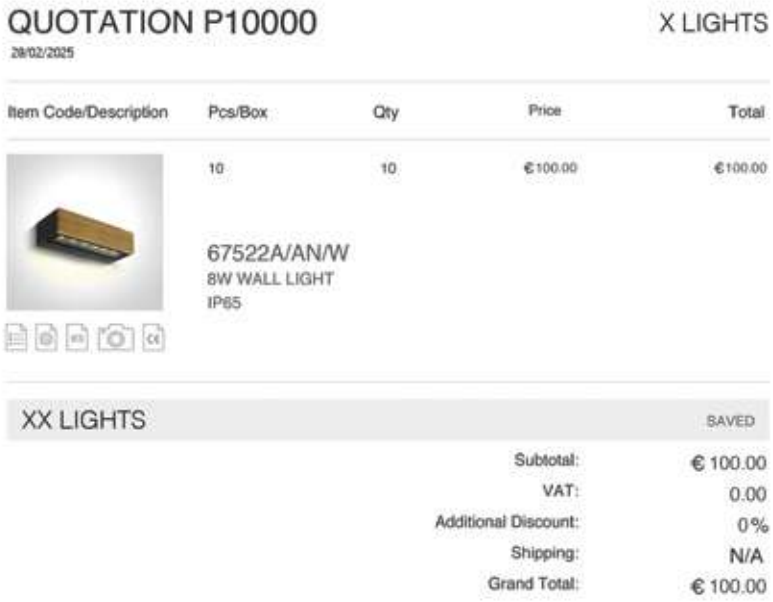

6

Generate a PDF quotation with product links that can be easily shared with your customers.

Catalogue Symbols

The following symbols are used throughout the catalogue to quickly identify key product characteristics, specifications and installation requirements.

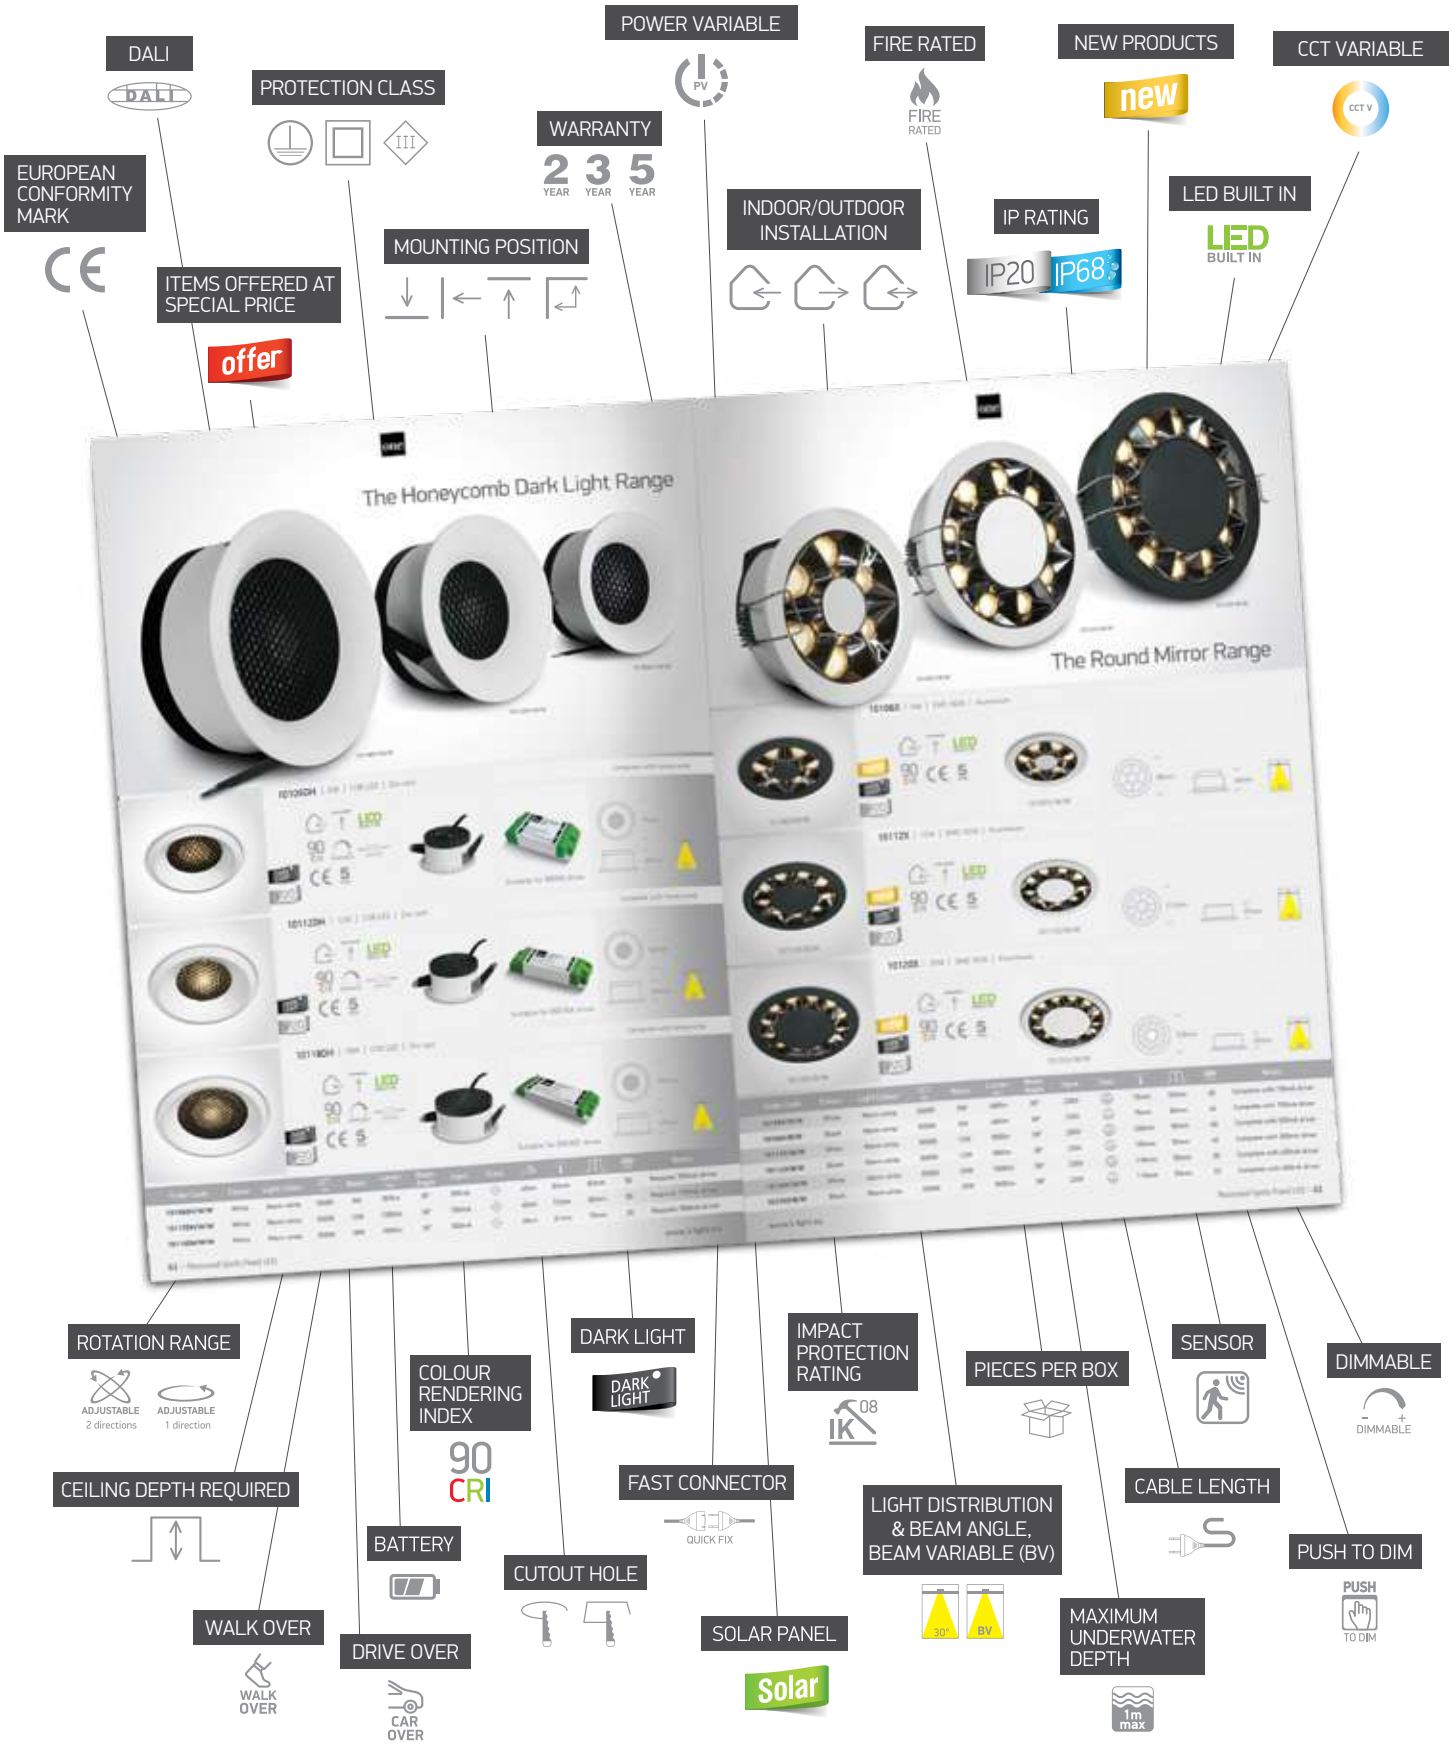

Colour Codes

The following codes indicate the available product colours and finishes referenced in product descriptions and ordering codes.

W White | AN Anthracite | B Black | G Grey | AL Aluminium

BS Brass | ABS Antique brass | GL Gold | CU Copper | DC Dark chrome

BBS Brushed brass | MG Metal grey

SS Stainless steel

CH Champagne

AL Aluminium

BGL Brushed gold

BAN Brushed anthracite

ABS Antique brass

C Chrome

MC Brushed chrome

BR Rust brown

BBR Brushed brown

Why ONE Light?

Reliable solutions for lighting professionals worldwide.

24-Hour Dispatch

Thanks to our efficient logistics network, most orders are prepared for dispatch within 24 hours of confirmation. Our team works with trusted freight partners to provide the most suitable shipping options and competitive sea and air freight rates worldwide.

99% Stock Availability

ONE Light maintains 99% availability across its catalogue, ensuring products are ready for immediate delivery from our new 10,000 m² warehouse.

Clear & Practical Packaging

Our packaging is designed to be clear, practical and recognizable, helping customers easily identify products while protecting them during transport and storage.

3000+Products

Featuring more than 3,000 product codes, ONE Light provides a complete range of technical lighting solutions, covering most applications across residential, commercial, and architectural projects.

01 | RECESSED SPOTS FIXED

Pages 03 - 32

03
10103G2
10103G1
10103GP
10103GTR

04
10105X
10105
10105GU

05
10105CM

06
10105A1

07
10105H

08
050182
050182R
050182RA
050182RB

09
10105ALG

10
10105ALG

11
10105DG
10105TG

12
50105TG
10105D1

13
10105D2
10105D4
10105AD

14
10105D8

15
10105M

16
10105M

17
10105MD

18
50105M

19
50105MA

20
10105CJ

21
10109F

22
10105R1
50105R1

23
10105R2

24
10105R2P

25
10105D9

26
10105Y

27
10105E1
10105GT1
10105GT2

28
10105TR

29
10105MR

30
050112 Reflectors
10105RM

31
050099 Reflectors
50105RM

32
050098 Reflectors
10105YTR

02 | RECESSED SPOTS FIXED LED

Pages 35 - 82

35
10101L
10101LA

36
10103B
10103C
10103B

38
10103E

39
10108R
10107DC
10108D1

40
10108A

41
50108A
10112TD

42
10112HA
050182
050182R
050182RA
050182RB

43
10110FD
10115FD

44
10105FD

46
10115FD
10107Z
10112Z
10120Z
050378A / 050378B / 050378C Reflectors

47
10103LB
10107RA
10112RA

48
10107D
10112D

49
10115D
10103J
10107J
10107JTR

50
10107DX
10112DX
10118DX

51
10103H
50103H

52
10110H

50110H


50012H

53

10106DC


10118DC

54

10106X

10120X

55

10107K

050104 Reflectors

56

10112K

050280 Reflectors

57

50106B

50306B


50406B

58

50506B

50006B

59

50102B

50202B

60

50302B

50502B

50902B

61

50107B

50207B

50307B

50507B

62

50406C


50906C

63

10107WD

10107M

64

10108H

65

10103M

10102H

66

10107DL

10107H

67

10107DB

10112C

68

10107PA

10112P

69

10112R

050162 Rings

70

10107MD

10107WP

10112TP

71

10106V

10106P


10110P

72

10107PV

73

10106PF

050042 Rings

74

10107DF

10107DFV

050178 Rings

75

10108J

10107HA

76

10107A

10112A

77

10103BTR

78

10107BT

79

10112BTR

80

50103ATR

81

10106XTR

10112XTR

82

10110HTR

50110HTR

50012HTR

03 | RECESSED SPOTS ADJUSTABLE Pages 85 - 102

85

11103A


11105

86

11105GU

87

11105C

88

11105CGU

89

51105

90

51105GA

91

11105AC

92

11105U

11105UA

11105UB

93

11105ABGL

94

11105ABG

51105ABG

51205ABG

95

11105M

96

11105M

97

11105A1

11105D8

98

11105D4

99

11105DT

11105TG

51105TA

51105TG

51205N

100

11109FA

11105F

101

11105TR

11105UTR

11105DTR

102

51010TR

04 | RECESSED SPOTS ADJUSTABLE LED Pages 105 - 124

105

11103B

106

11106K

107

11107B

108

11112

109

11112H

050086 Rings

050086A Ring

51112H

050088 Rings

050088A Ring

110

11104K

050100 Rings

11107K

050102 Rings

111

11107FD

11112TA

112

11112E

51212E

113

11107WD

11207WD

114

11107P

11113D

11106PK

11112P

115

11106T

11107T

116

11107C

11207C

117


11111C

050302 Rings


51111C

51211C

118

11112B

11113E

119

11108LA

120

11103M

51106M

121

51406B

51506B

122

51012H

51024H

123

11107RA

11112RA

11112RB

124

11107BT

11112T

11107TTR

05 | DOWNLIGHTS FIXED Pages 127 - 168

127

10103FA

10108FA

10112FA

128

10118FA

10130FA

129

10103FA

10108FA

10112FA

130

10118FA

10130FA

131

10140F

10148PE

132

50116FA

50122FA

50130FA

133

50140FA

50140BAU

134

50140F

50140B

50140BU

135
50140BR
50140BRU
136
50140BW
137
62116F
62116FA
138
50122D
50130B
139
10103T
10124T
140
10103T

10107T
10115T
10124T
141
10110CE
10114CE
10120CE
142
50110CE
50114CE
50120CE
143
10107CA

10115CA
144
10120CA
10130CA
10160CA
145
10107CA
10110CA
10115CA
146
10120CA
10120CB
10130CA

147
10108ED
10107ED
10112ED
148
10120ED
10130ED
10140ED
149
10106DH
150
10110DH
10114DH
10120DH

10130DH
151
10107Z
10112Z
10120Z
050378A / 050378B / 050378C Reflectors
152
10107Z
10112Z
10120Z
050378A / 050378B / 050378C Reflectors
153
10116FD

154
10108FD
10116FD
10122FD
155
10109D
10122D
156
10109FD
10120FD
157
10107UV
10113UV
10120UV

158
10130UV
10113UV
10120UV
10130UV
159
50110UV
50115UV
50125UV
50130UV
160
10110U
10124U

161
10130U
10113B
10118B
10125B
162
10107B
10113B
10125B
163
10110BX
10115BX
164
10120BX

10125BX
10130BX
165
10110TD
10125TD
166
10108CF
10115CF
10110G
10115G
167
10112GA
10118GA

168
10125GA
10135GA
10112G
10118G
10125G
10135G
10140G

06 | DOWNLIGHTS ADJUSTABLE Pages 169 - 174

169

11110TR

51100TR

170

11126F

171

11110E


11120E

172

51130

51230

173

11115G

11128G

174

11115G

11128G

07 | STRIPS & PROFILES Pages 177 - 236

177

7848

7848/RGBW

178

7843

7843E

7823

7833

179

7820

062002

180

7820W

181

7829A

182

7829

7829AW

183

7835

184

7835W

185

7839

7844

7844E

186

7846

7846H

187

7839W

188

7844W

7846W

7846WA

189

7844L

7844LW

7820WL

190

7820V

7835V

191

7825

7870

192

7875

7845

7887

193

7880

7882

7884

194

7885

7887A

195

7887B

7844/A

196

7846/DEW


7835/DEW

197

7820/BL

7820W/BL

198

7820A/RGB

199

7830/RGB

7830/RGBW

7846/RGB

7846/RGBW

200

7830W/RGB

7830W/RGBW

201

7940

7940A

7940B

7820B/RGBW

7820C/RGBW

202

7890

203

7903

204

7903R

7903TR

205

7902

7904

7912

206

7902R

7912R

7910R

7901TR

7904TR

207

7900

7901

208

7902

7904

7905

209

7912

7912A

210

7910

211

7910A

050122

212

7906

7906D

213 7901R 7902R
214 7904R
215 7906R 7912R
216 7910R 7910AR
217 7900TR 7901TR 7904TR
218 7906TR 7909TR
219 7908A 7908
220 7922
221 7920
222 7918 7914R 7915R
223 7840
224 7842 7840A 7840B 7840D
225 38114B
226 38104B 38108B 38114B
227 38103 38105
228 38110 38102A 38102B 38102C 38101A 38101B 38101C 38101D
229 7850 7860
230 7862
231 7864
232 7872
233 7901AATR 7901ATR 7901BATR 7901A
234 7841A 7841 7841B
235 7811 7868
236 7866 7866F

08 | TRACK LIGHTS Pages 239 - 272

239 65668T
240 65306BT 65506BT 65406BT
241 65611NT 65612NT 65614NT
242 65611NT 65612NT 65614NT
243 65660AT 050300A Rings 050300AH Honeycomb 0750A/15 & 0750A/24 65660BT 050300B Rings 0750B/15
244 65660BTT 050300B Rings 0750B/15
245 65660BTL 050300B Rings 0750B/15 & 0750A/24 65670AT 050380A Rings 050380AH Honeycomb 0770A/15 (15°) 65670BT 050380B Rings 050380BH Honeycomb

0770B/15 (15°)

246

65670CT

65670CTL

65670CTT

050380C Rings

050380CH Honeycomb

0770C/15 (15°)

247

65642AT

050380A Rings

050380AH Honeycomb

0770A/15 (15°)

65642BT

050380B Rings

050380BH Honeycomb

0770B/15 (15°)

65642CT

050380C Rings

050380CH Honeycomb

0770C/15 (15°)

248

65642AT

050380A Rings

050380AH Honeycomb

0770A/15 (15°)

65642BT

050380B Rings

050380BH Honeycomb

0770B/15 (15°)

65642CT

050380C Rings

050380CH Honeycomb

0770C/15 (15°)

249

65606AT

65606BT

65606CT

65606DT

250

65606AT

65606BT

65606CT

65606DT

251

65656AT

65656BT

65656CT

65656DT

252

65656AT

65656BT

65656DT

253

65634BT

65634DT

254

65644T


65652T

255

65646T

65108AT

65108T

65524T

256


65646T

65108AT

65108T

65524T

257

65662AT

65662BT

258

65662AT


65662BT

259

65650AT

65650BT

65650CT

260

65650AT

65650BT

65650CT

261

65026T

65024T

262

65024TA

65018T

65025T

263

65170AT

65170BT

65168T

264

65028AT

65028BT

65028CT

265

65172AT

65172BT

65664AT

65664BT

266

63108AT

267

65105NAT

268

65105NT

269

65105DT

65105BT

270

65105CT

271

65520T

65522T

65519T

65105GT

272

65111AT

65518T

9 | TRACKS & MAGNETIC Pages 275 - 330

275

40001A

40002A

40003A

40002C

276

41026R

41032

277

41020

41004A

41010A

41008A

278

41012A

41016A

41018A

41024A

41022A

279

40003R

41034R

41004B

41008B

41012B

41016B

280

41002

41002A

41030

281

40001AL

40002AL

40003AL

41026R

41032

282

40001AL

40002AL

40003AL

41026R

41032

283

41004AL

41010AL

41008AL

284

41012AL

41016AL

41018AL

285

42001A

42002A

42012AA

42012BA

286

42001B

42002B

42012AB

42012BB

287

42001

42002

42003


42012A

42012B

42012C

288

42012D

42012E

289

42001RB

42002RB

42012ARB

42012BRB

290

42001R

42002R

42012AR

42012BR

291

42001ATR

42002ATR

42012AATR

292

42001TR

42002TR

42012ATR


42012BTR

293

42032A

42032

42022A

42022B

42022

294

42004A

42004C

42004B

42026

42006BX

295

42100AA

42100BA

42100A

42100B

296

42100AAL

42100BAL

42100AL

42100BL

297

42100EA

42100E

42100EL

298

42102A

42102AL

42102B

42102BL

299

42106A

42106AL

42106B

42106BL

300

42112AA

42112AAL

42112BA

42112BAL

301

42120B

42104B

42104BL

302

42124AA

42124BA

303

42128A

42128B

42128C

304

42134

42134A

305

42122A

42108

42108A

42118

306

42122AL

42108L

42108AL

42118L

307

42138

42110

42144

42140

308

42138L

42110L

42144L

42140L

309

42114A

42114B

42114C

42116C

310

42114AL

42114BL

42114CL

311

42130A

42130B

42132

42142

312

42130BL

42132L

42142L

313

42126AA

42126BA

42136

314

42146

42146L

316

42004PM

42004PN

42004PP

42004PA

42004PB

317

42004PD

42004PR

42004PC

42004PE

42004PG

318

42004PF

42004PH

42004PJ

42004PK

42004PL

319

42001P

42002P

42003P

42001PA

42002PA

42003PA

320

42100PA

42100PB

42100PC

42100PAL

42100PBL

42100PCL

321

42112PA

42112PB

42112PC

322

42112PAL

42112PBL

42112PCL

323

43001F

43002F

43006FA

43006FC

324

43004FA

43004FB

43004FG

43004FJ

43004FK

43004FL

43004FF

325

43100FA

43100FB

43100FC

43100FD

326

43102FA

43102FB

43102FC

327

43116F

43122F

43118F

43118FA

43120F

328

43106FA

43106FB

43108FA

43108FB

329

43110F

43112F

330

43128FA

43126FA

43126FB

10 | OFFICE & KITCHEN Pages 333 - 354

333

61066

61066T

334

61108

61110


61110A

335

38225M

38248M

38250M

336

38120L

38135L

38248L

337

38148N

338

38012A

38012B

339

62140RF

62140RE

340

62140BFU

62150BFU

62140BRU

62150BRU

341

38150B

38150C

38150BU

342

38150B

38150C

38150BU

050170

343

38150A

38151A

344

38150A

38151A

345

050170D

38150E

050170C

346

38140AU

347

38160A

38161A

348

38160A

38161A

349

38145AR

38150AR

350

38145AR

351

38152R

38152RC

38152RL

352

38152R

38152RC

353

38145BR

38150BR

354

36002

11 | WALL & CEILING Pages 357 - 392

357

12103G

358

12105F

12105L

12105K

359

12105H

360


12105E1

12105E2

361

12105M

050112 Reflectors

362

12105MA

050112 Reflectors

363

12105N

364

12105NA

12205NA

365

12105T

12105TA

12205TA

366

12105E


12105AL

12105D1

367

12105AB

12105AC

12134

368

12105Y

12105YA

12205YA

369

12144

12142

370

65105NB

65105NBA

371

65105N

65205N

65305N

65405N

65505N

372

65105N

65205N

65305N

65405N

65505N

373

12105E4

12105E6

374

65105E

65205E

65105EA

375

60056

6017

6017A

6030

376

67518

377

67142A

67142B

378

67142F

67142G

67536A

67536B

379

67142D

380

67142H

67142K

381

67130C

382

67400A

67400B

383

67130E

67130

384

67426

67426A

385

67130D

67426D

386

67130F

67426B

387

67426C

67132C

67142C

388

67400D

67400E

389

67132D

67132A

390

67328

67420

67420B

391

67204B

67204

67216

392

67208B

67208

67210

12 | WALL & CEILING LED Pages 395 - 458

395

12115G

12108LA

12208LA

396

397

65004A

65004B

398

65004C

65004D

65004E

399

38010A

38010B

400

67466A

67466B

67466C

401

12107K

12107KA

050106 Rings

402

12110D

12115D

12108T

12112T

403
12107V
12107VA
12112F

404
12108C
12122C
12108X
12108XA

405
12108D
12108DB
050206 Reflectors

406
12122D
050208 Reflectors

407
12112Z
12120Z
12130Z

408
12112Z
12120Z
050378B / 050378C Reflectors

409
12110HA
12115HA

410
12112ZA
12120ZA
12106E
12112E
12114E

411
12112A
12120A
12128A

412
12115F
12120F

413
12110R
12118R
12125R

414
12107R
12110R
12118R
12125R

415
12106X
12112X
12120X

416
12110H
12110HB
12112H
12124H

417
12107B
12207B
12307B

418
12106B
12406B
12906B

419
12406C
12606C
12906C

420
12108FD
12116FD

421
12112D
12120D
12125D
12130D

422
12112D

423
12120D
12125D
12130D
12109M
12114M
12120M

424
67138C
67138D
67380
67516C

425
67540A
67540B
67540C

426
67540D
67540E

427
67138E

428
67138F

429
67138
67138A

430
67138EL

431
67138L
67480A
67480B

432
67524A
67524B

433
67440
67440A

434
67076
67076A

435
67374

436
67374A
67492
67492P

437
65748
67474A

438
67362C
67392

439
67526A1
67526A2
67526A3

440

67526B1

67526B2

67526B3

441

67394

442

67472A

67472

443

67378A

444

67376

67376A

67412

445

67340A

446

67398

67398A

67398C

447

67450

67532

67450A

448

67422

67422A

67512

449

67386A

67386C

67396

67396A

450

67388B

67388C

451

67414

67417

67418

67430A

452

67359

67360

453

67359C

67359A

67360A

454

67359B

455

67176

67502B

456

67444C

67442B

67442

457

67484

67478

458

67454

13 | PLAFO Pages 461 - 496

461

62026A

62026B

62026C

62026D

462

62026B

62026C

62026D

463

62006

62006A

62006B

62006BD

464

62006C

62006CD

62006D

465

62020AU

62020BU

62020CU

466

62020DU

62020EU

62020FU

467

62020HU

62020JU

62020KU

62020LU

468

62020MU

62020PU

469

62018AF

62030F

62038F

470

67402

471

62115F

62130F

62140F

472

62122F

62130AF

473

62146

474

62146A

62160

62160A

475

62160FB

476
62002A 62002B 62002C 62002D

477
62024C 62154

478
62118D 62125D 62150D

479
62130N

480
62132N 62142N 62132N 62142N

481
62134N

482
62144N

483
62130L

484
62148L

485
62182 62182A

486
62132NA 62142NA

487
67452

488
67366 67368 67370

489
67384 67384A

490
67362 67363

491
67362A 67363A 67282E 67282EA

492
67280E 67280EA

493
67280N 67280AN 67282N 67282AN

494
67498 67390

495
67220A 67220B 67220E

496
67218 67218E 67218R

14 | PENDANTS Pages 499 - 512

499
63105M 050112 Reflectors

500
63105MA 050112 Reflectors

501
63105N

502
63108A 63108B

503
63124 63124C 63126

504
63126A 63140 63140B 63122 63122B

505
63142A

506
0990 0992

507
63146A 63146B

508
63146C 63146D

509
63040 63042 63044

510
63020

511
63016A 63022 63022A 63022B

512
63016A 63022 63022A 63022B

15 | DECORATIVE Pages 515 - 554

515

61050A

61050B

516

61082A

517

61082B

61082

518

61100

61102

519

61090

61106

61094

520

61092

61000

521

61084

61088

522

61098

61104

523

61118


61118A

524

62120

62120A

525

62156C

62156D

526

63150

63150A

63150B

63150C

527

63152A

63152B

63152C

528

65148A

65148B

529

63046

63046A

530

63048

63050

531

63114

63156

532

63144A

63144B

533

62144NB

534

62144NB

535

63076A

63076C

63076D

63076E

536

63062

63068A

63066A

537

63066

63068

538

63154A

63154B

63154C

63154D

539

61086

540

61086A

541

63054A

63054C

542

63056

543

63058

544

62142NB

62180NB

545

62148A


62148B

546

63110C

63112

547

63174C

548

62172B


62172C

549

63134P

550

60132


63116A


61116

551

62170A


62170B

552

60162

553

60178B

62166B


63166P

554

62184B

16 | HOTEL & BEDROOM Pages 557 - 566

557

61046

558

60118

61116A

559

65746

65746A

65746R

65746RA

560

65746B

561

65738

562

65738A

563

65146

65146A

65147

65147A

564

65144

61132A

61132B

565

65740A

566

65105NA

65105NBA

17 | BATHROOM Pages 569 - 578

569

38118N

570

38118K

571

38114R

38120R

38120D

572

38112C

38118C

573

38110BD

60106

60106A

574

38114M

38114EL

38115C

38116P

575

38108N

38114N

38114T

576

60208

60208A

577

60208C

60208D

578

60208C

60208D

18 | WALL RECESSED & INGROUND Pages 581 - 608

581

68007

582

68006N


050176
Cover plates

68006N/BOX

583

68074

68074A

68074B

584


68070

68004

68004A

585


68030

68032

586

68000B

050000B1
Cover plates

050000B2
Cover plates

050000B3
Cover plates


050000B4
Cover plates

050000B5
Cover plates

68000E

050000E1
Cover plates

050000E2
Cover plates

050000E3
Cover plates

050000E4
Cover plates

050000E5
Cover plates

050000E6
Cover plates

587


68068


68068A

68068C

588


68068

68068A

68068B

68068C

589

68072A

68072C

68076

68076A

590

68062

68064

68066

591


69042A

592


69042B


69044

69015A

69015B

69015C

593

69016

69016A

69016B

594

69016G

69016AG

69016BG

595

69042M

69042

69028A

596

69052


69052A

597

69056A


69056B

69056C

598

69070A

69070B

69070C

599

69068A

69068B

69068C

69068CH

600

69076A

69076B

69076C

69076D

601

69040

69050

602

69060

603

69054


69054A

604


69072

69074A

69074B

69074C

605

69062

606

69058A


69058B

69058C

607

69006G

69046G

608

69006

19 | GARDEN & UNDERWATER

Pages 611 - 644

611

7070

7068

7010P

7012

612


67456


67458

67482

613

67198G

67198AG


67464G

614

67200G

67202G

615

67196BG

616

67196A

67196B

67196C

617

7046

7047

618

7052B

67514

7052

619

67488A

67488B

67488C

620

67538A

67538B

67538C

621

67204G

67204E

622

67496

67408

623

67094

67098

624

67100

67102

625

67534A

67534B

67534C

626

67508A

67508B

627 628 629 630

67494 67494A 67470 67470A 67460A 67460B 67490 67490A 67358 67034

631 632 633 634 635

67506 67506A 67504 67504A 67510 67510A 67510B 67410 67410A 67406

636 637 638

67406A 67406B 67406C 67406D 0994 0998 0996 67530B 67462 67520

639 640 642

67520A 050250 63028 63028A 63028B 7072 7072A 69064A 69064B 69064C

643 644

69066M 69066 69066A 69066B

20 | INDUSTRIAL & FLOODLIGHTS Pages 647 - 674

647 648 649 650

38120P 38140P 38150P 38220P 38240P 38250P 38118E 38136E 38158E 38218E

651 652 653

38236E 38258E 38118M 38158M 38236M 38120M 38140M 38140ME 38150M 38120N

654 655 656

38140N 38150N 38118LA 38136LA 38145LA 38118LC 38136LC 38145LC 38236LC 38245LC

657 658 659 660

38100A 38100B 38100C 050012A 050012 38100A 38100B 38100C 38280 38115LB

38130LB

38150LB

661

63100NA

63150NA

63200NA

662


63100NB

63150NB

63200NB

663

63150NL

63240NL

664

63100N

63150N

63200N

665

63100L

63150L

63200L

666

70118A

70118B

70118C

70118D

667

7028CB

7028CC

7028CD

7028CE

668

7028CF

7028CH

669

7055B/RGB

7055A/RGBW

7055B//RGBW

670

7055A

7055B

671

7058A

7058R

672

7056A

673

70112

674

70110

70105

21 | EMERGENCY LIGHTS Pages 677 - 686

677

89412

678

89002B

89002C

89002

679

67218E

67218R

67366E

67280ANE

67282ANE

680

89404

89404A

89408

89414

681

89416

682

89001/EME

683

89005A/EME

684

89005B/EME

685

89009/EME

686

89002A

22 | DRIVERS Pages 689 - 716

689

89004

89006P

89006PC

89004A

89006PA

690

89004T

89007T

89004AT

89010AT

691

89008

89015

89020

692

89015C

89020C

89030C

693

89008A

89015A

89030A

694

89048

89060

695

89048T

89009UT

89016UT

89024UT

89030UT

696

89015T

89015CT

89006AT

89008AT

89015AT

697

89040AT

89007AL

89015L

89015AL

698

89026AL

89044L

699

89028M

89028AM

700

89015W

89030W

701

89075W

89015V

89030V

89075V

702

89100V

89150V

89200V

89320V

703

89040VT

89050VT

704

89075VT

89100VT

89150VT

89200VT

89300VT

705

89060VN


89100VN

89150VN

89200VN

89350VN

706

89100VND

89200VND

707

89030VL

89060VL

89075VL

89100VL

89150VL

708

89240VL

89100VLT

89150VLT

709

89100VLL

89150VLL

89240VLL

710

89090VL

89200VL

711

89100VP

89150VP

89200VP

89300VP

712

89150VPL

713

89240VPL

89200X

89320X

89240XL

714

89200XN

89350XN

89240XR

715

89009L

89050LL

716

89040L

89050TLD

23 | CONTROL & DIMMING Pages 719 - 724

719

22004

22014

22004M

22004P

720

22008

22008A

22008AB

22008MP

22008P

721

22006

722

22006A

22022

22000

89102L

89302

89100LP

89100L

89104LT

723

20030

20032

724

20034

20036

24 | LAMPS Pages 727 - 748

727

7103ALG

7106ALG

7107ALG

728

7103ALGD

7106ALGD

729

7201G

7307BG

7306CG/BL

7304GE

7101AL

730

7306G

7306GD

7307G

731

7305EG

7305EGD

732

7301CG

7303CG

7306CG

7306CBG

7306CGD

733

7306GZ

7307G

7306CHG

7306CGA

734

7306GC

7306GCD

7306DG

7306DGD

735

7307MA

7307M

7313M

736

7306GDV

737

7310H

738

7315G

7315GB

7315GD

739

9G09/RGBW

9G09T

740

9G10B

9G09

741

9F07L

742

9G80N

743

9009L

9018L

9022L

744

9009L

9018L

9022L

745

9007LA

9016LA

9018LA

746

9G08E

747

9G03RAD

9T05RD

9G04RAD

9G06RD

748

9G03R

25 | ACCESSORIES & GADGETS Pages 751 - 756

751

0903F

0903M

0904F

0904M

752

0950GA

0950G

0950GB

0802

050180C

050180E

753

0800BA

0800B

0800A

0800C

754

0802BA

0802A

0802C

0802D

755

70038

70044

756

61138

61136

26 | CEILING FANS Pages 759 - 770

759

6300

24002

760

6300A

761

6316

762

6322C

763

6302C

6302

6304

6306

764

6302C

6302

6304

6306

765

6310C

6310

766

6310C

6310

767

6312LC

6308L

768

6312LC

6314LC

6308L

6312L

6314L

769

6312DC

6314DC

6308D

6312D

6314D

770

6320

27 | MARKETING Pages 773 - 774

773

060020 / 060020A

060016

060018

060008

774

060054

060010

060014

060012

060026 / 060027

060028 / 060029

one

CATALOGUE
2027

Recessed Spots Fixed

Pages 03-32

01

GU10 MR11 Range

10103G2/W

10103G2 | 5W | MR11 | GU10 | Aluminium

new
IP20


10103G2/B

Complete with 0950G.



10103G1/W

10103G1 | 5W | MR11 | GU10 | Aluminium

new
DARK LIGHT
IP20


10103G1/B

Complete with 0950G.



10103GP/W

10103GP | 5W | MR11 | GU10 | Aluminium

new
DARK LIGHT
IP65

10103GP/B

Complete with 0950G.



10103GTR/W

10103GTR | 5W | MR11 | GU10 | Trimless | Aluminium

new
DARK LIGHT
IP20

10103GTR/B



Order Code	Colour	Watts	Input	Class				Notes
10103G2/W	White	5W	100-240V		48mm	100mm	100	-
10103G2/B	Black	5W	100-240V		48mm	100mm	100	-
10103G1/W	White	5W	100-240V		48mm	100mm	100	-
10103G1/B	Black	5W	100-240V		48mm	100mm	100	-
10103GP/W	White	5W	100-240V		58mm	110mm	100	-
10103GP/B	Black	5W	100-240V		58mm	110mm	100	-
10103GTR/W	White	5W	100-240V		50mm	90mm	100	-
10103GTR/B	Black	5W	100-240V		50mm	90mm	100	-

The Classic MR16

10105X/W

10105X | 50W | MR16 | GU5,3 | Aluminium

CE 5 YEAR

IP20



10105X/B



10105/MC

10105 | 50W | MR16 | GU5,3 | Aluminium

CE 5 YEAR

IP20



10105GU/W

10105GU | 10W | MR16 | GU10 | Aluminium

CE 5 YEAR

IP20

Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
10105X/W	White	50W	12V	III	40cm	63mm	60mm	100	-
10105X/B	Black	50W	12V	III	40cm	63mm	60mm	100	-
10105/MC	Brushed chrome	50W	12V	III	40cm	70mm	60mm	100	-
10105GU/W	White	10W	100-240V		15cm	70mm	150mm	100	-

The Cement Range

10105CM | 10W | MR16 | GU10 | Cement + aluminium reflector

DARK LIGHT

IP20

offer

5 YEAR

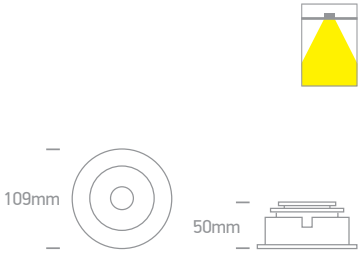

Order Code	Colour	Watts	Input	Class					Notes
10105CM	Cement	10W	100-240V		15cm	95mm	120mm	12	-

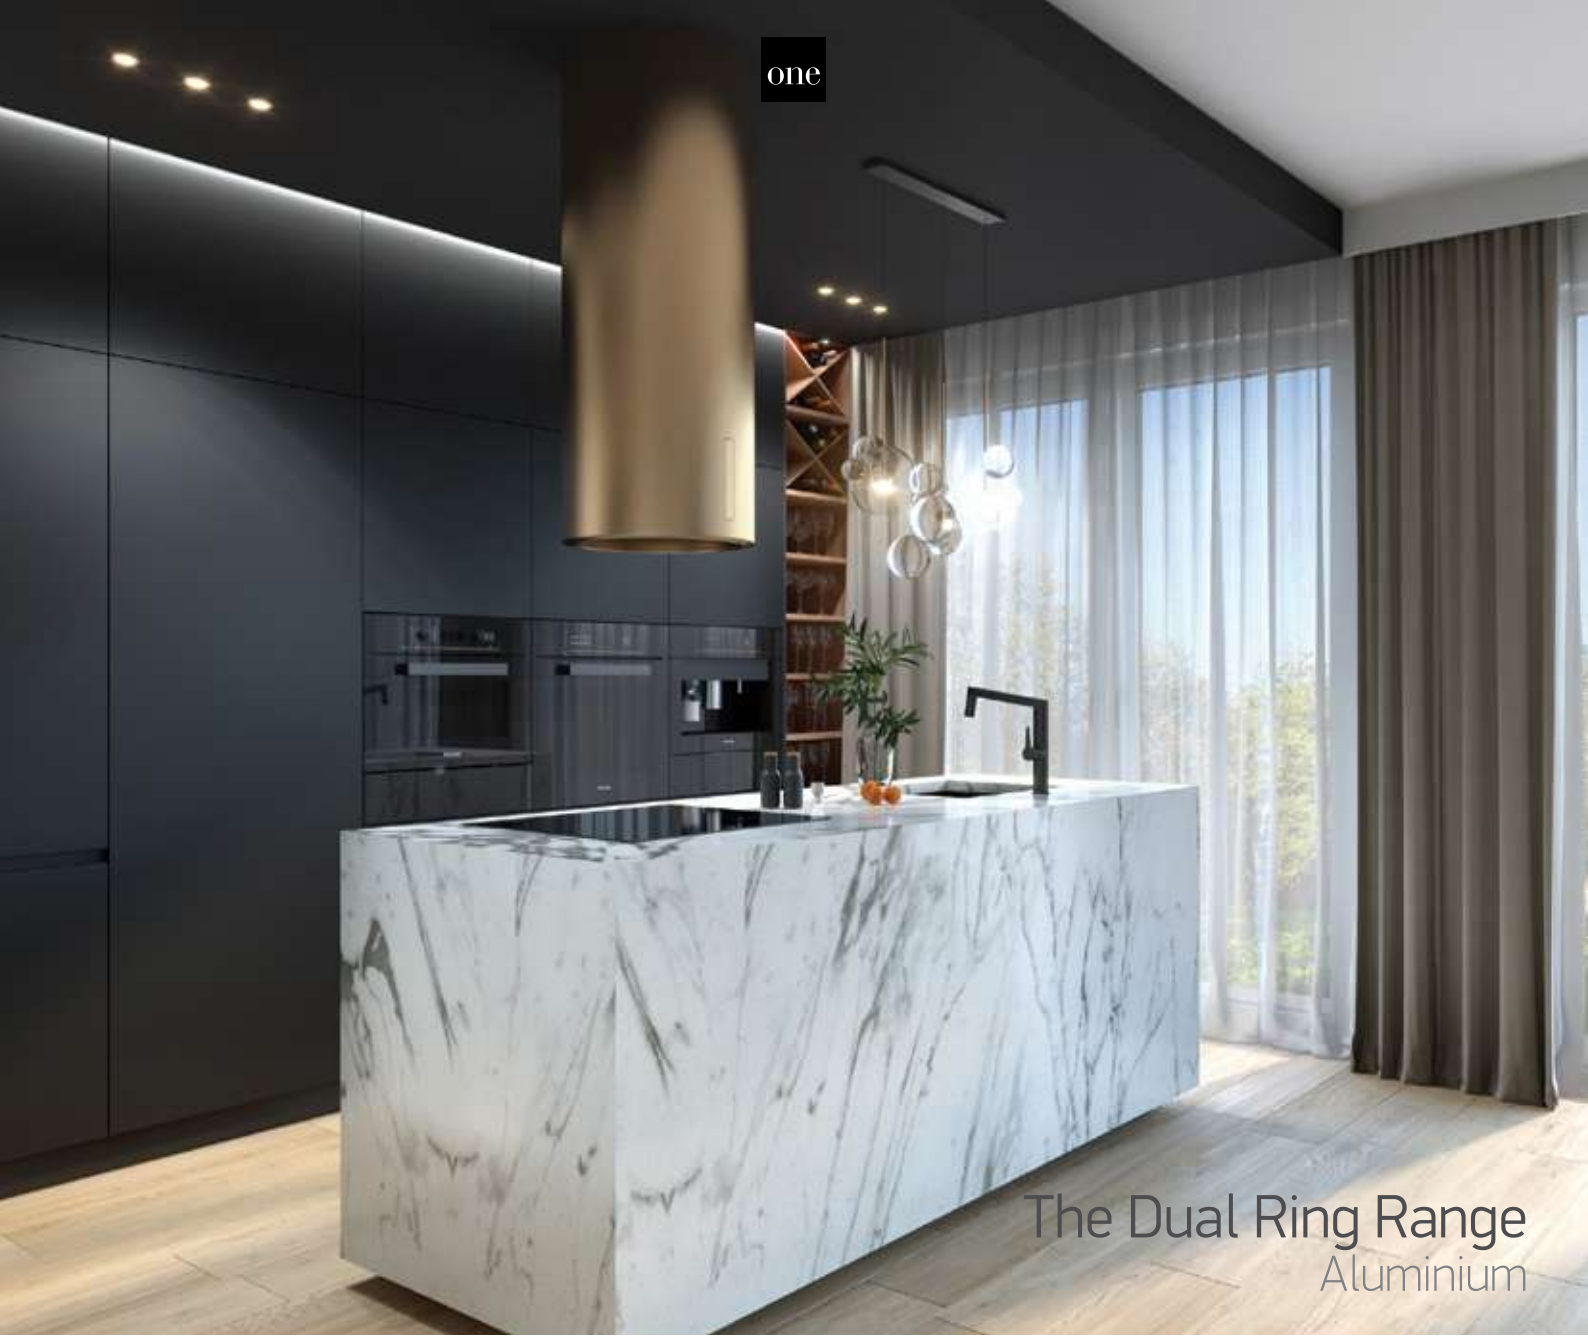

The Dual Ring Range
Aluminium

10105A1/W

10105A1 | 10W | MR16 | GU10 | Aluminium

IP20

Complete with 0950G.

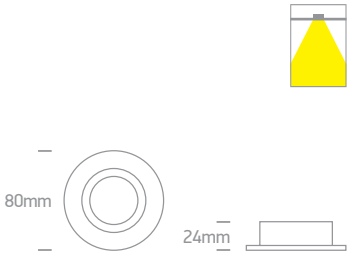

10105A1/B

10105A1 | 10W | MR16 | GU10 | Aluminium

IP20

Complete with 0950G.

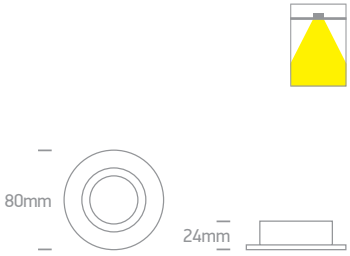

Order Code	Colour	Watts	Input	Class					Notes
10105A1/W	White	10W	100-240V		15cm	68mm	120mm	100	-
10105A1/B	Black	10W	100-240V		15cm	68mm	120mm	100	-

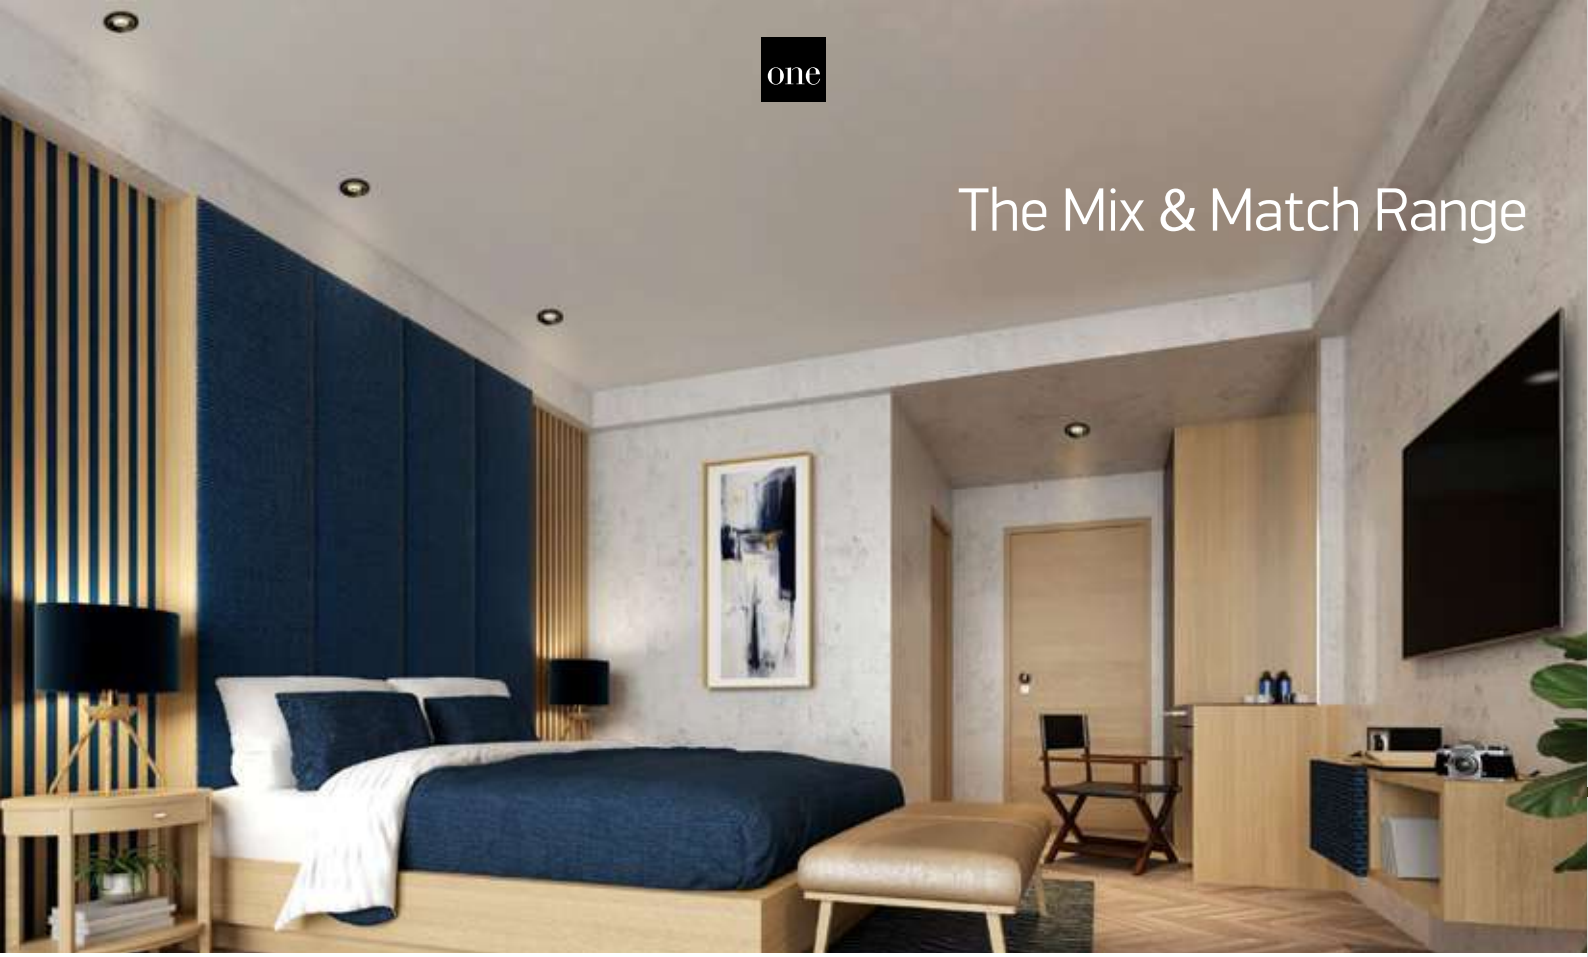

The Mix & Match Range

10105H/W

10105H | 10W | MR16 | GU10 | Aluminium

LED version on page 42.

CE 5 YEAR

DARK LIGHT

IP20

Complete with 0950GB.

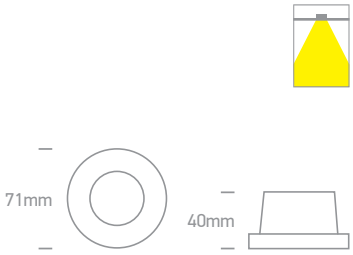

10105H/B

10105H | 10W | MR16 | GU10 | Aluminium

LED version on page 42.

CE 5 YEAR

DARK LIGHT

IP20

Complete with 0950GB.

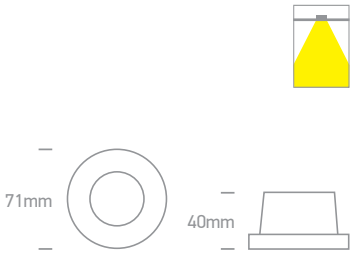

10105H/BS

10105H | 10W | MR16 | GU10 | Aluminium

CE 5 YEAR

DARK LIGHT

IP20

Complete with 0950GB.

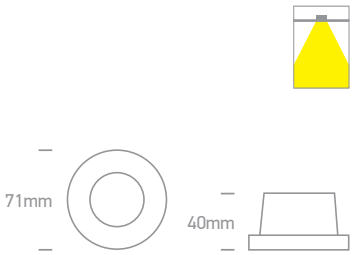

Order Code	Colour	Watts	Input	Class					Notes
10105H/W	White	10W	100-240V	⏚	15cm	64mm	100mm	50	-
10105H/B	Black	10W	100-240V	⏚	15cm	64mm	100mm	50	-
10105H/BS	Brass	10W	100-240V	⏚	15cm	64mm	100mm	50	-

The Mix & Match Range

10105H/B + 050182/W + 050182R/W

050182 | Rings for 10105H | Aluminium

050182/W White

IP20

050182/B Black

050182/BS Brass



050182R | Round base for 10105H | Aluminium

050182R/W White

IP20

050182R/B Black

050182R/BS Brass



050182RA | Square base for 10105H | Aluminium

050182RA/W White

IP20

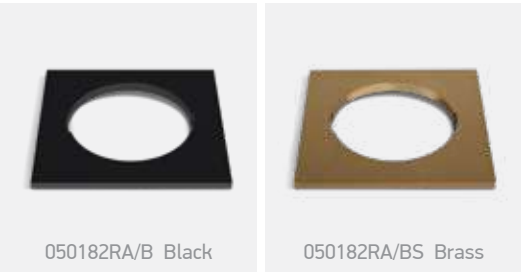

050182RA/B Black

050182RA/BS Brass



050182RB | Double Square base for 10105H | Aluminium

050182RB/W White

IP20

050182RB/B Black

050182RB/BS Brass



The Dark Light Dual Ring
Aluminium

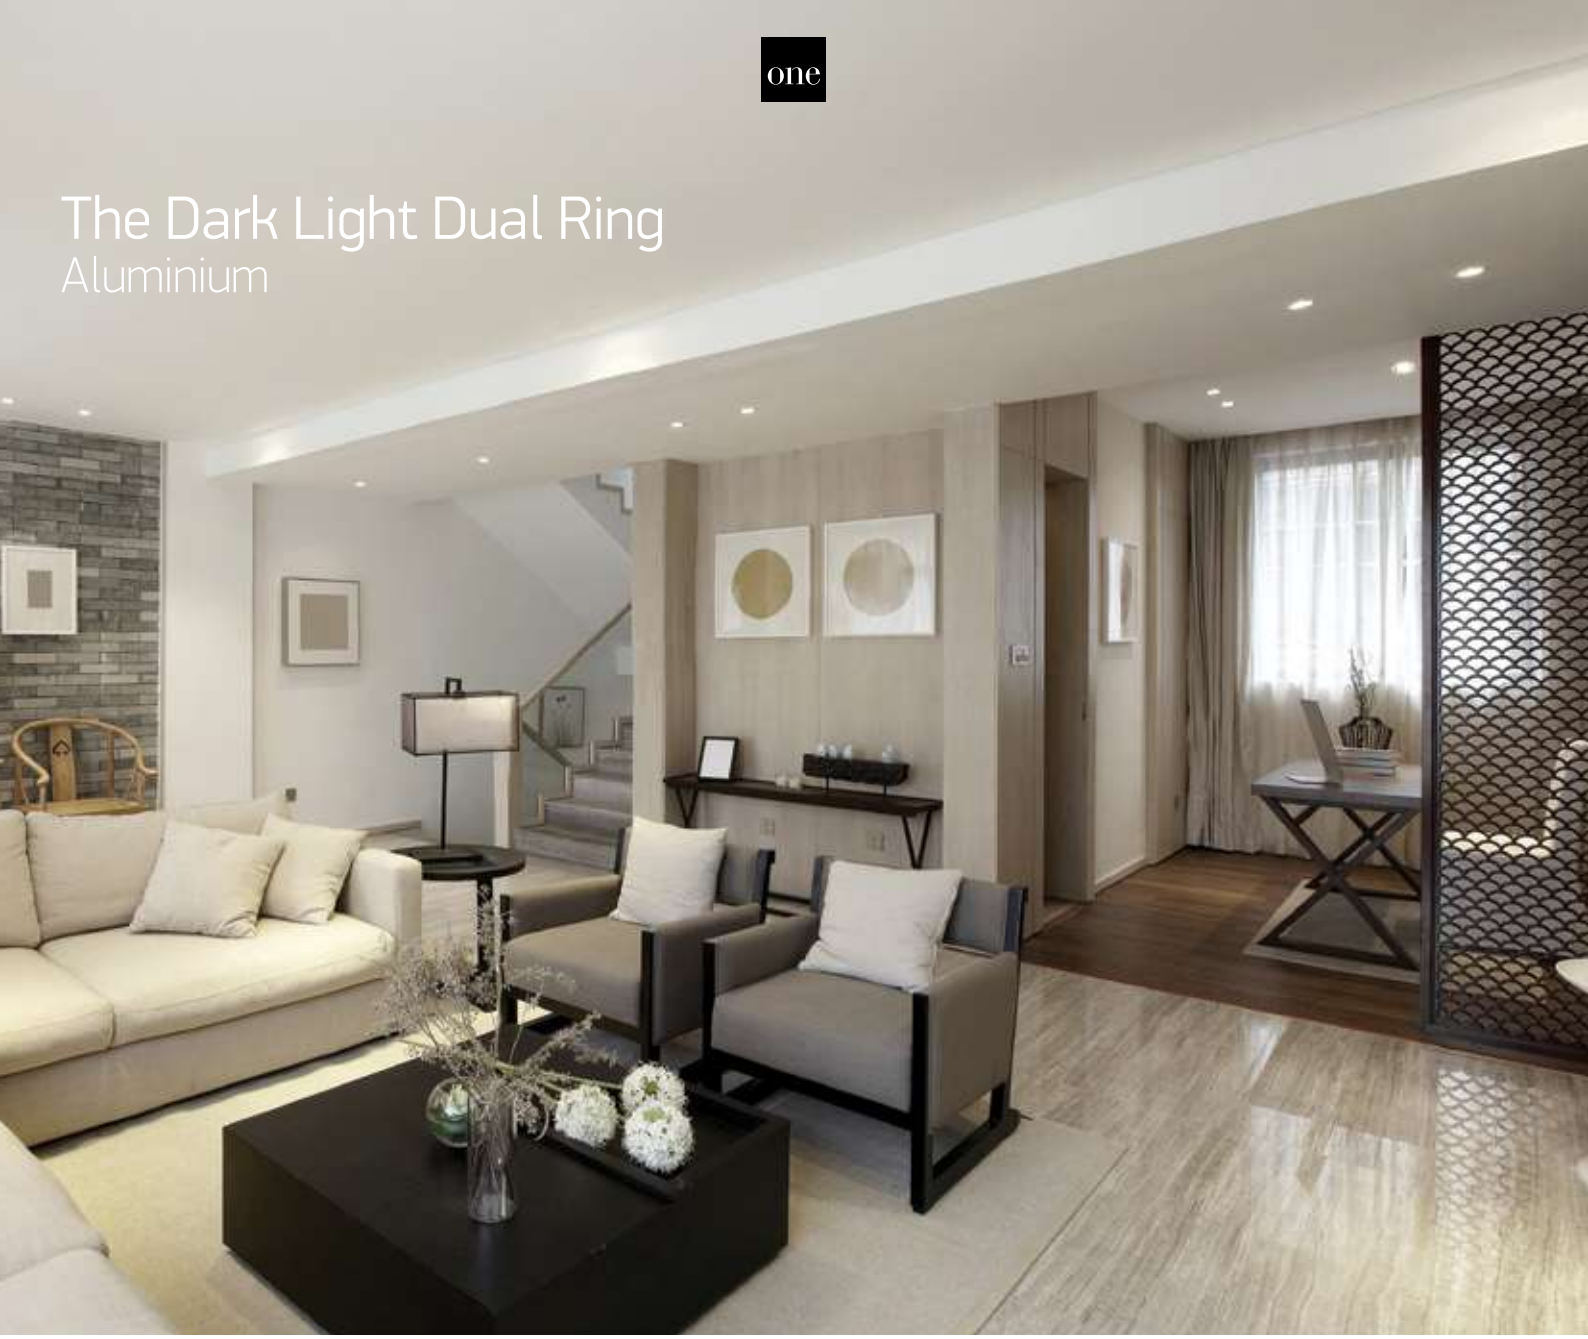

10105ALG/W

10105ALG | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

Complete with 0950GB.



10105ALG/B

10105ALG | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

Complete with 0950GB.



Order Code	Colour	Watts	Input	Class					Notes
10105ALG/W	White	10W	100-240V		15cm	78mm	150mm	50	-
10105ALG/B	Black	10W	100-240V		15cm	78mm	150mm	50	-

The Dark Light Dual Ring
Aluminium

10105ALG/W/B

10105ALG | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

5 YEAR

Complete with 0950GB.



10105ALG/W/BS

10105ALG | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

5 YEAR

Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105ALG/W/B	White	Black	10W	100-240V		15cm	78mm	150mm	50	-
10105ALG/W/BS	White	Brass	10W	100-240V		15cm	78mm	150mm	50	-

one

The Semi Trimless Dark Light

10105DG/W

10105DG | 10W | MR16 | GU10 | Semi trimless | Aluminium

DARK LIGHT
IP20

Complete with 0950G.

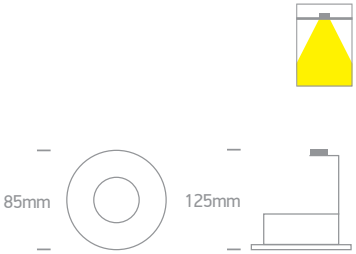

10105TG/W

10105TG | 10W | MR16 | GU10 | Semi trimless | Aluminium

DARK LIGHT
IP20

Complete with 0950G.

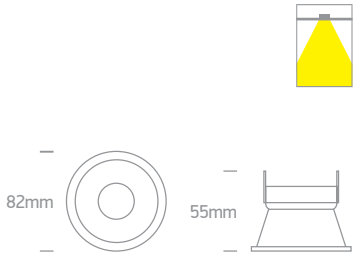

10105TG/B

10105TG | 10W | MR16 | GU10 | Semi trimless | Aluminium

DARK LIGHT
IP20

Complete with 0950G.

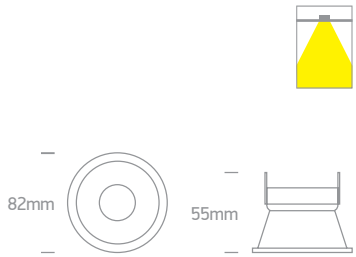

50105TG/W

50105TG | 10W | MR16 | GU10 | Semi trimless | Aluminium

DARK LIGHT
IP20

Complete with 0950G.

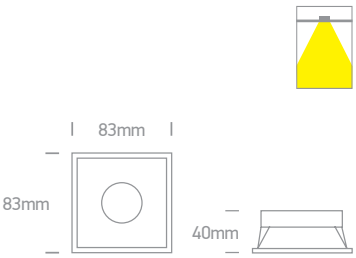

Order Code	Colour	Watts	Input	Class					Notes
10105DG/W	White	10W	100-240V		15cm	76mm	155mm	50	-
10105TG/W	White	10W	100-240V		15cm	75mm	140mm	50	-
10105TG/B	Black	10W	100-240V		15cm	75mm	140mm	50	-
50105TG/W	White	10W	100-240V		15cm	76x76mm	140mm	50	-

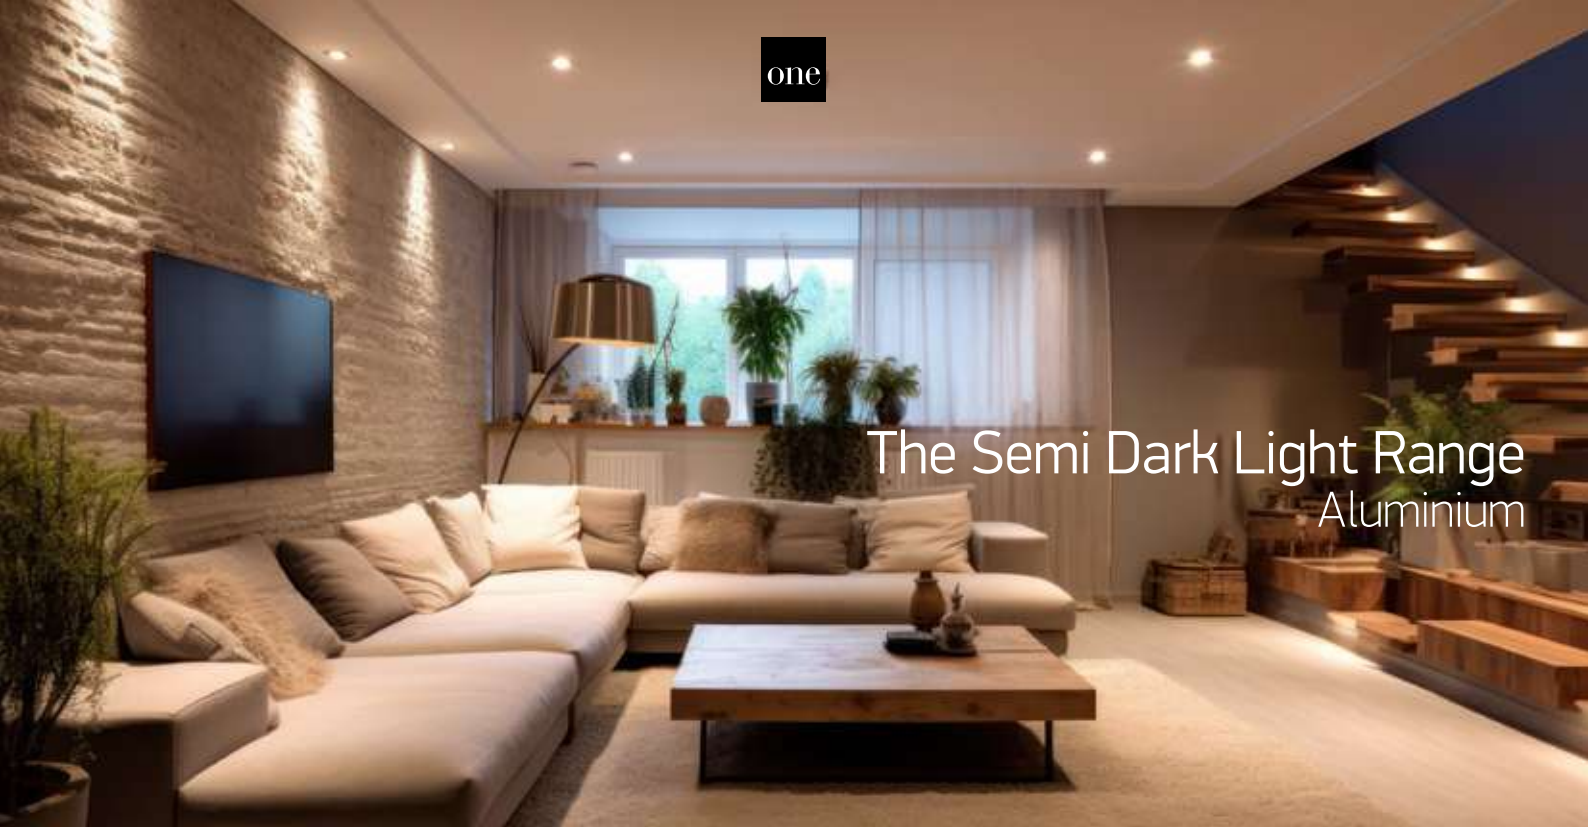

The Semi Dark Light Range
Aluminium

10105D1/W

10105D1 | 10W | MR16 | GU10 | Aluminium

IP20

10105D1/B

Complete with 0950GB.



10105D2/W

10105D2 | 10W | MR16 | GU10 | Aluminium

IP20

10105D2/B

Complete with 0950G.



10105D4/W

10105D4 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

10105D4/B

Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
10105D1/W	White	10W	100-240V		15cm	62mm	135mm	50	-
10105D1/B	Black	10W	100-240V		15cm	62mm	135mm	50	-
10105D2/W	White	10W	100-240V		15cm	62mm	120mm	50	-
10105D2/B	Black	10W	100-240V		15cm	62mm	120mm	50	-
10105D4/W	White	10W	100-240V		15cm	68mm	140mm	50	-
10105D4/B	Black	10W	100-240V		15cm	68mm	140mm	50	-

Semi Trimless Dark Light
Aluminium

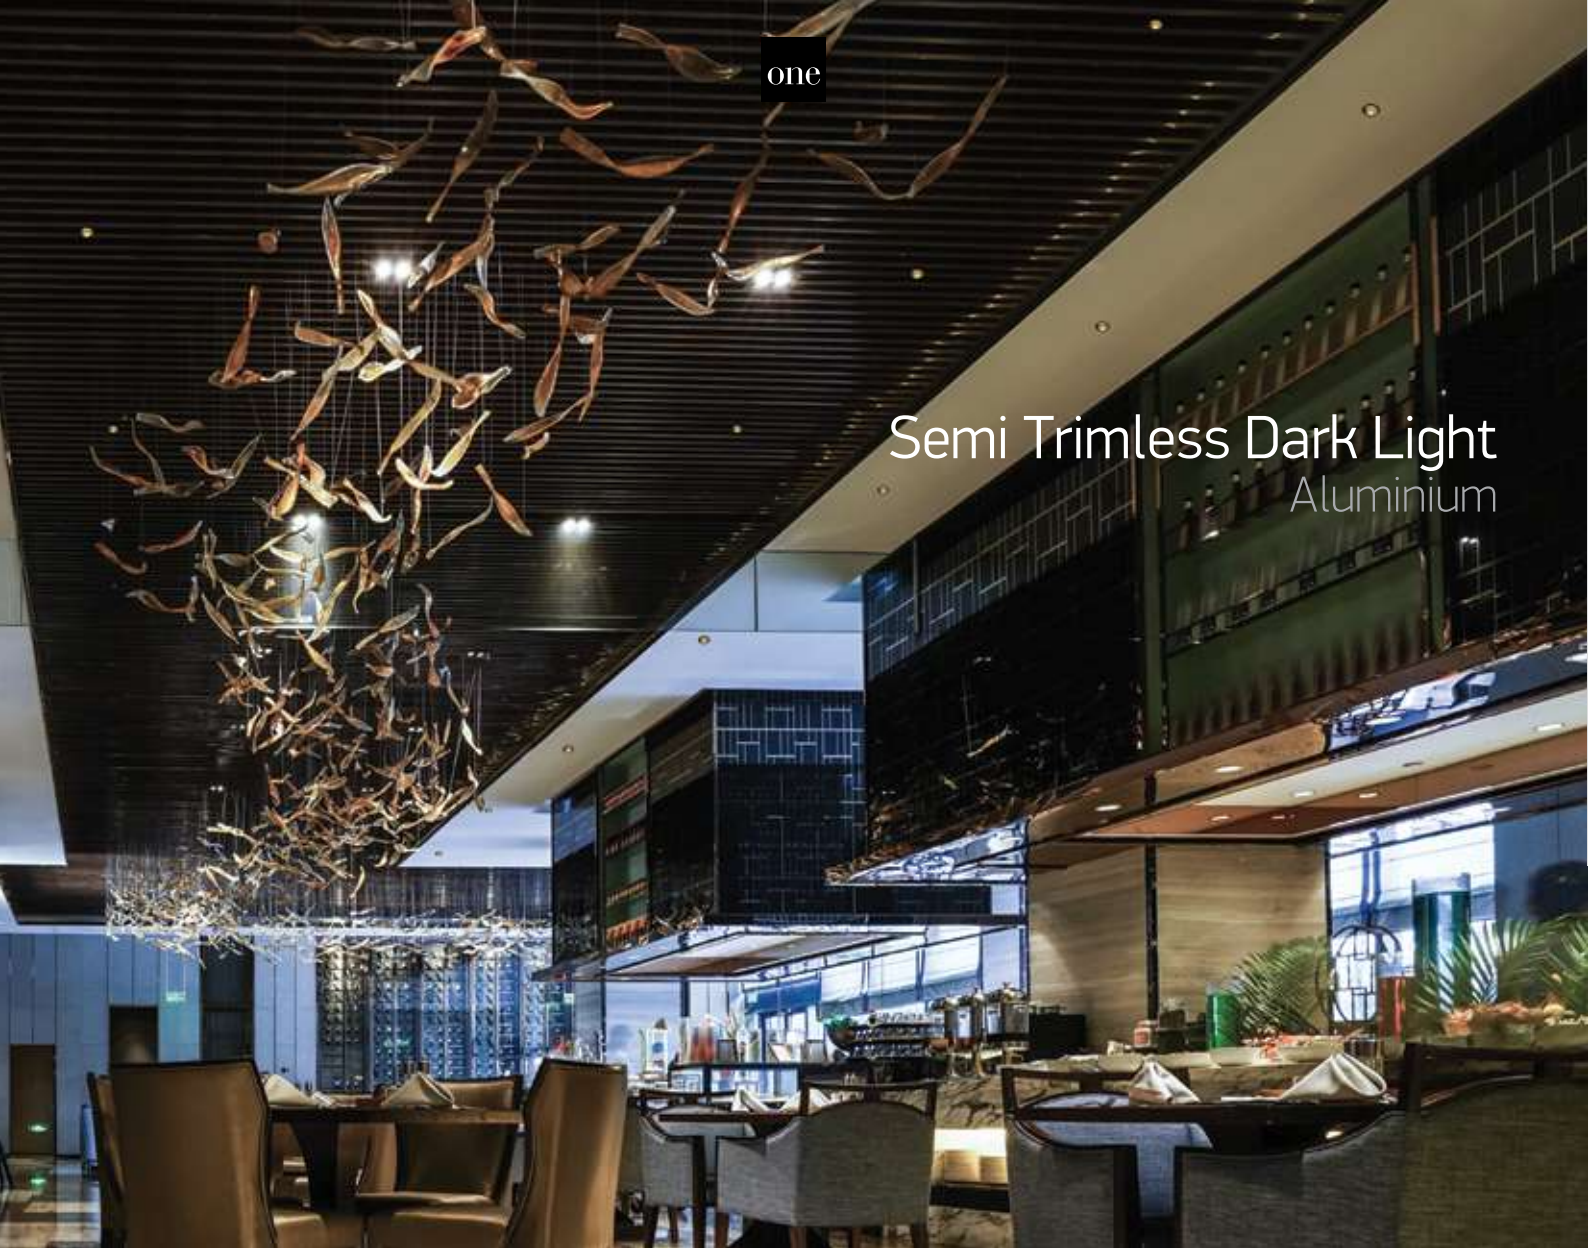

10105AD/W/B

10105AD | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

CE 5 YEAR

10105AD/W/W

Complete with 0950GB.



10105AD/B/BS

10105AD | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

CE 5 YEAR

10105AD/B/B

Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105AD/W/W	White	White	10W	100-240V		15cm	64mm	130mm	36	-
10105AD/W/B	White	Black	10W	100-240V		15cm	64mm	130mm	36	-
10105AD/B/B	Black	Black	10W	100-240V		15cm	64mm	130mm	36	-
10105AD/B/BS	Black	Brass	10W	100-240V		15cm	64mm	130mm	36	-

Semi Trimless Dark Light

Aluminium

10105D8/W/W

10105D8 | 10W | MR16 | GU10 | Aluminium

new

DARK LIGHT

IP20

CE 5 YEAR

10105D8/W/BS

Complete with 0950GB.



10105D8/W/B

10105D8 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

CE 5 YEAR

Complete with 0950GB.



10105D8/B/B

10105D8 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

CE 5 YEAR

10105D8/B/BS

Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105D8/W/W	White	White	10W	100-240V		15cm	62mm	130mm	50	-
10105D8/W/BS	White	Brass	10W	100-240V		15cm	62mm	130mm	50	-
10105D8/W/B	White	Black	10W	100-240V		15cm	62mm	130mm	50	-
10105D8/B/B	Black	Black	10W	100-240V		15cm	62mm	130mm	50	-
10105D8/B/BS	Black	Brass	10W	100-240V		15cm	62mm	130mm	50	-

The Chill Out Range
Round

10105M/W/W

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20

Complete with 0950GB.



10105M/W/B

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20

Complete with 0950GB.



10105M/W/BS

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20

Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105M/W/W	White	White	10W	100-240V		15cm	70mm	120mm	50	-
10105M/W/B	White	Black	10W	100-240V		15cm	70mm	120mm	50	-
10105M/W/BS	White	Brass	10W	100-240V		15cm	70mm	120mm	50	-

The Chill Out Range
Round

10105M/B/B

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20

Complete with 0950GB.



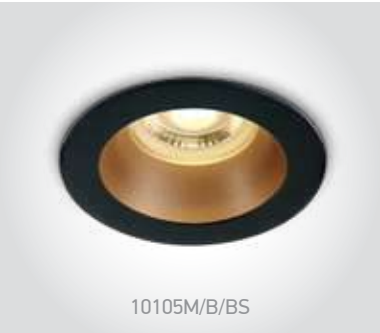

10105M/B/BS

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20

Complete with 0950GB.



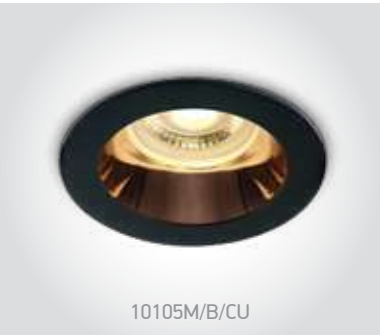

10105M/B/CU

10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20

Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105M/B/B	Black	Black	10W	100-240V		15cm	70mm	120mm	50	-
10105M/B/BS	Black	Brass	10W	100-240V		15cm	70mm	120mm	50	-
10105M/B/CU	Black	Copper	10W	100-240V		15cm	70mm	120mm	50	-

The Chill Out Range
Round

10105MD/W/C

10105MD | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20

Complete with 0950GB.



10105MD/W/GL

10105MD | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20

Complete with 0950GB.



10105MD/B/B

10105MD | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20

Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105MD/W/C	White	Chrome	10W	100-240V		15cm	70mm	120mm	50	-
10105MD/W/GL	White	Gold	10W	100-240V		15cm	70mm	120mm	50	-
10105MD/B/B	Black	Black	10W	100-240V		15cm	70mm	120mm	50	-

The Chill Out Range
Square

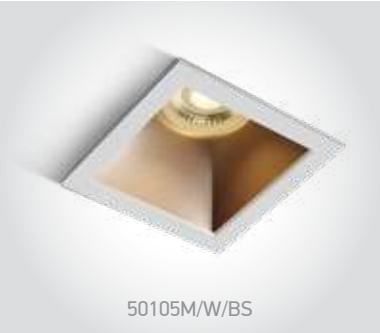
50105M/W/BS

50105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20

Complete with 0950GB.



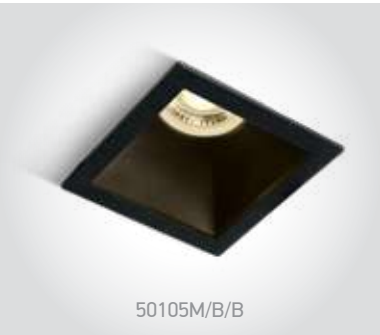
50105M/B/B

50105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20

Complete with 0950GB.



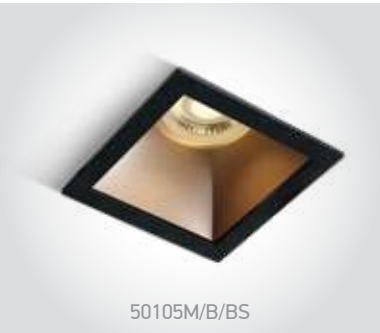
50105M/B/BS

50105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20

Complete with 0950GB.



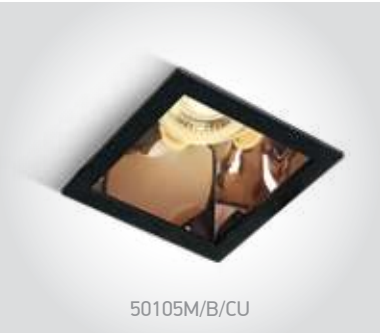
50105M/B/CU

50105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

DARK LIGHT
IP20

Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
50105M/W/BS	White	Brass	10W	100-240V		15cm	76x76mm	130mm	50	-
50105M/B/B	Black	Black	10W	100-240V		15cm	76x76mm	130mm	50	-
50105M/B/BS	Black	Brass	10W	100-240V		15cm	76x76mm	130mm	50	-
50105M/B/CU	Black	Copper	10W	100-240V		15cm	76x76mm	130mm	50	-

The Asymmetric Chill Out Range
Square

50105MA/W/B

50105MA/B/B

50105MA/W/B

50105MA | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Asymmetric for shelf illumination.

DARK LIGHT

IP20

Asymmetric.



50105MA/B/B

50105MA | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Asymmetric for shelf illumination.

DARK LIGHT

IP20

Asymmetric.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
50105MA/W/B	White	Black	10W	100-240V		15cm	76x76mm	150mm	50	Asymmetric
50105MA/B/B	Black	Black	10W	100-240V		15cm	76x76mm	150mm	50	Asymmetric

The Bathroom Range
Aluminium

10105CJ | 50W | MR16 | GU5,3 | Aluminium

DARK LIGHT
IP43
offer

CE 5 YEAR



Order Code	Colour	Watts	Input	Class					Notes
10105CJ/ABS/5	Antique brass	50W	12V	III	40cm	102mm	120mm	50	-

The Fire Rated Dark Light

10109F | 10W | MR16 | GU10 | Fire Rated | Aluminium

FIRE RATED

5 YEAR

DARK LIGHT

IP65

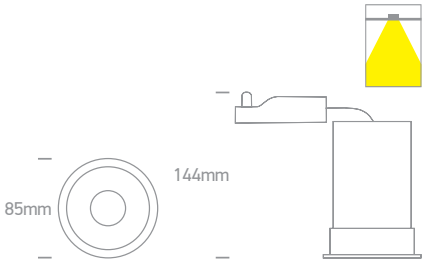

Order Code	Colour	Watts	Input	Class				Notes
10109F/W	White	10W	100-240V		73mm	160mm	30	-

The IP65 Bathroom Range
Aluminium

10105R1/W

10105R1 | 10W | MR16 | GU10 | Aluminium

IP65

Complete with 0950GB.

Clear glass.



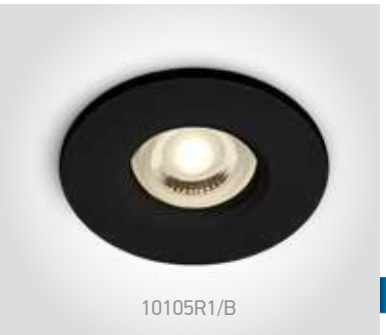
10105R1/B

10105R1 | 10W | MR16 | GU10 | Aluminium

IP65

Complete with 0950GB.

Clear glass.



10105R1/AL

10105R1 | 10W | MR16 | GU10 | Aluminium

IP65

Complete with 0950GB.

Clear glass.



50105R1/W

50105R1 | 10W | MR16 | GU10 | Aluminium

Complete with 0950GB.

IP65

50105R1/B

50105R1/AL



Order Code	Colour	Watts	Input	Class					Notes
10105R1/W	White	10W	100-240V		15cm	68mm	120mm	50	Clear glass
10105R1/B	Black	10W	100-240V		15cm	68mm	120mm	50	Clear glass
10105R1/AL	Aluminium	10W	100-240V		15cm	68mm	120mm	50	Clear glass
50105R1/W	White	10W	100-240V		15cm	68mm	120mm	50	Clear glass
50105R1/B	Black	10W	100-240V		15cm	68mm	120mm	50	Clear glass
50105R1/AL	Aluminium	10W	100-240V		15cm	68mm	120mm	50	Clear glass

The IP65 Dark Light Range
Aluminium

10105R2/W

10105R2 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP65

CE 5 YEAR

Complete with 0950G.

Clear glass.



10105R2/B

10105R2 | 10W | MR16 | GU10 | Aluminium

new
DARK LIGHT
IP65

CE 5 YEAR

Complete with 0950G.

Clear glass.



Order Code	Colour	Watts	Input	Class					Notes
10105R2/W	White	10W	100-240V		15cm	82mm	130mm	50	Clear glass
10105R2/B	Black	10W	100-240V		15cm	82mm	130mm	50	Clear glass

The IP65 Dark Light Range
Aluminium

10105R2P | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP65

5 YEAR

Complete with 0950G.

Prismatic glass.



Order Code	Colour	Watts	Input	Class					Notes
10105R2P/W	White	10W	100-240V		15cm	82mm	130mm	50	Prismatic glass

one

Recessed Cylinders
Aluminium

10105D9/W/B

10105D9 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20

Complete with 0950GB.



10105D9/B/B

10105D9 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20

Complete with 0950GB.



10105D9/B/GL

10105D9 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20

Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105D9/W/B	White	Black	10W	100-240V		15cm	62mm	100mm	50	-
10105D9/B/B	Black	Black	10W	100-240V		15cm	62mm	100mm	50	-
10105D9/B/GL	Black	Gold	10W	100-240V		15cm	62mm	100mm	50	-

Recessed Cylinders
Aluminium

10105Y/W

10105Y | 10W | MR16 | GU10 | Aluminium

CE 5 YEAR

DARK LIGHT

IP20

Complete with 0950GB.



10105Y/B

10105Y | 10W | MR16 | GU10 | Aluminium

CE 5 YEAR

DARK LIGHT

IP20

Complete with 0950GB.



10105E1/B/GL

10105E1 | 10W | MR16 | GU10 | Aluminium

CE 5 YEAR

DARK LIGHT

IP20

Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105Y/W	White	-	10W	100-240V		15cm	68mm	120mm	50	-
10105Y/B	Black	-	10W	100-240V		15cm	68mm	120mm	50	-
10105E1/B/GL	Black	Gold	10W	100-240V		15cm	62mm	100mm	50	-

Trimless Gypsum

10105GT2

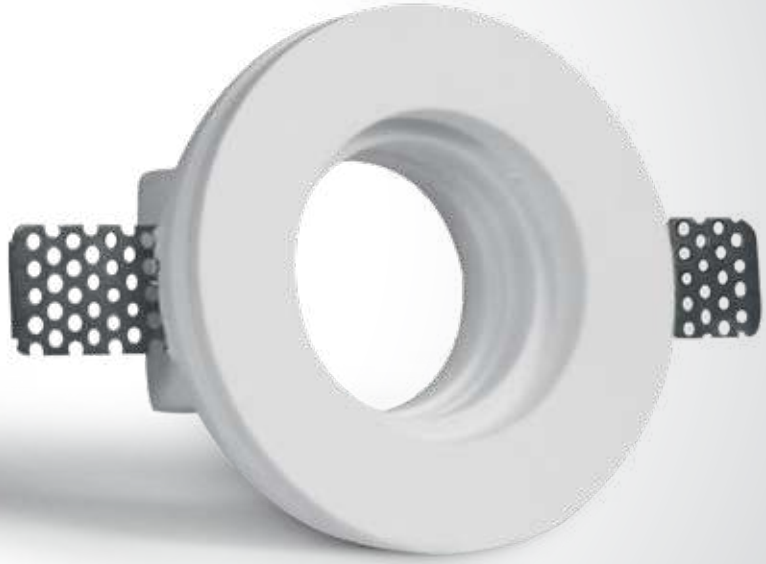

10105GT1

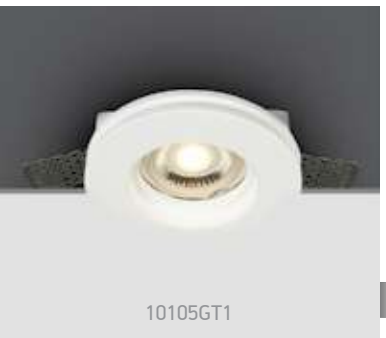

10105GT1

10105GT1 | 10W | MR16 | GU10 | Trimless | Gypsum

IP20

Suitable for GU10 LED lamp.

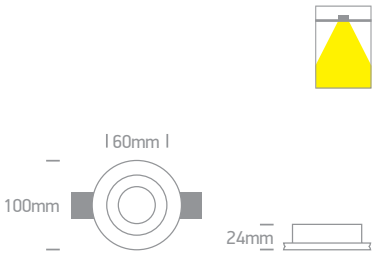

10105GT2

10105GT2 | 10W | MR16 | GU10 | Trimless | Gypsum

DARK LIGHT

IP20

Suitable for GU10 LED lamp.

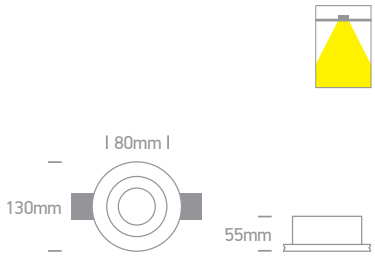

Order Code	Colour	Watts	Input	Class					Notes
10105GT1	White	10W	100-240V		15cm	102mm	100mm	24	-
10105GT2	White	10W	100-240V		15cm	132mm	150mm	24	-

The Trimless Chill Out Range
Aluminium

10105TR/W

10105TR | 10W | MR16 | GU10 | Trimless | Aluminium

DARK LIGHT

IP20

5 YEAR

Complete with 0950GB.

2 Step reflector.



10105TR/B

10105TR | 10W | MR16 | GU10 | Trimless | Aluminium

DARK LIGHT

IP20

5 YEAR

Complete with 0950GB.

2 Step reflector.



10105TR/BS

10105TR | 10W | MR16 | GU10 | Trimless | Aluminium

DARK LIGHT

IP20

5 YEAR

Complete with 0950GB.

2 Step reflector.



Order Code	Colour	Watts	Input	Class					Notes
10105TR/W	White	10W	100-240V		15cm	70mm	120mm	60	-
10105TR/B	Black	10W	100-240V		15cm	70mm	120mm	60	-
10105TR/BS	Brass	10W	100-240V		15cm	70mm	120mm	60	-

The Trimless Chill Out Range
Round

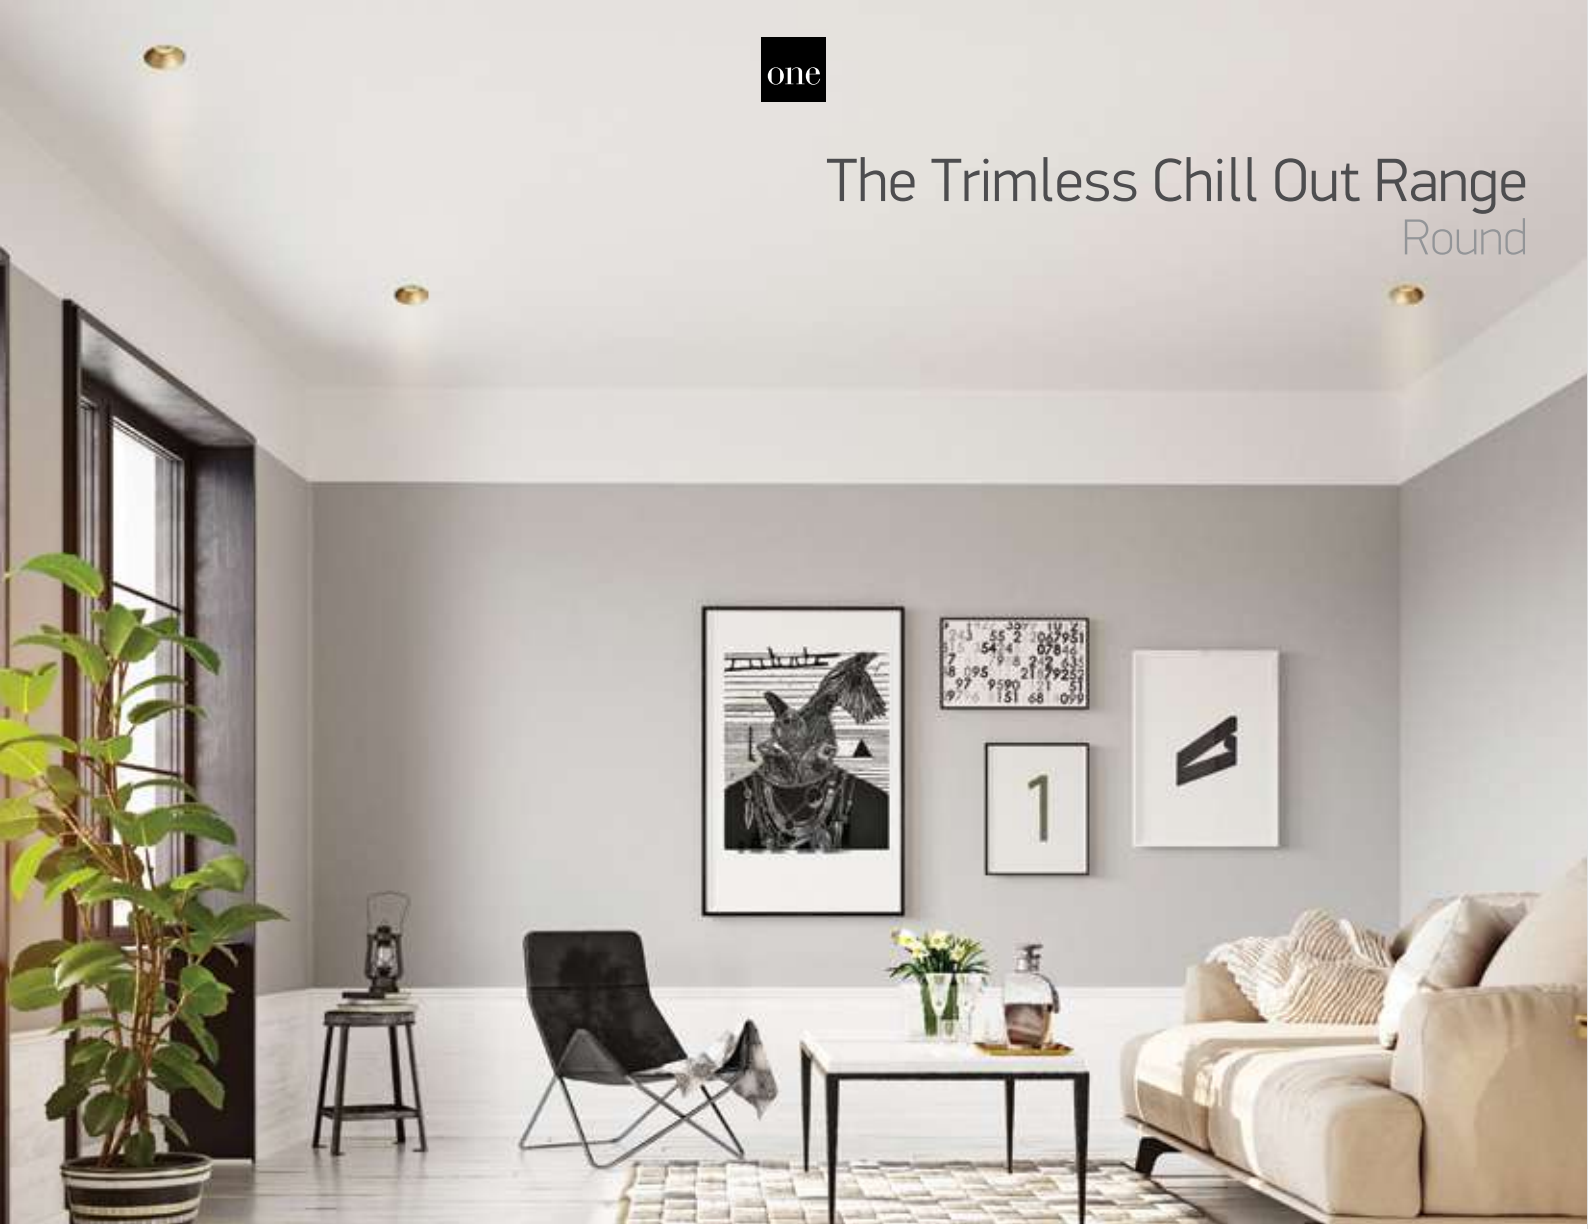

10105MR + 050112/B

10105MR | 10W | MR16 | GU10 | Trimeless | Aluminium

Reflector must be ordered separately.

new

DARK LIGHT

IP20

CE 5 YEAR

Complete with 0950GB.



10105MR + 050112/W

10105MR + 050112/B

10105MR + 050112/BS

10105MR + 050112/ABS

10105MR + 050112/DC

050112/W White

050112/B Black

050112/G Grey

050112/BS Brass

050112/ABS
Antique brass

050112/GL Gold

050112/DC
Dark chrome

Order Code	Colour	Watts	Input	Class					Notes
10105MR	White	10W	100-240V	⏚	15cm	90mm	130mm	50	-

10105RM + 050099/W

10105RM + 050099/B

The Trimless Chill Out Range
Round

10105RM + 050099/W

10105RM | 10W | MR16 | GU10 | Trimless | Aluminium body + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

CE 5 YEAR

Complete with 0950GB.





050099/W White

050099/B Black

050099/CU Copper

050099/DC Dark chrome

Order Code	Colour	Watts	Input	Class					Notes
10105RM	White	10W	100-240V	⏚	15cm	90mm	130mm	50	-

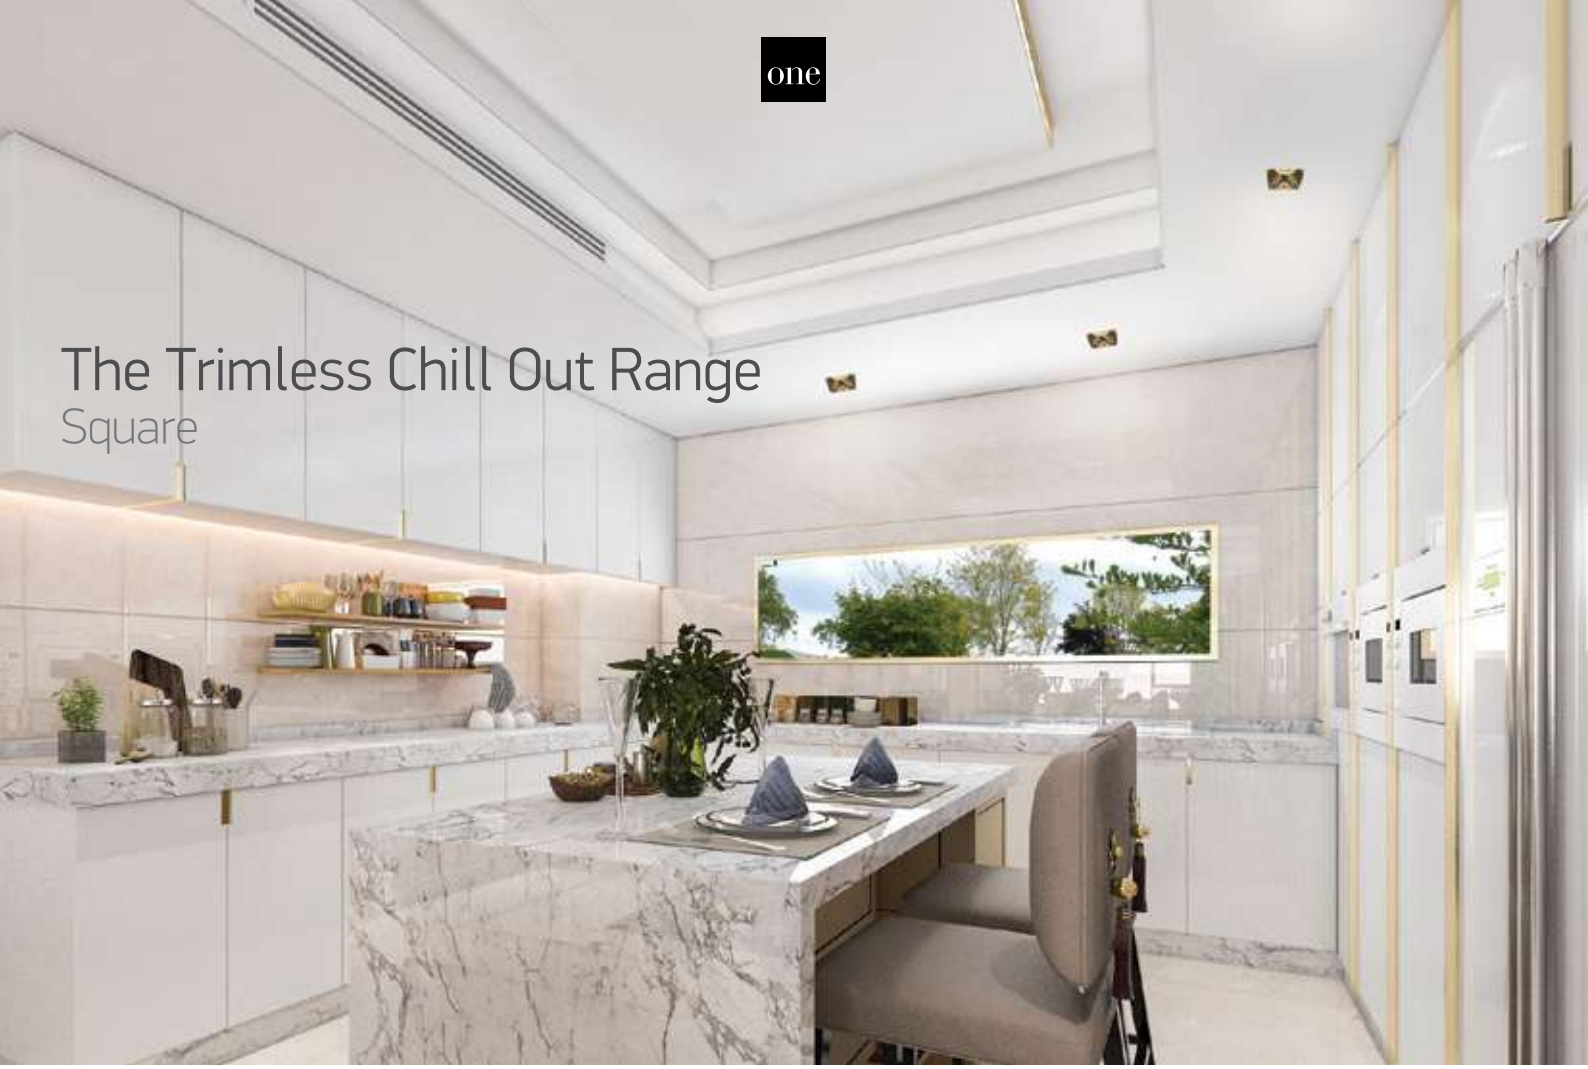

The Trimless Chill Out Range
Square

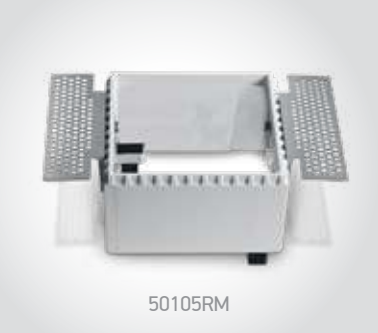

50105RM

50105RM | 10W | MR16 | GU10 | Trimless | Aluminium body + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

5 YEAR

Complete with 0950GB.

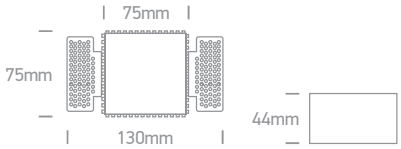

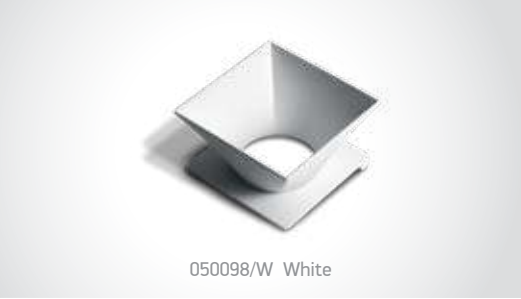

050098/W White

050098/B Black

050098/BS Brass

50105RM + 050098/W

50105RM + 050098/B

50105RM + 050098/BS

Order Code	Colour	Watts	Input	Class					Notes
50105RM	White	10W	100-240V		15cm	85x75mm	130mm	50	-

Trimless Cylinder

10105YTR/W

10105YTR | 10W | MR16 | GU10 | Trimless | Aluminium

DARK LIGHT

IP20

5 YEAR

Complete with 0950GB.

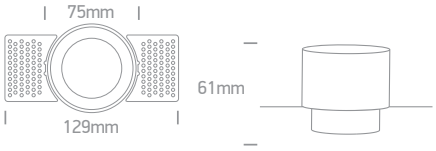

Order Code	Colour	Watts	Input	Class					Notes
10105YTR/W	White	10W	100-240V		15cm	80mm	130mm	50	-

one

Recessed Spots Fixed LED

Pages 35-82

02

The Super Mini Series

10101L/W/W

10101L | 1W | LED | Aluminium

Driver can not pass through the cut-out hole.

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
CE
3 YEAR
IP44

10101L/B/W



10101L/W/BL

10101L | 1W | LED | Aluminium

Driver can not pass through the cut-out hole.

LED BUILT IN
DIMMABLE
QUICK FIX
CE
3 YEAR
IP44



10101LA/W/W

10101LA | 2W | COB | Aluminium

Driver can not pass through the cut-out hole.

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
CE
3 YEAR
IP44

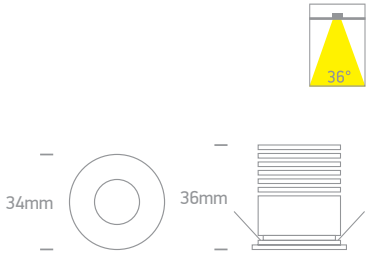

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10101L/W/W	White	Warm white	3000K	1W	95lm	-	350mA	III	100cm	12mm	30mm	100	Requires 350mA driver
10101L/W/BL	White	Blue	-	1W	-	-	350mA	III	100cm	12mm	30mm	100	Requires 350mA driver
10101L/B/W	Black	Warm white	3000K	1W	95lm	-	350mA	III	100cm	12mm	30mm	100	Requires 350mA driver
10101LA/W/W	White	Warm white	3000K	2W	190lm	36°	700mA	III	200cm	27mm	55mm	100	Requires 700mA driver

Mini Spots
Aluminium

10103B/AL/W

10103B | 1W/2W | COB | Aluminium

1W@350mA / 2W@700mA.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · IP20

10103B/W/C



10103C/B/W

10103C | 3W | COB | Aluminium

new · LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · IP20

Suitable for 89004 driver.



10103B/W/V

10103B | 3W | COB | Aluminium

new · LED BUILT IN · 90 CRI · DIMMABLE · CCT V · QUICK FIX · CE · 5 YEAR · IP20

Suitable for 89004 driver.



10103B/B/V

10103B | 3W | COB | Aluminium

new · LED BUILT IN · 90 CRI · DIMMABLE · CCT V · QUICK FIX · CE · 5 YEAR · IP20

Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103B/W/C	White	Cool white	4000K	1W/2W	200lm@2W	40°	350mA/700mA	III	40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/AL/W	Aluminium	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA	III	40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103C/B/W	Black	Warm white	3000K	3W	300lm	40°	350mA	III	40cm	36mm	38mm	100	Requires 350mA driver
10103B/W/V	White	CCT V	3000K-3500K-4000K	3W	300lm	36°	350mA	III	40cm	35mm	38mm	100	Requires 350mA driver
10103B/B/V	Black	CCT V	3000K-3500K-4000K	3W	300lm	36°	350mA	III	40cm	35mm	38mm	100	Requires 350mA driver

The 3W Dark Light Range
Aluminium

10103E/W/B/W

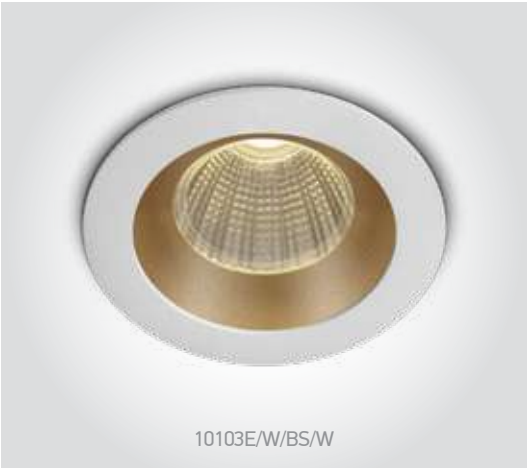

10103E/W/BS/W

10103E/B/BS/W

The 3W Dark Light Range
Aluminium

10103E | 3W | COB | Aluminium

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP20
CE 5 YEAR



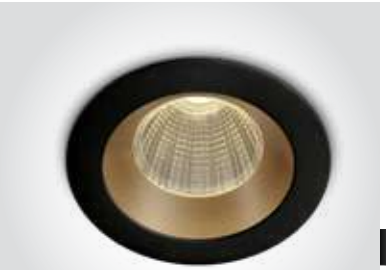

10103E | 3W | COB | Aluminium

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP20
CE 5 YEAR



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103E/W/B/W	White	Black	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	44mm	60mm	50	Requires 350mA driver
10103E/W/BS/W	White	Brass	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	44mm	60mm	50	Requires 350mA driver
10103E/B/BS/W	Black	Brass	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	44mm	60mm	50	Requires 350mA driver

The 7W / 8W Range

10108R/W/W

10108R | 8W | COB | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
IP20

10108R/B/W



10107DC/B/W

10107DC | 7W | COB | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP20



10108D1/W/W

10108D1 | 8W | COB | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10108R/W/W	White	Warm white	3000K	8W	750lm	60°	230V		-	68mm	50mm	50	Complete with 350mA driver
10108R/B/W	Black	Warm white	3000K	8W	750lm	60°	230V		-	68mm	50mm	50	Complete with 350mA driver
10107DC/B/W	Black	Warm white	3000K	7W	560lm	50°	230V		15cm	55mm	110mm	50	Complete with 300mA driver
10108D1/W/W	White	Warm white	3000K	8W	560lm	36°	230V		-	73mm	105mm	50	Complete with 300mA driver

The 8W Asymmetric Range

10108A | 8W | COB | Aluminium | Asymmetric reflector

LED BUILT IN

80 CRI

CE

3 YEAR

DARK LIGHT

IP20

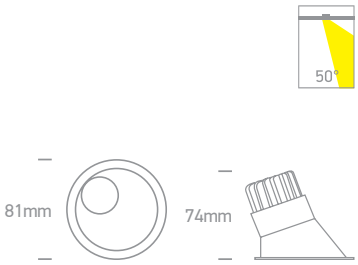

50108A | 8W | COB | Aluminium | Asymmetric reflector

LED BUILT IN

80 CRI

CE

3 YEAR

DARK LIGHT

IP20



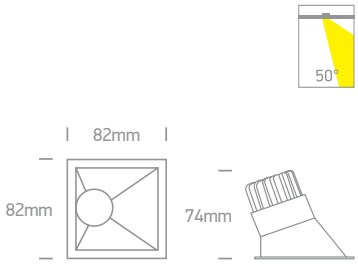

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108A/W/W	White	Warm white	3000K	8W	560lm	50°	230V		68mm	85mm	20	Complete with 350mA driver
50108A/W/W	White	Warm white	3000K	8W	560lm	50°	230V		73x73mm	85mm	50	Complete with 350mA driver

The 12W Dark Light Range
Aluminium

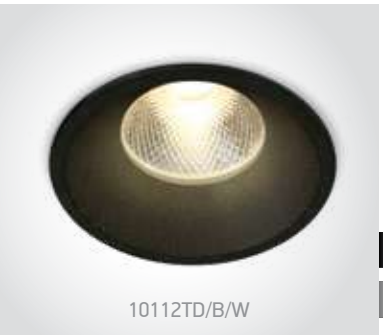

10112TD | 12W | COB | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

DARK LIGHT

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10112TD/B/W	Black	Warm white	3000K	12W	960lm	20°	230V		82mm	100mm	50	Complete with 300mA driver

one

The Mix & Match Range

10112HA | 12W | COB | Aluminium

GU10 version on page 7.

10112HA/W/W

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP20
CE
5 YEAR

10112HA/B/W



050182 | Rings for 10112HA | Aluminium

050182/W White

IP20
CE

050182/B Black

050182/BS Brass



050182R | Round base for 10112HA | Aluminium

050182R/W White

IP20
CE

050182R/B Black

050182R/BS Brass



050182RA | Square base for 10112HA | Aluminium

050182RA/W White

IP20
CE

050182RA/B Black

050182RA/BS Brass



050182RB | Double Square base for 10112HA | Aluminium

050182RB/W White

IP20
CE

050182RB/B Black

050182RB/BS Brass



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112HA/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	66mm	135mm	50	Requires 700mA driver
10112HA/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	66mm	135mm	50	Requires 700mA driver

The Dark Light Pro Range

Aluminium CCT V

10110FD | 10W | COB | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CCT V
CE
3 YEAR





10115FD | 15W | COB | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CCT V
CE
3 YEAR

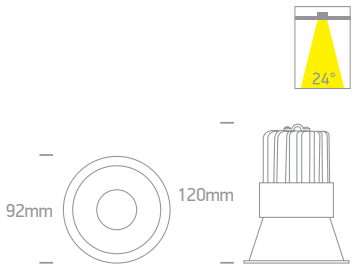

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10110FD/W/V	White	CCT V	3000K-3500K-4000K	10W	800lm	24°	230V		68mm	130mm	50	Complete with 300mA driver
10110FD/B/V	Black	CCT V	3000K-3500K-4000K	10W	800lm	24°	230V		68mm	130mm	50	Complete with 300mA driver
10115FD/W/V	White	CCT V	3000K-3500K-4000K	15W	1275lm	24°	230V		82mm	150mm	20	Complete with 350mA driver

The Dark Light Pro Range
Aluminium

10105FD/B/W

10105FD | 5W | COB | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20



10115FD/B/W

10115FD | 15W | COB | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20

10115FD/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10105FD/B/W	Black	Warm white	3000K	5W	300lm	24°	230V		50mm	120mm	50	Complete with 300mA driver
10115FD/W/W	White	Warm white	3000K	15W	1275lm	24°	230V		82mm	150mm	20	Complete with 350mA driver
10115FD/B/W	Black	Warm white	3000K	15W	1275lm	24°	230V		82mm	150mm	20	Complete with 350mA driver

The Retro Dark Light Range

10107Z/B/W

10112Z/W/W

10120Z/B/W

The Retro Dark Light Range

10107Z | 7W | COB | Aluminium + plastic

10107Z/W/W

LED BUILT IN | 80 CRI | CE | 3 YEAR | DARK LIGHT | IP20

10107Z/B/W

Complete with Black & Brass reflectors. Optional White reflector code 050378A/W.



10112Z | 12W | COB | Aluminium + plastic

10112Z/W/W

LED BUILT IN | 80 CRI | CE | 3 YEAR | DARK LIGHT | IP20

10112Z/B/W

Complete with Black & Brass reflectors. Optional White reflector code 050378B/W.



10120Z | 20W | COB | Aluminium + plastic

10120Z/W/W

LED BUILT IN | 80 CRI | CE | 3 YEAR | DARK LIGHT | IP20

10120Z/B/W

Complete with Black & Brass reflectors. Optional White reflector code 050378C/W.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107Z/W/W	White	Warm white	3000K	7W	560lm	45°	230V		65mm	80mm	40	Complete with 160mA driver
10107Z/B/W	Black	Warm white	3000K	7W	560lm	45°	230V		65mm	80mm	40	Complete with 160mA driver
10112Z/W/W	White	Warm white	3000K	12W	960lm	45°	230V		82mm	88mm	30	Complete with 300mA driver
10112Z/B/W	Black	Warm white	3000K	12W	960lm	45°	230V		82mm	88mm	30	Complete with 300mA driver
10120Z/W/W	White	Warm white	3000K	20W	1600lm	45°	230V		105mm	105mm	20	Complete with 500mA driver
10120Z/B/W	Black	Warm white	3000K	20W	1600lm	45°	230V		105mm	105mm	20	Complete with 500mA driver

one

The COB Dark Light Range

10103LB | 3W | COB | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · CE · 5 YEAR · IP20



10103LB | 3W | COB | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · CE · 5 YEAR · IP20



10107RA | 7W | COB | Aluminium

LED BUILT IN · new · 90 CRI · CCT V · CE · DARK LIGHT · 3 YEAR · IP20



10112RA | 12W | COB | Aluminium

LED BUILT IN · new · 90 CRI · CCT V · CE · DARK LIGHT · 3 YEAR · IP20

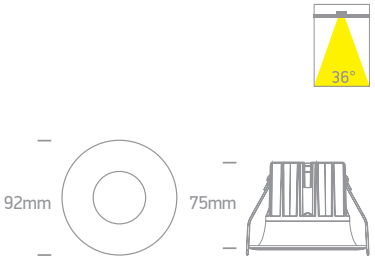

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103LB/W/W	White	Warm white	3000K	3W	300lm	36°	350mA	III	40cm	38mm	55mm	100	Requires 350mA driver
10103LB/B/W	Black	Warm white	3000K	3W	300lm	36°	350mA	III	40cm	38mm	55mm	100	Requires 350mA driver
10107RA/W/V	White	CCT V	3000K-4000K-5000K	7W	500lm	36°	230V		-	55mm	80mm	50	Complete with 160mA driver
10112RA/W/V	White	CCT V	3000K-4000K-5000K	12W	900lm	36°	230V		-	75mm	90mm	50	Complete with 300mA driver

The COB Dark Light Range

10107D/W/V

10107D | 7W | COB | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CCT V
CE
3 YEAR



10107D/B/V



10112D/W/V

10112D | 12W | COB | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CCT V
CE
3 YEAR



10112D/B/V



10115D/W/V

10115D | 15W | COB | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CCT V
CE
3 YEAR



10115D/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107D/W/V	White	CCT V	3000K-4000K-5000K	7W	630lm	50°	230V		65mm	95mm	50	Complete with 160mA driver
10107D/B/V	Black	CCT V	3000K-4000K-5000K	7W	630lm	50°	230V		65mm	95mm	50	Complete with 160mA driver
10112D/W/V	White	CCT V	3000K-4000K-5000K	12W	1080lm	50°	230V		72mm	100mm	50	Complete with 300mA driver
10112D/B/V	Black	CCT V	3000K-4000K-5000K	12W	1080lm	50°	230V		72mm	100mm	50	Complete with 300mA driver
10115D/W/V	White	CCT V	3000K-4000K-5000K	15W	1350lm	50°	230V		83mm	110mm	30	Complete with 350mA driver
10115D/B/V	Black	CCT V	3000K-4000K-5000K	15W	1350lm	50°	230V		83mm	110mm	30	Complete with 350mA driver

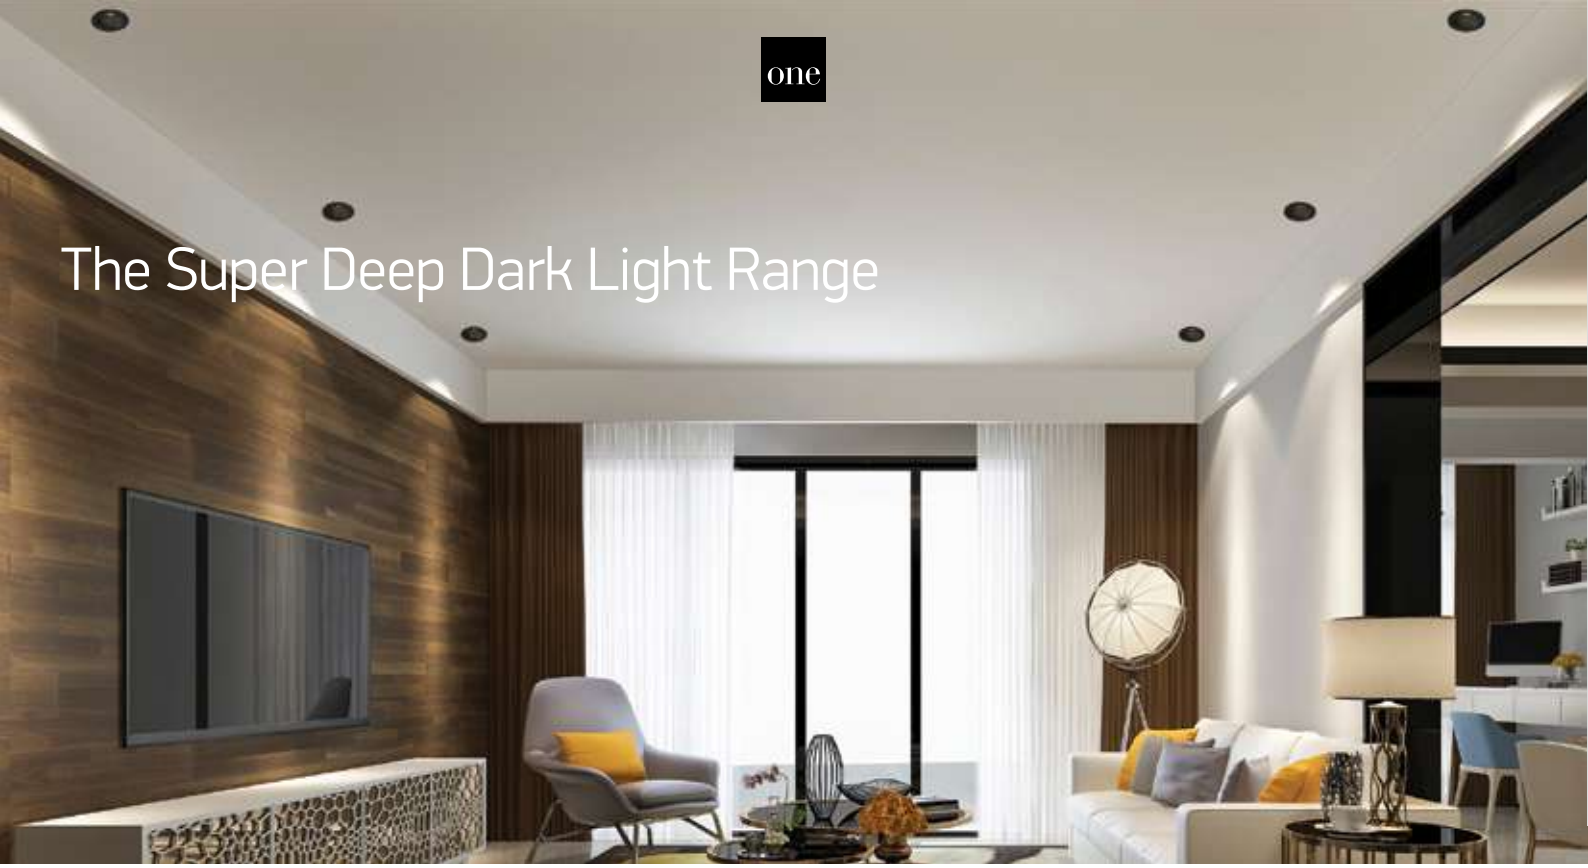

The Super Deep Dark Light Range

10103J/W/W

10103J | 3W | LED | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CE
3 YEAR



10103J/B/W



10107J/W/V

10107J | 7W | LED | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CCT V
CE
3 YEAR



10107J/B/V



10107JTR/W/V

10107JTR | 7W | LED | Trimless | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CCT V
CE
3 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103J/W/W	White	Warm white	3000K	3W	150lm	36°	230V		25mm	100mm	50	Complete with 700mA driver
10103J/B/W	Black	Warm white	3000K	3W	150lm	36°	230V		25mm	100mm	50	Complete with 700mA driver
10107J/W/V	White	CCT V	3000K-3500K-4000K	7W	450lm	36°	230V		39mm	110mm	30	Complete with 160mA driver
10107J/B/V	Black	CCT V	3000K-3500K-4000K	7W	450lm	36°	230V		39mm	110mm	30	Complete with 160mA driver
10107JTR/W/V	White	CCT V	3000K-3500K-4000K	7W	450lm	36°	230V		45mm	130mm	30	Complete with 160mA driver

one

The COB Dark Light Range
CCT V

10107DX | 7W | COB | Aluminium

10107DX/W/V

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CCT V
CE
5 YEAR

new
10107DX/B/V



10112DX | 12W | COB | Aluminium

10112DX/W/V

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CCT V
CE
5 YEAR

new
10112DX/B/V



10118DX | 18W | COB | Aluminium

10118DX/W/V

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CCT V
CE
5 YEAR

new
10118DX/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107DX/W/V	White	CCT V	3000K-3500K-4000K	7W	560lm	36°	230V		54mm	60mm	50	Complete with 160mA driver
10107DX/B/V	Black	CCT V	3000K-3500K-4000K	7W	560lm	36°	230V		54mm	60mm	50	Complete with 160mA driver
10112DX/W/V	White	CCT V	3000K-3500K-4000K	12W	960lm	36°	230V		70mm	70mm	30	Complete with 300mA driver
10112DX/B/V	Black	CCT V	3000K-3500K-4000K	12W	960lm	36°	230V		70mm	70mm	30	Complete with 300mA driver
10118DX/W/V	White	CCT V	3000K-3500K-4000K	18W	1440lm	36°	230V		82mm	80mm	20	Complete with 450mA driver
10118DX/B/V	Black	CCT V	3000K-3500K-4000K	18W	1440lm	36°	230V		82mm	80mm	20	Complete with 450mA driver

The Mirror Dark Light Range

10103H | 3W | SMD | Aluminium

10103H/B/W

LED BUILT IN

90 CRI

CE

5 YEAR

DARK LIGHT

IP20

10103H/W/W



50103H | 3W | SMD | Aluminium

50103H/B/W

LED BUILT IN

90 CRI

CE

5 YEAR

DARK LIGHT

IP20

50103H/W/W

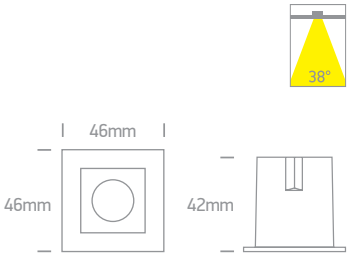

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103H/W/W	White	Warm white	3000K	3W	160lm	38°	230V		35mm	70mm	60	Complete with 700mA driver
10103H/B/W	Black	Warm white	3000K	3W	160lm	38°	230V		35mm	70mm	60	Complete with 700mA driver
50103H/W/W	White	Warm white	3000K	3W	160lm	38°	230V		38x38mm	70mm	60	Complete with 700mA driver
50103H/B/W	Black	Warm white	3000K	3W	160lm	38°	230V		38x38mm	70mm	60	Complete with 700mA driver

one

The Mirror Dark Light Range

10110H/W/W

10110H | 10W | SMD | Aluminium

LED BUILT IN

90 CRI

CE

5 YEAR

DARK LIGHT

IP20

10110H/B/W



50110H/W/W

50110H | 10W | SMD | Aluminium

LED BUILT IN

90 CRI

CE

5 YEAR

DARK LIGHT

IP20



50012H/W/W

50012H | 12W | SMD | Aluminium

LED BUILT IN

90 CRI

CE

5 YEAR

DARK LIGHT

IP20

50012H/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10110H/W/W	White	Warm white	3000K	10W	700lm	38°	230V		75mm	60mm	40	Complete with 700mA driver
10110H/B/W	Black	Warm white	3000K	10W	700lm	38°	230V		75mm	60mm	40	Complete with 700mA driver
50110H/W/W	White	Warm white	3000K	10W	700lm	38°	230V		68x68mm	60mm	40	Complete with 700mA driver
50012H/W/W	White	Warm white	3000K	12W	840lm	38°	230V		140x36mm	80mm	40	Complete with 700mA driver
50012H/B/W	Black	Warm white	3000K	12W	840lm	38°	230V		140x36mm	80mm	40	Complete with 700mA driver

The COB Dark Light Range

10118DC/W/W

10106DC/B/W

10106DC/B/W

10106DC | 6W | COB | Aluminium

LED BUILT IN

90 CRI

DIMMABLE

QUICK FIX

DARK LIGHT

IP20

CE 5 YEAR

Suitable for 89008 driver.

10118DC/W/W

10118DC | 18W | COB | Aluminium

LED BUILT IN

90 CRI

DIMMABLE

QUICK FIX

DARK LIGHT

IP20

CE 5 YEAR

Suitable for 89030C driver.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106DC/B/W	Black	Warm white	3000K	6W	570lm	36°	350mA	III	40cm	55mm	75mm	50	Requires 350mA driver
10118DC/W/W	White	Warm white	3000K	18W	1750lm	36°	500mA	III	40cm	94mm	100mm	30	Requires 500mA driver

one

10120X/B/W

10106X/W/W

The Round Mirror Range

10106X/W/W

10106X | 6W | SMD | Aluminium

LED BUILT IN

90 CRI

CE

5 YEAR

DARK LIGHT

IP20



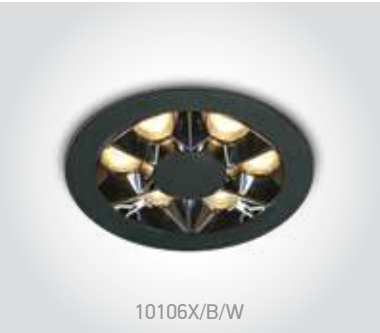

10106X/B/W

10106X | 6W | SMD | Aluminium

LED BUILT IN

90 CRI

CE

5 YEAR

DARK LIGHT

IP20



10120X/B/W

10120X | 20W | SMD | Aluminium

LED BUILT IN

90 CRI

CE

5 YEAR

DARK LIGHT

IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10106X/W/W	White	Warm white	3000K	6W	480lm	38°	230V		75mm	60mm	40	Complete with 150mA driver
10106X/B/W	Black	Warm white	3000K	6W	480lm	38°	230V		75mm	60mm	40	Complete with 150mA driver
10120X/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V		116mm	50mm	30	Complete with 450mA driver

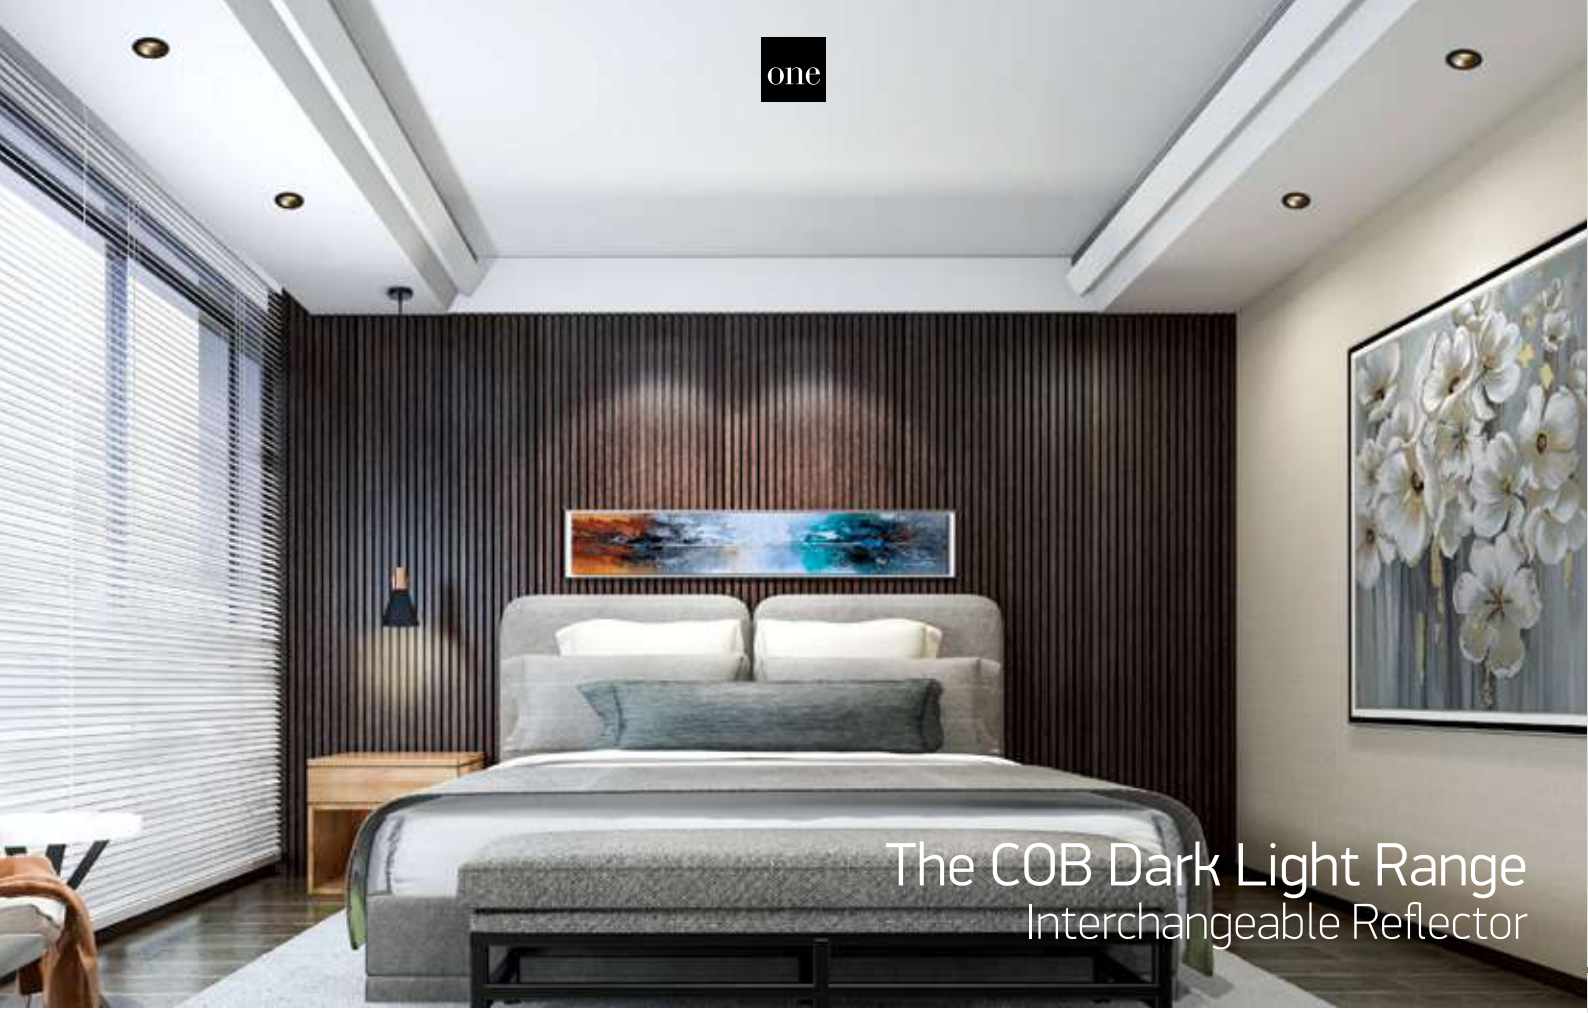

The COB Dark Light Range
Interchangeable Reflector

10107K/W/W + 050104/B

10107K | 6,5W | COB | Aluminium

Ring must be ordered separately.

LED BUILT IN
80 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP20
CE 5 YEAR



10107K/B/W + 050104/BS



10107K/W/V + 050104/W

10107K | 6,5W | COB | Aluminium

Ring must be ordered separately.

new
LED BUILT IN
90 CRI
DIMMABLE
CCT V
DARK LIGHT
IP20
QUICK FIX
CE 5 YEAR



050104/W White

050104/B Black

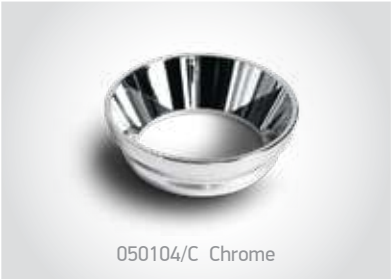

050104/C Chrome

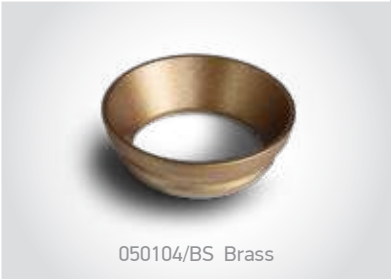

050104/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107K/W/W	White	Warm white	3000K	6,5W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver
10107K/B/W	Black	Warm white	3000K	6,5W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver
10107K/W/V	White	CCT V	3000K-3500K-4000K	6,5W	650lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver

The COB Dark Light Range
Interchangeable Reflector

10112K/W/W + 050280/B

10112K | 12W | COB | Aluminium

Reflector must be ordered separately.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20

10112K/B/W + 050280/BS

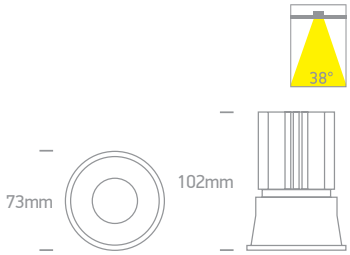

10112K/W/V + 050280/W

10112K | 12W | COB | Aluminium

Reflector must be ordered separately.

new · LED BUILT IN · 90 CRI · DIMMABLE · CCT V · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20

10112K/B/V + 050280/B

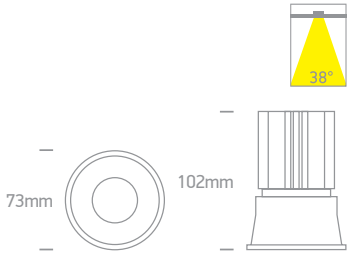

050280/W White

050280/B Black

050280/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112K/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver
10112K/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver
10112K/W/V	White	CCT V	3000K-3500K-4000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver
10112K/B/V	Black	CCT V	3000K-3500K-4000K	12W	1100lm	38°	700mA	III	40cm	67mm	120mm	50	Requires 700mA driver

one

Mirror Square Boxes
Aluminium

50106B/W/W

50106B | 6W | COB | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
IP20

50106B/B/W

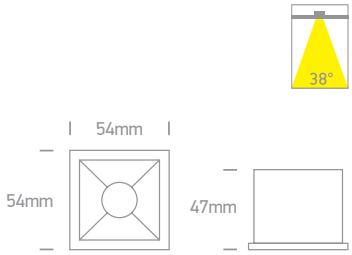

50306B/W/W

50306B | 12W | COB | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
IP20

50306B/B/W

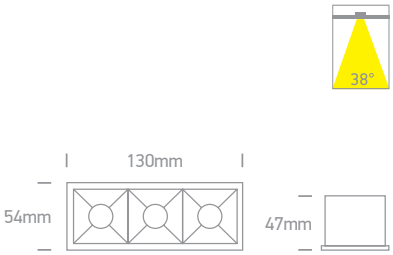

50406B/W/W

50406B | 16W | COB | Aluminium

Adjustable version page 121.

LED BUILT IN
90 CRI
CE
3 YEAR
IP20

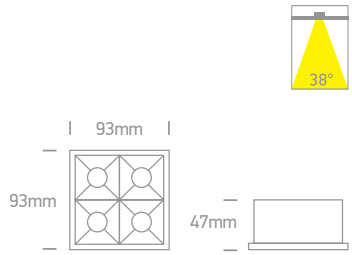

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50106B/W/W	White	Warm white	3000K	6W	480lm	38°	230V		50x45mm	70mm	50	Complete with 135mA driver
50106B/B/W	Black	Warm white	3000K	6W	480lm	38°	230V		50x45mm	70mm	50	Complete with 135mA driver
50306B/W/W	White	Warm white	3000K	12W	960lm	38°	230V		124x45mm	70mm	48	Complete with 300mA driver
50306B/B/W	Black	Warm white	3000K	12W	960lm	38°	230V		124x45mm	70mm	48	Complete with 300mA driver
50406B/W/W	White	Warm white	3000K	16W	1280lm	38°	230V		85x85mm	70mm	36	Complete with 400mA driver

Mirror Square Boxes
Aluminium

50506B/W/W

50506B | 20W | COB | Aluminium

Adjustable version page 121.

LED BUILT IN

90 CRI

CE

3 YEAR

IP20

50506B/B/W



50006B/W/W

50006B | 40W | COB | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50506B/W/W	White	Warm white	3000K	20W	1600lm	38°	230V		200x45mm	70mm	20	Complete with 500mA driver
50506B/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V		200x45mm	70mm	20	Complete with 500mA driver
50006B/W/W	White	Warm white	3000K	40W	3200lm	38°	230V		386x45mm	70mm	15	Complete with 1000mA driver

Mini Shop Square Boxes
Aluminium

50102B/W/W

50102B | 2W | LED | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20

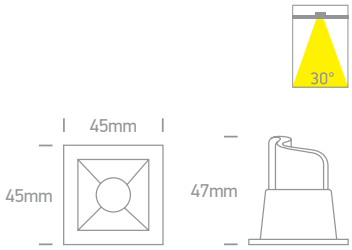

50102B/B/W

50102B | 2W | LED | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20

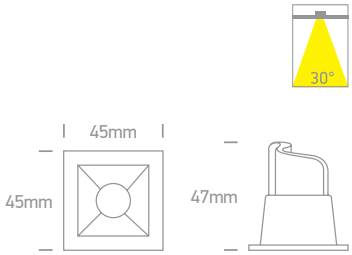

50202B/W/W

50202B | 2x2W | LED | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20

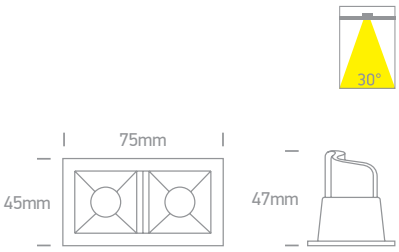

50202B/B/W

50202B | 2x2W | LED | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20

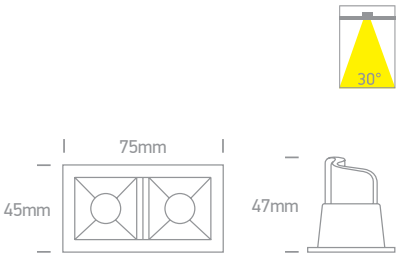

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
50102B/W/W	White	Warm white	3000K	2W	160lm	30°	700mA	III	30cm	36x36mm	60mm	100	Use 89004A driver
50102B/B/W	Black	Warm white	3000K	2W	160lm	30°	700mA	III	30cm	36x36mm	60mm	100	Use 89004A driver
50202B/W/W	White	Warm white	3000K	2x2W	2x160lm	30°	700mA	III	30cm	66x36mm	60mm	60	Use 89006PA driver
50202B/B/W	Black	Warm white	3000K	2x2W	2x160lm	30°	700mA	III	30cm	66x36mm	60mm	60	Use 89006PA driver

Mini Shop Square Boxes
Aluminium

50302B | 3x2W | LED | Aluminium

50302B/W/W

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
CE 3 YEAR
IP20

50302B/B/W

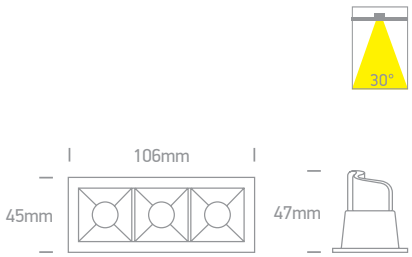

50502B | 5x2W | LED | Aluminium

50502B/W/W

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
CE 3 YEAR
IP20

50502B/B/W

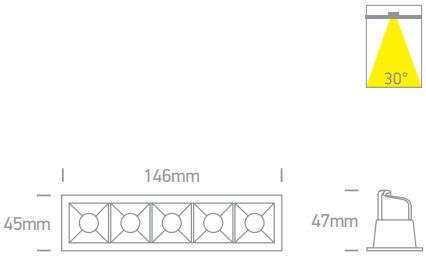

50902B | 10x2W | LED | Aluminium

50902B/W/W

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
CE 3 YEAR
IP20

50902B/B/W

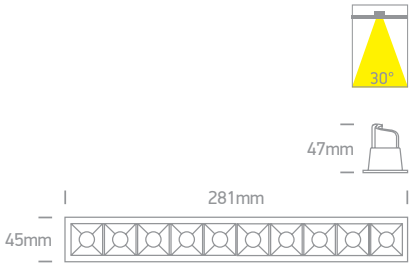

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
50302B/W/W	White	Warm white	3000K	3x2W	3x160lm	30°	700mA	III	30cm	97x36mm	60mm	50	Use 89008A driver
50302B/B/W	Black	Warm white	3000K	3x2W	3x160lm	30°	700mA	III	30cm	97x36mm	60mm	50	Use 89008A driver
50502B/W/W	White	Warm white	3000K	5x2W	5x160lm	30°	700mA	III	30cm	137x36mm	60mm	30	Use 89015A driver
50502B/B/W	Black	Warm white	3000K	5x2W	5x160lm	30°	700mA	III	30cm	137x36mm	60mm	30	Use 89015A driver
50902B/W/W	White	Warm white	3000K	10x2W	10x160lm	30°	700mA	III	30cm	272x36mm	60mm	20	Use 89030A driver
50902B/B/W	Black	Warm white	3000K	10x2W	10x160lm	30°	700mA	III	30cm	272x36mm	60mm	20	Use 89030A driver

one

Medium Shop Square Boxes

50107B | 6,5W | COB | Aluminium + steel

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20



50207B | 2x6,5W | COB | Aluminium + steel

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20

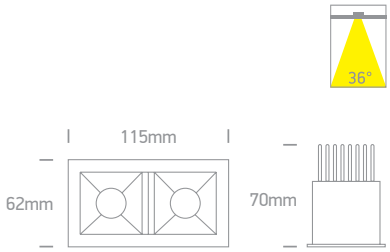

50307B | 3x6,5W | COB | Aluminium + steel

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20

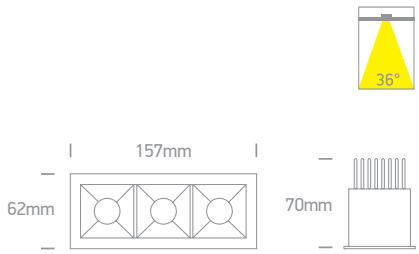

50507B | 5x6,5W | COB | Aluminium + steel

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 3 YEAR · IP20

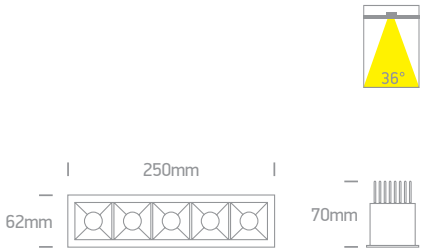

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
50107B/W/W	White	Warm white	3000K	6,5W	550lm	36°	350mA	III	40cm	57x57mm	90mm	60	Use 89008 driver
50207B/W/W	White	Warm white	3000K	2x6,5W	2x550lm	36°	350mA	III	40cm	108x57mm	90mm	36	Use 89015 driver
50307B/W/W	White	Warm white	3000K	3x6,5W	3x550lm	36°	350mA	III	40cm	150x57mm	90mm	24	Use 89020 driver
50507B/W/W	White	Warm white	3000K	5x6,5W	5x550lm	36°	350mA	III	40cm	240x57mm	90mm	16	Use 1x89015 & 1x89020 drivers

Dark Light Tubes

50406C/W/W

50406C | 10W | SMD | Aluminium

LED BUILT IN

85 CRI

CE

3 YEAR

DARK LIGHT

IP20

50406C/B/W



50906C/W/W

50906C | 22W | SMD | Aluminium

LED BUILT IN

85 CRI

CE

3 YEAR

DARK LIGHT

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50406C/W/W	White	Warm white	3000K	10W	800lm	25°	230V		68x68mm	70mm	30	Complete with 700mA driver
50406C/B/W	Black	Warm white	3000K	10W	800lm	25°	230V		68x68mm	70mm	30	Complete with 700mA driver
50906C/W/W	White	Warm white	3000K	22W	1760lm	25°	230V		96x96mm	70mm	18	Complete with 700mA driver

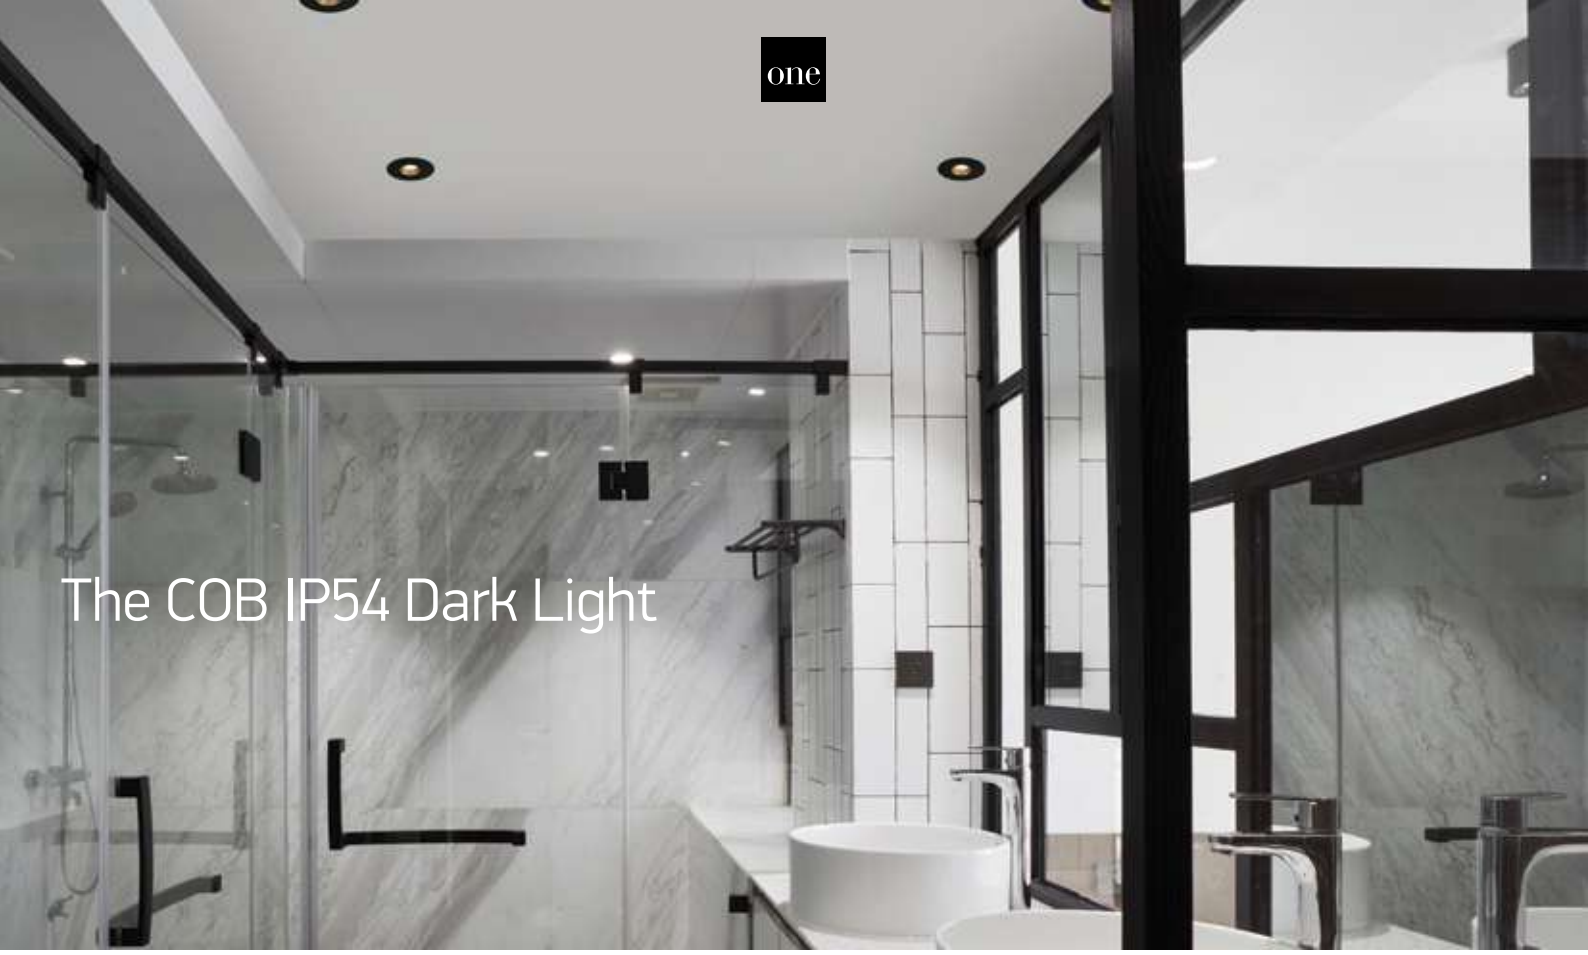

The COB IP54 Dark Light

10107WD/W/W

10107WD | 6,5W | COB | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP54



10107WD/W/V

10107WD | 6,5W | COB | Aluminium

new · LED BUILT IN · 90 CRI · DIMMABLE · CCT V · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP54



10107M/W/W

10107M | 7W | COB | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · DARK LIGHT · IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107WD/W/W	White	Warm white	3000K	6,5W	600lm	36°	700mA	III	40cm	75mm	110mm	50	Requires 700mA driver
10107WD/W/V	White	CCT V	3000K-3500K-4000K	6,5W	650lm	38°	700mA	III	40cm	75mm	110mm	50	Requires 700mA driver
10107M/W/W	White	Warm white	3000K	7W	490lm	40°	230V		-	68mm	80mm	50	Complete with 300mA driver

The COB IP54 Dark Light

10108H/W/W

10108H | 8W | COB | Aluminium

DARK LIGHT

IP54

LED BUILT IN

90 CRI

CE

5 YEAR



10108H/B/W

10108H | 8W | COB | Aluminium

DARK LIGHT

IP54

LED BUILT IN

90 CRI

CE

5 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108H/W/W	White	Warm white	3000K	8W	625lm	36°	230V		75mm	70mm	50	Complete with 200mA driver
10108H/B/W	Black	Warm white	3000K	8W	625lm	36°	230V		75mm	70mm	50	Complete with 200mA driver

The IP65 Mini Range

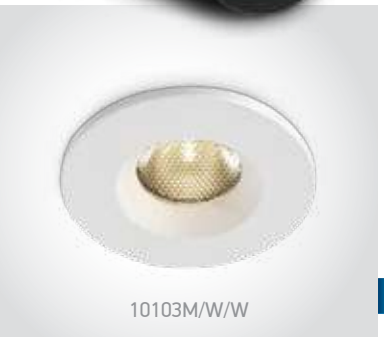
10103M/W/W

10103M | 3W | SMD | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · IP65

10103M/B/W

Suitable for 89004A driver.



10103M/W/V

10103M | 3W | SMD | Aluminium

new · LED BUILT IN · 90 CRI · DIMMABLE · CCT V · QUICK FIX · CE · 5 YEAR · IP65


10103M/B/V

Suitable for 89004 driver.



10102H/W/W

10102H | 2W | LED | Aluminium

Driver can not pass through the cut-out hole.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP65

10102H/B/W



10102H/W/V

10102H | 2W | SMD | Aluminium

new · LED BUILT IN · 90 CRI · CCT V · CE · 5 YEAR · DARK LIGHT · IP65


10102H/B/V


10102H/W/V Complete with White & Black reflectors.
10102H/B/V Complete with Black & Brass reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103M/W/C	White	Cool white	4000K	3W	270lm	30°	700mA	III	60cm	38mm	55mm	50	Requires 700mA driver
10103M/W/W	White	Warm white	3000K	3W	270lm	30°	700mA	III	60cm	38mm	55mm	50	Requires 700mA driver
10103M/B/W	Black	Warm white	3000K	3W	270lm	30°	700mA	III	60cm	38mm	55mm	50	Requires 700mA driver
10103M/W/V	White	CCT V	3000K-3500K-4000K	3W	270lm	30°	350mA	III	60cm	38mm	55mm	50	Requires350mA driver
10103M/B/V	Black	CCT V	3000K-3500K-4000K	3W	270lm	30°	350mA	III	60cm	38mm	55mm	50	Requires 350mA driver
10102H/W/C	White	Cool white	4000K	2W	160lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10102H/W/W	White	Warm white	3000K	2W	160lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10102H/B/W	Black	Warm white	3000K	2W	160lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10102H/W/V	White	CCT V	3000K-3500K-4000K	2W	160lm	30°	230V		-	30mm	50mm	50	Complete with 350mA driver
10102H/B/V	Black	CCT V	3000K-3500K-4000K	2W	160lm	30°	230V		-	30mm	50mm	50	Complete with 350mA driver

The 6,5W IP65 Project Range
Aluminium

10107DL/W/W/V

10107DL | 6,5W | COB | Aluminium

new

DARK LIGHT

IP65

LED BUILT IN

90 CRI

DIMMABLE

CCT V

QUICK FIX

CE

5 YEAR



10107DL/W/B/V

10107DL | 6,5W | COB | Aluminium

new

DARK LIGHT

IP65

LED BUILT IN

90 CRI

DIMMABLE

CCT V

QUICK FIX

CE

5 YEAR

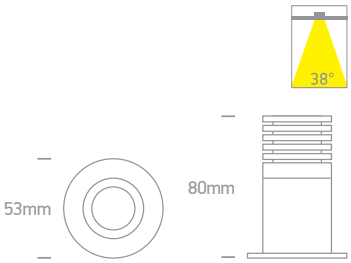

10107H/W/W

10107H | 6,5W | COB | Aluminium

DARK LIGHT

IP65

LED BUILT IN

90 CRI

DIMMABLE

QUICK FIX

CE

5 YEAR

10107H/W/C

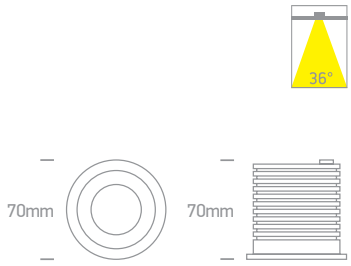

Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107DL/W/W/V	White	White	CCT V	3000K-3500K-4000K	6,5W	650lm	38°	700mA	III	40cm	47mm	90mm	50	Requires 700mA driver
10107DL/W/B/V	White	Black	CCT V	3000K-3500K-4000K	6,5W	650lm	38°	700mA	III	40cm	47mm	90mm	50	Requires 700mA driver
10107H/W/C	White	-	Cool white	4000K	6,5W	600lm	36°	700mA	III	40cm	60mm	90mm	50	Requires 700mA driver
10107H/W/W	White	-	Warm white	3000K	6,5W	600lm	36°	700mA	III	40cm	60mm	90mm	50	Requires 700mA driver

The COB Curved Reflector IP65 Range

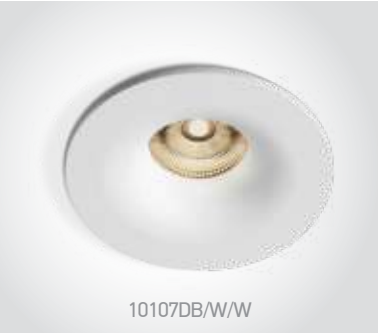
10107DB/W/W

10107DB | 6,5W | COB | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · CE · 5 YEAR


10107DB/B/W

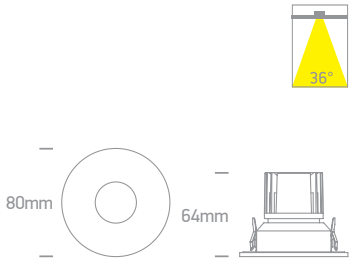

10107DB/W/V

10107DB | 6,5W | COB | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · CCT V · new · DARK LIGHT · IP65 · QUICK FIX · CE · 5 YEAR

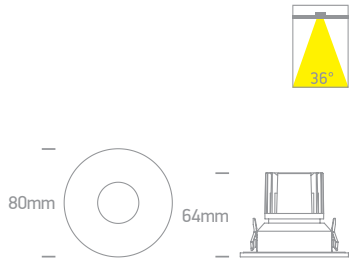

10112C/B/W

10112C | 12W | COB | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · DARK LIGHT · IP65 · CE · 5 YEAR

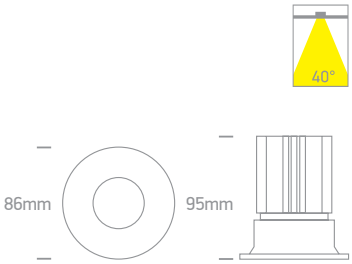

10112C/W/V

10112C | 12W | COB | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · CCT V · new · DARK LIGHT · IP65 · QUICK FIX · CE · 5 YEAR

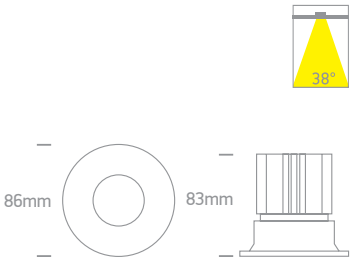

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107DB/W/W	White	Warm white	3000K	6,5W	500lm	36°	700mA	III	40cm	60mm	80mm	50	Requires 700mA driver
10107DB/B/W	Black	Warm white	3000K	6,5W	500lm	36°	700mA	III	40cm	60mm	80mm	50	Requires 700mA driver
10107DB/W/V	White	CCT V	3000K-3500K-4000K	6,5W	500lm	36°	700mA	III	40cm	60mm	80mm	50	Requires 700mA driver
10112C/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	75mm	120mm	50	Requires 700mA driver
10112C/W/V	White	CCT V	3000K-3500K-4000K	12W	1200lm	38°	700mA	III	40cm	75mm	100mm	50	Requires 700mA driver

one

The COB IP64 & IP65 Range

10107PA | 6,5W | COB | Aluminium

10107PA/W/W

new
IP65

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
CE 5 YEAR


10107PA/W/C



10107PA | 6,5W | COB | Aluminium

10107PA/W/V

new
IP65

LED BUILT IN
90 CRI
DIMMABLE
CCT V
QUICK FIX
CE 5 YEAR



10112P | 12W | COB | Aluminium

10112P/W/W

DARK LIGHT
IP65

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
CE 5 YEAR

10112P/B/W



10112P | 12W | COB | Natural aluminium

10112P/AL/W

DARK LIGHT
IP64

LED BUILT IN
80 CRI
DIMMABLE
QUICK FIX
CE 3 YEAR



	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107PA/W/C	White	Cool white	4000K	6,5W	650lm	40°	700mA	III	40cm	54mm	70mm	50	Requires 700mA driver
10107PA/W/W	White	Warm white	3000K	6,5W	650lm	40°	700mA	III	40cm	54mm	70mm	50	Requires 700mA driver
10107PA/W/V	White	CCT V	3000K-3500K-4000K	6,5W	650lm	40°	700mA	III	40cm	54mm	70mm	50	Requires 700mA driver
10112P/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	68mm	105mm	50	Requires 700mA driver
10112P/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	68mm	105mm	50	Requires 700mA driver
10112P/AL/W	Aluminium	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	68mm	105mm	50	Requires 700mA driver

Floating Ring Range

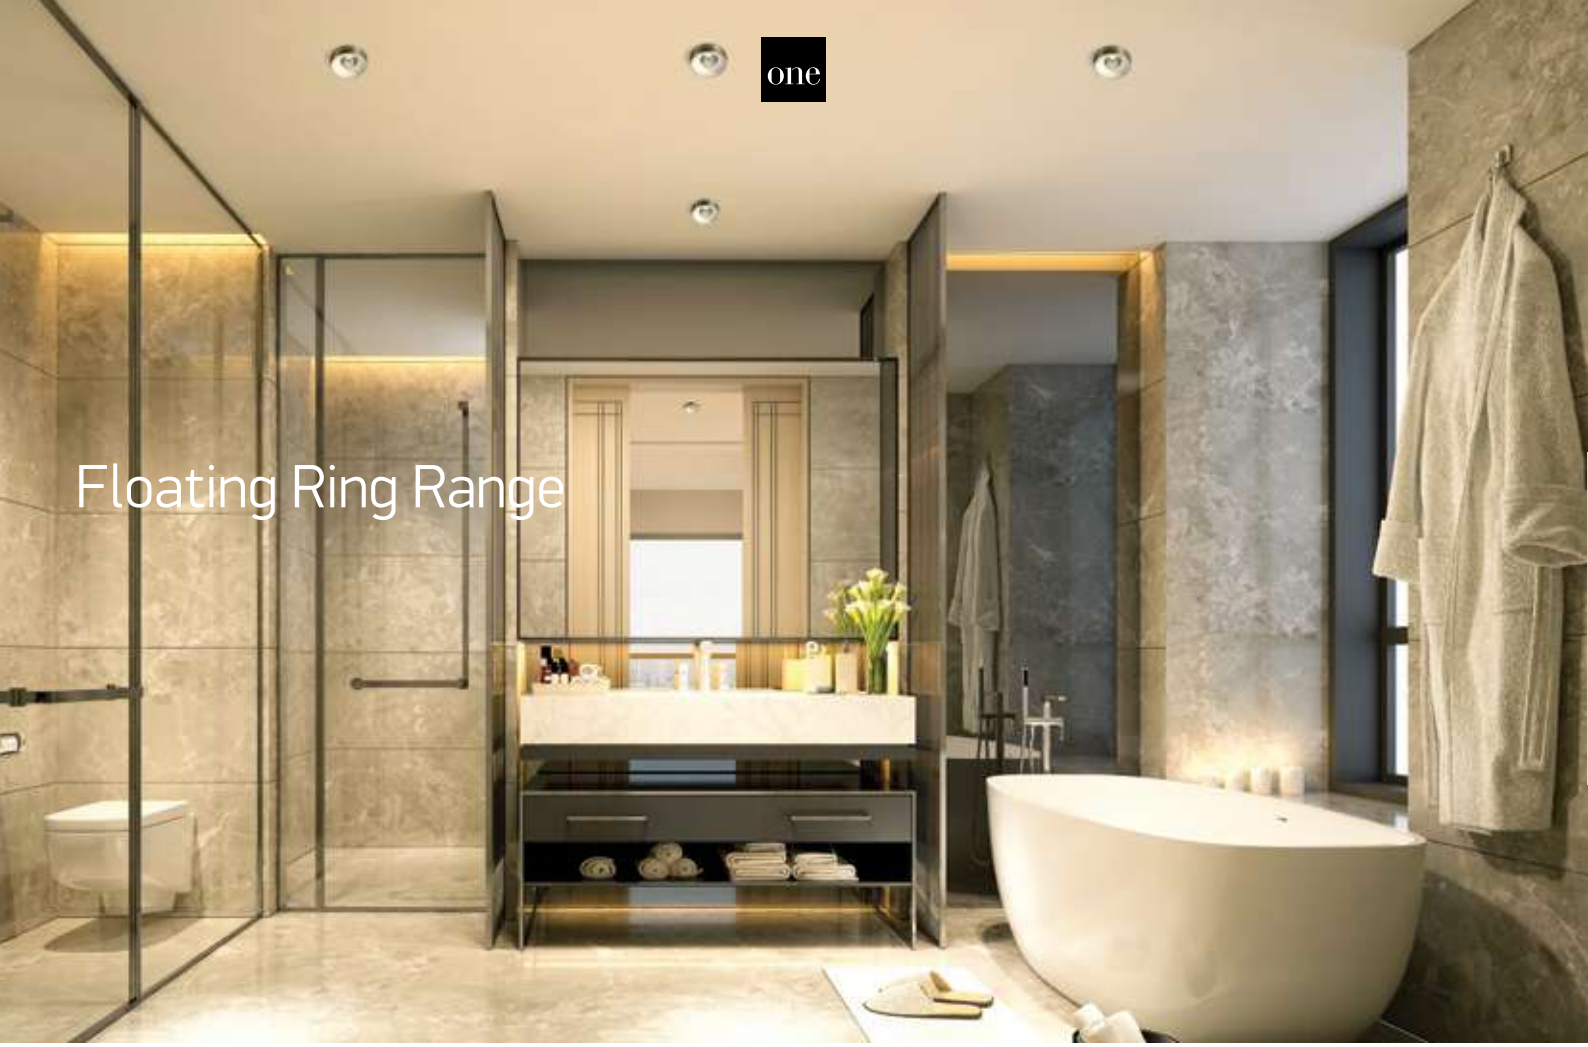

10112R/W/W

10112R | 12W | COB | Aluminium

LED BUILT IN

90 CRI

DIMMABLE

QUICK FIX

DARK LIGHT

IP65

CE 5 YEAR

10112R/W/W + 050162/B



10112R/B/W

10112R | 12W | COB | Aluminium

LED BUILT IN

90 CRI

DIMMABLE

QUICK FIX

DARK LIGHT

IP65

CE 5 YEAR

10112R/B/W + 050162/W



050162/W White

050162/B Black

050162/DC Dark Chrome

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				With ring		Notes
10112R/W/W	White	Warm white	3000K	12W	1100lm	50°	700mA	III	40cm	68mm	110mm	80mm	50	Requires 700mA driver
10112R/B/W	Black	Warm white	3000K	12W	1100lm	50°	700mA	III	40cm	68mm	110mm	80mm	50	Requires 700mA driver

one

The COB IP65 Dark Light Range

10107MD | 6,5W | COB | Aluminium

new | DARK LIGHT | IP65 | LED BUILT IN | 90 CRI | CCT V | CE | 5 YEAR





10107WP | 6,5W | COB | Aluminium

new | DARK LIGHT | IP65 | LED BUILT IN | 90 CRI | DIMMABLE | CCT V | QUICK FIX | CE | 5 YEAR



10112TP | 12W | COB | Aluminium

DARK LIGHT | IP65 | LED BUILT IN | 90 CRI | DIMMABLE | QUICK FIX | CE | 5 YEAR



10112TP | 12W | COB | Aluminium

new | DARK LIGHT | IP65 | LED BUILT IN | 90 CRI | DIMMABLE | CCT V | QUICK FIX | CE | 5 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107MD/W/V	White	CCT V	3000K-3500K-4000K	6,5W	650lm	36°	230V		-	36mm	80mm	50	Complete with 150mA driver
10107MD/B/V	Black	CCT V	3000K-3500K-4000K	6,5W	650lm	36°	230V		-	36mm	80mm	50	Complete with 150mA driver
10107WP/W/V	White	CCT V	3000K-3500K-4000K	6,5W	650lm	38°	700mA	III	40cm	56mm	90mm	50	Requires 700mA driver
10107WP/B/V	Black	CCT V	3000K-3500K-4000K	6,5W	650lm	38°	700mA	III	40cm	56mm	90mm	50	Requires 700mA driver
10112TP/W/EW	White	Extra warm white	2700K	12W	1100lm	38°	700mA	III	40cm	75mm	110mm	50	Requires 700mA driver
10112TP/W/V	White	CCT V	3000K-3500K-4000K	12W	1200lm	38°	700mA	III	40cm	75mm	100mm	50	Requires 700mA driver
10112TP/B/V	Black	CCT V	3000K-3500K-4000K	12W	1200lm	38°	700mA	III	40cm	75mm	100mm	50	Requires 700mA driver

The IP65 Range

10106V/W/W

10106V | 6W | COB | Aluminium + glass

LED BUILT IN
80 CRI
IK 08
CE
3 YEAR
IP65

10106V/B/W



10106P/W/W

10106P | 6W | SMD | Dimmable | Plastic

LED BUILT IN
80 CRI
TRIAC DIMMABLE
CE
2 YEAR
IP65

10106P/W/C



10106P/W/V

10106P | 6W | SMD | Dimmable | Plastic

LED BUILT IN
80 CRI
TRIAC DIMMABLE
CCT V
new
IK 03
CE
2 YEAR
IP65



10110P/W/W

10110P | 12W | COB | Aluminium

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
CE
5 YEAR
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106V/W/W	White	Warm white	3000K	6W	460lm	25°	100-240V		-	94mm	100mm	12	Complete with 500mA driver
10106V/B/W	Black	Warm white	3000K	6W	460lm	25°	100-240V		-	94mm	100mm	12	Complete with 500mA driver
10106P/W/C	White	Cool white	4000K	6W	570lm	100°	230V		-	67mm	70mm	48	Complete with dimmable driver
10106P/W/W	White	Warm white	3000K	6W	570lm	100°	230V		-	67mm	70mm	48	Complete with dimmable driver
10106P/W/V	White	CCT V	2700K-3000K-4000K	6W	600lm	100°	230V		-	67mm	70mm	48	Complete with dimmable driver
10110P/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA		40cm	75mm	110mm	48	Requires 700mA driver

The IP65 CCT V

10107PV/W/V

10107PV | 7W | SMD | Dimmable | Plastic

LED BUILT IN

85 CRI

TRIAC DIMMABLE

CCT V

CE 3 YEAR

IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107PV/W/V	White	CCT V	2700K-3000K-4000K	7W	600lm	38°	230V		30cm	72mm	40mm	48	AC LED

The Fire Rated IP65 Range

10106PF/W

10106PF | 6W | COB | Fire Rated | Aluminium

Ring must be ordered separately.

LED BUILT IN

80 CRI

DIMMABLE

QUICK FIX

FIRE RATED

CE

3 YEAR

IP65



Dimensions are complete with the ring.

050042/W White

050042/B Black

050042/C Chrome

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106PF/W	Warm white	3000K	6W	500lm	40°	350mA	III	40cm	68mm	90mm	20	Requires 350mA driver

The Fire Rated IP65 Range

10107DF/W + 050178/B

10106PF/W + 050042/C

10107DF/W

10107DF | 7W | SMD | Fire Rated | Metal + plastic

Complete with white ring.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · FIRE RATED · IP65 · CE · 3 YEAR

Optional rings.
Order code
050178/B Black
050178/C Chrome



10107DFV/W/V

10107DFV | 7W | SMD | Fire Rated | Metal + plastic

Complete with white ring.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CCT V · FIRE RATED · IP65 · CE · 3 YEAR

Optional rings.
Order code
050178/B Black
050178/C Chrome



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107DF/W	White	Warm white	3000K	7W	500lm	60°	230V		65mm	80mm	36	Complete with dimmable driver
10107DFV/W/V	White	CCT V	2700K-3200K-4000K	7W	510lm	60°	230V		65mm	80mm	36	Complete with dimmable driver

The LED Decorative Range

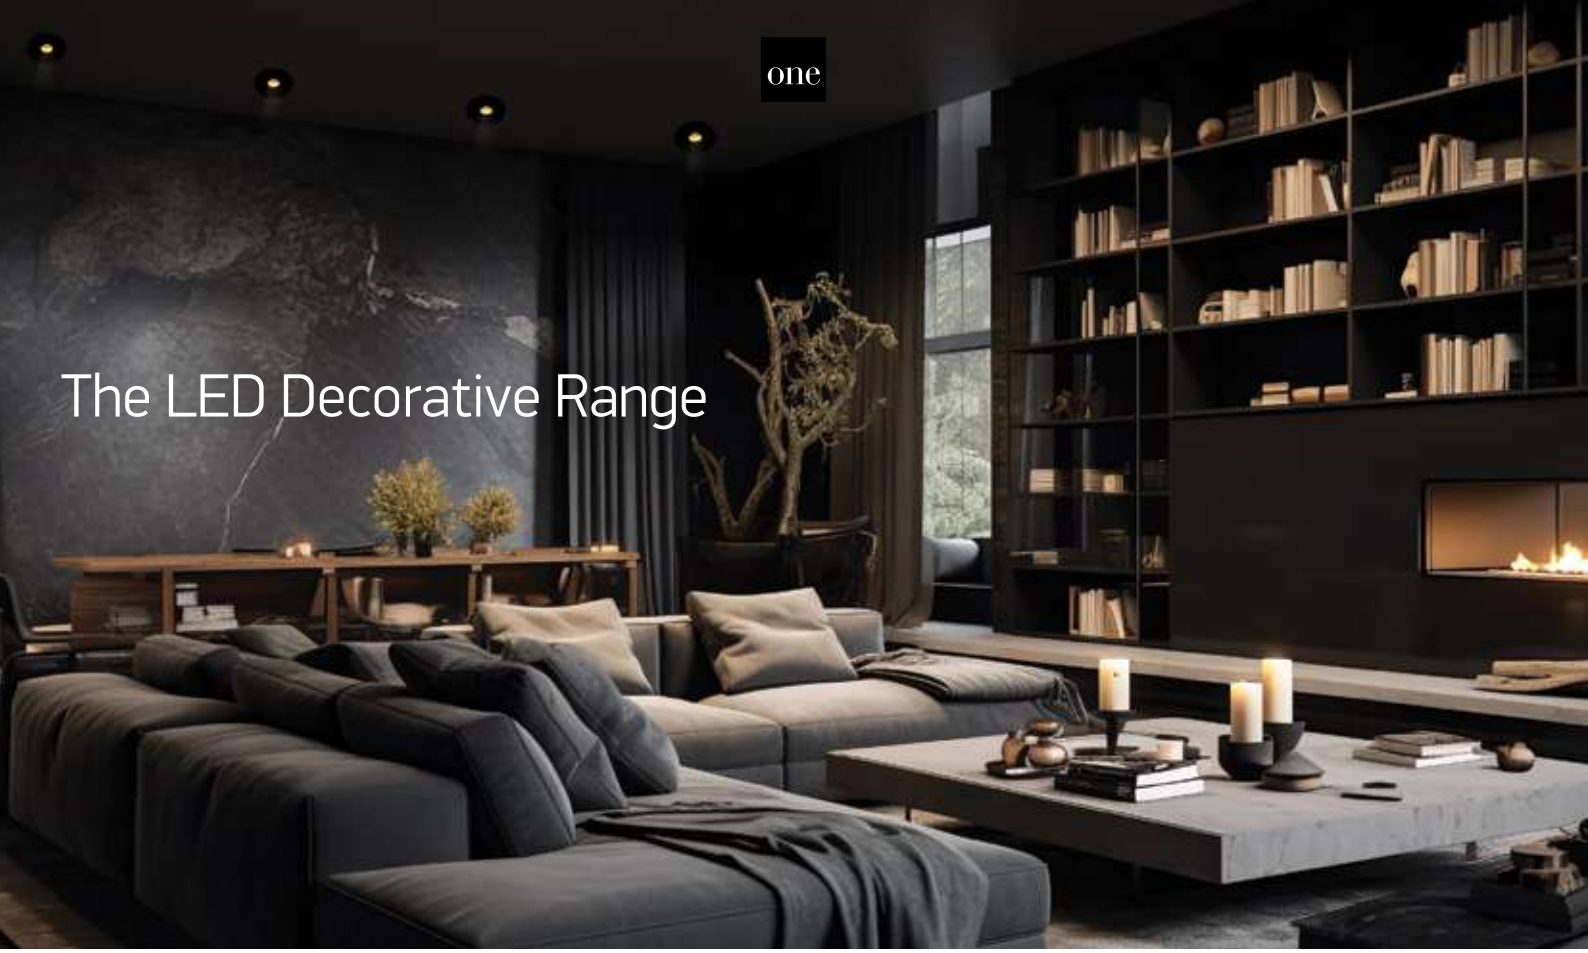

10108J/W/W

10108J | 8W | COB + SMD | Aluminium

Trim Lit.

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP40





10107HA/W/V

10107HA | 6,5W | COB | Aluminium

LED BUILT IN
90 CRI
DIMMABLE
CCT V
new
QUICK FIX
CE
5 YEAR
IP20

Complete with Black, White & Brass reflectors.



10107HA/B/V

10107HA | 6,5W | COB | Aluminium

LED BUILT IN
90 CRI
DIMMABLE
CCT V
new
QUICK FIX
CE
5 YEAR
IP20

Complete with Black & Brass reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10108J/W/W	White	Warm white	3000K	8W	560lm	24°	230V		-	70mm	100mm	30	Complete with 200mA driver
10107HA/W/V	White	CCT V	3000K-3500K-4000K	6,5W	650lm	38°	700mA	III	40cm	68mm	80mm	50	Requires 700mA driver
10107HA/B/V	Black	CCT V	3000K-3500K-4000K	6,5W	650lm	38°	700mA	III	40cm	68mm	80mm	50	Requires 700mA driver

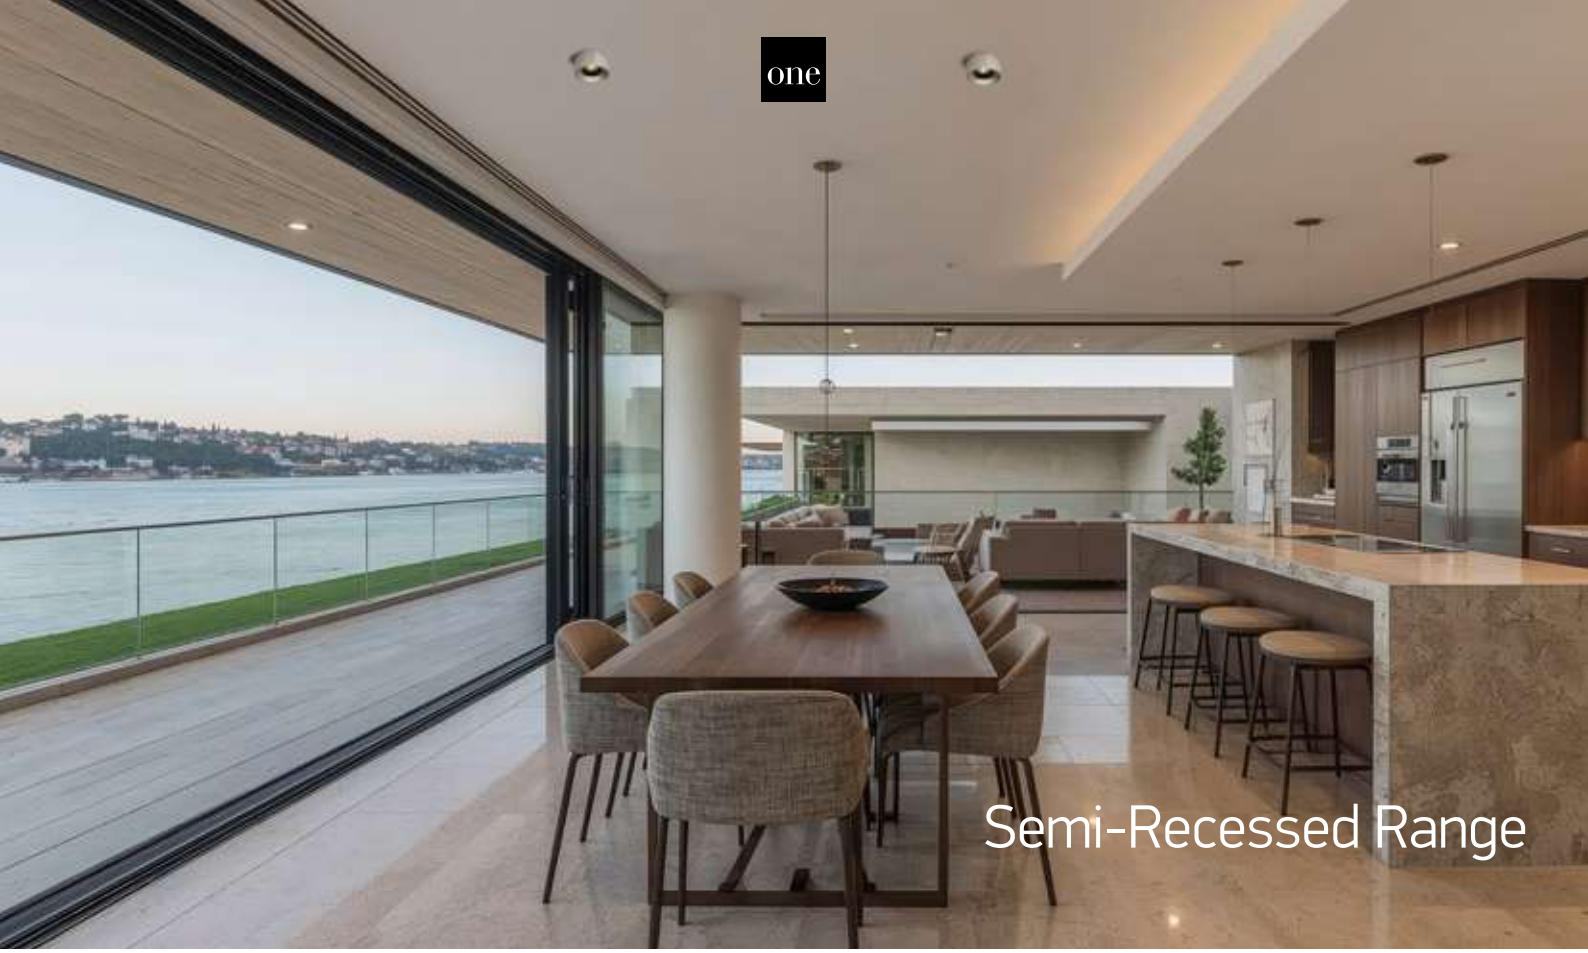

Semi-Recessed Range

10107A/W/W

10107A | 7W | SMD | Aluminium

Semi-Recessed.

LED BUILT IN

90 CRI

CE

3 YEAR

IP20

10112A/W/W

10112A | 12W | SMD | Aluminium

Semi-Recessed.

LED BUILT IN

90 CRI

CE

3 YEAR

IP20



10112A/B/W

10112A | 12W | SMD | Aluminium

Semi-Recessed.

LED BUILT IN

90 CRI

CE

3 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107A/W/W	White	Warm white	3000K	7W	600lm	38°	230V		54mm	40mm	50	Complete with 180mA driver
10112A/W/W	White	Warm white	3000K	12W	1100lm	38°	230V		72mm	40mm	50	Complete with 300mA driver
10112A/B/W	Black	Warm white	3000K	12W	1100lm	38°	230V		72mm	40mm	50	Complete with 300mA driver

The Trimless 3W Range
Aluminium

one

10103BTR/W/W

10103BTR | 3W | COB | Trimless | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20

2-Step reflector.

Suitable for 89004 driver.



10103BTR/B/W

10103BTR | 3W | COB | Trimless | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20

2-Step reflector.

Suitable for 89004 driver.



10103BTR/BS/W

10103BTR | 3W | COB | Trimless | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20

2-Step reflector.

Suitable for 89004 driver.



10103BTR/W/V

10103BTR | 3W | COB | Trimless | Aluminium

new · LED BUILT IN · 90 CRI · DIMMABLE · CCT V · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20

2-Step reflector.

Suitable for 89004 driver.



10103BTR/B/V

10103BTR | 3W | COB | Trimless | Aluminium

new · LED BUILT IN · 90 CRI · DIMMABLE · CCT V · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20

2-Step reflector.

Suitable for 89004 driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103BTR/W/W	White	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	42mm	80mm	100	Requires 350mA driver
10103BTR/B/W	Black	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	42mm	80mm	100	Requires 350mA driver
10103BTR/BS/W	Brass	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	42mm	80mm	100	Requires 350mA driver
10103BTR/W/V	White	CCT V	3000K-3500K-4000K	3W	240lm	36°	350mA	III	40cm	42mm	80mm	100	Requires 350mA driver
10103BTR/B/V	Black	CCT V	3000K-3500K-4000K	3W	240lm	36°	350mA	III	40cm	42mm	80mm	100	Requires 350mA driver

10107BT/W/V

10107BT/B/V

The Trimless 6,5W Range
CCT V

10107BT/W/V

10107BT | 6,5W | COB | Trimless | Aluminium

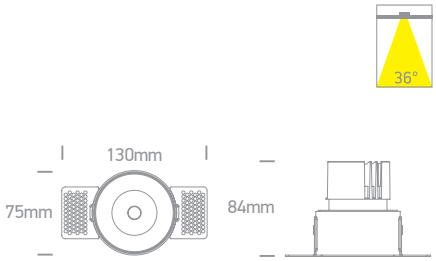

10107BT/B/V

10107BT | 6,5W | COB | Trimless | Aluminium

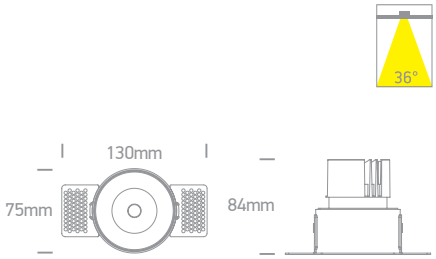

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107BT/W/V	White	CCT V	3000K-3500K-4000K	6,5W	650lm	36°	700mA	III	40cm	83mm	100mm	30	Requires 700mA driver
10107BT/B/V	Black	CCT V	3000K-3500K-4000K	6,5W	650lm	36°	700mA	III	40cm	83mm	100mm	30	Requires 700mA driver

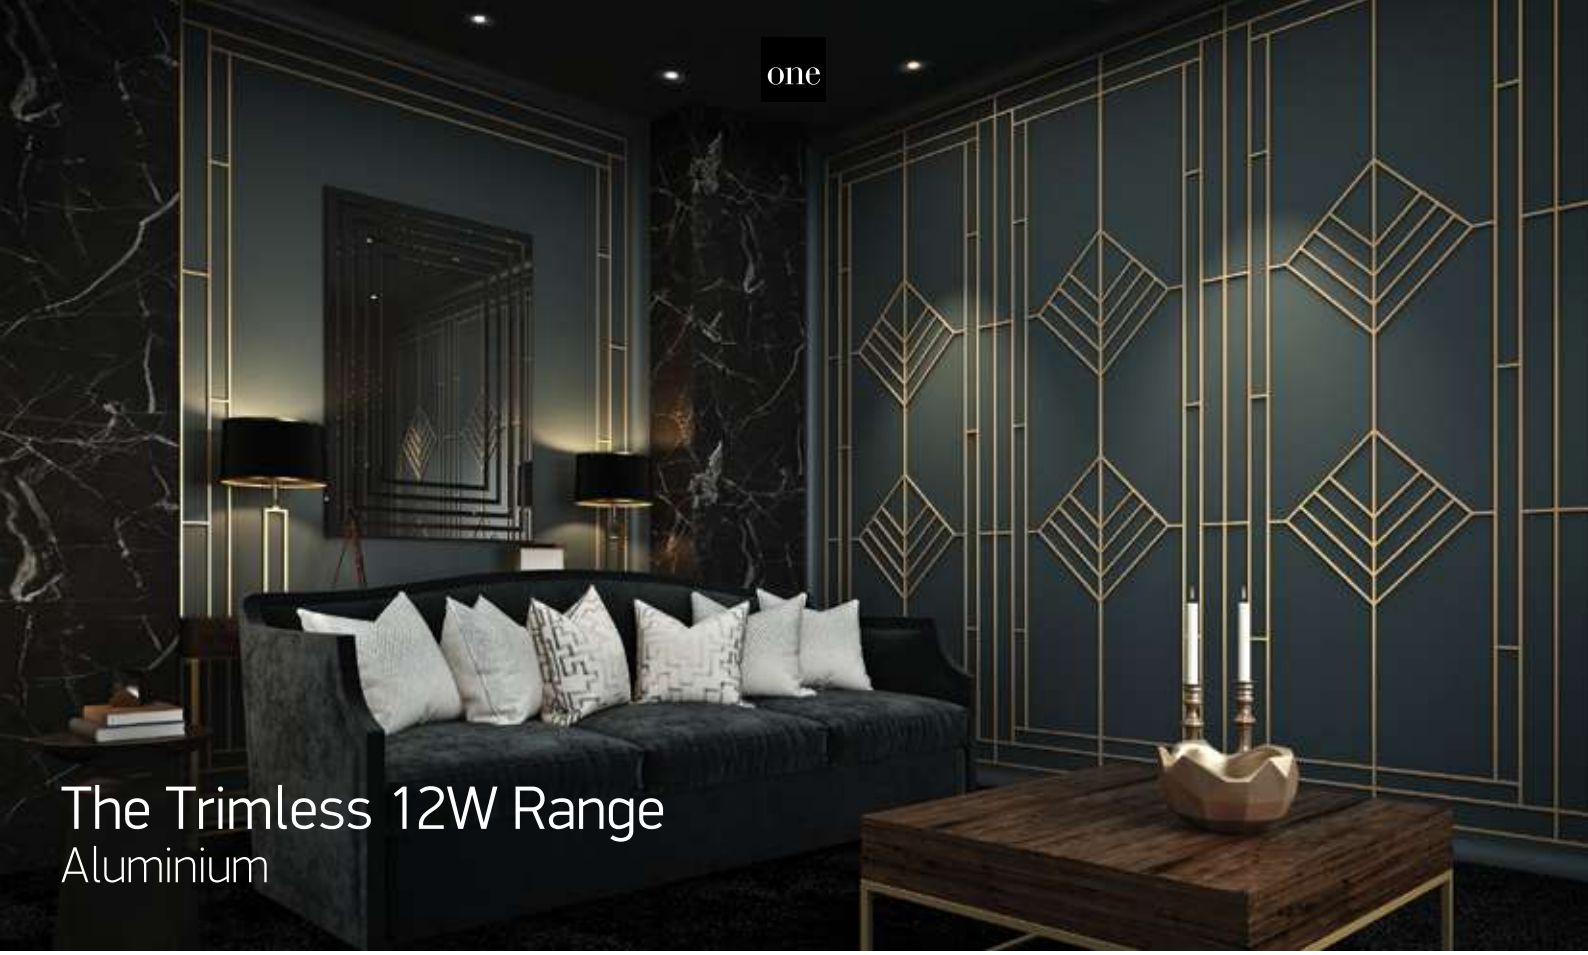

The Trimless 12W Range
Aluminium

10112BTR/W/V

10112BTR | 12W | COB | Trimless | Aluminium

new | DARK LIGHT | IP20 | 90 CRI | LED BUILT IN | DIMMABLE | CCT V | QUICK FIX | CE | 5 YEAR

2-step reflector

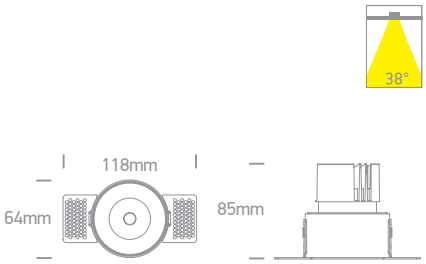

10112BTR/B/V

10112BTR | 12W | COB | Trimless | Aluminium

new | DARK LIGHT | IP20 | 90 CRI | LED BUILT IN | DIMMABLE | CCT V | QUICK FIX | CE | 5 YEAR

2-step reflector

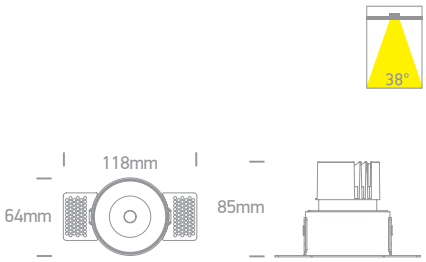

10112BTR/BS/V

10112BTR | 12W | COB | Trimless | Aluminium

new | DARK LIGHT | IP20 | 90 CRI | LED BUILT IN | DIMMABLE | CCT V | QUICK FIX | CE | 5 YEAR

2-Step reflector.

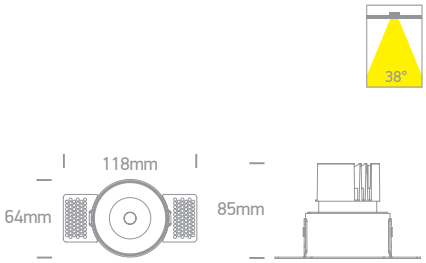

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112BTR/W/V	White	CCT V	3000K-3500K-4000K	12W	1200lm	38°	700mA	III	40cm	70mm	100mm	48	Requires 700mA driver
10112BTR/B/V	Black	CCT V	3000K-3500K-4000K	12W	1200lm	38°	700mA	III	40cm	70mm	100mm	48	Requires 700mA driver
10112BTR/BS/V	Brass	CCT V	3000K-3500K-4000K	12W	1200lm	38°	700mA	III	40cm	70mm	100mm	48	Requires 700mA driver

Trimless Dark Light Tubes

50103ATR/B/W

50103ATR | 3W | SMD | Trimless | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

DARK LIGHT

IP20

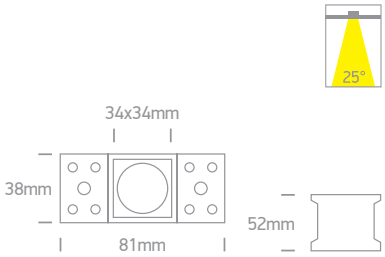

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50103ATR/B/W	Black	Warm white	3000K	3W	200lm	25°	230V		50x38mm	70mm	50	Complete with 700mA driver

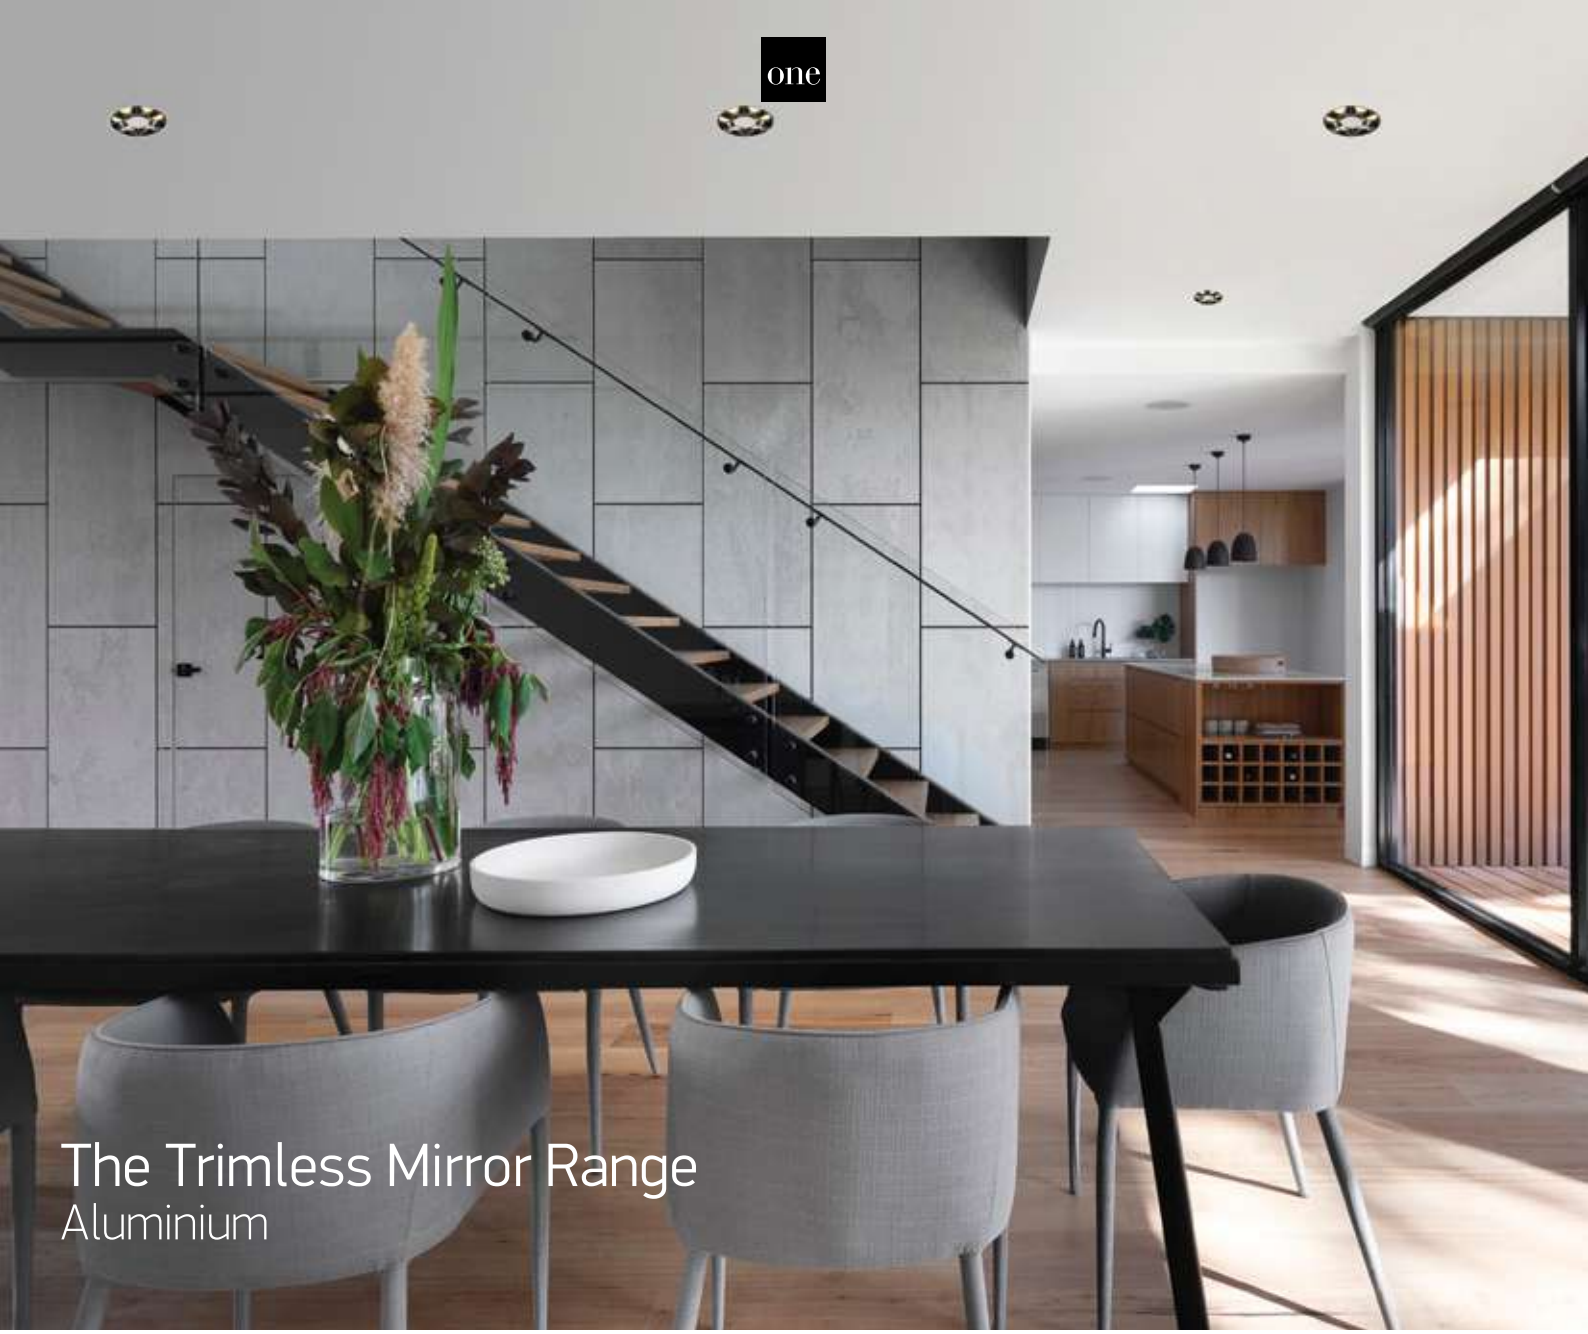

The Trimless Mirror Range
Aluminium

10106XTR | 6W | SMD | Trimless | Aluminium

LED BUILT IN
90 CRI
CE
5 YEAR
DARK LIGHT
IP20

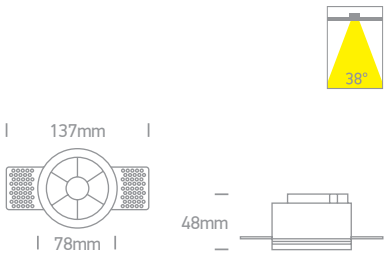

10112XTR | 12W | SMD | Trimless | Aluminium

LED BUILT IN
90 CRI
CE
5 YEAR
DARK LIGHT
IP20

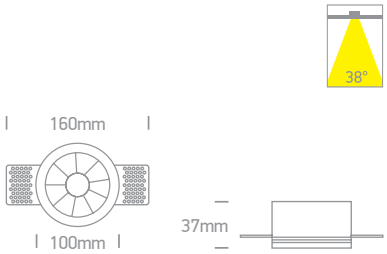

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10106XTR/W/W	White	Warm white	3000K	6W	480lm	38°	230V		78mm	70mm	40	Complete with 150mA driver
10112XTR/W/W	White	Warm white	3000K	12W	960lm	38°	230V		100mm	60mm	40	Complete with 300mA driver

one

The Trimless Mirror Range
Aluminium

10110HTR/W/W

10110HTR | 10W | SMD | Trimless | Aluminium

LED BUILT IN
90 CRI
CE
5 YEAR
DARK LIGHT
IP20

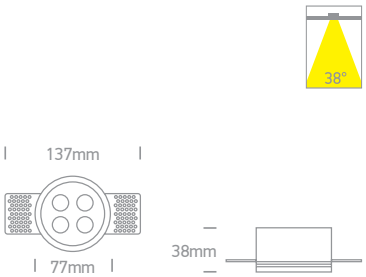

50110HTR/W/W

50110HTR | 10W | SMD | Trimless | Aluminium

LED BUILT IN
90 CRI
CE
5 YEAR
DARK LIGHT
IP20

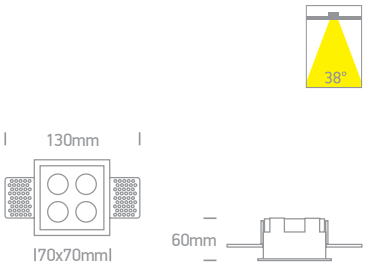

50012HTR/W/W

50012HTR | 12W | SMD | Trimless | Aluminium

LED BUILT IN
90 CRI
CE
5 YEAR
DARK LIGHT
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10110HTR/W/W	White	Warm white	3000K	10W	700lm	38°	230V		78mm	80mm	40	Complete with 700mA driver
50110HTR/W/W	White	Warm white	3000K	10W	700lm	38°	230V		72x72mm	100mm	40	Complete with 700mA driver
50012HTR/W/W	White	Warm white	3000K	12W	840lm	38°	230V		145x41mm	100mm	40	Complete with 700mA driver

Recessed Spots Adjustable

Pages 85 - 102

03

The Classic Adjustable MR11

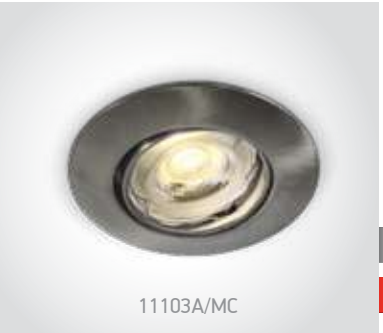

11103A/MC

11103A | 35W | MR11 | GU4 | Aluminium

ADJUSTABLE

5 YEAR

IP20

offer

Suitable for MR11 LED lamp.



Order Code	Colour	Watts	Input	Class					Notes
11103A/MC	Brushed chrome	35W	12V	III	40cm	57mm	35mm	100	-

The Classic Adjustable MR16

11105/C

11105 | 50W | MR16 | GU5,3 | Aluminium

ADJUSTABLE

5 YEAR

IP20

offer

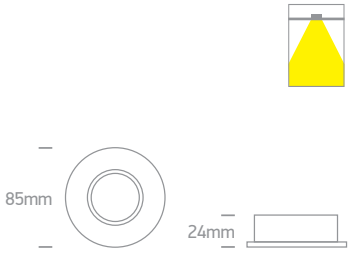

Order Code	Colour	Watts	Input	Class					Notes
11105/C	Chrome	50W	12V	III	40cm	75mm	55mm	100	-

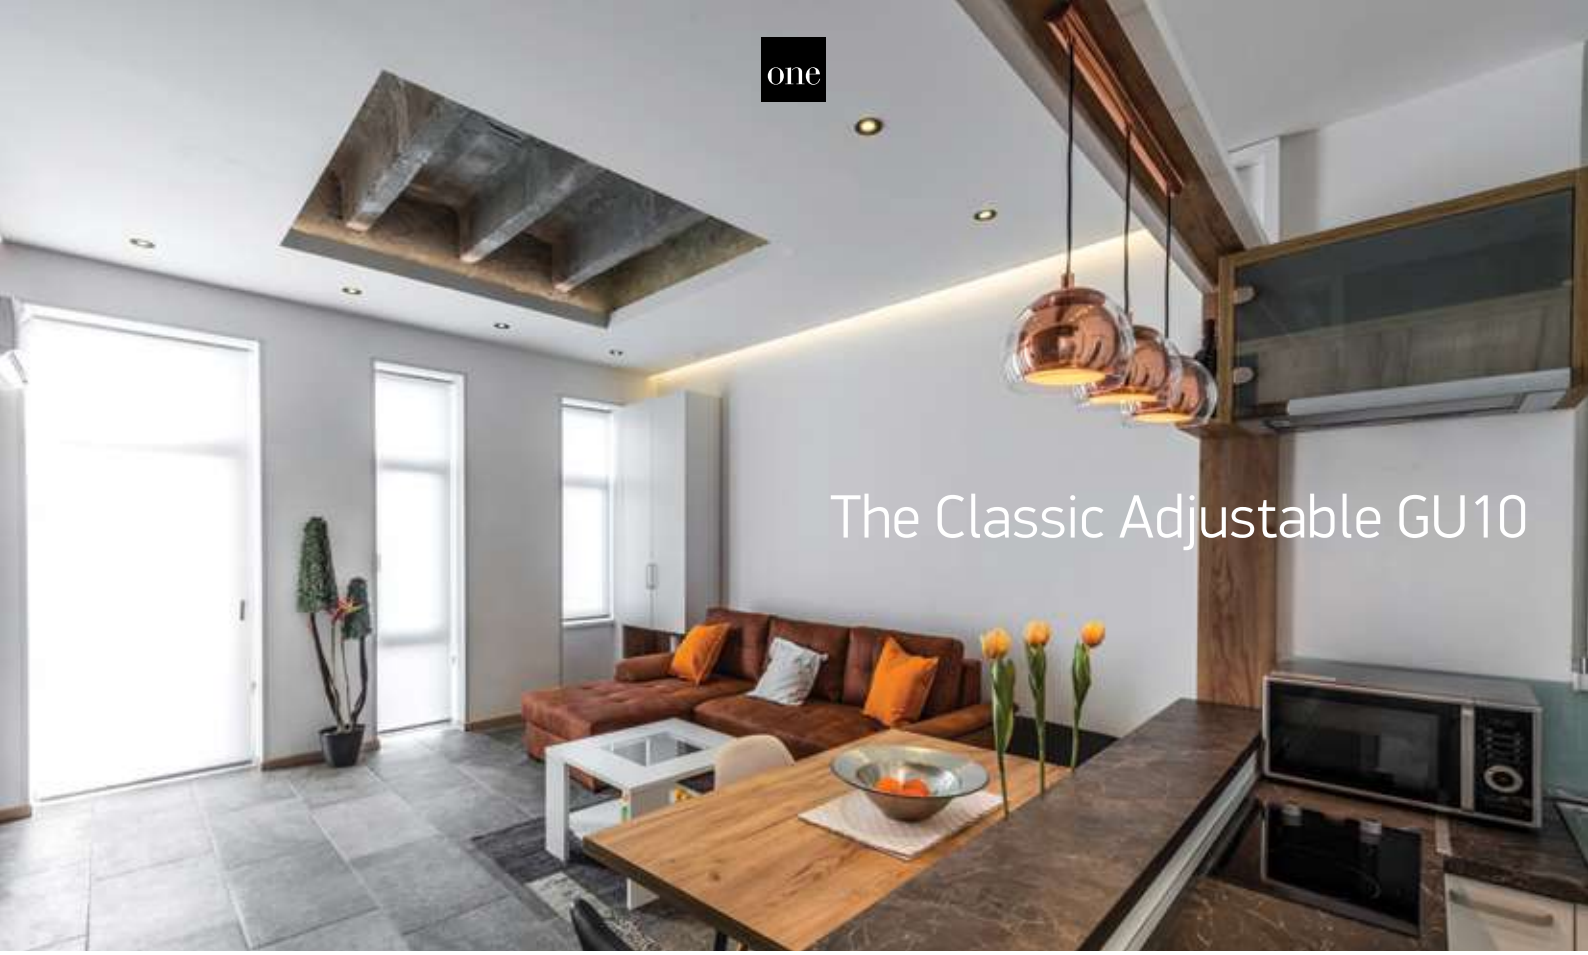

The Classic Adjustable GU10

11105GU/W

11105GU | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

Complete with 0950G.



11105GU/B

11105GU | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

Complete with 0950G.



11105GU/MC

11105GU | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
11105GU/W	White	10W	100-240V		15cm	75mm	95mm	100	-
11105GU/B	Black	10W	100-240V		15cm	75mm	95mm	100	-
11105GU/MC	Brushed chrome	10W	100-240V		15cm	75mm	95mm	100	-

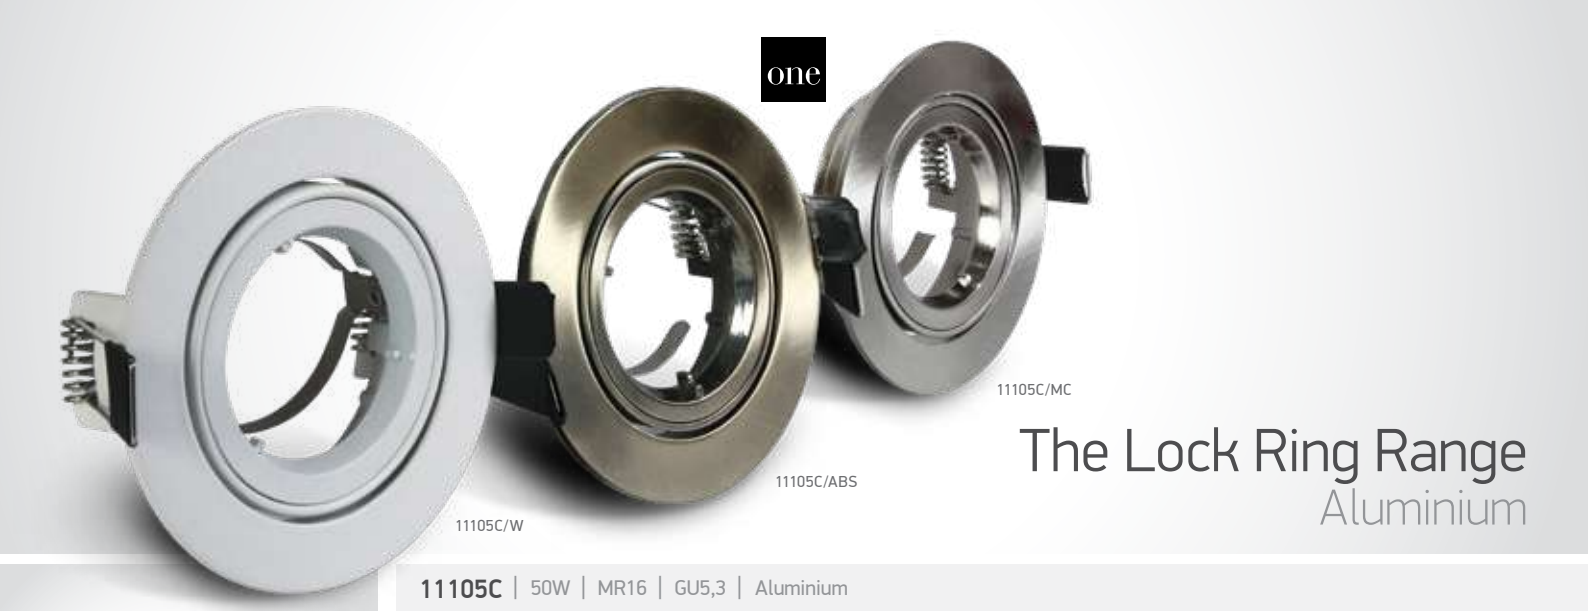

The Lock Ring Range
Aluminium

11105C/W

11105C | 50W | MR16 | GU5,3 | Aluminium

ADJUSTABLE

5 YEAR

IP20

offer



11105C/MC

11105C | 50W | MR16 | GU5,3 | Aluminium

ADJUSTABLE

5 YEAR

IP20

offer



11105C/ABS

11105C | 50W | MR16 | GU5,3 | Aluminium

ADJUSTABLE

5 YEAR

IP20

offer



11105C/N

11105C | 50W | MR16 | GU5,3 | Aluminium

ADJUSTABLE

5 YEAR

IP20

offer



Order Code	Colour	Watts	Input	Class					Notes
11105C/W	White	50W	12V	III	40cm	82mm	60mm	100	-
11105C/MC	Brushed chrome	50W	12V	III	40cm	82mm	60mm	100	-
11105C/ABS	Antique brass	50W	12V	III	40cm	82mm	60mm	100	-
11105C/N	Brushed metal	50W	12V	III	40cm	82mm	60mm	100	-

The Lock Ring GU10 Range
Aluminium

11105CGU/W

11105CGU | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20

Complete with 0950G.



11105CGU/MC

11105CGU | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20

Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
11105CGU/W	White	10W	100-240V		15cm	82mm	95mm	100	-
11105CGU/MC	Brushed chrome	10W	100-240V		15cm	82mm	95mm	100	-

one

The Classic Square

51105/MC

IP20

offer

51105 | 50W | MR16 | GU5,3 | Aluminium

ADJUSTABLE

5 YEAR



Order Code	Colour	Watts	Input	Class					Notes
51105/MC	Brushed chrome	50W	12V	III	40cm	75mm	65mm	100	-

one

51105GA/MC

51105GA/W

The Classic Square GU10
Halogen Lamp Included

51105GA/W

51105GA | 50W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20

offer

Supplied with GU10 50W halogen lamp.

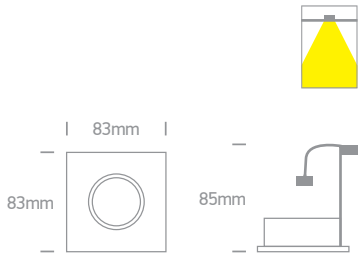

51105GA/MC

51105GA | 50W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20

offer

Supplied with GU10 50W halogen lamp.

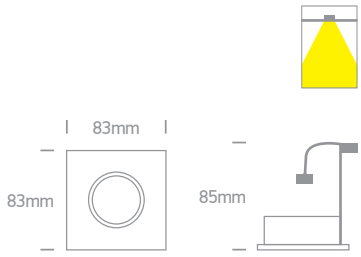

Order Code	Colour	Watts	Input	Class					Notes
51105GA/W	White	50W	230V		15cm	73mm	100mm	50	Supplied with GU10 lamp
51105GA/MC	Brushed chrome	50W	230V		15cm	73mm	100mm	50	Supplied with GU10 lamp

The Dual Ring Range

11105AC | 50W | MR16 | GU5,3 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

offer



Order Code	Colour	Watts	Input	Class					Notes
11105AC/AL	Aluminium	50W	12V	III	40cm	75mm	60mm	50	-

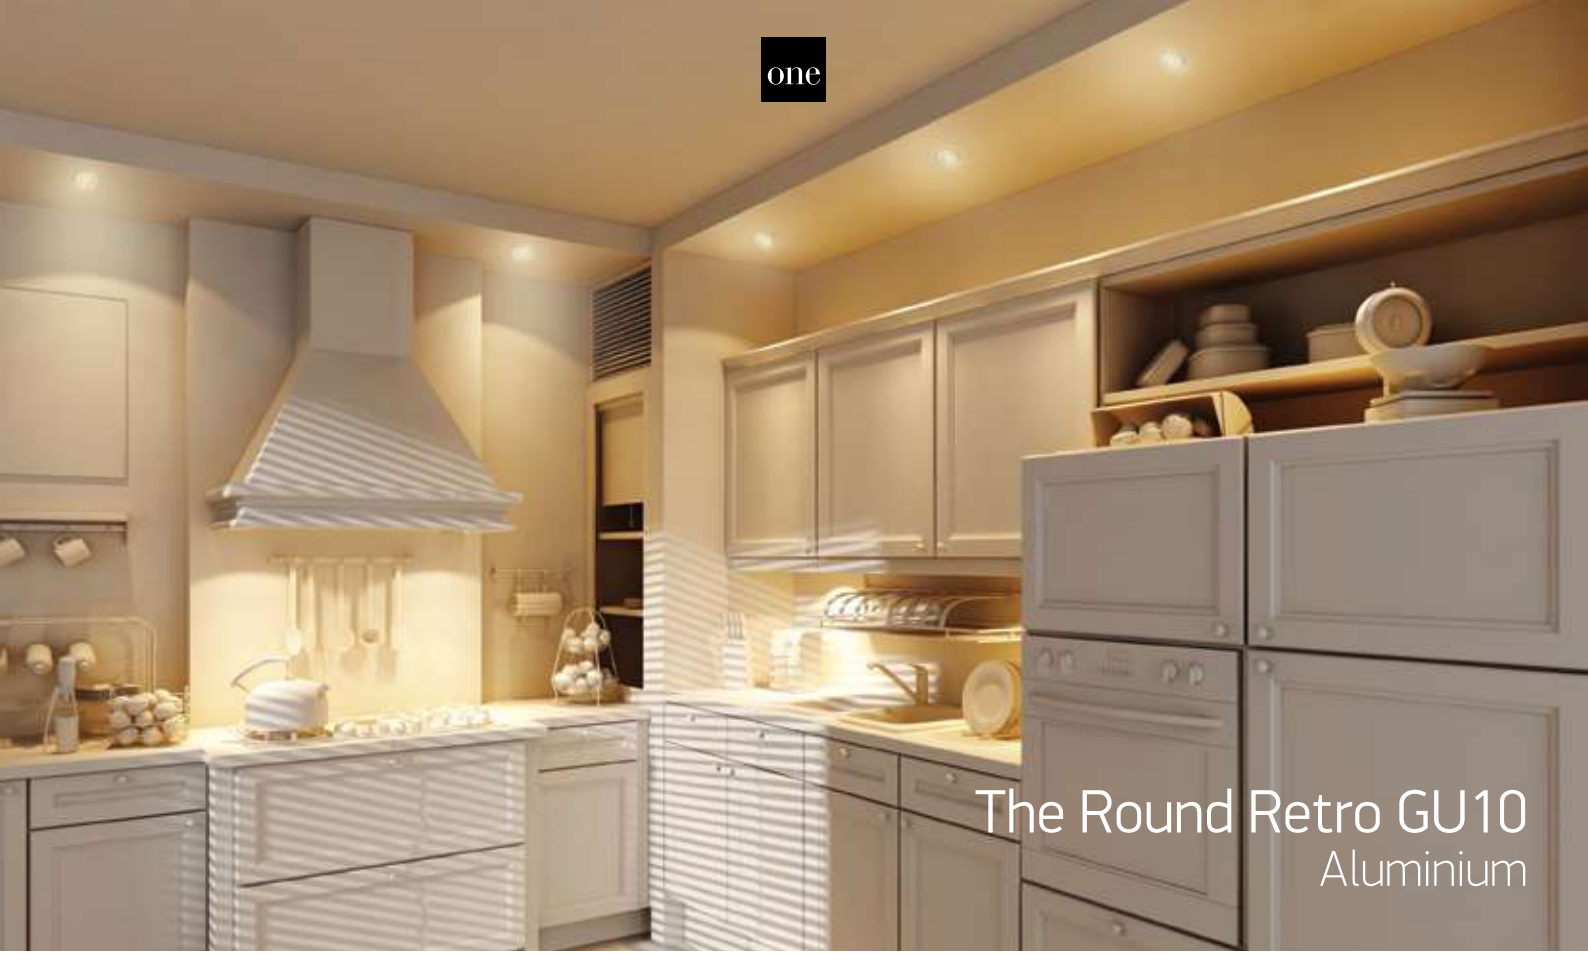

The Round Retro GU10
Aluminium

11105U/W

11105U | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20



11105UA/W

11105UA | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20



11105UB/W

11105UB | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20



Order Code	Colour	Watts	Input	Class					Notes
11105U/W	White	10W	100-240V		15cm	72mm	120mm	50	-
11105UA/W	White	10W	100-240V		15cm	72mm	120mm	50	-
11105UB/W	White	10W	100-240V		15cm	82mm	120mm	50	-

The Dual Ring Range
Aluminium

11105ABGL/W

11105ABGL | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

Leaf springs.

Complete with 0950G.



11105ABGL/B

11105ABGL | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

Leaf springs.

Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
11105ABGL/W	White	10W	100-240V		15cm	80mm	100mm	50	-
11105ABGL/B	Black	10W	100-240V		15cm	80mm	100mm	50	-

one

The Dual Ring Range
Aluminium

11105ABG/W

11105ABG | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

11105ABG/B

11105ABG/AL

Complete with 0950GB.

51105ABG/W

51105ABG | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

51105ABG/B

51105ABG/AL

Complete with 0950GB.



51205ABG/W

51205ABG | 2x10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

51205ABG/B

Complete with 0950GB.



Order Code	Colour	Watts	Input	Class					Notes
11105ABG/W	White	10W	100-240V		15cm	80mm	100mm	50	-
11105ABG/B	Black	10W	100-240V		15cm	80mm	100mm	50	-
11105ABG/AL	Aluminium	10W	100-240V		15cm	80mm	100mm	50	-
51105ABG/W	White	10W	100-240V		15cm	80mm	100mm	50	-
51105ABG/B	Black	10W	100-240V		15cm	80mm	100mm	50	-
51105ABG/AL	Aluminium	10W	100-240V		15cm	80mm	100mm	50	-
51205ABG/W	White	2x10W	100-240V		15cm	162x82mm	100mm	20	-
51205ABG/B	Black	2x10W	100-240V		15cm	162x82mm	100mm	20	-

The Chill Out Range

11105M/W/W

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

Complete with 0950GB.



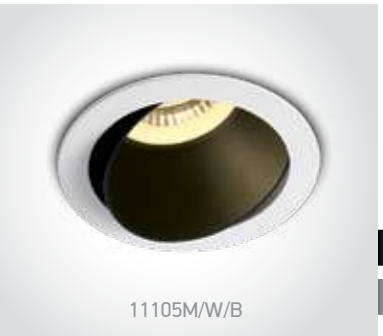

11105M/W/B

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

Complete with 0950GB.



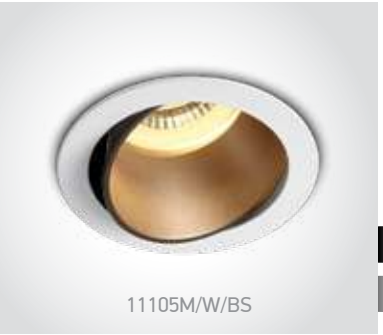

11105M/W/BS

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
11105M/W/W	White	White	10W	100-240V		15cm	72mm	120mm	50	-
11105M/W/B	White	Black	10W	100-240V		15cm	72mm	120mm	50	-
11105M/W/BS	White	Brass	10W	100-240V		15cm	72mm	120mm	50	-

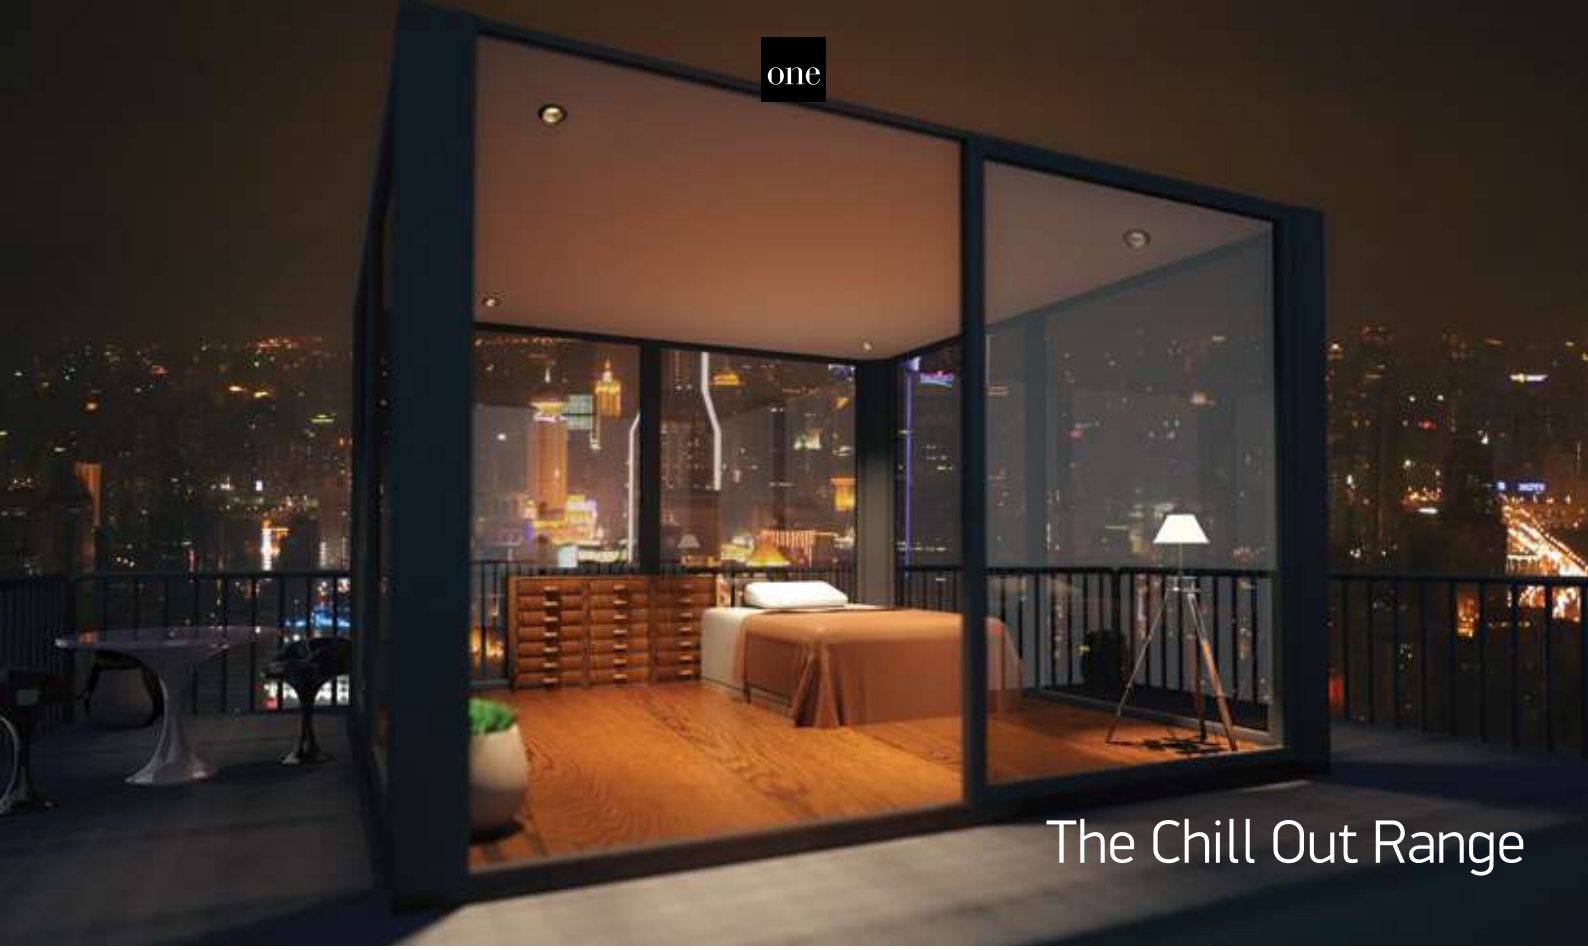

The Chill Out Range

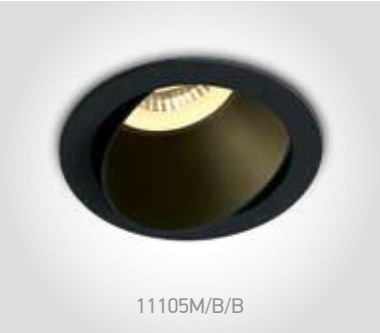

11105M/B/B

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20

Complete with 0950GB.



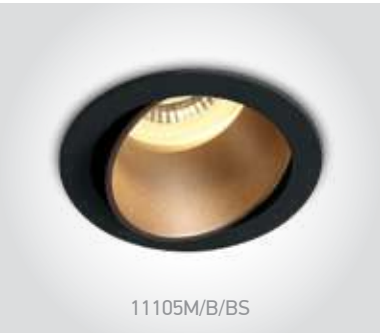

11105M/B/BS

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20

Complete with 0950GB.



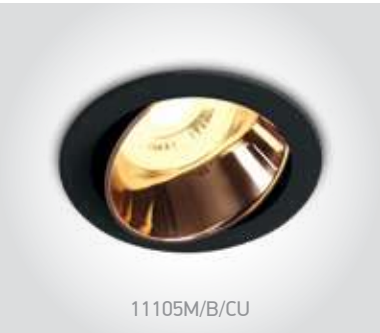

11105M/B/CU

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20

Complete with 0950GB.



Order Code	Colour	Reflector	Watts	Input	Class					Notes
11105M/B/B	Black	Black	10W	100-240V		15cm	72mm	120mm	50	-
11105M/B/BS	Black	Brass	10W	100-240V		15cm	72mm	120mm	50	-
11105M/B/CU	Black	Copper	10W	100-240V		15cm	72mm	120mm	50	-

The Round Clip In Range

11105A1/W

11105A1 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

11105A1/B

Complete with 0950G.



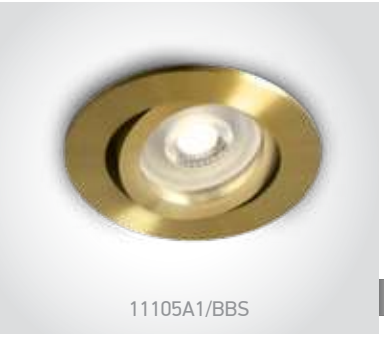
11105A1/BBS

11105A1 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

11105A1/AL

Complete with 0950G.



11105D8/W

11105D8 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20

Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
11105A1/W	White	10W	100-240V		15cm	72mm	120mm	100	-
11105A1/B	Black	10W	100-240V		15cm	72mm	120mm	100	-
11105A1/AL	Aluminium	10W	100-240V		15cm	72mm	120mm	100	-
11105A1/BBS	Brushed brass	10W	100-240V		15cm	72mm	120mm	100	-
11105D8/W	White	10W	100-240V		15cm	76mm	130mm	60	-

The Dark Light Spots
Round

11105D4/W

11105D4 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

Complete with 0950G.



11105DT/W

11105DT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

Complete with 0950G.

11105TG/W

11105TG | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

Complete with 0950G.

Order Code	Colour	Watts	Input	Class					Notes
11105D4/W	White	10W	100-240V		15cm	75mm	140mm	50	-
11105DT/W	White	10W	100-240V		15cm	95mm	140mm	50	-
11105TG/W	White	10W	100-240V		15cm	85mm	110mm	50	-

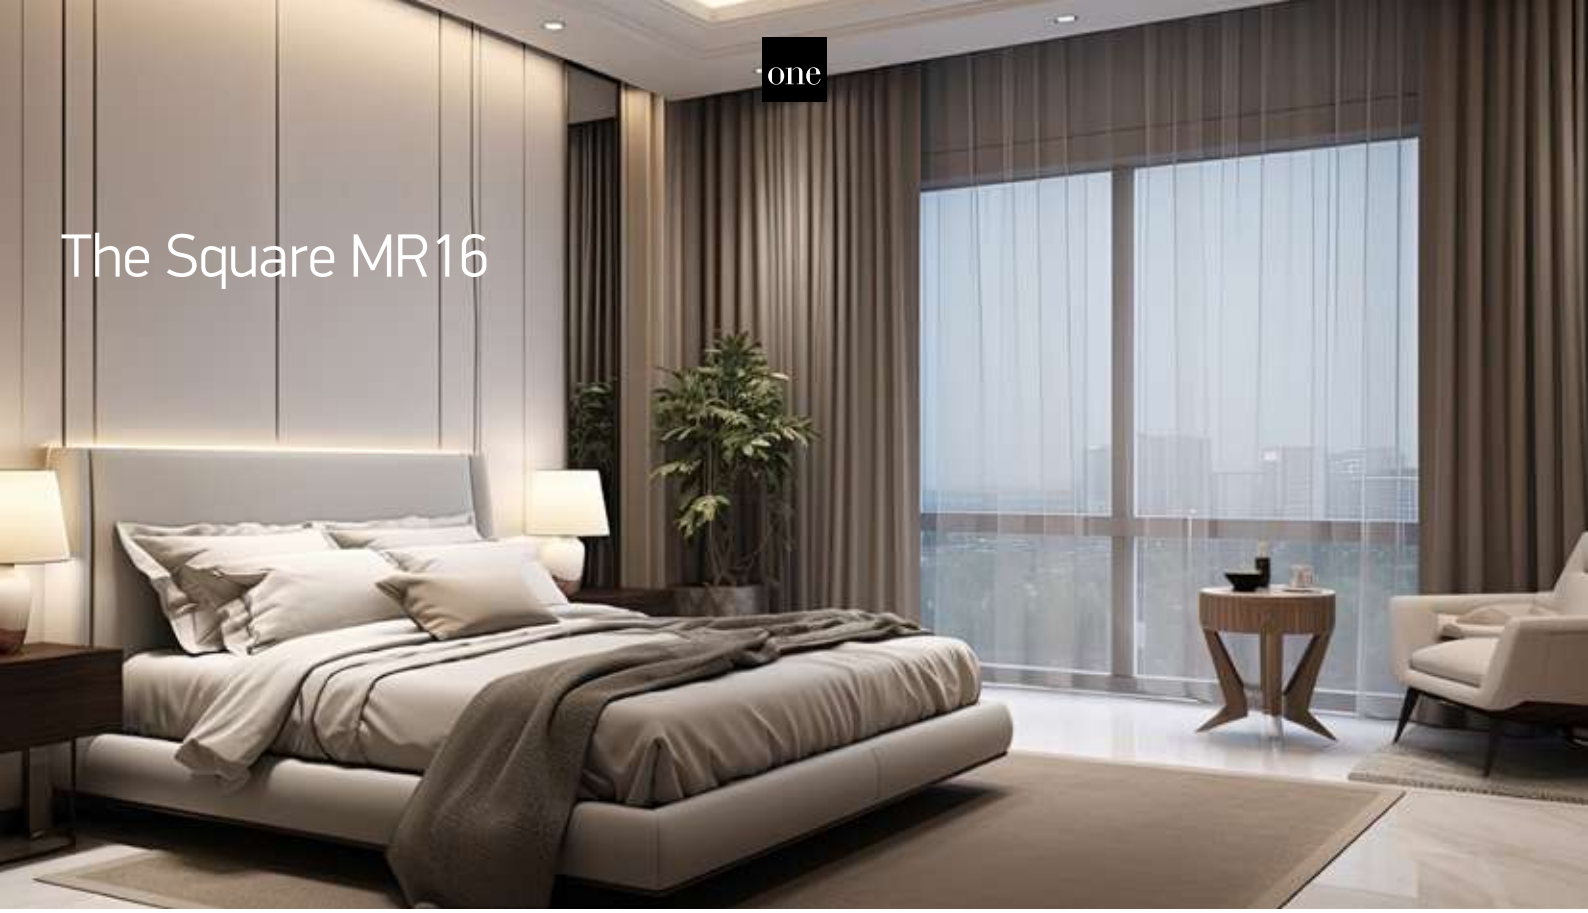

The Square MR16

51105TA/W

51105TA | 10W | MR16 | GU10 | Metal

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20

51105TA/B

Complete with 0950G.



51105TG/W

51105TG | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20

Complete with 0950G.

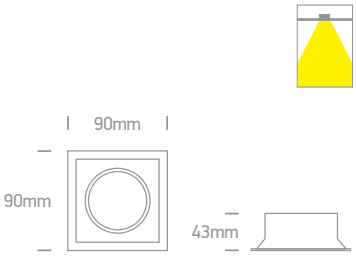

51205N/W

51205N | 2x10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

Complete with 0950G.



Order Code	Colour	Watts	Input	Class					Notes
51105TA/W	White	10W	100-240V		15cm	80x80mm	150mm	36	-
51105TA/B	Black	10W	100-240V		15cm	80x80mm	150mm	36	-
51105TG/W	White	10W	100-240V		15cm	80x80mm	110mm	50	-
51205N/W	White	2x10W	100-240V		15cm	187x97mm	130mm	25	-

The Fire Rated GU10 Range

11109FA/W

11109FA | 10W | MR16 | GU10 | Fire Rated | Aluminium

FIRE RATED · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP20

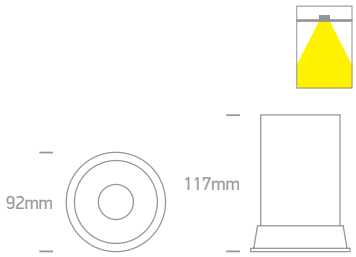

11105F/W

11105F | 10W | MR16 | GU10 | Fire Rated | Trimless | Aluminium

FIRE RATED · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP20

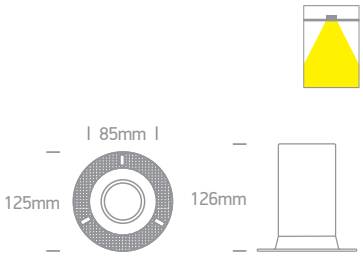

Order Code	Colour	Watts	Input	Class				Notes
11109FA/W	White	10W	100-240V		85mm	160mm	30	-
11105F/W	White	10W	100-240V		85mm	170mm	30	-

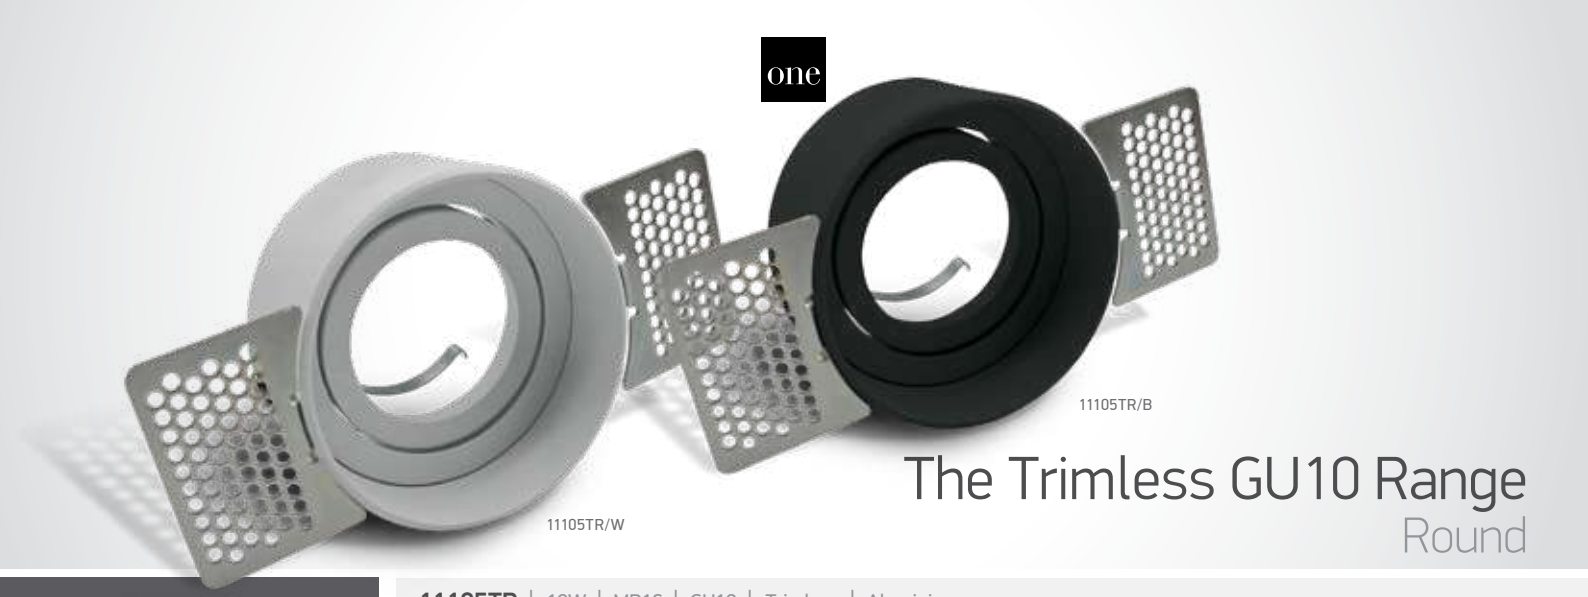

The Trimless GU10 Range
Round

11105TR/W

11105TR | 10W | MR16 | GU10 | Trimless | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

Complete with 0950G.



11105TR/B

11105TR | 10W | MR16 | GU10 | Trimless | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

Complete with 0950G.



11105UTR/W

11105UTR | 10W | MR16 | GU10 | Trimless | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

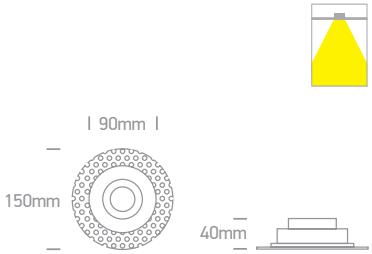

11105DTR/W

11105DTR | 10W | MR16 | GU10 | Trimless | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

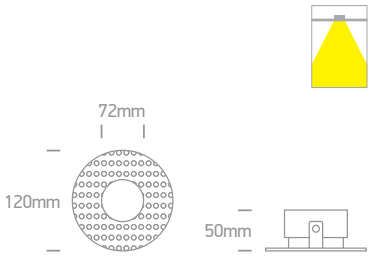

Order Code	Colour	Watts	Input	Class					Notes
11105TR/W	White	10W	100-240V		15cm	84mm	120mm	50	-
11105TR/B	Black	10W	100-240V		15cm	84mm	120mm	50	-
11105UTR/W	White	10W	100-240V		20cm	105mm	120mm	20	-
11105DTR/W	White	10W	100-240V		15cm	90mm	120mm	36	-

The Trimless GU10 Range
Square

51010TR | 10W | MR16 | GU10 | Trimless | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

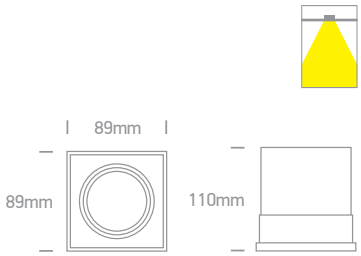

Order Code	Colour	Watts	Input	Class				Notes
51010TR/W	White	10W	100-240V		97,5x97,5mm	150mm	16	-

Recessed Spots Adjustable LED

Pages 105 - 124

04

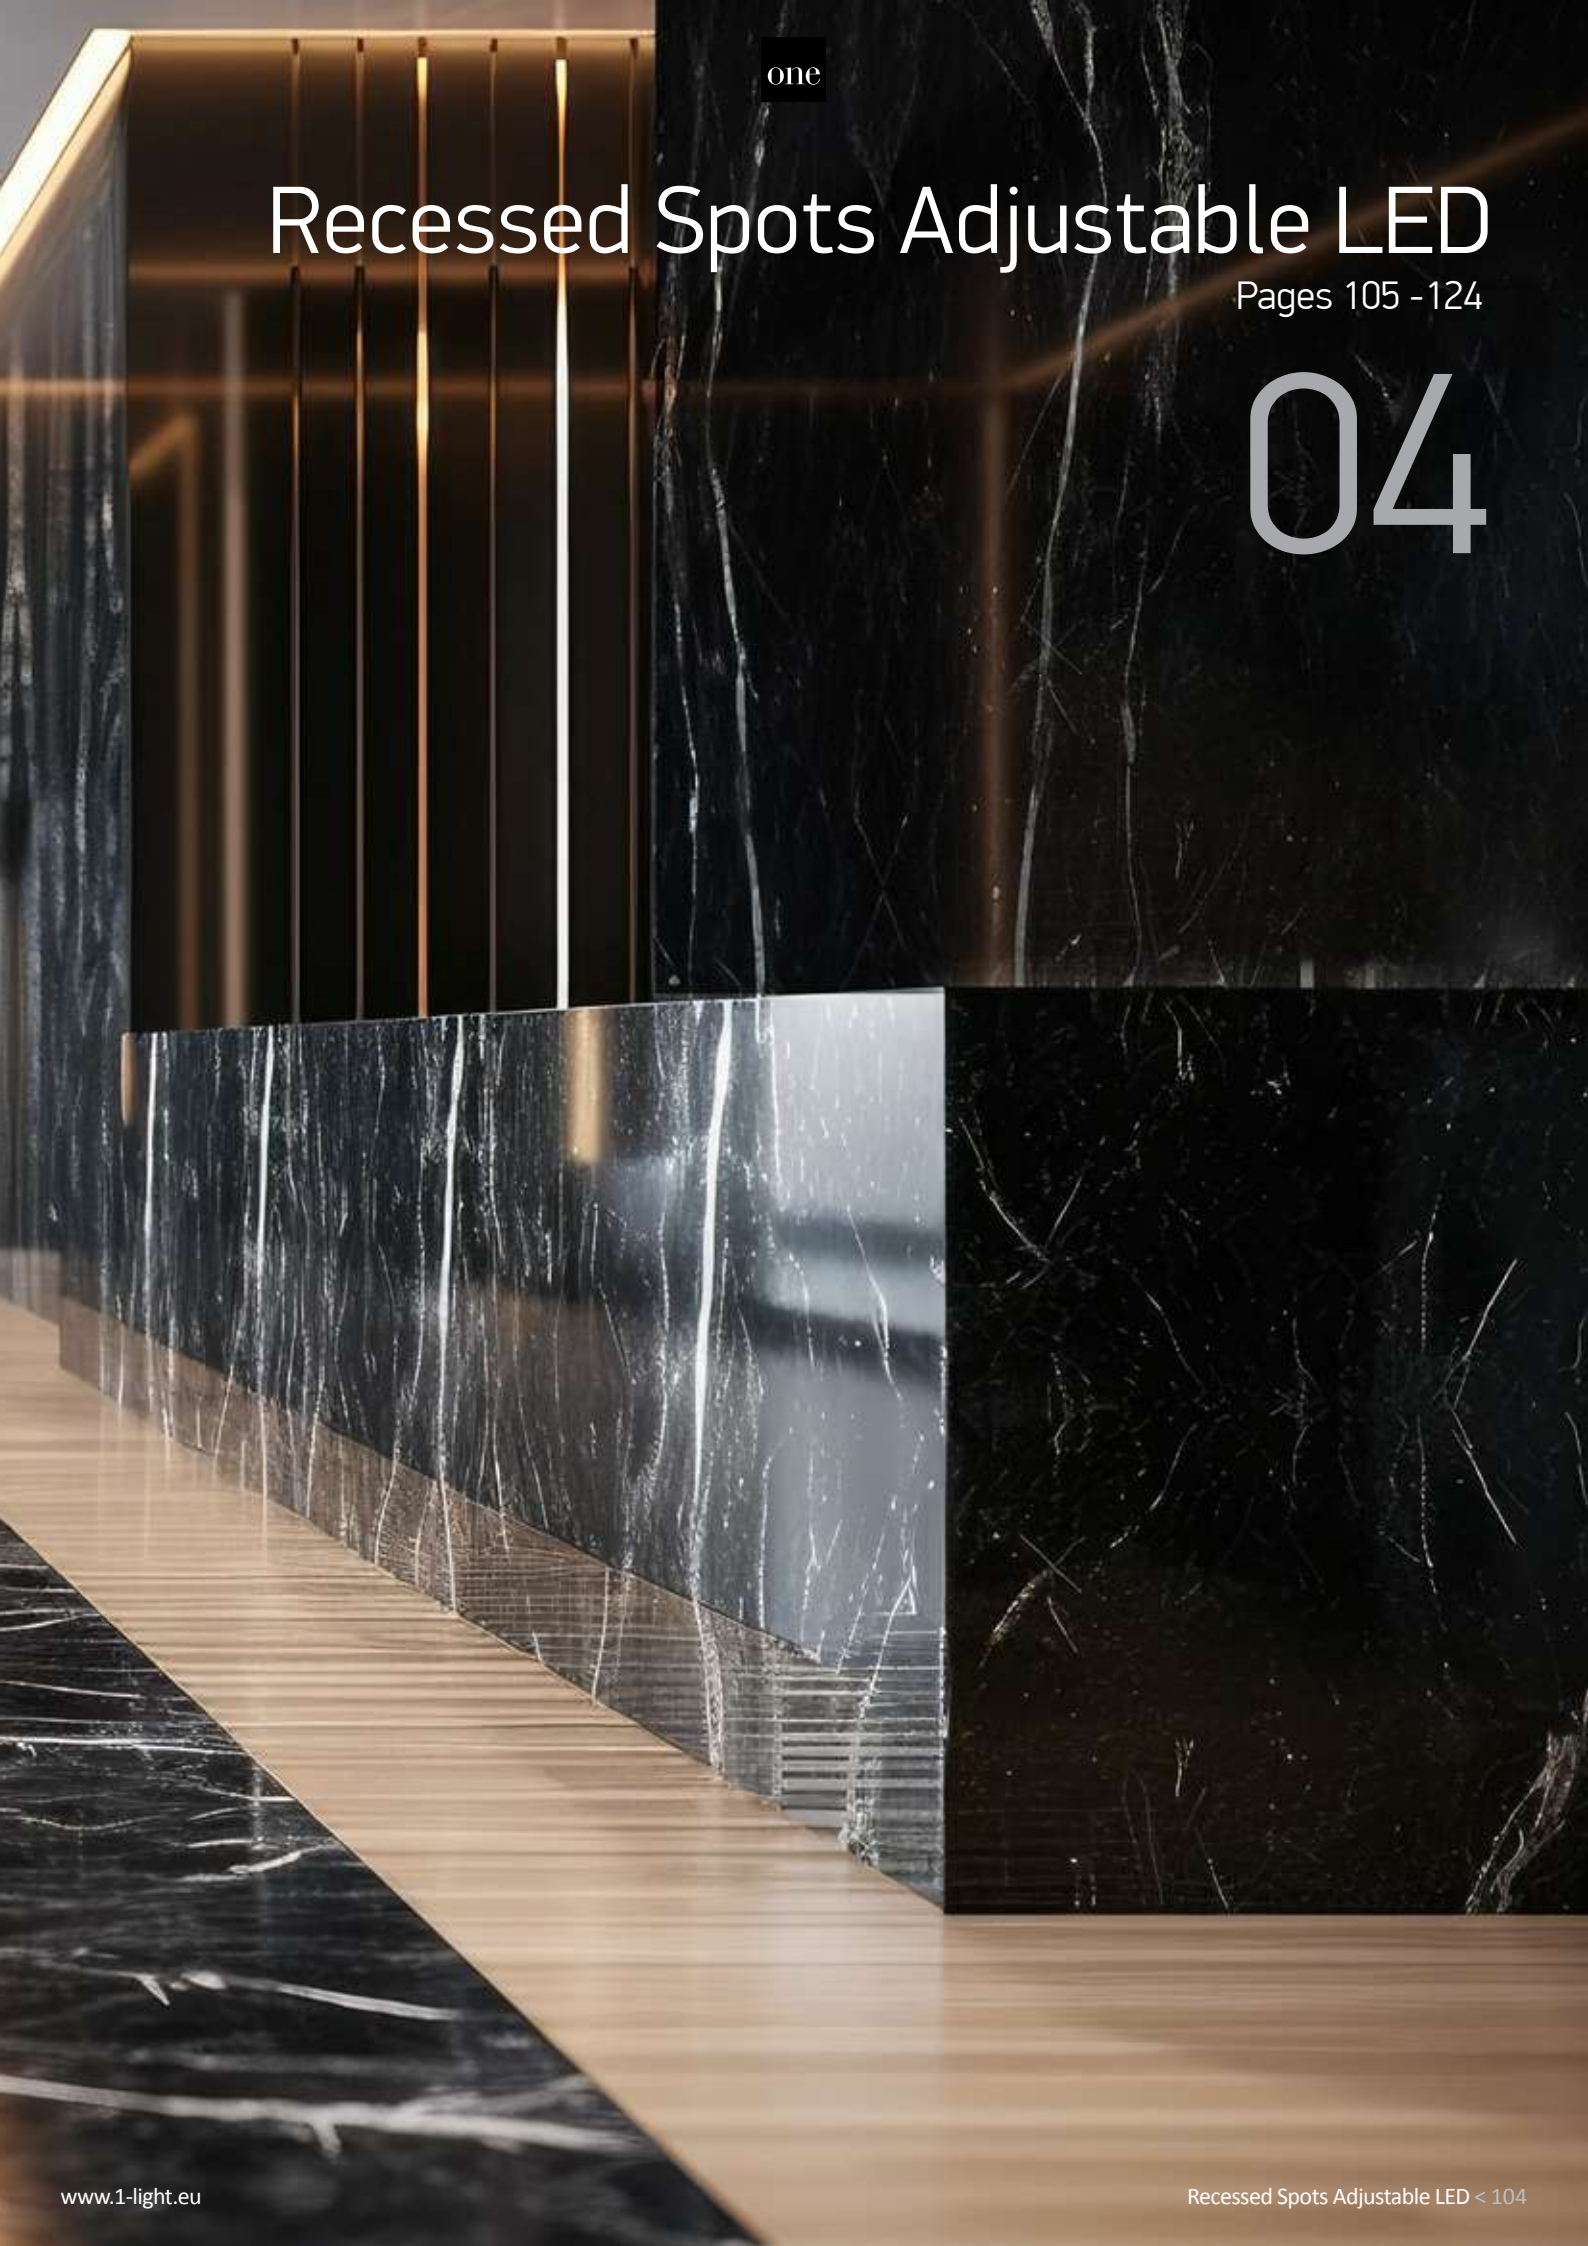

The Mini Series
Aluminium

11103B/W/W

11103B | 1W/2W | COB | Aluminium

1W@350mA / 2W@700mA

LED BUILT IN
90 CRI
DIMMABLE
ADJUSTABLE
QUICK FIX
CE
5 YEAR
IP20

Suitable for 89004A driver.



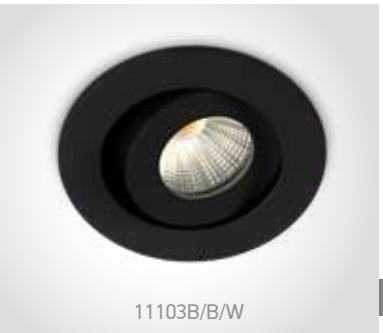

11103B/B/W

11103B | 1W/2W | COB | Aluminium

1W@350mA / 2W@700mA

LED BUILT IN
90 CRI
DIMMABLE
ADJUSTABLE
QUICK FIX
CE
5 YEAR
IP20

Suitable for 89004A driver.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103B/W/W	White	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA	III	40cm	45mm	60mm	100	Requires 350mA/700mA driver
11103B/B/W	Black	Warm white	3000K	1W/2W	200lm@2W	40°	350mA/700mA	III	40cm	45mm	60mm	100	Requires 350mA/700mA driver

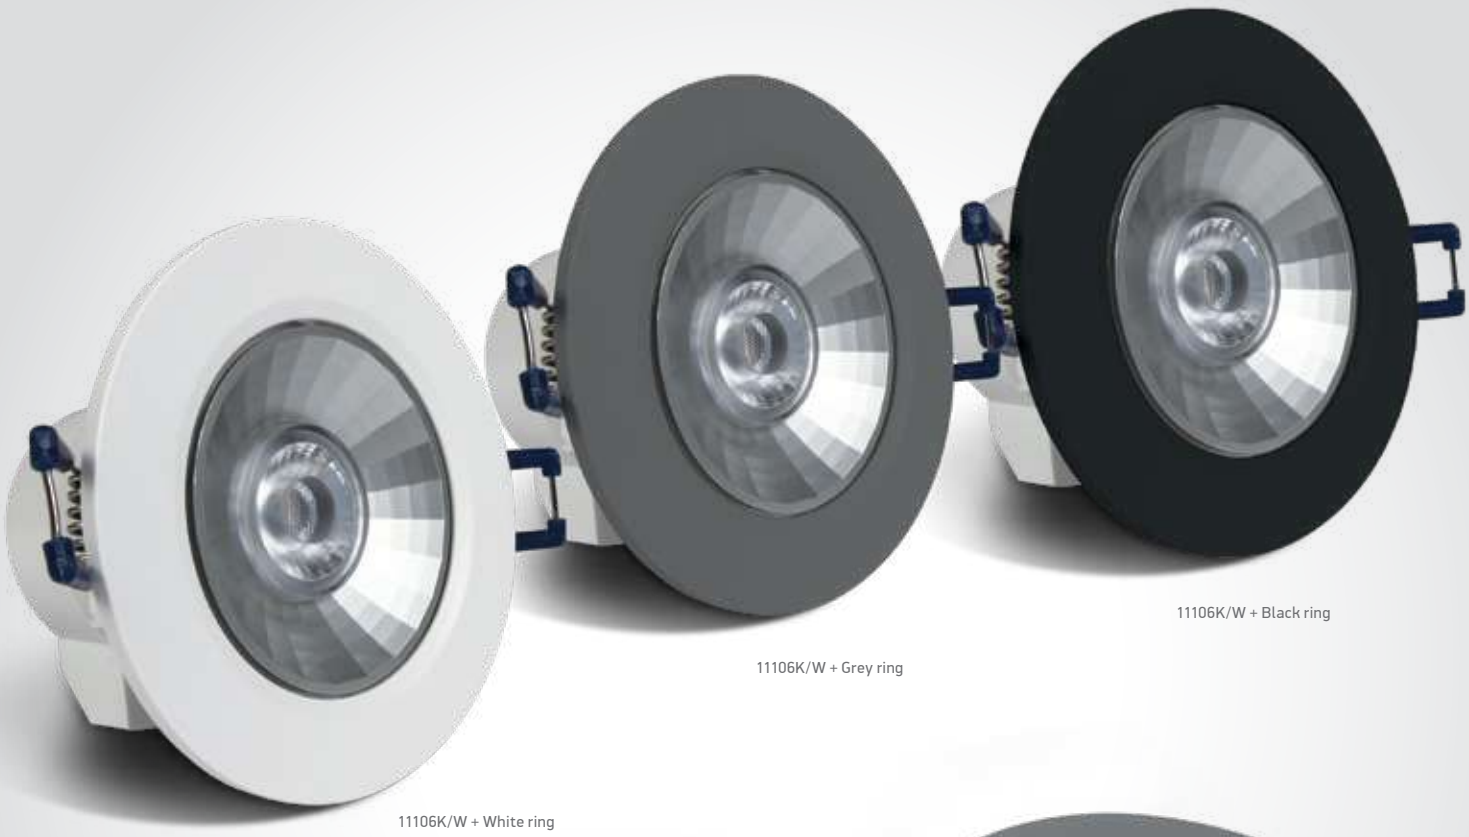

11106K/W + Black ring

11106K/W + Grey ring

11106K/W + White ring

The Reflector Spots

11106K/W

11106K | 6W | LED | Plastic

LED BUILT IN

80 CRI

ADJUSTABLE

CE

IP20

offer

2 YEAR

Complete with White/Black/Grey rings.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11106K/W	White/Black/Grey	Warm white	3000K	6W	345lm	38°	100-240V		67mm	90mm	48	Complete with driver

The 7W COB Range
CCT V

11107B | 7W | COB | Aluminium

new

IP20

LED BUILT IN

90 CRI

CCT V

ADJUSTABLE

CE 3 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11107B/W/V	White	CCT V	3000K-3500K-4000K	7W	560lm	60°	230V		75mm	75mm	50	Complete with 200mA driver

11112/W/V

11107B/W/V

The 12W COB Range
CCT V

11112/W/V

11112 | 12W | COB | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11112/W/V	White	CCT V	3000K-3500K-4000K	12W	1200lm	38°	700mA	III	40cm	76mm	90mm	50	Requires 700mA driver

one

51112H/W/W + 050088/G

11112H/B/W + 050086A/W

11112H/B/W + 050086/BS

The Interchangeable Rings Range
Aluminium

11112H/B/W+050086/W

11112H | 12W | COB | Aluminium

Ring must be ordered separately.

LED BUILT IN

80 CRI

ADJUSTABLE

CE

5 YEAR

IP20

60°

108mm

95mm

050086/W White

050086/B Black

050086/G Grey

050086/BS Brass

050086A/W White

51112H/W/W+050088/B

51112H | 12W | COB | Aluminium

Ring must be ordered separately.

LED BUILT IN

80 CRI

ADJUSTABLE

CE

5 YEAR

IP20

60°

108mm

108mm

95mm

050088/W White

050088/G Grey

050088/BS Brass

050088A/W White

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11112H/B/W	Black	Warm white	3000K	12W	940lm	60°	230V		90mm	120mm	30	Complete with 300mA driver
51112H/W/W	White	Warm white	3000K	12W	940lm	60°	230V		95x95mm	120mm	30	Complete with 300mA driver

11104K/B/W + 050100/B

11107K/B/W + 050102/CU

one

The Interchangeable Rings Range
Aluminium

11104K/B/W + 050100/BS

11104K | 3W/5W | COB | Aluminium

3W@350mA/5W@500mA | Ring must be ordered separately.

LED BUILT IN · 80 CRI · DIMMABLE · ADJUSTABLE · DARK LIGHT · IP20 · QUICK FIX · CE · 5 YEAR

35°

68mm · 62mm

050100/B Black

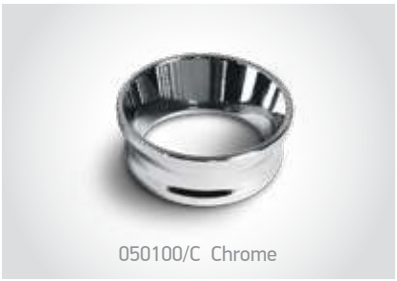

050100/C Chrome

050100/BS Brass

050100/CU Copper

11107K/W/W + 050102/B

11107K | 6,5W | COB | Aluminium

Ring must be ordered separately.

LED BUILT IN · 90 CRI · DIMMABLE · ADJUSTABLE · DARK LIGHT · IP20 · QUICK FIX · CE · 5 YEAR

11107K/B/W + 050102/BS

35°

85mm · 73mm

11107K/W/V + 050102/W

11107K | 6,5W | COB | Aluminium

Ring must be ordered separately.

new · LED BUILT IN · 90 CRI · DIMMABLE · CCT V · ADJUSTABLE · QUICK FIX · CE · DARK LIGHT · IP20 · 5 YEAR

35°

85mm · 73mm

050102/W White

050102/B Black

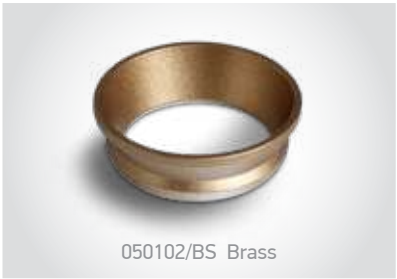

050102/BS Brass

050102/CU Copper

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11104K/B/W	Black	Warm white	3000K	3W/5W	400lm@5W	35°	350mA/500mA	III	40cm	60mm	80mm	50	Requires 350mA/500mA driver
11107K/W/W	White	Warm white	3000K	6,5W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver
11107K/B/W	Black	Warm white	3000K	6,5W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver
11107K/W/V	White	CCT V	3000K-3500K-4000K	6,5W	650lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver

The COB Dark Light

11107FD/B/W

11107FD | 7W | COB | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 2 YEAR · DARK LIGHT · IP20



11107FD/W/V

11107FD | 7W | COB | Aluminium

new · LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR · DARK LIGHT · IP20

11107FD/B/V



11112TA/W/W

11112TA | 12W | COB | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · ADJUSTABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20

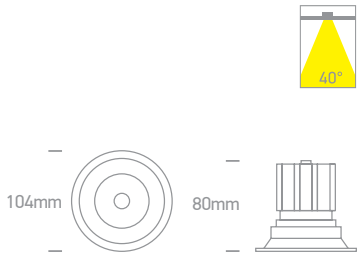

11112TA/W/V

11112TA | 12W | COB | Aluminium

new · LED BUILT IN · 90 CRI · DIMMABLE · CCT V · ADJUSTABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20

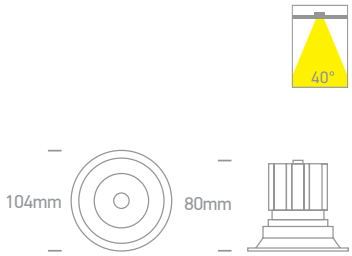

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107FD/B/W	Black	Warm white	3000K	7W	560lm	60°	230V		-	80mm	110mm	50	Complete with 300mA driver
11107FD/W/V	White	CCT V	3000K-3500K-4000K	7W	560lm	60°	230V		-	80mm	110mm	50	Complete with 200mA driver
11107FD/B/V	Black	CCT V	3000K-3500K-4000K	7W	560lm	60°	230V		-	80mm	110mm	50	Complete with 200mA driver
11112TA/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA		40cm	92mm	100mm	50	Requires 700mA driver
11112TA/W/V	White	CCT V	3000K-3500K-4000K	12W	1100lm	40°	700mA		40cm	92mm	100mm	50	Requires 700mA driver

one

The IP44 COB Shop & Hotel Range

11112E | 12W | COB | Aluminium

LED BUILT IN
90 CRI
DIMMABLE
ADJUSTABLE
DARK LIGHT
IP44
QUICK FIX
CE
5 YEAR



51212E | 2x12W | COB | Aluminium

LED BUILT IN
90 CRI
DIMMABLE
ADJUSTABLE
DARK LIGHT
IP44
QUICK FIX
CE
5 YEAR

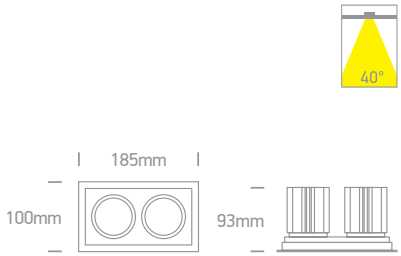

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11112E/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	87mm	105mm	50	Requires 700mA driver
51212E/W/W	White	Warm white	3000K	2x12W	2x1100lm	40°	700mA	III	40cm	175x90mm	105mm	24	Requires 2x700mA drivers

The IP54 COB Outdoor/Bathroom Range

11107WD/W/V

11107WD | 6,5W | COB | Aluminium

new · DARK LIGHT · IP54 · LED BUILT IN · 90 CRI · DIMMABLE · CCT V · ADJUSTABLE · QUICK FIX · CE · 5 YEAR



11207WD/W/W

11207WD | 2x6,5W | COB | Aluminium

DARK LIGHT · IP54 · LED BUILT IN · 90 CRI · DIMMABLE · ADJUSTABLE · QUICK FIX · CE · 5 YEAR



11207WD/W/V

11207WD | 2x6,5W | COB | Aluminium

new · DARK LIGHT · IP54 · LED BUILT IN · 90 CRI · DIMMABLE · CCT V · ADJUSTABLE · QUICK FIX · CE · 5 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107WD/W/V	White	CCT V	3000K-3500K-4000K	6,5W	600lm	38°	700mA	III	40cm	83mm	110mm	36	Requires 700mA driver
11207WD/W/W	White	Warm white	3000K	2x6,5W	2x600lm	36°	700mA	III	40cm	160x83mm	100mm	16	Requires 2x700mA drivers
11207WD/W/V	White	CCT V	3000K-3500K-4000K	2x6,5W	2x600lm	36°	700mA	III	40cm	160x83mm	100mm	16	Requires 2x700mA drivers

The COB Outdoor/Bathroom Range

11107P | 6,5W | COB | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · CCT V · new · ADJUSTABLE · QUICK FIX · CE · IP54 · 5 YEAR



11113D | 13W | COB | Aluminium

LED BUILT IN · 92 CRI · DIMMABLE · ADJUSTABLE · DARK LIGHT · QUICK FIX · CE · IP54 · 3 YEAR



11106PK | 8W | SMD | Dimmable | Plastic

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · ADJUSTABLE · DARK LIGHT · CE · 2 YEAR · IP54



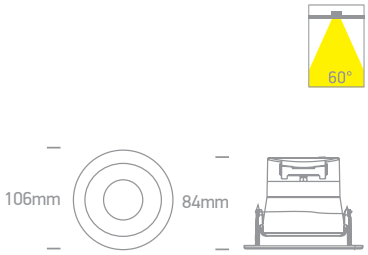

11112P | 12W | COB | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · ADJUSTABLE · DARK LIGHT · QUICK FIX · CE · IP65 · 5 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107P/W/V	White	CCT V	3000K-3500K-4000K	6,5W	600lm	36°	700mA	III	40cm	70mm	80mm	36	Requires 700mA driver
11113D/W/W	White	Warm white	3000K	13W	1100lm	38°	350mA	III	40cm	80mm	110mm	36	Requires 350mA driver
11106PK/W/W	White	Warm white	3000K	8W	850lm	60°	230V	II	-	92mm	120mm	30	Complete with 100mA dimmable driver
11106PK/B/W	Black	Warm white	3000K	8W	850lm	60°	230V	II	-	92mm	120mm	30	Complete with 100mA dimmable driver
11112P/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	72mm	100mm	48	Requires 700mA driver

one

The Mirror Recessed Cylinders

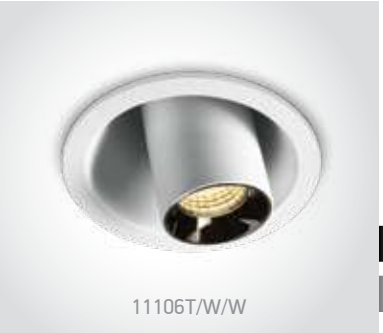

11106T | 6W | COB | Aluminium

DARK LIGHT
IP20

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR





11107T | 7W | COB | Aluminium

DARK LIGHT
IP20

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11106T/W/W	White	Warm white	3000K	6W	480lm	38°	230V		52mm	70mm	50	Complete with 135mA driver
11106T/B/W	Black	Warm white	3000K	6W	480lm	38°	230V		52mm	70mm	50	Complete with 135mA driver
11107T/W/W	White	Warm white	3000K	7W	560lm	38°	230V		74mm	80mm	30	Complete with 160mA driver
11107T/B/W	Black	Warm white	3000K	7W	560lm	38°	230V		74mm	80mm	30	Complete with 160mA driver

The 6,5W COB Recessed Cylinders

11107C | 6,5W | COB | Aluminium

11107C/W/W

LED BUILT IN · 90 CRI · DIMMABLE · ADJUSTABLE · DARK LIGHT · QUICK FIX · CE · 5 YEAR · IP20

11107C/B/W



11107C | 6,5W | COB | Aluminium

11107C/W/V

new · LED BUILT IN · 90 CRI · DIMMABLE · CCT V · ADJUSTABLE · QUICK FIX · CE · 5 YEAR · DARK LIGHT · IP20

new

11107C/B/V

11107C/W/V Complete with Black, White & Brass reflectors. 11107C/B/V Complete with Black & Brass reflectors.



11207C | 2x6,5W | COB | Aluminium

11207C/W/W

LED BUILT IN · 90 CRI · DIMMABLE · ADJUSTABLE · DARK LIGHT · QUICK FIX · CE · 5 YEAR · IP20

11207C/B/W



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107C/W/W	White	Black	Warm white	3000K	6,5W	550lm	36°	700mA	III	40cm	83mm	80mm	36	Requires 700mA driver
11107C/B/W	Black	Brass	Warm white	3000K	6,5W	550lm	36°	700mA	III	40cm	83mm	80mm	36	Requires 700mA driver
11107C/W/V	White	-	CCT V	3000K-3500K-4000K	6,5W	550lm	36°	700mA	III	40cm	83mm	80mm	36	Requires 700mA driver
11107C/B/V	Black	-	CCT V	3000K-3500K-4000K	6,5W	550lm	36°	700mA	III	40cm	83mm	80mm	36	Requires 700mA driver
11207C/W/W	White	Black	Warm white	3000K	2x6,5W	2x550lm	36°	700mA	III	40cm	2x83mm	90mm	24	Requires 2x700mA drivers
11207C/B/W	Black	Brass	Warm white	3000K	2x6,5W	2x550lm	36°	700mA	III	40cm	2x83mm	90mm	24	Requires 2x700mA drivers

one

11111C/W/V

51211C/B/W

The COB Recessed Cylinders

11111C | 11W | COB | Aluminium

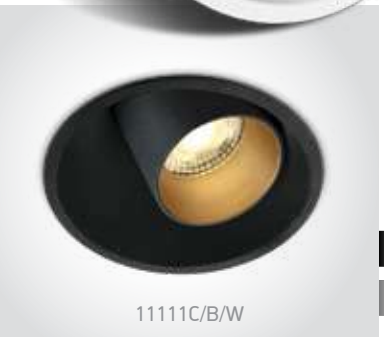

11111C/B/W

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · DARK LIGHT · IP20 · 5 YEAR

Optional rings.
Order code 050302/W & 050302/B.

Complete with Black & Brass reflectors.



11111C | 12W | COB | Aluminium

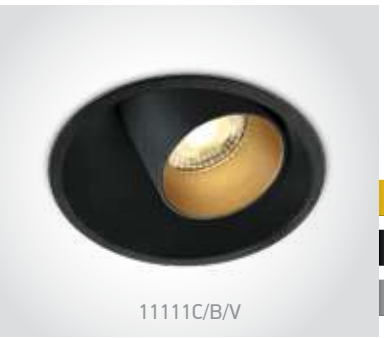

11111C/B/V

new · LED BUILT IN · 90 CRI · DIMMABLE · CCT V · ADJUSTABLE · QUICK FIX · CE · DARK LIGHT · IP20 · 5 YEAR

new

11111C/W/V

11111C/W/V Complete with Black, White & Brass reflectors.
11111C/B/V Complete with Black & Brass reflectors.



51111C | 11W | COB | Aluminium

51111C/B/W

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · DARK LIGHT · IP20 · 5 YEAR

51111C/W/W

Complete with Black & Brass reflectors.



51211C | 2x11W | COB | Aluminium

51211C/B/W

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · DARK LIGHT · IP20 · 5 YEAR

Complete with Black & Brass reflectors.

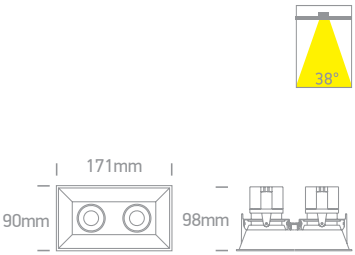

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11111C/B/W	Black	Warm white	3000K	11W	820lm	38°	230V		-	85mm	110mm	20	Complete with 250mA driver
11111C/W/V	White	CCT V	3000K-3500K-4000K	12W	900lm	40°	700mA		40cm	85mm	110mm	20	Requires 700mA driver
11111C/B/V	Black	CCT V	3000K-3500K-4000K	12W	900lm	40°	700mA		40cm	85mm	110mm	20	Requires 700mA driver
51111C/W/W	White	Warm white	3000K	11W	820lm	38°	230V		-	85x85mm	110mm	20	Complete with 250mA driver
51111C/B/W	Black	Warm white	3000K	11W	820lm	38°	230V		-	85x85mm	110mm	20	Complete with 250mA driver
51211C/B/W	Black	Warm white	3000K	2x11W	2x820lm	38°	230V		-	165x85mm	110mm	20	Complete with 250mA drivers

The COB Recessed Cylinders
High Power

11112B/W/V

11112B | 12W | COB | Aluminium

new

DARK LIGHT

IP20

LED BUILT IN

90 CRI

DIMMABLE

CCT V

ADJUSTABLE

QUICK FIX

CE

5 YEAR

new

11112B/B/V

11112B/W/V Complete with Black, White & Brass reflectors. 11112B/B/V Complete with Black & Brass reflectors.



11113E/W/W

11113E | 12W | COB | Aluminium

IP20

LED BUILT IN

90 CRI

DIMMABLE

ADJUSTABLE

QUICK FIX

CE

3 YEAR



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11112B/W/V	White	Black/White/Brass	CCT V	3000K-3500K-4000K	12W	900lm	40°	700mA	III	40cm	120mm	90mm	12	Requires 700mA driver
11112B/B/V	Black	Black/Brass	CCT V	3000K-3500K-4000K	12W	900lm	40°	700mA	III	40cm	120mm	90mm	12	Requires 700mA driver
11113E/W/W	White	-	Warm white	3000K	12W	1100lm	36°	350mA	III	40cm	80mm	120mm	36	Requires 350mA driver

Swivel Range
Aluminium

11108LA/W/W

11108LA | 8W | COB | Aluminium

LED BUILT IN

80 CRI

ADJUSTABLE

CE

3 YEAR

IP20



11108LA/B/W

11108LA | 8W | COB | Aluminium

LED BUILT IN

80 CRI

ADJUSTABLE

CE

3 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11108LA/W/W	White	Warm white	3000K	8W	600lm	25°	230V		68mm	50mm	24	Complete with 200mA driver
11108LA/B/W	Black	Warm white	3000K	8W	600lm	25°	230V		68mm	50mm	24	Complete with 200mA driver

Moving Inner Cylinder Range

11103M/W/W

11103M | 3W | COB | Aluminium

LED BUILT IN
90 CRI
DIMMABLE
ADJUSTABLE
QUICK FIX
CE
3 YEAR
DARK LIGHT
IP20



51106M/W/W

51106M | 6W | COB | Aluminium

LED BUILT IN
90 CRI
DIMMABLE
ADJUSTABLE
QUICK FIX
CE
3 YEAR
IP20

Suitable for 89008 driver.

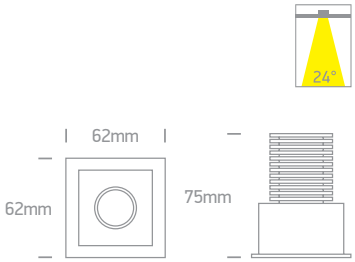

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103M/W/W	White	Warm white	3000K	3W	280lm	36°	350mA	III	40cm	44mm	35mm	100	Requires 350mA driver
51106M/W/W	White	Warm white	3000K	6W	540lm	24°	350mA	III	40cm	58x58mm	95mm	60	Requires 350mA driver

The Mirror Adjustable Boxes

51506B/W/W

51406B/W/W

51406B | 16W | COB | Aluminium

LED BUILT IN

90 CRI

ADJUSTABLE

3 YEAR

IP20



51506B/W/W

51506B | 20W | COB | Aluminium

LED BUILT IN

90 CRI

ADJUSTABLE

3 YEAR

IP20

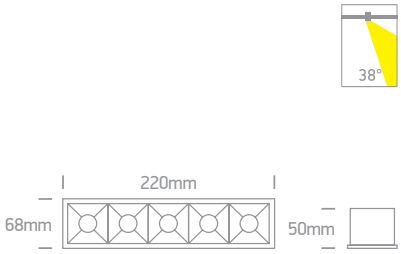

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51406B/W/W	White	Warm white	3000K	16W	1280lm	38°	230V		100x100mm	100mm	30	Complete with 400mA driver
51506B/W/W	White	Warm white	3000K	20W	1600lm	38°	230V		212x55mm	70mm	30	Complete with 500mA driver

The Mirror Adjustable Boxes

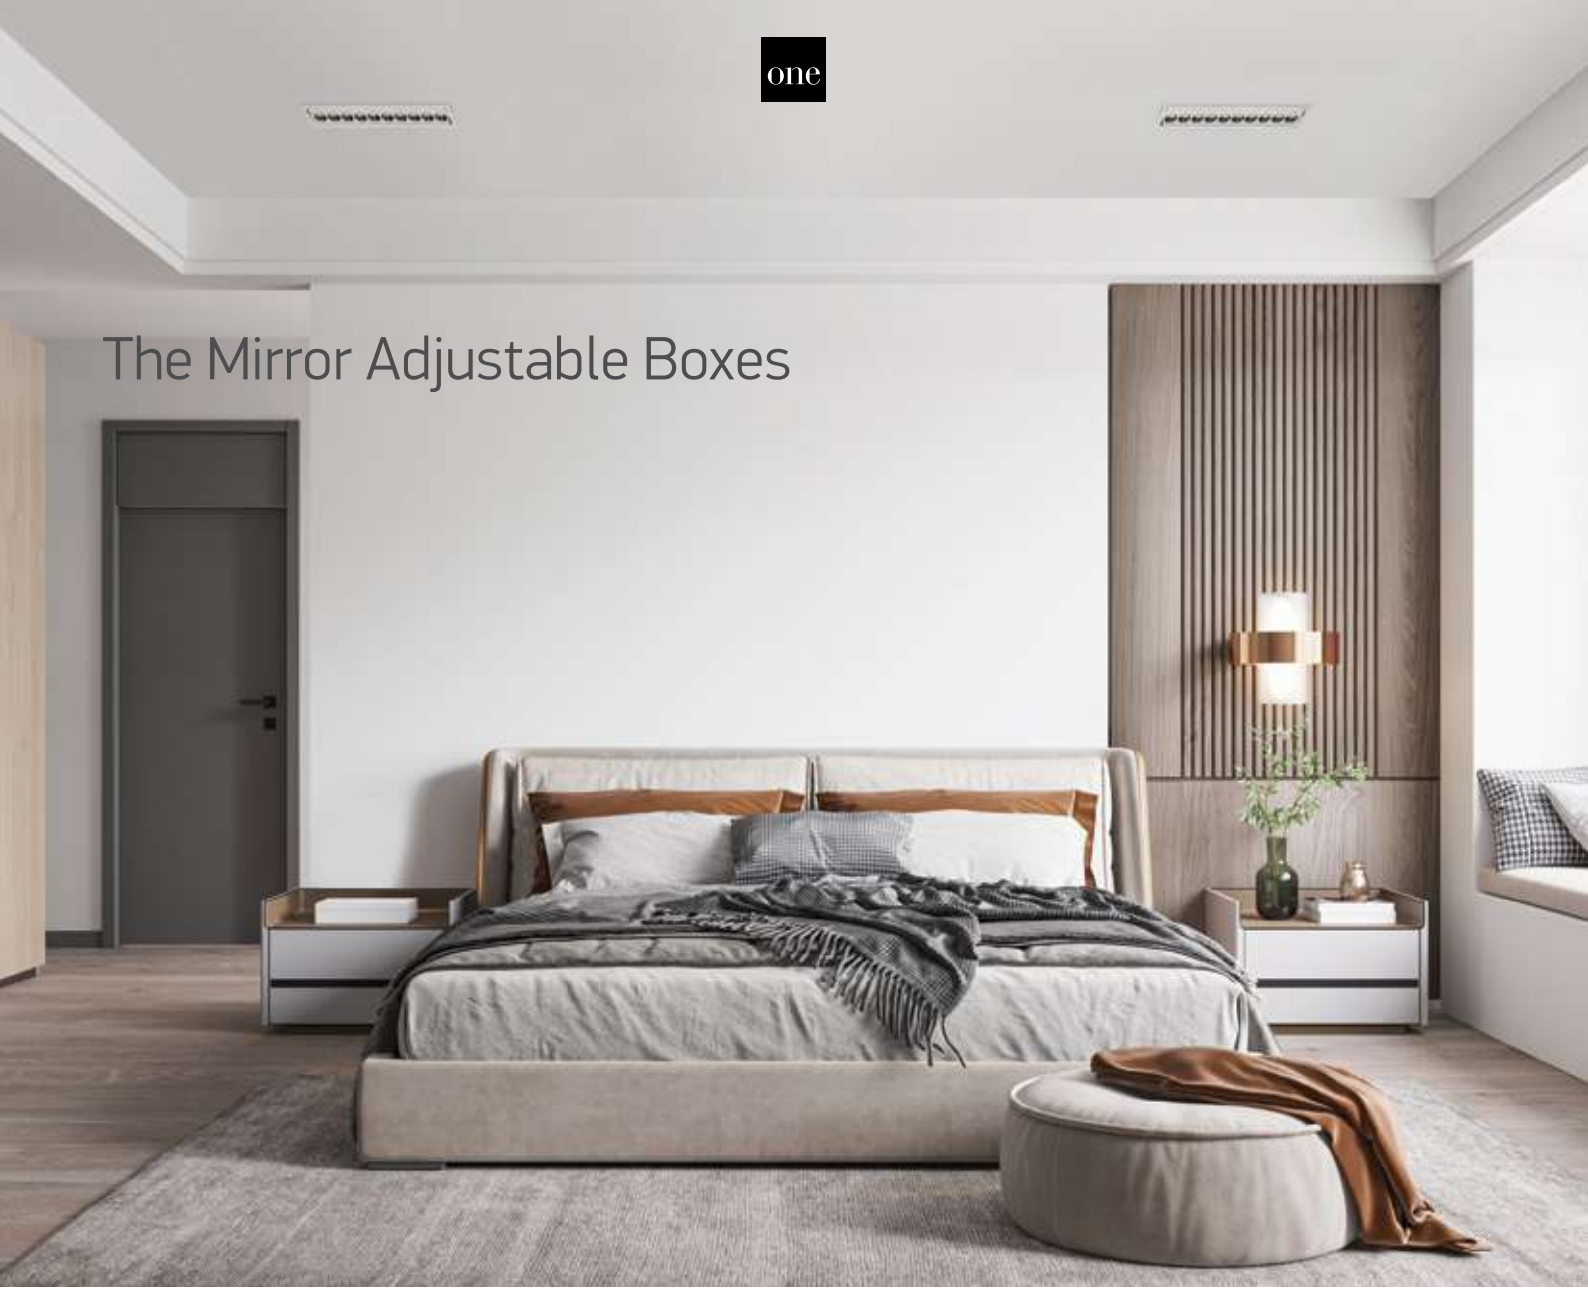

51012H/B/W

51012H | 12W | SMD | Aluminium

LED BUILT IN

90 CRI

ADJUSTABLE

CE

5 YEAR

DARK LIGHT

IP20



51024H/B/W

51024H | 24W | SMD | Aluminium

LED BUILT IN

90 CRI

ADJUSTABLE

CE

5 YEAR

DARK LIGHT

IP20



51024H/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51012H/B/W	Black	Warm white	3000K	12W	840lm	38°	230V		150x43mm	70mm	40	Complete with 700mA driver
51024H/W/W	White	Warm white	3000K	24W	1680lm	38°	230V		280x43mm	70mm	20	Complete with 700mA driver
51024H/B/W	Black	Warm white	3000K	24W	1680lm	38°	230V		280x43mm	70mm	20	Complete with 700mA driver

one

11112RA/B/V

11107RA/W/V

The COB Cylinders

11107RA | 6,5W | COB | Aluminium

11107RA/W/V

new

DARK LIGHT

IP20

LED BUILT IN

90 CRI

DIMMABLE

CCT V

ADJUSTABLE

QUICK FIX

CE

5 YEAR

new

11107RA/B/V

11107RA/W/V Complete with Black & White reflectors.
11107RA/B/V Complete with Brass & Black reflectors.



11112RA | 12W | COB | Aluminium

11112RA/W/V

new

DARK LIGHT

IP20

LED BUILT IN

90 CRI

DIMMABLE

CCT V

ADJUSTABLE

QUICK FIX

CE

5 YEAR

new

11112RA/B/V

11112RA/W/V Complete with Black & White reflectors.
11112RA/B/V Complete with Brass & Black reflectors.



11112RB | 12W | COB | Aluminium

11112RB/W/W

LED BUILT IN

90 CRI

DIMMABLE

ADJUSTABLE

DARK LIGHT

IP20

QUICK FIX

CE

5 YEAR



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107RA/W/V	White	Black/White	CCT V	3000K-3500K-4000K	6,5W	500lm	36°	700mA	III	40cm	45mm	40mm	36	Requires 700mA driver
11107RA/B/V	Black	Black/Brass	CCT V	3000K-3500K-4000K	6,5W	500lm	36°	700mA	III	40cm	45mm	40mm	36	Requires 700mA driver
11112RA/W/V	White	Black/White	CCT V	3000K-3500K-4000K	12W	1020lm	36°	700mA	III	40cm	55mm	50mm	20	Requires 700mA driver
11112RA/B/V	Black	Black/Brass	CCT V	3000K-3500K-4000K	12W	1020lm	36°	700mA	III	40cm	55mm	50mm	20	Requires 700mA driver
11112RB/W/W	White	Black	Warm white	3000K	12W	1020lm	36°	350mA	III	40cm	55mm	50mm	18	Requires 350mA driver

The Trimless COB Spots

11107BT/W/W

11107BT | 6,5W | COB | Trimless | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · ADJUSTABLE · QUICK FIX · CE · 5 YEAR

DARK LIGHT · IP54



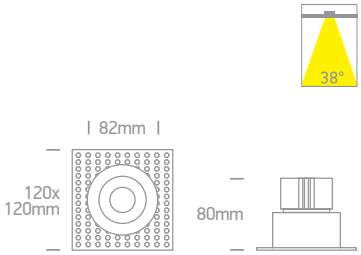

11107BT/W/V

11107BT | 6,5W | COB | Trimless | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · CCT V · ADJUSTABLE · QUICK FIX · CE · 5 YEAR

new · DARK LIGHT · IP54

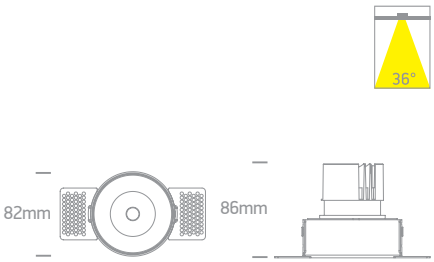

11112T/W/W

11112T | 12W | COB | Trimless | Aluminium

LED BUILT IN · 90 CRI · DIMMABLE · ADJUSTABLE · QUICK FIX · CE · 5 YEAR

DARK LIGHT · IP20



11107TTR/W/W

11107TTR | 7W | COB | Trimless | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR

DARK LIGHT · IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107BT/W/W	White	Warm white	3000K	6,5W	500lm	38°	700mA	III	40cm	96mm	105mm	30	Requires 700mA driver
11107BT/W/V	White	CCT V	3000K-3500K-4000K	6,5W	650lm	36°	700mA	III	40cm	94mm	105mm	30	Requires 700mA driver
11112T/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	75mm	110mm	40	Requires 700mA driver
11107TTR/W/W	White	Warm white	3000K	7W	560lm	38°	230V	II	-	88mm	90mm	30	Complete with 160mA driver

Downlights Fixed

Pages 127-168

05

The 3-12W Round Recessed Panels
Aluminium

10103FA/W/W

10103FA | 3W | SMD | Aluminium

LED BUILT IN

80 CRI

CE 2 YEAR

IP40



10108FA/W/C

10108FA | 8W | SMD | Aluminium

Optional dimmable driver code 89009UT.

LED BUILT IN

80 CRI

CE 2 YEAR

IP40



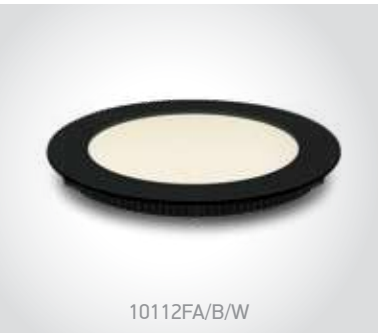

10112FA/B/W

10112FA | 12W | SMD | Aluminium

Optional dimmable driver code 89016UT.

LED BUILT IN

80 CRI

CE 2 YEAR

IP40



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103FA/W/W	White	Warm white	3000K	3W	180lm	120°	230V		70mm	50mm	60	Complete with 300mA driver
10108FA/W/C	White	Cool white	4000K	8W	560lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10108FA/B/C	Black	Cool white	4000K	8W	560lm	120°	230V		108mm	50mm	40	Complete with 300mA driver
10112FA/B/C	Black	Cool white	4000K	12W	840lm	120°	230V		155mm	50mm	30	Complete with 250mA driver
10112FA/B/W	Black	Warm white	3000K	12W	720lm	120°	230V		155mm	50mm	30	Complete with 250mA driver

The 18-30W Round Recessed Panels
Aluminium

10112FA/B/W

10130FA/W/C

10118FA/W/W

10118FA | 18W | SMD | Aluminium

Optional dimmable driver code 89024UT.

LED BUILT IN

80 CRI

CE

2 YEAR

IP40

10118FA/B/W



10130FA/W/C

10130FA | 30W | SMD | Aluminium

Optional dimmable driver code 89030UT.

LED BUILT IN

80 CRI

CE

2 YEAR

IP40

10130FA/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10118FA/W/W	White	Warm white	3000K	18W	1080lm	120°	230V		210mm	50mm	20	Complete with 450mA driver
10118FA/B/W	Black	Warm white	3000K	18W	1080lm	120°	230V		210mm	50mm	20	Complete with 450mA driver
10130FA/W/C	White	Cool white	4000K	30W	2100lm	120°	230V		285mm	50mm	15	Complete with 700mA driver
10130FA/W/W	White	Warm white	3000K	30W	1800lm	120°	230V		285mm	50mm	15	Complete with 700mA driver

The 3-12W Round Recessed Panels
CCT V

10103FA/W/V

10103FA | 3W | SMD | Aluminium

LED BUILT IN
80 CRI
CCT V
CE
3 YEAR
IP20

10103FA/B/V

CCT Variable



10108FA/W/V

10108FA | 8W | SMD | Aluminium

LED BUILT IN
80 CRI
CCT V
CE
3 YEAR
IP20

10108FA/B/V

CCT Variable



10112FA/W/V

10112FA | 12W | SMD | Aluminium

LED BUILT IN
80 CRI
CCT V
CE
3 YEAR
IP20

10112FA/B/V

CCT Variable



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103FA/W/V	White	CCT V	3000K-4000K-5700K	3W	240lm	120°	230V		70mm	50mm	30	Complete with 300mA driver
10103FA/B/V	Black	CCT V	3000K-4000K-5700K	3W	240lm	120°	230V		70mm	50mm	30	Complete with 300mA driver
10108FA/W/V	White	CCT V	3000K-4000K-5700K	8W	640lm	120°	230V		108mm	50mm	20	Complete with 200mA driver
10108FA/B/V	Black	CCT V	3000K-4000K-5700K	8W	640lm	120°	230V		108mm	50mm	20	Complete with 200mA driver
10112FA/W/V	White	CCT V	3000K-4000K-5700K	12W	1200lm	120°	230V		155mm	50mm	20	Complete with 300mA driver
10112FA/B/V	Black	CCT V	3000K-4000K-5700K	12W	1200lm	120°	230V		155mm	50mm	20	Complete with 300mA driver

The 18W-30W Round Recessed Panels
CCT V

10118FA/W/V

10118FA/B/V

10118FA/W/V

10118FA | 18W | SMD | Aluminium

LED BUILT IN

80 CRI

3 YEAR

IP20

10118FA/B/V

CCT Variable



10130FA/W/V

10130FA | 30W | SMD | Aluminium

LED BUILT IN

80 CRI

3 YEAR

IP20

10130FA/B/V

CCT Variable



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10118FA/W/V	White	CCT V	3000K-4000K-5700K	18W	1800lm	120°	230V		210mm	50mm	16	Complete with 450mA driver
10118FA/B/V	Black	CCT V	3000K-4000K-5700K	18W	1800lm	120°	230V		210mm	50mm	16	Complete with 450mA driver
10130FA/W/V	White	CCT V	3000K-4000K-5700K	30W	3300lm	120°	230V		285mm	50mm	12	Complete with 800mA driver
10130FA/B/V	Black	CCT V	3000K-4000K-5700K	30W	3300lm	120°	230V		285mm	50mm	12	Complete with 800mA driver

The 40-48W Round Recessed Panels
Aluminium

10140F/W/C

10140F | 40W | SMD | Aluminium

LED BUILT IN

90 CRI

CE

2 YEAR

IP40



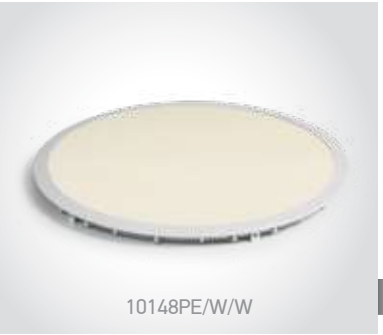

10148PE/W/W

10148PE | 48W | SMD | Aluminium

Driver must be ordered separately.

LED BUILT IN

80 CRI

DIMMABLE

CE

2 YEAR

IP20

Optional non-dimmable driver. Order code 89048.

Optional TRIAC dimmable driver. Order code 89048T.

Optional DALI, Triac & Push to DIM & 1-10V driver. Order code 89050TLD.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10140F/W/C	White	Cool white	4000K	40W	3400lm	120°	230V		408mm	40mm	5	Complete with 1000mA driver
10140F/W/W	White	Warm white	3000K	40W	3400lm	120°	230V		408mm	40mm	5	Complete with 1000mA driver
10148PE/W/W	White	Warm white	3000K	48W	3500lm	120°	1200mA		585mm	80mm	4	Requires 1200mA driver

The 16-30W Square Recessed Panels
Aluminium

50116FA | 16W | SMD | Aluminium

LED BUILT IN
80 CRI
CCT V
CE
3 YEAR
IP20



50122FA | 22W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP40



50122FA | 22W | SMD | Aluminium

LED BUILT IN
80 CRI
CCT V
CE
3 YEAR
IP20



50130FA | 30W | SMD | Aluminium

LED BUILT IN
80 CRI
CCT V
CE
3 YEAR
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50116FA/W/V	White	CCT V	3000K-4000K-5700K	16W	1600lm	120°	230V		155x155mm	50mm	20	Complete with 400mA driver
50122FA/W/W	White	Warm white	3000K	22W	1320lm	120°	230V		210x210mm	50mm	20	Complete with 500mA driver
50122FA/W/V	White	CCT V	3000K-4000K-5700K	22W	2200lm	120°	230V		210x210mm	50mm	16	Complete with 550mA driver
50130FA/W/V	White	CCT V	3000K-4000K-5700K	30W	3000lm	120°	230V		280x280mm	50mm	12	Complete with 800mA driver

Panels For Germany/Austria
620x620mm

50140FA | 36W | SMD | 620x620mm | Aluminium

For recessed 620x620mm ceilings.

LED BUILT IN
90 CRI
CCT V
CE
new
2 YEAR
IP20

Optional DALI & Push to DIM driver. Order code 89044L.



50140BAU | 40W | SMD | 620x620mm | Aluminium + Steel | Microprismatic

Backlit.

LED BUILT IN
80 CRI
UGR19
CCT V
CE
3 YEAR
IP20

Optional suspension kit. Order code 050017.

Optional recessed kit (4pcs). Order code 050108.

Optional DALI & Push to DIM driver. Order code 89040L.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140FA/V	-	CCT V	3000K-4000K-5500K	36W	3600lm	230V		50mm	4	Complete with 950mA driver
50140BAU/W/V	White	CCT V	3000K-4000K-6000K	40W	3600lm-4000lm-3800lm	230V		60mm	4	Complete with 1000mA driver

Panels
600x600mm

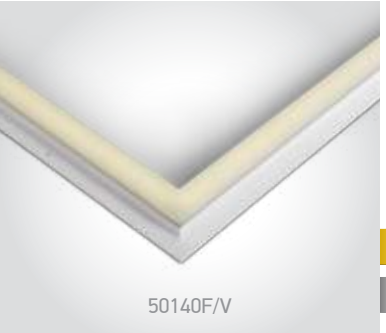

50140F/V

50140F | 36W | SMD | 595x595mm | Aluminium

For recessed 600x600mm ceilings.

LED BUILT IN
90 CRI
CCT V
CE
new
2 YEAR
IP20

Optional DALI & Push to DIM driver. Order code 89044L.



50140B/W/C

50140B | 40W | SMD | 595x595mm | Aluminium + Steel

Backlit.

LED BUILT IN
80 CRI
CE
3 YEAR
IP20

Optional suspension kit. Order code 050017.

Optional recessed kit (4pcs). Order code 050108.

Optional DALI & Push to DIM driver. Order code 89044L.



50140BU/W/V

50140BU | 40W | SMD | 595x595mm | Aluminium + steel | Microprismatic

Backlit.

LED BUILT IN
80 CRI
UGR19
CCT V
CE
3 YEAR
IP20

Optional suspension kit. Order code 050017.

Optional recessed kit (4pcs). Order code 050108.

Optional DALI & Push to DIM driver. Order code 89044L.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140F/V	-	CCT V	3000K-4000K-5500K	36W	3600lm	230V		50mm	4	Complete with 950mA driver
50140B/W/C	White	Cool white	4000K	40W	4000lm	230V		50mm	4	Complete with 850mA driver
50140BU/W/V	White	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V		60mm	4	Complete with 1000mA driver

The Rectangular Panels
1200x300mm

50140BR/W/C

50140BR | 40W | SMD | Aluminium + steel

Backlit.

LED BUILT IN
80 CRI
CE
3 YEAR
IP20

Optional suspension kit. Order code 050017.

Requires 2 sets.

Optional recessed kit (4pcs). Order code 050108.

Optional DALI & Push to DIM driver. Order code 89040L.



50140BRU/W/V

50140BRU | 40W | SMD | Aluminium + steel | Microprismatic

Backlit.

LED BUILT IN
80 CRI
UGR19
CCT V
CE
3 YEAR
IP20

Optional suspension kit. Order code 050017.

Requires 2 sets.

Optional recessed kit (4pcs). Order code 050108.

Optional DALI & Push to DIM driver. Order code 89040L.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140BR/W/C	White	Cool white	4000K	40W	4000lm	230V		50mm	4	Complete with 1000mA driver
50140BRU/W/V	White	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V		50mm	4	Complete with 1000mA driver

The IP65 Recessed Panels
600X600mm

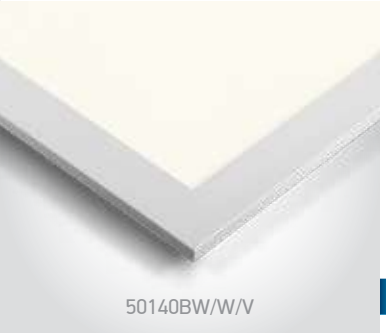
50140BW/W/V

50140BW | 40W | SMD | 595x595mm | Aluminium + Steel

Backlit.

LED BUILT IN

80 CRI

CCT V

CE

3 YEAR

IP65

Optional suspension kit. Order code 050017.

Optional recessed kit (4pcs). Order code 050108.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140BW/W/V	White	CCT V	3000K-4000K-5700K	40W	4000lm	230V		60mm	4	Complete with IP65 950mA driver

Surface/Recessed Panels
Adjustable Cut Out Hole

62116F/W/W

62116F | 16W | SMD | Surface / Recessed Mounted | Plastic

LED BUILT IN

80 CRI

CE 2 YEAR

IP20

Adjustable cutout hole.



62116FA/W/W

62116FA | 16W | SMD | Surface / Recessed Mounted | Plastic

LED BUILT IN

80 CRI

CE 2 YEAR

IP20

Adjustable cutout hole.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
62116F/W/W	White	Warm white	3000K	16W	1500lm	100-240V		70-175mm	50mm	20	Complete with 210mA driver
62116FA/W/C	White	Cool white	4000K	16W	1500lm	100-240V		70-190mm	50mm	20	Complete with 230mA driver
62116FA/W/W	White	Warm white	3000K	16W	1500lm	100-240V		70-190mm	50mm	20	Complete with 230mA driver

LED Downlights

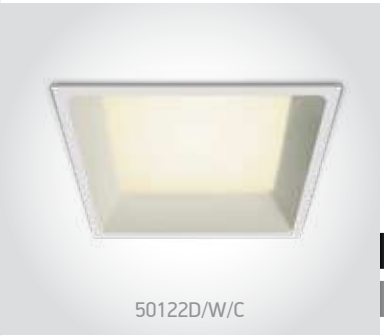

50122D/W/C

50122D | 22W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

DARK LIGHT

IP20



50130B/W/C

50130B | 30W | COB | Aluminium + metal

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50122D/W/C	White	Cool white	4000K	22W	1870lm	100°	230V		160x160mm	75mm	20	Complete with 500mA driver
50130B/W/C	White	Cool white	4000K	30W	2700lm	30°	230V		130x130mm	120mm	16	Complete with 750mA driver

The Budget Downlight Range
Aluminium

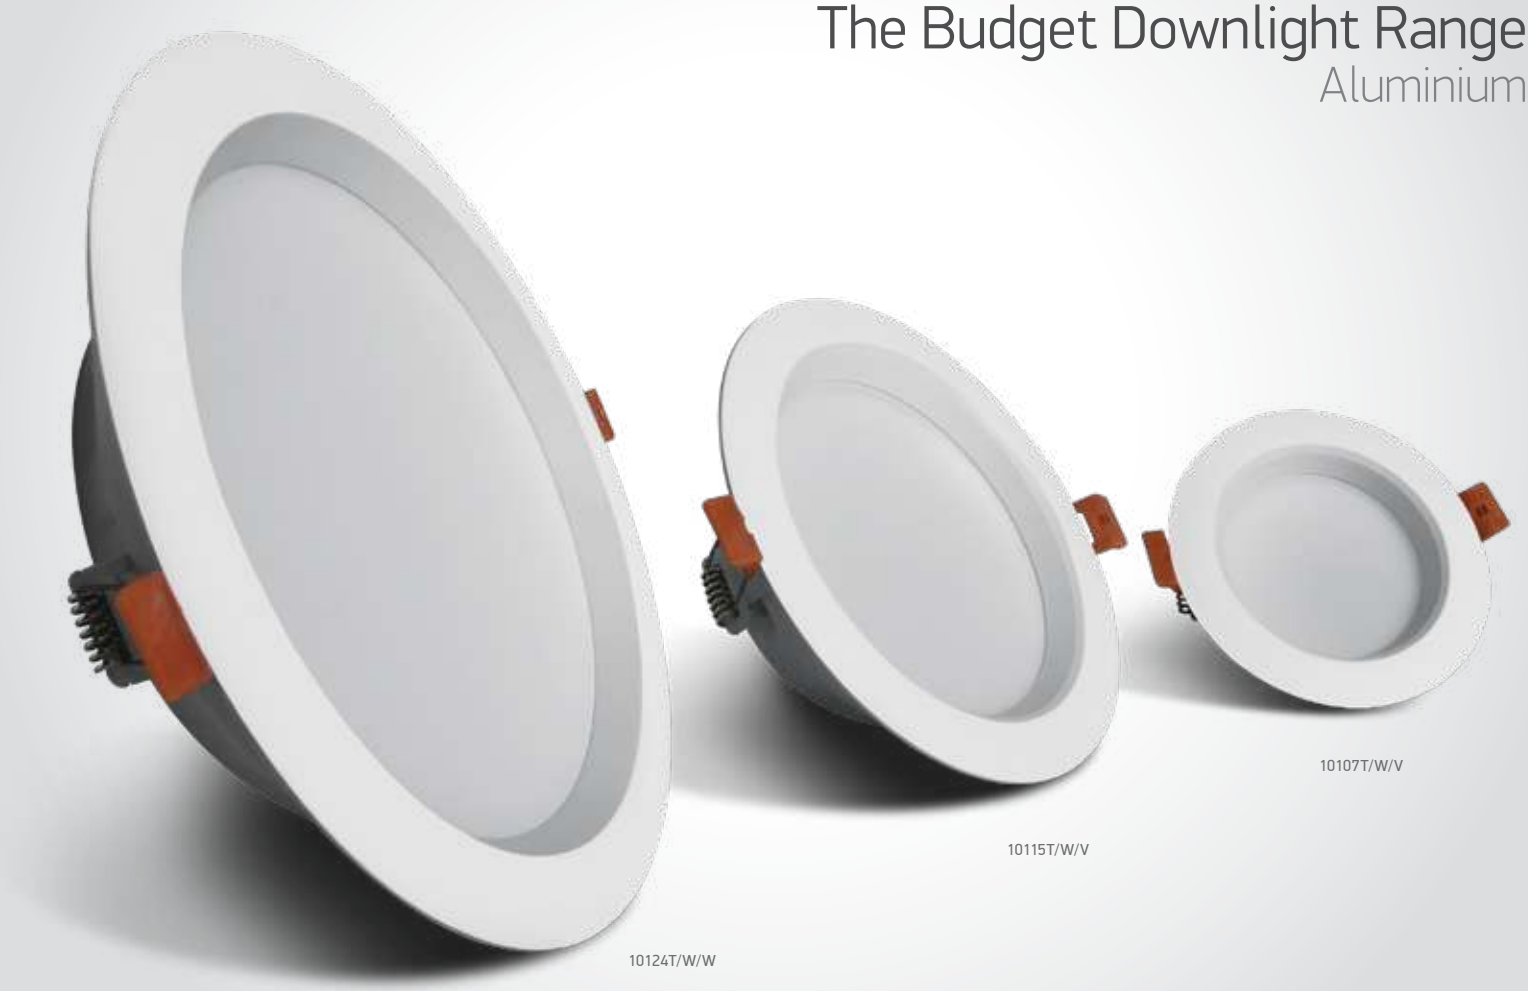

10103T | 3W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



10124T | 24W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103T/W/C	White	Cool white	4000K	3W	220lm	120°	230V		68mm	50mm	100	Complete with 250mA driver
10103T/W/W	White	Warm white	3000K	3W	210lm	120°	230V		68mm	50mm	100	Complete with 250mA driver
10124T/W/W	White	Warm white	3000K	24W	1700lm	120°	230V		210mm	75mm	20	Complete with 600mA driver

The Budget Downlight Range
CCT V

10103T | 3W | SMD | Aluminium

LED BUILT IN
80 CRI
CCT V
CE
3 YEAR
new
IP20

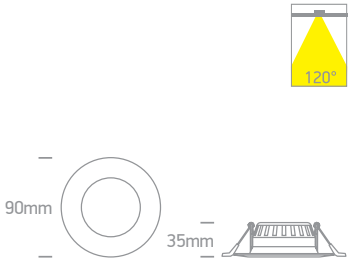

10107T | 7W | SMD | Aluminium

LED BUILT IN
80 CRI
CCT V
CE
3 YEAR
new
IP20

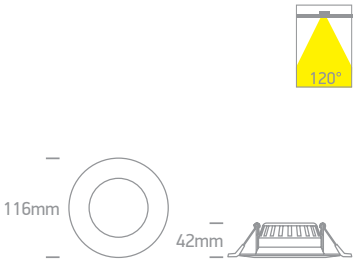

10115T | 15W | SMD | Aluminium

LED BUILT IN
80 CRI
CCT V
CE
3 YEAR
new
IP20

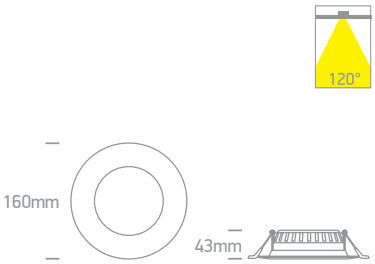

10124T | 24W | SMD | Aluminium

LED BUILT IN
80 CRI
CCT V
CE
3 YEAR
new
IP20

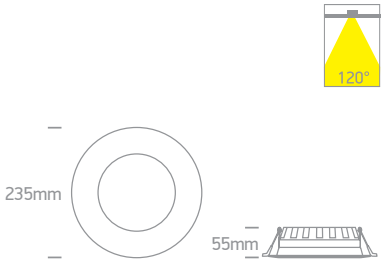

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103T/W/V	White	CCT V	3000K-4000K-5000K	3W	240lm	120°	230V		68mm	50mm	100	Complete with 70mA driver
10107T/W/V	White	CCT V	3000K-4000K-5000K	7W	560lm	120°	230V		85mm	60mm	60	Complete with 200mA driver
10115T/W/V	White	CCT V	3000K-4000K-5000K	15W	1200lm	120°	230V		130mm	60mm	30	Complete with 350mA driver
10124T/W/V	White	CCT V	3000K-4000K-5000K	24W	1920lm	120°	230V		210mm	75mm	20	Complete with 600mA driver

one

Floating Round Panels Range

Adjustable Cut Out Hole

10110CE | 10W | SMD | Aluminium + PC

LED BUILT IN
90 CRI
CE
2 YEAR
IP20

Adjustable cutout hole.

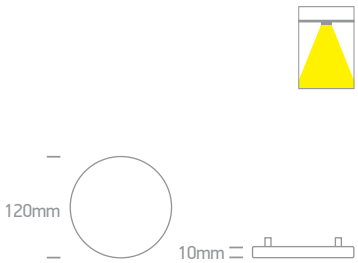

10114CE | 14W | SMD | Aluminium + PC

LED BUILT IN
90 CRI
CE
2 YEAR
IP20

Adjustable cutout hole.

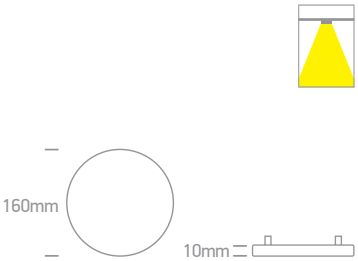

10120CE | 20W | SMD | Aluminium + PC

LED BUILT IN
90 CRI
CE
2 YEAR
IP20

Adjustable cutout hole.

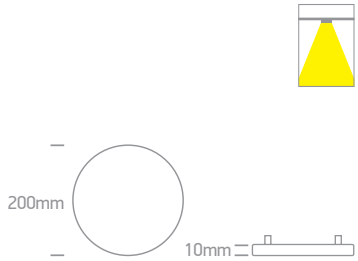

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10110CE/C	White	Cool white	4000K	10W	1150lm	230V		60-100mm	40mm	40	Complete with 250mA driver
10110CE/W	White	Warm white	3000K	10W	1150lm	230V		60-100mm	40mm	40	Complete with 250mA driver
10114CE/C	White	Cool white	4000K	14W	1610lm	230V		60-140mm	40mm	40	Complete with 300mA driver
10114CE/W	White	Warm white	3000K	14W	1610lm	230V		60-140mm	40mm	40	Complete with 300mA driver
10120CE/C	White	Cool white	4000K	20W	2300lm	230V		70-180mm	40mm	40	Complete with 700mA driver
10120CE/W	White	Warm white	3000K	20W	2300lm	230V		70-180mm	40mm	40	Complete with 700mA driver

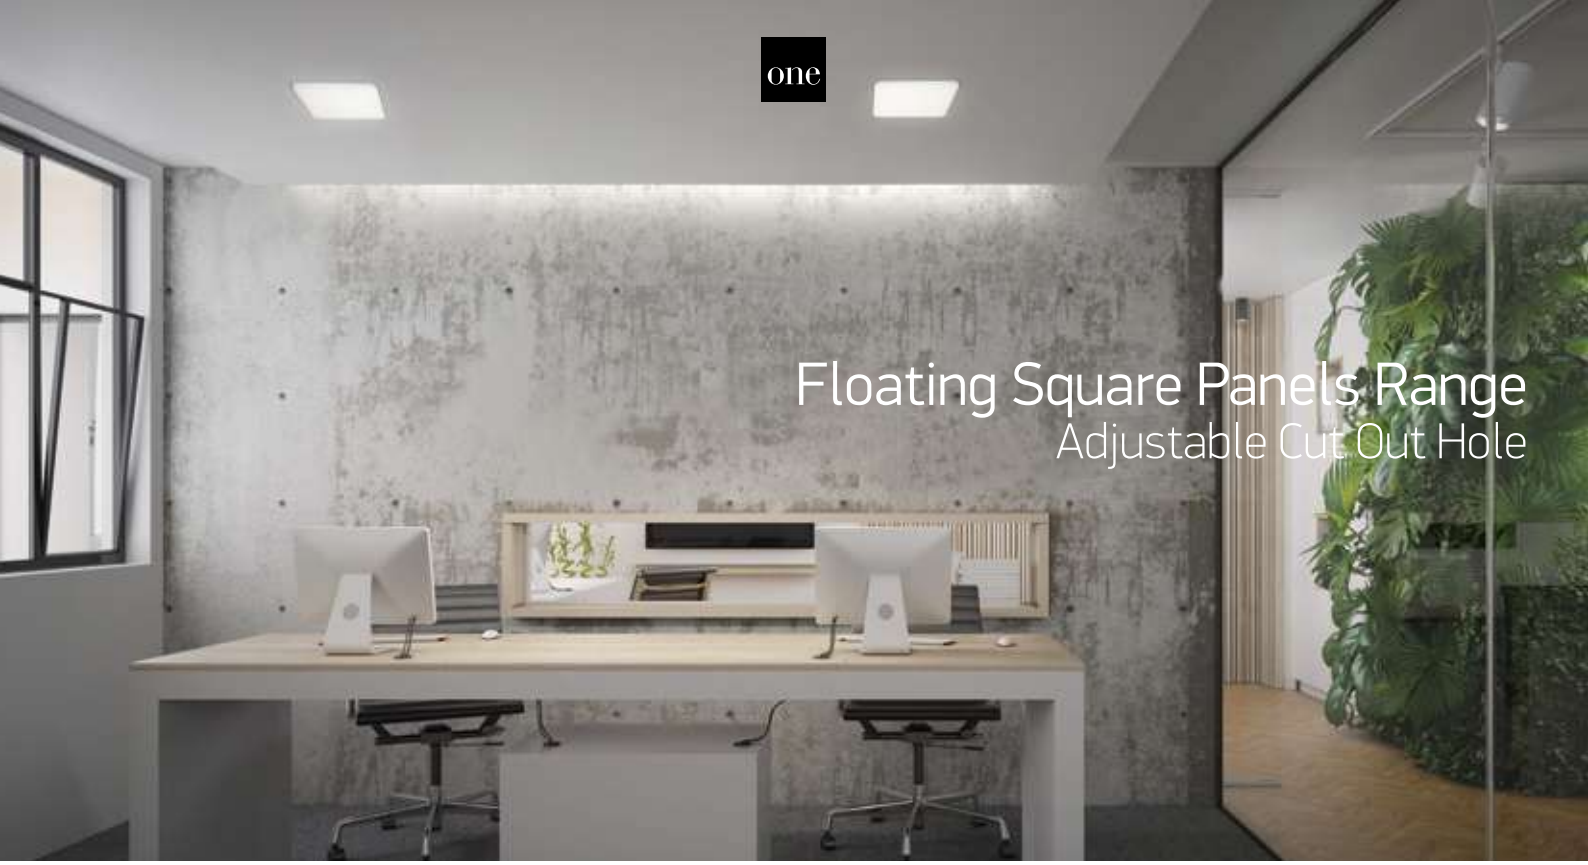

Floating Square Panels Range
Adjustable Cut Out Hole

50110CE/W

50110CE | 10W | SMD | Aluminium + PC

LED BUILT IN

90 CRI

CE

2 YEAR

IP20

Adjustable cutout hole.

50114CE/W

50114CE | 14W | SMD | Aluminium + PC

LED BUILT IN

90 CRI

CE

2 YEAR

IP20

Adjustable cutout hole.

50120CE/W

50120CE | 20W | SMD | Aluminium + PC

LED BUILT IN

90 CRI

CE

2 YEAR

IP20

Adjustable cutout hole.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
50110CE/W	White	Warm white	3000K	10W	1150lm	230V		50-100mm	50mm	40	Complete with 250mA driver
50114CE/C	White	Cool white	4000K	14W	1610lm	230V		70-140mm	50mm	40	Complete with 300mA driver
50114CE/W	White	Warm white	3000K	14W	1610lm	230V		70-140mm	50mm	40	Complete with 300mA driver
50120CE/C	White	Cool white	4000K	20W	2300lm	230V		70-180mm	50mm	40	Complete with 700mA driver
50120CE/W	White	Warm white	3000K	20W	2300lm	230V		70-180mm	50mm	40	Complete with 700mA driver

The COB Downlight Range
Aluminium

10107CA | 7W | COB | Aluminium

LED BUILT IN
90 CRI
CE
2 YEAR
IP20



10115CA | 15W | COB | Aluminium

LED BUILT IN
90 CRI
CE
2 YEAR
IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107CA/W/W	White	Warm white	3000K	7W	560lm	60°	230V		75mm	70mm	50	Complete with 300mA driver
10115CA/W/W	White	Warm white	3000K	15W	1275lm	60°	230V		125mm	100mm	30	Complete with 350mA driver

The COB Downlight Range
Aluminium

10120CA/W/C

10120CA | 20W | COB | Aluminium

LED BUILT IN

90 CRI

CE

2 YEAR

IP20



10130CA/W/C

10130CA | 30W | COB | Aluminium

LED BUILT IN

90 CRI

CE

2 YEAR

IP20

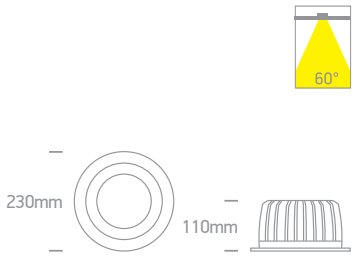

10160CA/W/C

10160CA | 60W | COB | Aluminium

LED BUILT IN

90 CRI

CE

2 YEAR

IP20

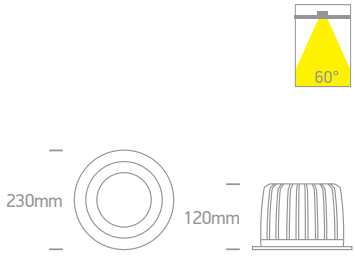

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120CA/W/C	White	Cool white	4000K	20W	1800lm	60°	230V		145mm	100mm	20	Complete with 500mA driver
10130CA/W/C	White	Cool white	4000K	30W	2700lm	60°	230V		210mm	140mm	10	Complete with 750mA driver
10130CA/W/W	White	Warm white	3000K	30W	2700lm	60°	230V		210mm	140mm	10	Complete with 750mA driver
10160CA/W/C	White	Cool white	4000K	60W	5400lm	60°	230V		210mm	160mm	10	Complete with 1500mA driver
10160CA/W/W	White	Warm white	3000K	60W	5400lm	60°	230V		210mm	160mm	10	Complete with 1500mA driver

one

The COB Downlight Range
CCT V

10107CA/W/V

10107CA | 7W | COB | Aluminium

new

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

new

IP20

10107CA/B/V



10110CA/W/V

10110CA | 10W | COB | Aluminium

new

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

new

IP20


10110CA/B/V



10115CA/W/V

10115CA | 15W | COB | Aluminium

new

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

new

IP20


10115CA/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107CA/W/V	White	CCT V	3000K-4000K-5000K	7W	600lm	60°	230V		75mm	70mm	50	Complete with 160mA driver
10107CA/B/V	Black	CCT V	3000K-4000K-5000K	7W	600lm	60°	230V		75mm	70mm	50	Complete with 160mA driver
10110CA/W/V	White	CCT V	3000K-4000K-5000K	10W	850lm	60°	230V		100mm	100mm	50	Complete with 250mA driver
10110CA/B/V	Black	CCT V	3000K-4000K-5000K	10W	850lm	60°	230V		100mm	100mm	50	Complete with 250mA driver
10115CA/W/V	White	CCT V	3000K-4000K-5000K	15W	1275lm	60°	230V		125mm	100mm	30	Complete with 350mA driver
10115CA/B/V	Black	CCT V	3000K-4000K-5000K	15W	1275lm	60°	230V		125mm	100mm	30	Complete with 350mA driver

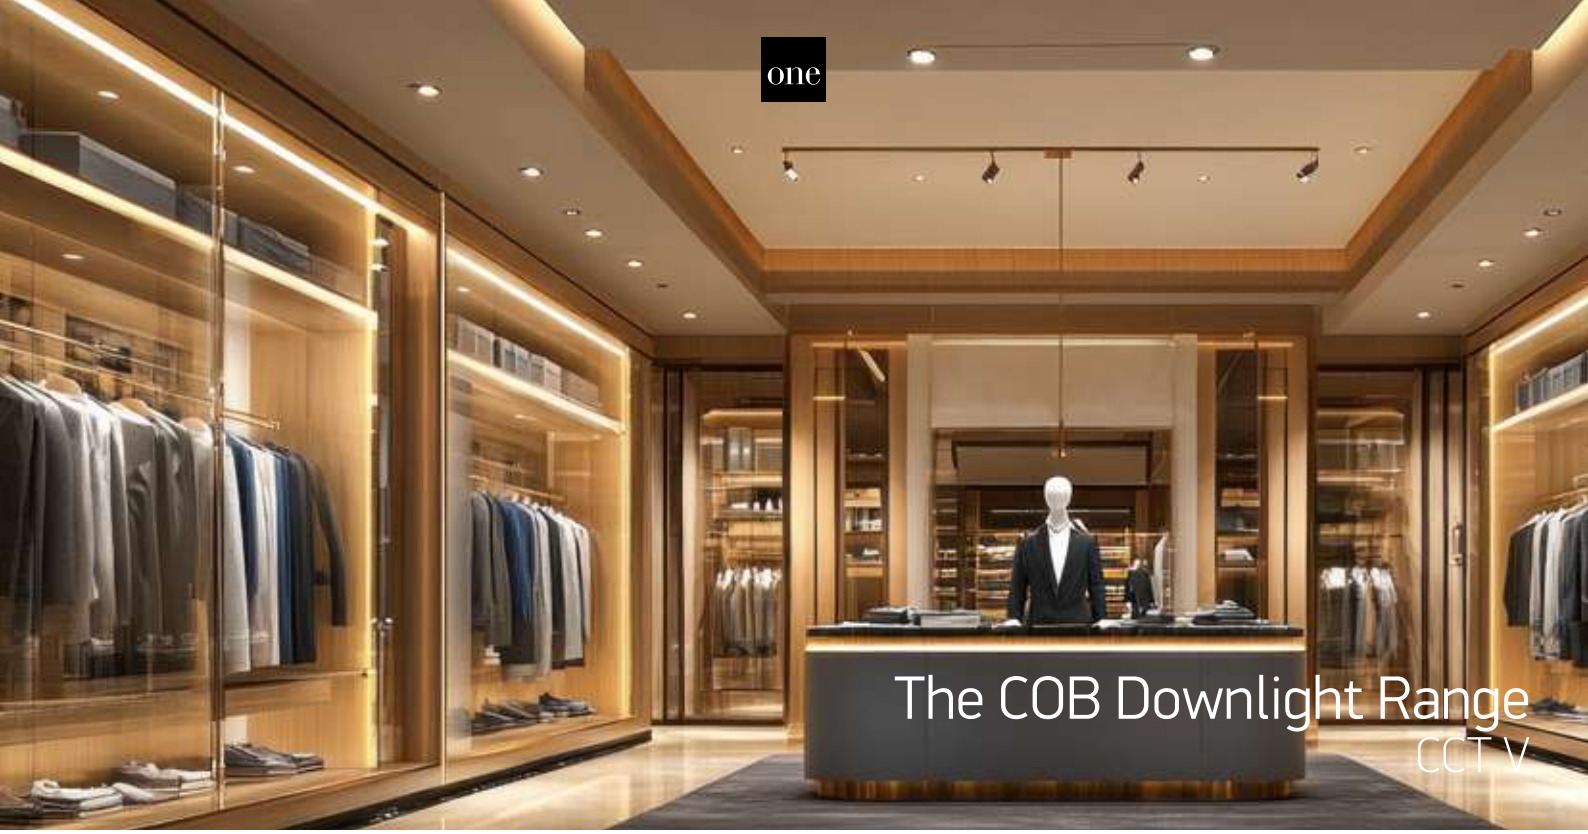

The COB Downlight Range
CCT V

10120CA/W/V

10120CA | 20W | COB | Aluminium

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

new

10120CA/B/V



10120CB/W/V

10120CB | 20W | COB | Aluminium

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

new


10120CB/B/V



10130CA/W/V

10130CA | 30W | COB | Aluminium

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

new


10130CA/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120CA/W/V	White	CCT V	3000K-4000K-5000K	20W	1800lm	60°	230V		145mm	100mm	20	Complete with 500mA driver
10120CA/B/V	Black	CCT V	3000K-4000K-5000K	20W	1800lm	60°	230V		145mm	100mm	20	Complete with 500mA driver
10120CB/W/V	White	CCT V	3000K-4000K-5000K	20W	1800lm	60°	230V		180mm	110mm	20	Complete with 500mA driver
10120CB/B/V	Black	CCT V	3000K-4000K-5000K	20W	1800lm	60°	230V		180mm	110mm	20	Complete with 500mA driver
10130CA/W/V	White	CCT V	3000K-4000K-5000K	30W	2700lm	60°	230V		210mm	170mm	10	Complete with 750mA driver
10130CA/B/V	Black	CCT V	3000K-4000K-5000K	30W	2700lm	60°	230V		210mm	170mm	10	Complete with 750mA driver

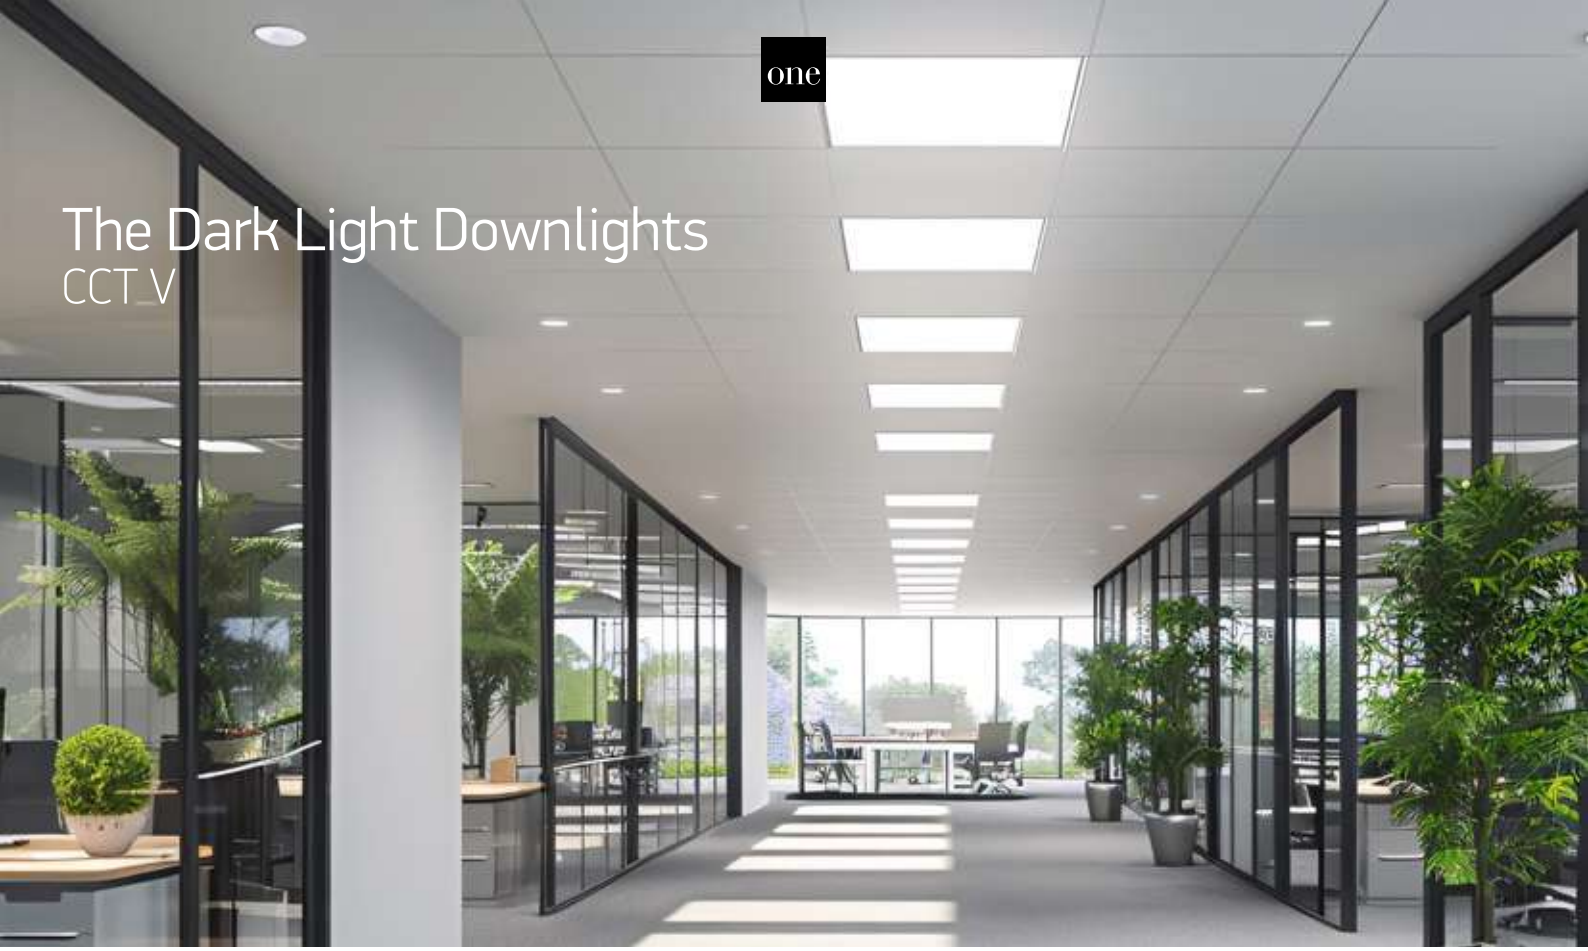

The Dark Light Downlights
CCT V

10108ED/W/B/W

10108ED | 8W | SMD | Aluminium

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP20



10107ED/W/V

10107ED | 7W | SMD | Aluminium

new · LED BUILT IN · 90 CRI · CCT V · CE · 3 YEAR · DARK LIGHT · IP20



10112ED/W/V

10112ED | 12W | SMD | Aluminium

new · LED BUILT IN · 90 CRI · CCT V · CE · 3 YEAR · DARK LIGHT · IP20

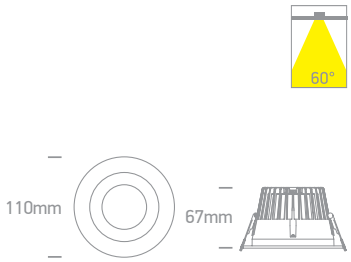

Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108ED/W/B/W	White	Black	Warm white	3000K	8W	480lm	60°	230V		75mm	80mm	50	Complete with 300mA driver
10107ED/W/V	White	White	CCT V	3000K-4000K-5000K	7W	560lm	60°	230V		75mm	100mm	50	Complete with 160mA driver
10112ED/W/V	White	White	CCT V	3000K-4000K-5000K	12W	960lm	60°	230V		95mm	90mm	50	Complete with 300mA driver

one

The Dark Light Downlights
CCT V

10120ED | 20W | SMD | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CCT V
3 YEAR

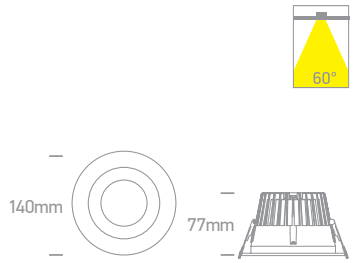

10130ED | 30W | SMD | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CCT V
3 YEAR

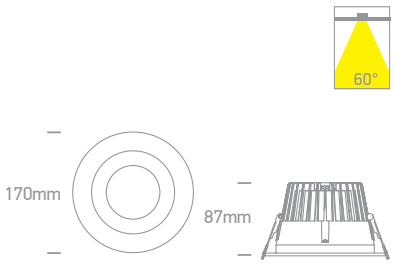

10140ED | 40W | SMD | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CCT V
3 YEAR

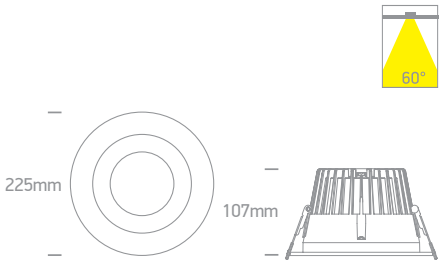

Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120ED/W/V	White	White	CCT V	3000K-4000K-5000K	20W	1600lm	60°	230V		120mm	100mm	30	Complete with 500mA driver
10130ED/W/V	White	White	CCT V	3000K-4000K-5000K	30W	2400lm	60°	230V		145mm	110mm	20	Complete with 750mA driver
10140ED/W/V	White	White	CCT V	3000K-4000K-5000K	40W	3200lm	60°	230V		210mm	130mm	10	Complete with 1000mA driver

The Honeycomb Dark Light
CCT V

10106DH | 6,5W | COB | Aluminium

Complete with honeycomb.

new

DARK LIGHT

IP20

LED BUILT IN

90 CRI

DIMMABLE

CCT V

QUICK FIX

CE

5 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106DH/W/V	White	CCT V	3000K-3500K-4000K	6,5W	500lm	36°	700mA	III	40cm	63mm	60	50	Requires 700mA driver

one

The Honeycomb Dark Light
CCT V

10110DH/W/V

10110DH | 10W | COB | Aluminium

Complete with honeycomb.

new | DARK LIGHT | IP20 | 90 CRI | 5 YEAR | LED BUILT IN | CCT V | CE


10110DH/B/V



10114DH/W/V

10114DH | 14W | COB | Aluminium

Complete with honeycomb.

new | DARK LIGHT | IP20 | 90 CRI | 5 YEAR | LED BUILT IN | CCT V | CE


10114DH/B/V



10120DH/W/V

10120DH | 20W | COB | Aluminium

Complete with honeycomb.

new | DARK LIGHT | IP20 | 90 CRI | 5 YEAR | LED BUILT IN | CCT V | CE


10120DH/B/V



10130DH/W/V

10130DH | 30W | COB | Aluminium

Complete with honeycomb.

new | DARK LIGHT | IP20 | 90 CRI | 5 YEAR | LED BUILT IN | CCT V | CE


10130DH/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10110DH/W/V	White	CCT V	3000K-3500K-4000K	10W	800lm	36°	230V		75mm	60mm	50	Complete with 250mA driver
10110DH/B/V	Black	CCT V	3000K-3500K-4000K	10W	800lm	36°	230V		75mm	60mm	50	Complete with 250mA driver
10114DH/W/V	White	CCT V	3000K-3500K-4000K	14W	1120lm	36°	230V		95mm	60mm	30	Complete with 350mA driver
10114DH/B/V	Black	CCT V	3000K-3500K-4000K	14W	1120lm	36°	230V		95mm	60mm	30	Complete with 350mA driver
10120DH/W/V	White	CCT V	3000K-3500K-4000K	20W	1600lm	36°	230V		120mm	60mm	20	Complete with 500mA driver
10120DH/B/V	Black	CCT V	3000K-3500K-4000K	20W	1600lm	36°	230V		120mm	60mm	20	Complete with 500mA driver
10130DH/W/V	White	CCT V	3000K-3500K-4000K	30W	2400lm	36°	230V		145mm	70mm	10	Complete with 750mA driver
10130DH/B/V	Black	CCT V	3000K-3500K-4000K	30W	2400lm	36°	230V		145mm	70mm	10	Complete with 750mA driver

one

10107Z/B/V + 050378A/BS

10107Z/W/V + 050378A/B

Retro Dark Light Range
CCT V

10107Z/B/V + 050378A/BS

10107Z | 7W | COB | Aluminium

Reflector must be ordered separately.

new | DARK LIGHT | IP20 | 90 CRI | CCT V | 3 YEAR | LED BUILT IN | CE

Reflector must be ordered separately. 050378A/W, 050378A/B, 050378A/BS.



10112Z/B/V + 050378B/BS

10112Z | 12W | COB | Aluminium

Reflector must be ordered separately.

new | DARK LIGHT | IP20 | 90 CRI | CCT V | 3 YEAR | LED BUILT IN | CE

Reflector must be ordered separately. 050378B/W, 050378B/B, 050378B/BS.



10120Z/B/V + 050378C/BS

10120Z | 20W | COB | Aluminium

Reflector must be ordered separately.

new | DARK LIGHT | IP20 | 90 CRI | CCT V | 3 YEAR | LED BUILT IN | CE

Reflector must be ordered separately. 050378C/W, 050378C/B, 050378C/BS.



10107Z/B/V + 050378A/B

10112Z/B/V + 050378B/W

10120Z/B/V + 050378C/BS

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107Z/B/V	Black	CCT V	3000K-3500K-4000K	7W	560lm	45°	230V		65mm	80mm	40	Complete with 160mA driver
10112Z/B/V	Black	CCT V	3000K-3500K-4000K	12W	960lm	45°	230V		82mm	88mm	30	Complete with 300mA driver
10120Z/B/V	Black	CCT V	3000K-3500K-4000K	20W	1600lm	45°	230V		105mm	105mm	20	Complete with 500mA driver

Retro Dark Light Range
CCT V

10107Z/W/V + 050378A/W

10107Z | 7W | COB | Aluminium

Reflector must be ordered separately.

new | DARK LIGHT | IP20 | 90 CRI | CCT V | 3 YEAR | LED BUILT IN | CE

Reflector must be ordered separately. 050378A/W, 050378A/B, 050378A/BS.



10112Z/W/V + 050378B/W

10112Z | 12W | COB | Aluminium

Reflector must be ordered separately.

new | DARK LIGHT | IP20 | 90 CRI | CCT V | 3 YEAR | LED BUILT IN | CE

Reflector must be ordered separately. 050378B/W, 050378B/B, 050378B/BS.



10120Z/W/V + 050378C/W

10120Z | 20W | COB | Aluminium

Reflector must be ordered separately.

new | DARK LIGHT | IP20 | 90 CRI | CCT V | 3 YEAR | LED BUILT IN | CE

Reflector must be ordered separately. 050378C/W, 050378C/B, 050378C/BS.



10107Z/W/V + 050378A/B

10112Z/W/V + 050378B/W

10120Z/W/V + 050378C/BS

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107Z/W/V	White	CCT V	3000K-3500K-4000K	7W	560lm	45°	230V		65mm	80mm	40	Complete with 160mA driver
10112Z/W/V	White	CCT V	3000K-3500K-4000K	12W	960lm	45°	230V		82mm	88mm	30	Complete with 300mA driver
10120Z/W/V	White	CCT V	3000K-3500K-4000K	20W	1600lm	45°	230V		105mm	105mm	20	Complete with 500mA driver

The Dark Light Dome Reflector
Aluminium

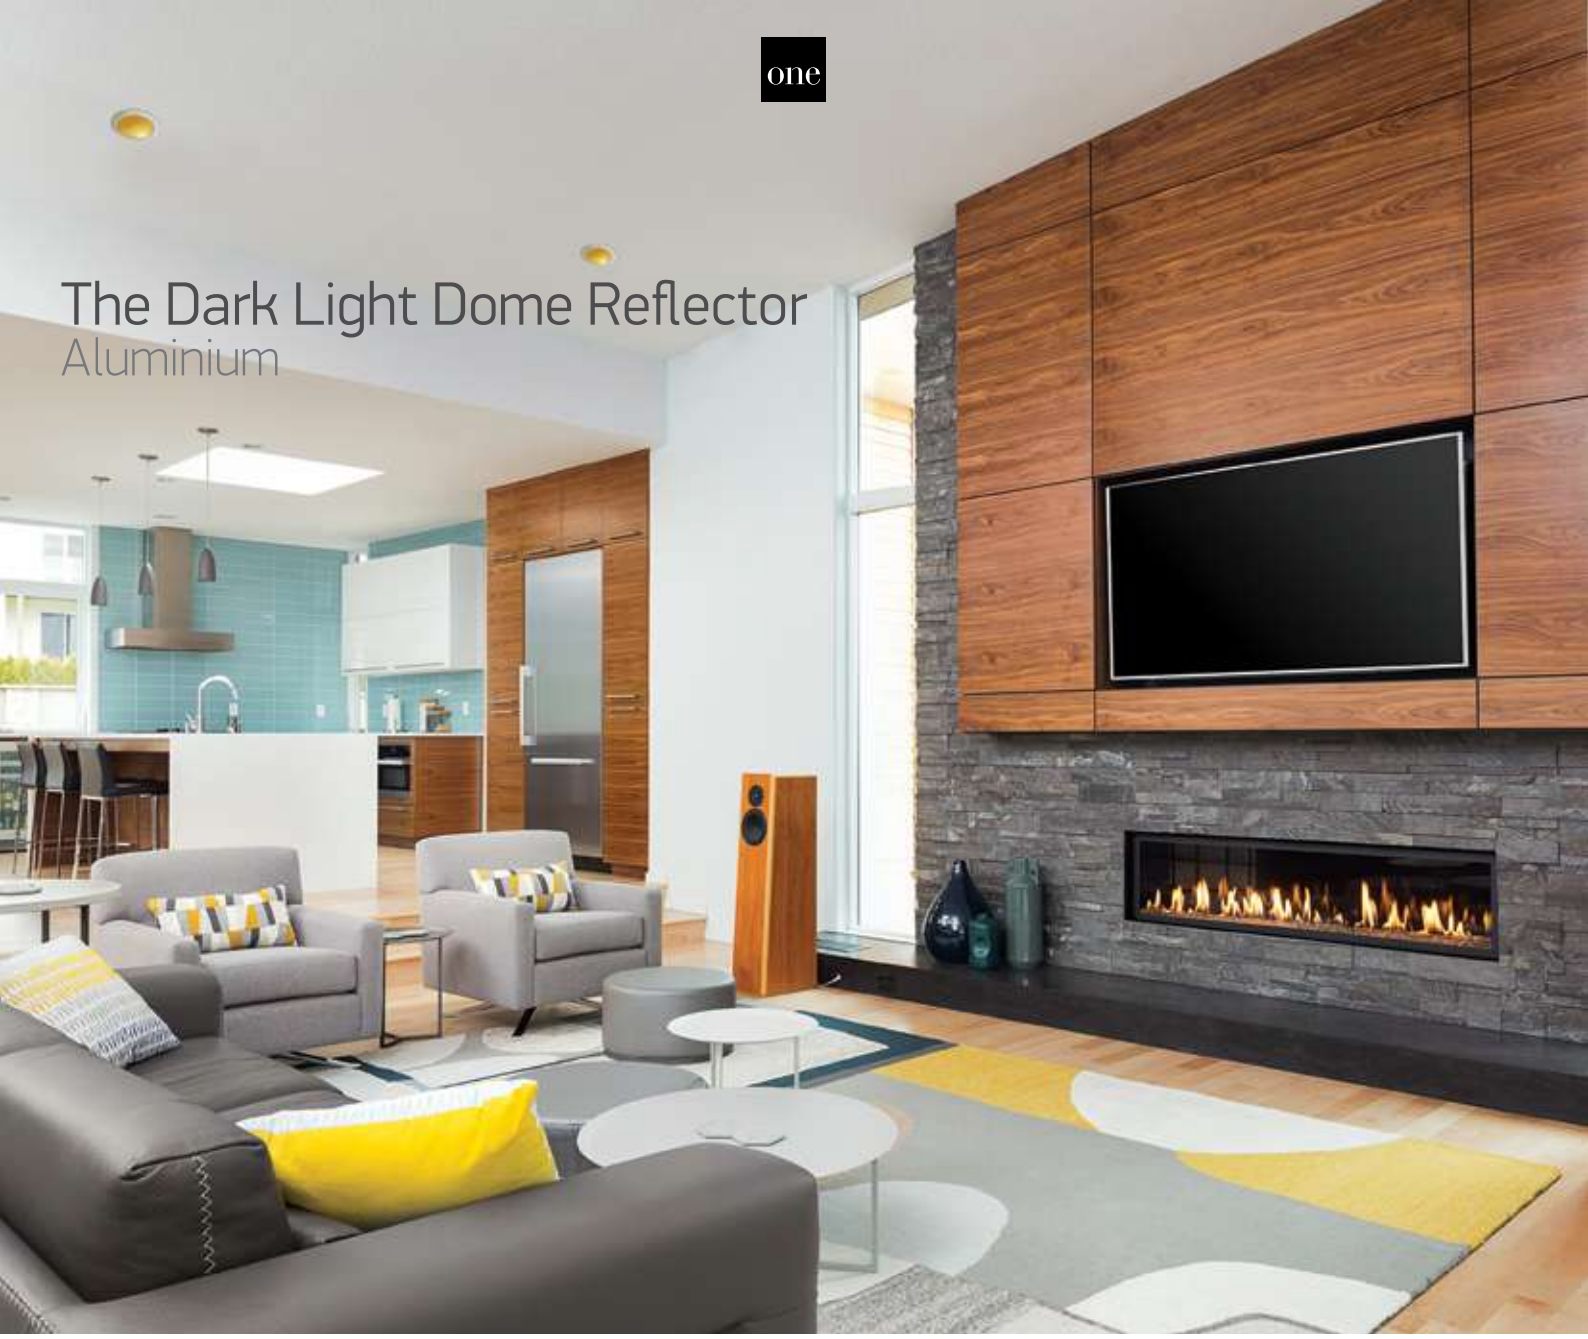

10116FD/W/BS

10116FD | 16W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

DARK LIGHT

IP20



10116FD/B/BS

10116FD | 16W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

DARK LIGHT

IP20



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10116FD/W/BS	White	Brass	Warm white	3000K	16W	800lm	230V		155mm	80mm	20	Complete with 300mA driver
10116FD/B/BS	Black	Brass	Warm white	3000K	16W	800lm	230V		155mm	80mm	20	Complete with 300mA driver

one

10122FD/W/C

10116FD/W/C

10108FD/W/W

The Dark Light Dome Reflector
Aluminium

10108FD/W/W

10108FD | 8W | SMD | Aluminium

LED BUILT IN

80 CRI

CE 3 YEAR

DARK LIGHT

IP20



10116FD/W/W

10116FD | 16W | SMD | Aluminium

LED BUILT IN

80 CRI

CE 3 YEAR

DARK LIGHT

IP20



10122FD/W/C

10122FD | 22W | SMD | Aluminium

LED BUILT IN

80 CRI

CE 3 YEAR

DARK LIGHT

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10108FD/W/W	White	Warm white	3000K	8W	560lm	230V		94mm	60mm	45	Complete with 300mA driver
10116FD/W/C	White	Cool white	4000K	16W	1150lm	230V		155mm	80mm	20	Complete with 300mA driver
10116FD/W/W	White	Warm white	3000K	16W	1150lm	230V		155mm	80mm	20	Complete with 300mA driver
10122FD/W/C	White	Cool white	4000K	22W	1550lm	230V		210mm	90mm	20	Complete with 600mA driver

The IP20 SMD Dark Light Range
CCT V

10109D/W/V

10109D | 12W | SMD | Aluminium

LED BUILT IN · 90 CRI · CCT V · IK 07 · CE · 5 YEAR · DARK LIGHT · IP20



10109D/B/V

10109D | 12W | SMD | Aluminium

LED BUILT IN · 90 CRI · CCT V · IK 07 · CE · 5 YEAR · DARK LIGHT · IP20



10122D/W/V

10122D | 22W | SMD | Aluminium

LED BUILT IN · 90 CRI · CCT V · IK 07 · CE · 5 YEAR · DARK LIGHT · IP20



10122D/B/V

10122D | 22W | SMD | Aluminium

LED BUILT IN · 90 CRI · CCT V · IK 07 · CE · 5 YEAR · DARK LIGHT · IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10109D/W/V	White	CCT V	3000K-4000K-5000K	12W	1000lm	100°	230V		110mm	70mm	40	Complete with 300mA driver
10109D/B/V	Black	CCT V	3000K-4000K-5000K	12W	1000lm	100°	230V		110mm	70mm	40	Complete with 300mA driver
10122D/W/V	White	CCT V	3000K-4000K-5000K	22W	1900lm	100°	230V		165mm	75mm	20	Complete with 600mA driver
10122D/B/V	Black	CCT V	3000K-4000K-5000K	22W	1900lm	100°	230V		165mm	75mm	20	Complete with 600mA driver

The IP54 & IP65 SMD Dark Light Range
CCT V

10109FD/W/C

10109FD | 9W | SMD | Aluminium

LED BUILT IN
80 CRI
IK 07
CE
3 YEAR
DARK LIGHT
IP54



10109FD/W/V

10109FD | 9W | SMD | Aluminium

LED BUILT IN
90 CRI
CCT V
IK 07
CE
5 YEAR
DARK LIGHT
IP65

10109FD/B/V

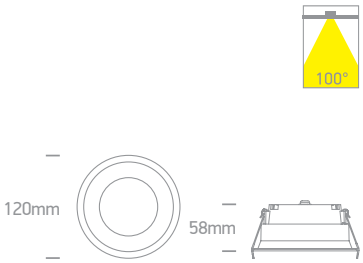

10120FD/W/V

10120FD | 20W | SMD | Aluminium

LED BUILT IN
90 CRI
CCT V
IK 07
CE
5 YEAR
DARK LIGHT
IP65

10120FD/B/V

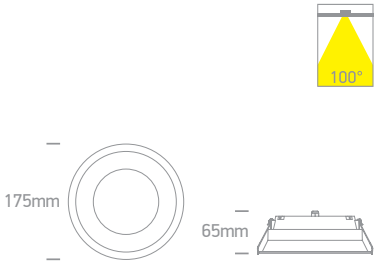

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10109FD/W/C	White	Cool white	4000K	9W	765lm	100°	230V		111mm	70mm	40	Complete with 300mA driver
10109FD/W/V	White	CCT V	3000K-4000K-5000K	9W	900lm	100°	230V		111mm	80mm	40	Complete with 220mA driver
10109FD/B/V	Black	CCT V	3000K-4000K-5000K	9W	900lm	100°	230V		111mm	80mm	40	Complete with 220mA driver
10120FD/W/V	White	CCT V	3000K-4000K-5000K	20W	2000lm	100°	230V		166mm	85mm	20	Complete with 500mA driver
10120FD/B/V	Black	CCT V	3000K-4000K-5000K	20W	2000lm	100°	230V		166mm	85mm	20	Complete with 500mA driver

UGR19 CCT V Range
White

10107UV/W/V

10107UV | 7W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
IK 04
CE
3 YEAR
IP44



10113UV/W/V

10113UV | 13W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
IK 04
CE
3 YEAR
IP44



10120UV/W/V

10120UV | 20W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
IK 04
CE
3 YEAR
IP44



10130UV/W/V

10130UV | 30W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
IK 04
CE
3 YEAR
IP44



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10107UV/W/V	White	CCT V	3000K-4000K-6000K	7W	525lm	230V		70mm	60mm	40	Complete with 180mA driver
10113UV/W/V	White	CCT V	3000K-4000K-6000K	13W	975lm	230V		120mm	70mm	20	Complete with 300mA driver
10120UV/W/V	White	CCT V	3000K-4000K-6000K	20W	1500lm	230V		170mm	75mm	20	Complete with 500mA driver
10130UV/W/V	White	CCT V	3000K-4000K-6000K	30W	2250lm	230V		210mm	80mm	20	Complete with 700mA driver

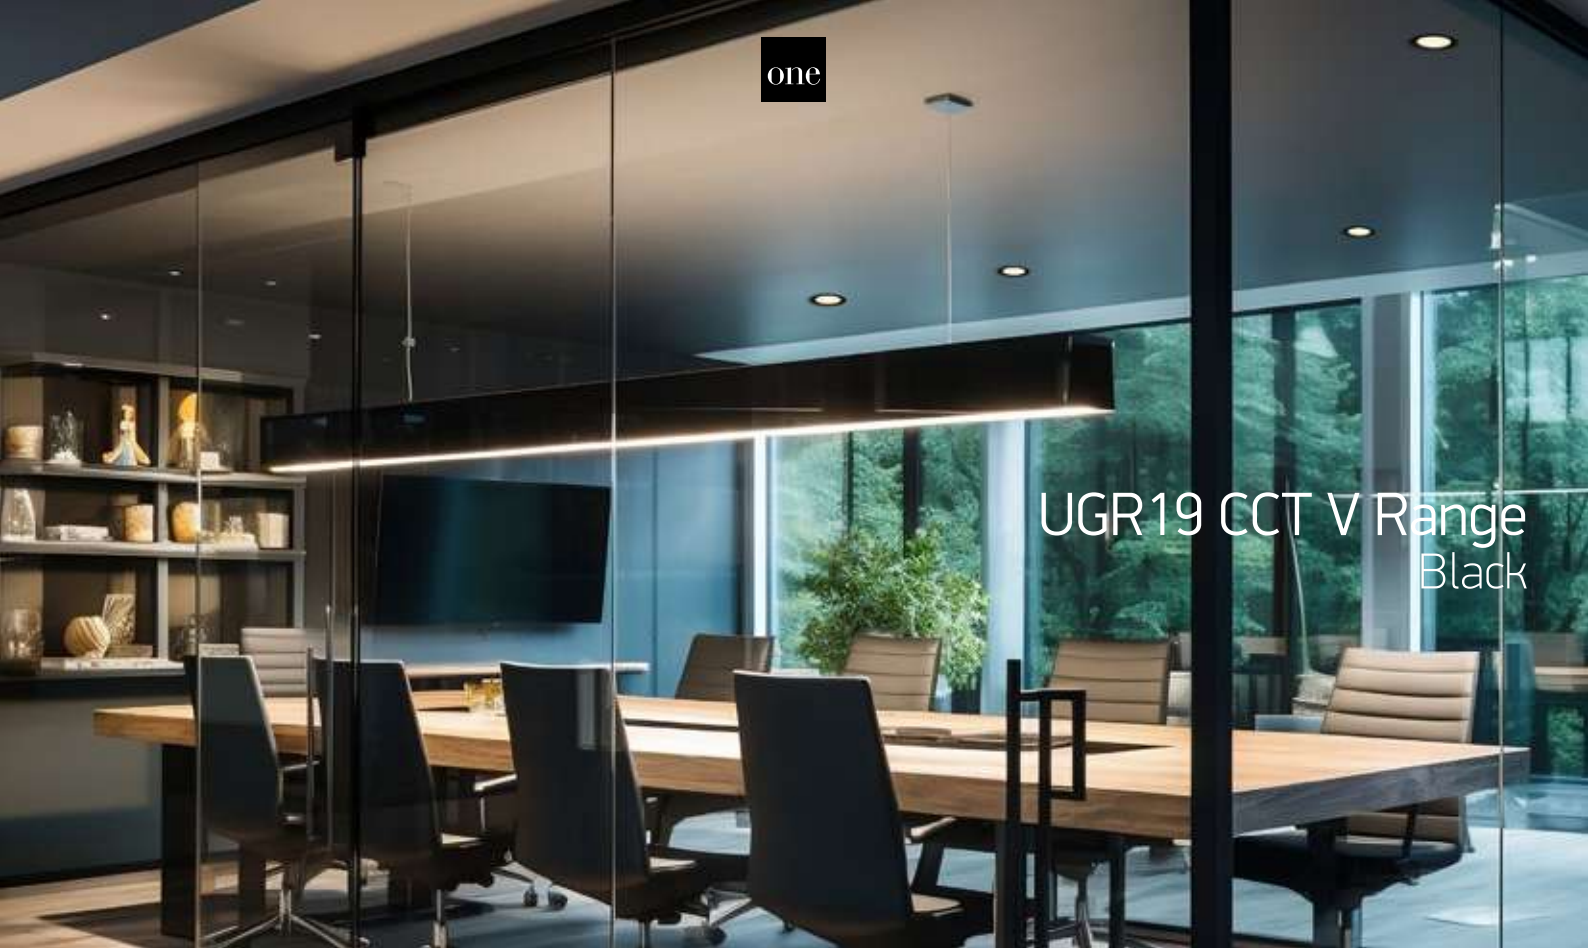

UGR19 CCT V Range
Black

10113UV/B/V

10113UV | 13W | SMD | Aluminium

LED BUILT IN · 90 CRI · UGR19 · CCT V · IK04 · CE · 3 YEAR · IP44

CCT Variable



10120UV/B/V

10120UV | 20W | SMD | Aluminium

LED BUILT IN · 90 CRI · UGR19 · CCT V · IK04 · CE · 3 YEAR · IP44

CCT Variable



10130UV/B/V

10130UV | 30W | SMD | Aluminium

LED BUILT IN · 90 CRI · UGR19 · CCT V · IK04 · CE · 3 YEAR · IP44

CCT Variable



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10113UV/B/V	Black	CCT V	3000K-4000K-6000K	13W	975lm	230V		120mm	70mm	20	Complete with 300mA driver
10120UV/B/V	Black	CCT V	3000K-4000K-6000K	20W	1500lm	230V		170mm	75mm	20	Complete with 500mA driver
10130UV/B/V	Black	CCT V	3000K-4000K-6000K	30W	2250lm	230V		210mm	80mm	20	Complete with 700mA driver

one

10110U/W/V

50110UV/V

10124U/W/V

UGR19 CCT V Office Range
Square

50110UV/W/V

50110UV | 10W | SMD | Aluminium

LED BUILT IN
80 CRI
UGR19
CCT V
CE 3 YEAR
IP44

CCT Variable



50115UV/W/V

50115UV | 15W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
CE 3 YEAR
IP44

CCT Variable





50125UV/W/V

50125UV | 25W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
CE 3 YEAR
IP44

CCT Variable





50130UV/W/V

50130UV | 30W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
CE 3 YEAR
IP44

CCT Variable



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
50110UV/W/V	White	CCT V	3000K-4000K-6000K	10W	1100lm	230V		85x85mm	70mm	40	Complete with 200mA driver
50115UV/W/V	White	CCT V	3000K-4000K-6000K	15W	1650lm	230V		130x130mm	70mm	20	Complete with 350mA driver
50125UV/W/V	White	CCT V	3000K-4000K-6000K	25W	2750lm	230V		160x160mm	70mm	20	Complete with 600mA driver
50130UV/W/V	White	CCT V	3000K-4000K-6000K	30W	3300lm	230V		205x205mm	80mm	10	Complete with 750mA driver

UGR19 CCT V Office Range
Round

10110U/W/V

10110U | 10W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
IK 04
CE
3 YEAR
IP44

CCT Variable

10124U/W/V

10124U | 24W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
IK 04
CE
3 YEAR
IP44

CCT Variable

10130U/W/V

10130U | 30W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
IK 04
CE
3 YEAR
IP44

CCT Variable

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10110U/W/V	White	CCT V	3000K-4000K-6000K	10W	850lm	230V		86mm	55mm	40	Complete with 250mA driver
10124U/W/V	White	CCT V	3000K-4000K-6000K	24W	2000lm	230V		160mm	55mm	20	Complete with 500mA driver
10130U/W/V	White	CCT V	3000K-4000K-6000K	30W	2500lm	230V		205mm	65mm	10	Complete with 750mA driver

The IP54 Downlights

10113B/W/W

10113B | 13W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



10118B/W/W

10118B | 18W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



10125B/W/C

10125B | 25W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10113B/W/W	White	Warm white	3000K	13W	925lm	90°	230V		95mm	70mm	24	Complete with 300mA driver
10118B/W/C	White	Cool white	4000K	18W	1400lm	90°	230V		140mm	70mm	30	Complete with 500mA driver
10118B/W/W	White	Warm white	3000K	18W	1300lm	90°	230V		140mm	70mm	30	Complete with 500mA driver
10125B/W/C	White	Cool white	4000K	25W	2000lm	90°	230V		210mm	80mm	10	Complete with 720mA driver

The IP54 Downlights
CCT V

10107B/W/V

10107B | 7W | SMD | Aluminium

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR
IP54



10113B/W/V

10113B | 13W | SMD | Aluminium

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR
IP54



10125B/W/V

10125B | 25W | SMD | Aluminium

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR
IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107B/W/V	White	CCT V	3000K-4000K-5000K	7W	540lm	90°	230V		65mm	70mm	50	Complete with 160mA driver
10113B/W/V	White	CCT V	3000K-4000K-5000K	13W	950lm	90°	230V		95mm	70mm	24	Complete with 300mA driver
10125B/W/V	White	CCT V	3000K-4000K-5000K	25W	2000lm	90°	230V		210mm	80mm	10	Complete with 650mA driver

The IP54 Downlights
CCT V

10110BX/W/V

10110BX | 10W | SMD | Aluminium

new

IP54

LED BUILT IN

90 CRI

CCT V

CE

5 YEAR

new

10110BX/B/V





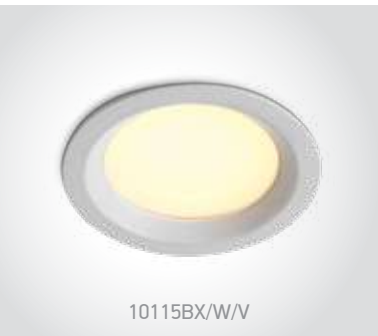

10115BX/W/V

10115BX | 15W | SMD | Aluminium

new

IP54

LED BUILT IN

90 CRI

CCT V

CE

5 YEAR

new

10115BX/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10110BX/W/V	White	CCT V	3000K-4000K-5000K	10W	900lm	90°	230V		75mm	60mm	50	Complete with 250mA driver
10110BX/B/V	Black	CCT V	3000K-4000K-5000K	10W	900lm	90°	230V		75mm	60mm	50	Complete with 250mA driver
10115BX/W/V	White	CCT V	3000K-4000K-5000K	15W	1350lm	90°	230V		95mm	60mm	30	Complete with 350mA driver
10115BX/B/V	Black	CCT V	3000K-4000K-5000K	15W	1350lm	90°	230V		95mm	60mm	30	Complete with 350mA driver

one

The IP54 & IP65 Downlights
CCT V

10120BX/W/V

10120BX | 20W | SMD | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
new
5 YEAR
new
IP54

10120BX/B/V



10125BX/W/V

10125BX | 25W | SMD | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
new
5 YEAR
new
IP65

10125BX/B/V



10130BX/W/V

10130BX | 30W | SMD | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
new
5 YEAR
new
IP65

10130BX/B/V





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120BX/W/V	White	CCT V	3000K-4000K-5000K	20W	1800lm	90°	230V		120mm	60mm	20	Complete with 500mA driver
10120BX/B/V	Black	CCT V	3000K-4000K-5000K	20W	1800lm	90°	230V		120mm	60mm	20	Complete with 500mA driver
10125BX/W/V	White	CCT V	3000K-4000K-5000K	25W	2250lm	90°	230V		170mm	80mm	20	Complete with 650mA driver
10125BX/B/V	Black	CCT V	3000K-4000K-5000K	25W	2250lm	90°	230V		170mm	80mm	20	Complete with 650mA driver
10130BX/W/V	White	CCT V	3000K-4000K-5000K	30W	2700lm	90°	230V		205mm	80mm	10	Complete with 700mA driver
10130BX/B/V	Black	CCT V	3000K-4000K-5000K	30W	2700lm	90°	230V		205mm	80mm	10	Complete with 700mA driver

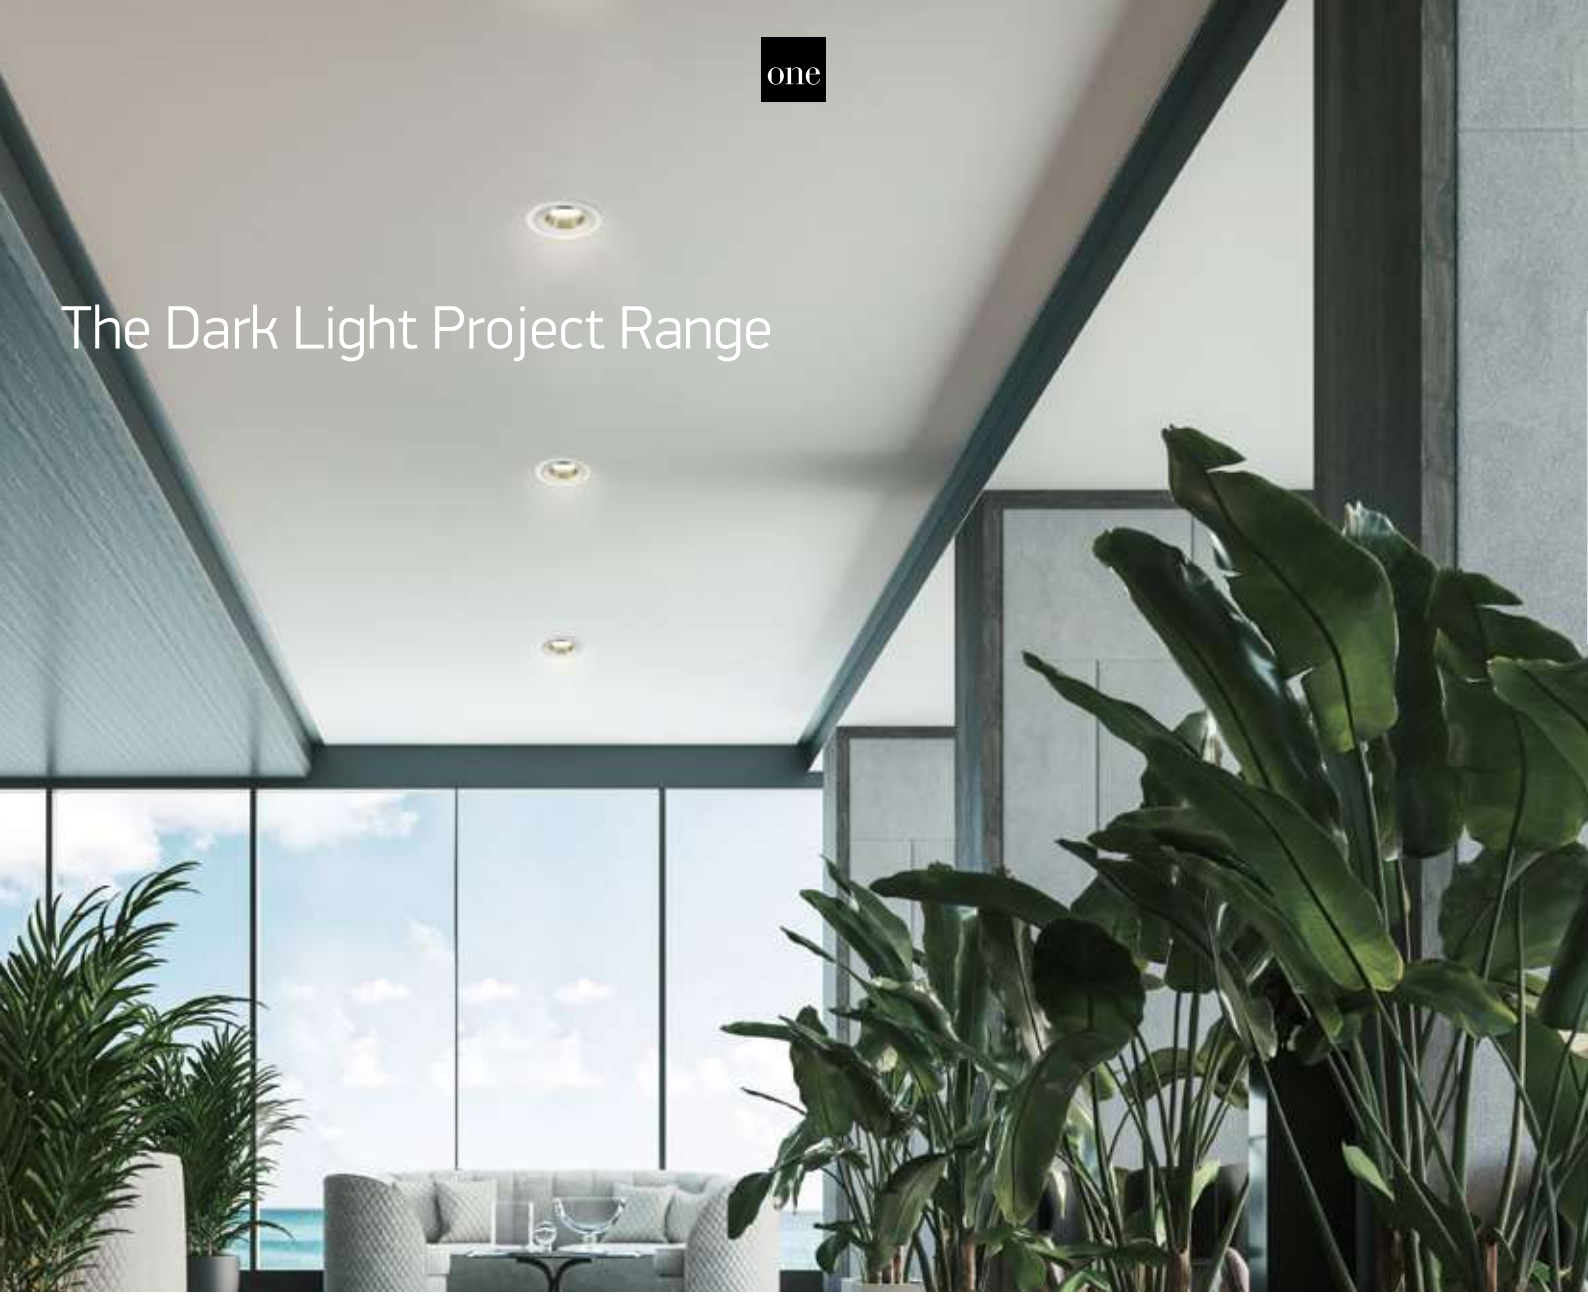

The Dark Light Project Range

10110TD/W/C

10110TD | 10W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

DARK LIGHT

IP54



10125TD/W/C

10125TD | 25W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

DARK LIGHT

IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10110TD/W/C	White	Cool white	4000K	10W	950lm	60°	230V		95mm	110mm	30	Complete with 250mA driver
10125TD/W/C	White	Cool white	4000K	25W	2400lm	60°	230V		210mm	140mm	12	Complete with 600mA driver
10125TD/W/W	White	Warm white	3000K	25W	2400lm	60°	230V		210mm	140mm	12	Complete with 600mA driver

The IP65 Frameless Range

10108CF | 8W | SMD | Aluminium + PC

LED BUILT IN
90 CRI
IK 08
CE
2 YEAR
IP65



10115CF | 15W | SMD | Aluminium + PC

LED BUILT IN
90 CRI
IK 08
CE
2 YEAR
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108CF/C	White	Cool white	4000K	8W	660lm	120°	230V		80mm	50mm	40	Complete with 500mA driver
10108CF/W	White	Warm white	3000K	8W	660lm	120°	230V		80mm	50mm	40	Complete with 500mA driver
10115CF/C	White	Cool white	4000K	15W	1250lm	120°	230V		135mm	50mm	20	Complete with 500mA driver
10115CF/W	White	Warm white	3000K	15W	1250lm	120°	230V		135mm	50mm	20	Complete with 500mA driver

The Outdoor/Bathroom IP65 Range

10110G | 10W | COB | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
IP65



10115G | 15W | COB | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10110G/W/C	White	Cool white	4000K	10W	800lm	60°	230V		200cm	82mm	90mm	30	Complete with 250mA driver
10110G/W/W	White	Warm white	3000K	10W	750lm	60°	230V		200cm	82mm	90mm	30	Complete with 250mA driver
10115G/W/W	White	Warm white	3000K	15W	1125lm	60°	230V		200cm	100mm	95mm	20	Complete with 350mA driver

The COB IP65 Downlights
CCT V

10112GA/W/V

10112GA | 12W | COB | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
new
IP65



10118GA/W/V

10118GA | 18W | COB | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
new
IP65



10125GA/W/V

10125GA | 25W | COB | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
new
IP65



10135GA/W/V

10135GA | 35W | COB | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
new
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10112GA/W/V	White	CCT V	3000K-3500K-4000K	12W	1200lm	40°	230V		75mm	60mm	40	Complete with 300mA driver
10118GA/W/V	White	CCT V	3000K-3500K-4000K	18W	1800lm	40°	230V		95mm	65mm	20	Complete with 450mA driver
10125GA/W/V	White	CCT V	3000K-3500K-4000K	25W	2500lm	40°	230V		120mm	80mm	10	Complete with 600mA driver
10135GA/W/V	White	CCT V	3000K-3500K-4000K	35W	3500lm	40°	230V		145mm	90mm	10	Complete with 900mA driver

The COB IP65 Darklight
CCT V

10112G | 12W | COB | Aluminium

new
DARK LIGHT
IP65
LED BUILT IN
90 CRI
CCT V
CE
3 YEAR



10118G | 18W | COB | Aluminium

new
DARK LIGHT
IP65
LED BUILT IN
90 CRI
CCT V
CE
3 YEAR



10125G | 25W | COB | Aluminium

new
DARK LIGHT
IP65
LED BUILT IN
90 CRI
CCT V
CE
3 YEAR



10135G | 35W | COB | Aluminium

new
DARK LIGHT
IP65
LED BUILT IN
90 CRI
CCT V
CE
3 YEAR



10140G | 40W | COB | Aluminium

new
DARK LIGHT
IP65
LED BUILT IN
90 CRI
CCT V
CE
3 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10112G/W/V	White	CCT V	3000K-3500K-4000K	12W	1200lm	40°	230V		74mm	80mm	40	Complete with 300mA driver
10112G/B/V	Black	CCT V	3000K-3500K-4000K	12W	1200lm	40°	230V		74mm	80mm	40	Complete with 300mA driver
10118G/W/V	White	CCT V	3000K-3500K-4000K	18W	1800lm	40°	230V		93mm	90mm	20	Complete with 450mA driver
10118G/B/V	Black	CCT V	3000K-3500K-4000K	18W	1800lm	40°	230V		93mm	90mm	20	Complete with 450mA driver
10125G/W/V	White	CCT V	3000K-3500K-4000K	25W	2500lm	40°	230V		118mm	100mm	10	Complete with 600mA driver
10125G/B/V	Black	CCT V	3000K-3500K-4000K	25W	2500lm	40°	230V		118mm	100mm	10	Complete with 600mA driver
10135G/W/V	White	CCT V	3000K-3500K-4000K	35W	3500lm	40°	230V		145mm	120mm	10	Complete with 900mA driver
10135G/B/V	Black	CCT V	3000K-3500K-4000K	35W	3500lm	40°	230V		145mm	120mm	10	Complete with 900mA driver
10140G/W/V	White	CCT V	3000K-3500K-4000K	40W	4000lm	40°	230V		165mm	130mm	10	Complete with 1050mA driver
10140G/B/V	Black	CCT V	3000K-3500K-4000K	40W	4000lm	40°	230V		165mm	130mm	10	Complete with 1050mA driver

Downlights Adjustable

Pages 169-174

06

Adjustable R111 Range

11110TR/B

11110TR | 75W | R111 | GU10 | Aluminium

Base must be ordered separately.

ADJUSTABLE

CE 5 YEAR

IP20

Suitable for R111 LED lamp.



51100TR/B

51100TR | Trimless box | Metal

CE 5 YEAR



Order Code	Colour	Watts	Input	Class					Notes
11110TR/B	Black	75W	100-240V	⏚	10cm	-	-	2	-
51100TR/B	Black	-	-	-	-	164x164mm	200mm	8	-

The COB Pop Up LED
Aluminium

11126F | 26W | COB | Aluminium

LED BUILT IN
92 CRI
DIMMABLE
ADJUSTABLE
QUICK FIX
CE
3 YEAR
IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11126F/W/W	White	Warm white	3000K	26W	2210lm	36°	700mA	III	116mm	150mm	18	Requires 700mA driver

Dark Mirror Reflector Range

11110E/W/W

11110E | 10W | COB | Aluminium

LED BUILT IN

80 CRI

ADJUSTABLE

CE

DARK LIGHT

3 YEAR

IP20



11120E/W/W

11120E | 20W | COB | Aluminium

LED BUILT IN

80 CRI

ADJUSTABLE

CE

DARK LIGHT

3 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11110E/W/W	White	Warm white	3000K	10W	850lm	30°	230V		85mm	80mm	40	Complete with 250mA driver
11120E/W/W	White	Warm white	3000K	20W	1700lm	30°	230V		140mm	110mm	20	Complete with 500mA driver

51130/B/C

51130/W/W

The COB Box Type Shop Range

51130/W/W

51130 | 30W | COB | Aluminium + metal

LED BUILT IN

90 CRI

ADJUSTABLE

CE

2 YEAR

IP20

51130/B/W



51230/W/W

51230 | 2x30W | COB | Aluminium + metal

LED BUILT IN

90 CRI

ADJUSTABLE

CE

2 YEAR

IP20

51230/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51130/W/C	White	Cool white	4000K	30W	2700lm	38°	230V		160x160mm	125mm	12	Complete with 750mA driver
51130/W/W	White	Warm white	3000K	30W	2700lm	38°	230V		160x160mm	125mm	12	Complete with 750mA driver
51130/B/C	Black	Cool white	4000K	30W	2700lm	38°	230V		160x160mm	125mm	12	Complete with 750mA driver
51130/B/W	Black	Warm white	3000K	30W	2700lm	38°	230V		160x160mm	125mm	12	Complete with 750mA driver
51230/W/C	White	Cool white	4000K	2x30W	2x2700lm	38°	230V		320x160mm	125mm	6	Complete with 2x750mA drivers
51230/W/W	White	Warm white	3000K	2x30W	2x2700lm	38°	230V		320x160mm	125mm	6	Complete with 2x750mA drivers
51230/B/C	Black	Cool white	4000K	2x30W	2x2700lm	38°	230V		320x160mm	125mm	6	Complete with 2x750mA drivers
51230/B/W	Black	Warm white	3000K	2x30W	2x2700lm	38°	230V		320x160mm	125mm	6	Complete with 2x750mA drivers

The Pop Up Range
White

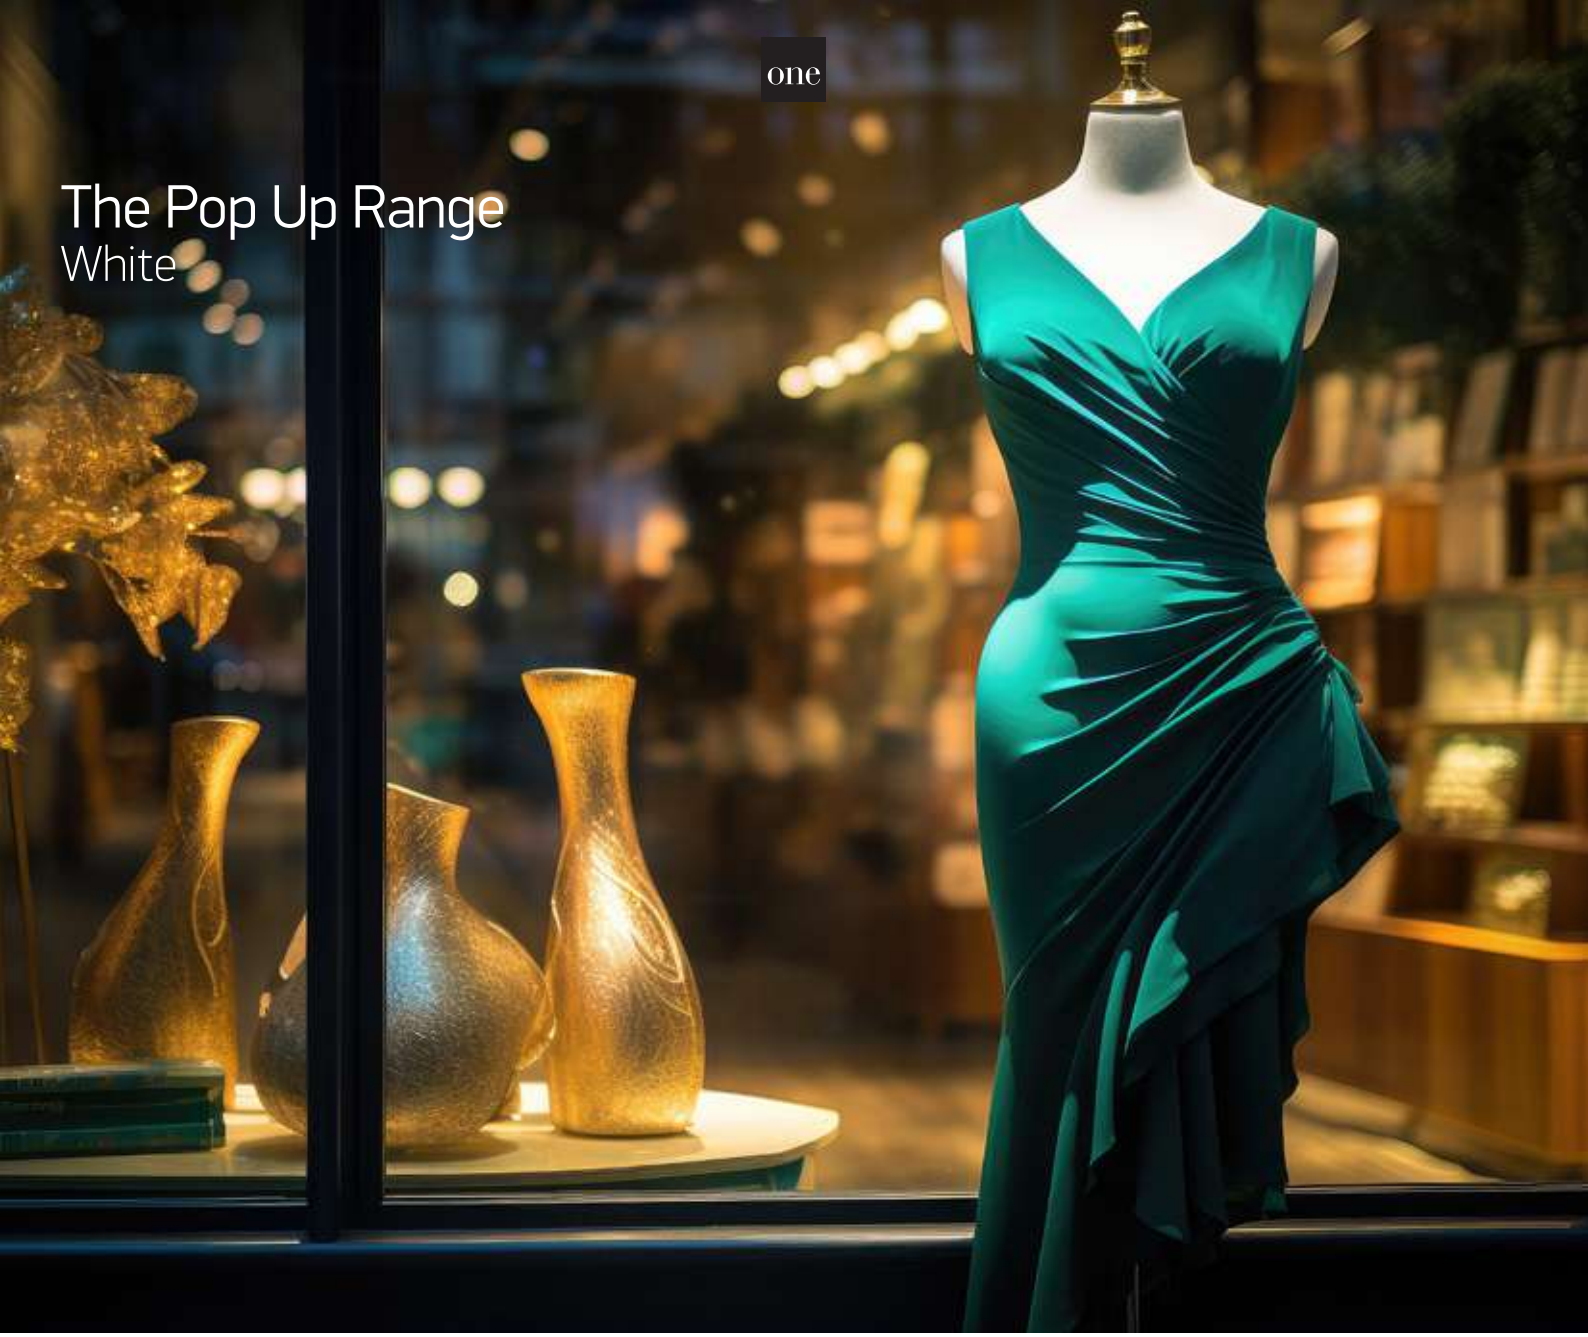

11115G/W/W

11115G | 15W | COB | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.

LED BUILT IN

90 CRI

ADJUSTABLE

CE

5 YEAR

IP20

Zoomable

Removable Honeycomb



11128G/W/W

11128G | 25W | COB | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.

LED BUILT IN

90 CRI

ADJUSTABLE

CE

5 YEAR

IP20

Zoomable

Removable Honeycomb



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11115G/W/W	White	Warm white	3000K	15W	1500lm	15°- 45°	230V		98mm	70mm	27	Complete with 350mA driver
11128G/W/W	White	Warm white	3000K	25W	2500lm	15°- 45°	230V		120mm	70mm	18	Complete with 600mA driver

11128G/B/W

11115G/B/W

The Pop Up Range
Black

11115G/B/W

11115G | 15W | COB | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.

LED BUILT IN

90 CRI

ADJUSTABLE

CE

5 YEAR

IP20

Zoomable

Removable Honeycomb



11128G/B/W

11128G | 25W | COB | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.

LED BUILT IN

90 CRI

ADJUSTABLE

CE

5 YEAR

IP20

Zoomable

Removable Honeycomb



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11115G/B/W	Black	Warm white	3000K	15W	1500lm	15°- 45°	230V		98mm	70mm	27	Complete with 350mA driver
11128G/B/W	Black	Warm white	3000K	25W	2500lm	15°- 45°	230V		120mm	70mm	18	Complete with 600mA driver

Strips & Profiles

Pages 177-236

07

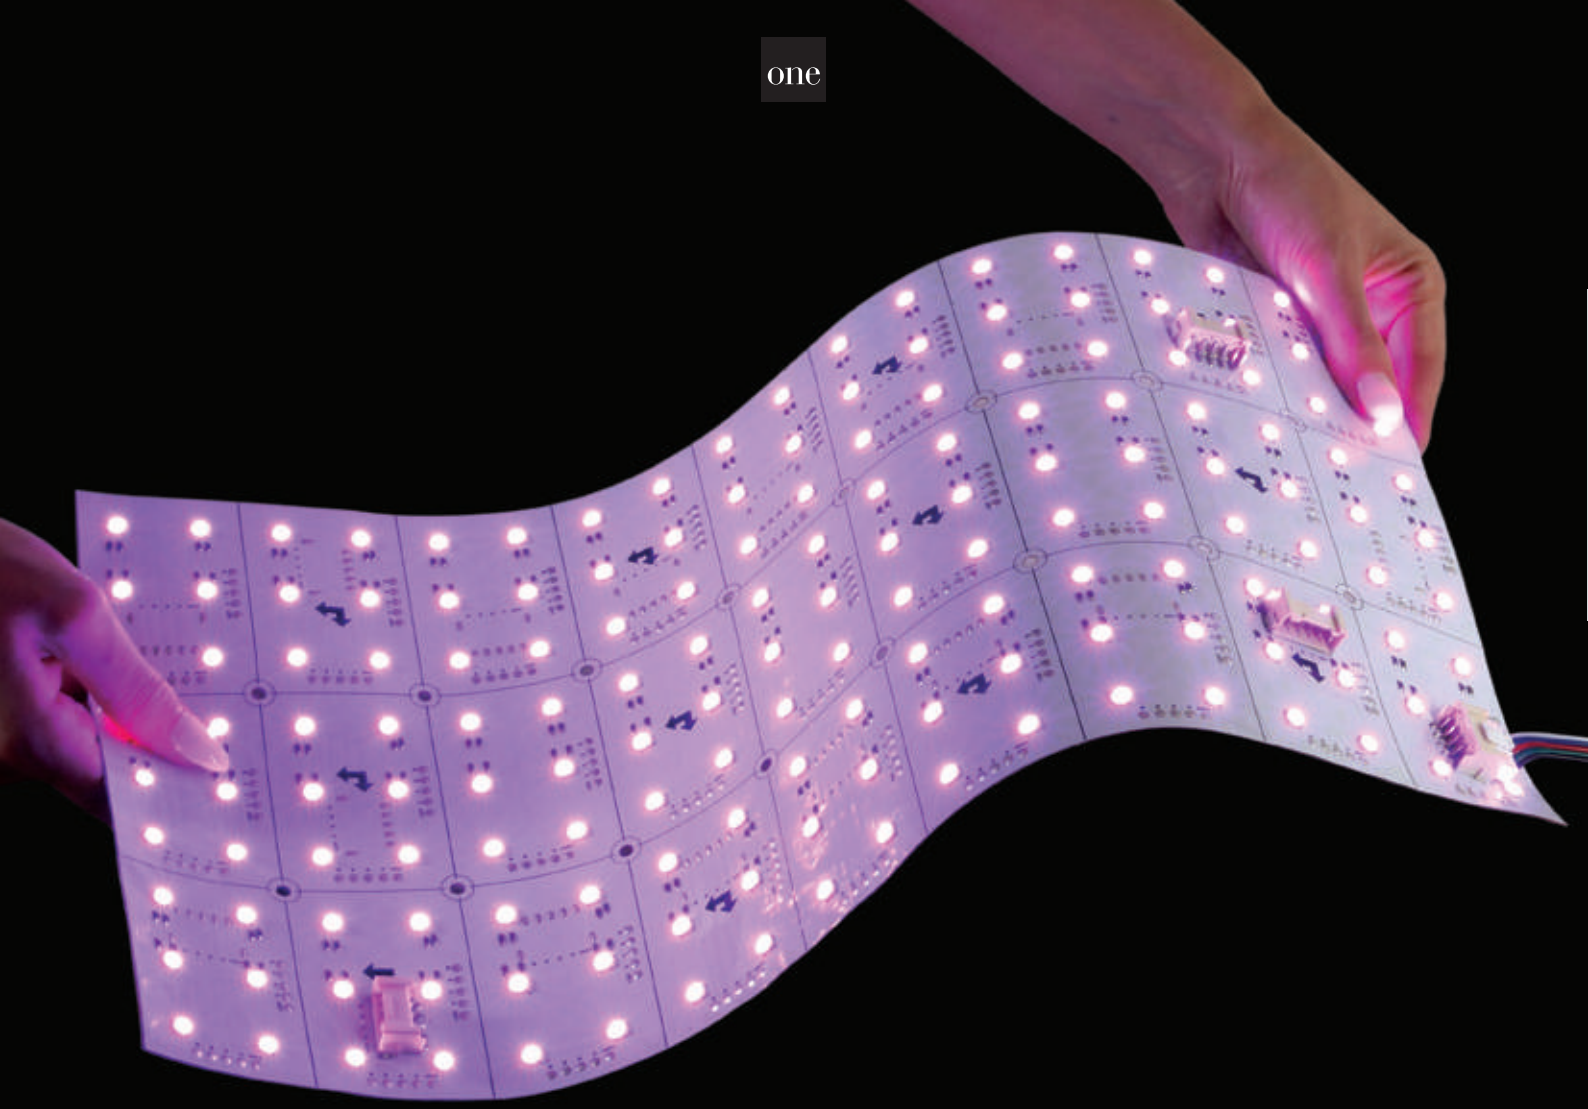

The Flex Tiles

7848 | 10W | SMD 2835 | 288LEDs/pc | Flex tile

3M Double face adhesive.

LED BUILT IN | 90 CRI | DIMMABLE | CE | 5 YEAR | IP20

Connect up to 10pcs.

Complete with 2pcs power supply & 2pcs connectors.

Dimming remote control. Order code 20030.



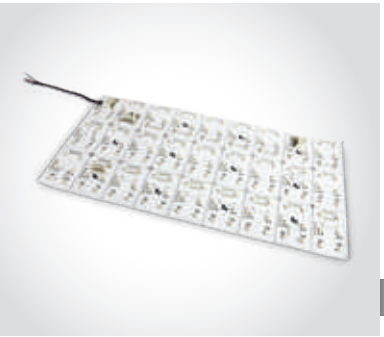

7848/RGBW | 24W | SMD 5050 | 162LEDs/pc | Flex tile

3M Double face adhesive.

LED BUILT IN | 80 CRI | DIMMABLE | CE | 5 YEAR | IP20

Connect up to 10pcs.

Complete with 2pcs power supply & 2pcs connectors.

Dimming remote control. Order code 20036.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7848/C	Cool white	4000K	10W	900lm	24V DC	III	2	Requires 24V DC driver
7848/W	Warm white	3000K	10W	850lm	24V DC	III	2	Requires 24V DC driver
7848/RGBW	RGB + Warm white	RGB + 3000K	RGB 18W + WW 6W	480lm (3000K)	24V DC	III	2	Requires 24V DC driver

The Ultra Slim Range 24V

7843 | 4W/m | COB | 480LEDs/m | Ultra slim

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20

Supplied in 5m roll.

Dimming remote control. Order code 20030.



7843E | 10W/m | COB | 400LEDs/m | Ultra slim

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR · IP20

Supplied in 5m roll.

Dimming remote control. Order code 20030.

7823 | 9,6W/m | SMD 2216 | 140LEDs/m | Ultra slim

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20

Supplied in 5m roll.

Dimming remote control. Order code 20030.



7833 | 14,4W/m | SMD 2110 | 196LEDs/m | Ultra slim

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20

Supplied in 5m roll.

Dimming remote control. Order code 20030.

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7843/C	Cool white	4000K	4W/m	440lm/m	24V DC	III	50	Requires 24V DC driver
7843/W	Warm white	3000K	4W/m	410lm/m	24V DC	III	50	Requires 24V DC driver
7843E/C	Cool white	4000K	10W/m	900lm/m	24V DC	III	50	Requires 24V DC driver
7843E/W	Warm white	3000K	10W/m	810lm/m	24V DC	III	50	Requires 24V DC driver
7843E/EW	Extra warm white	2700K	10W/m	790lm/m	24V DC	III	50	Requires 24V DC driver
7823/C	Cool white	4000K	9,6W/m	970lm/m	24V DC	III	40	Requires 24V DC driver
7823/W	Warm white	3000K	9,6W/m	864lm/m	24V DC	III	40	Requires 24V DC driver
7823/EW	Extra warm white	2700K	9,6W/m	768lm/m	24V DC	III	40	Requires 24V DC driver
7833/C	Cool white	4000K	14,4W/m	1300lm/m	24V DC	III	40	Requires 24V DC driver
7833/W	Warm white	3000K	14,4W/m	1200lm/m	24V DC	III	40	Requires 24V DC driver
7833/EW	Extra warm white	2700K	14,4W/m	1160lm/m	24V DC	III	40	Requires 24V DC driver

The 4,8W/m Indoor 24V

7820/D

7820 | 4,8W/m | SMD 2216 | 70LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR

Supplied in 5m roll.

Dimming remote control.
Order code 20030.

Cut every 10cm
(7-LED segment)

Accessories for 7820

III · 50cm · CE

7824 Power supply cable
7822 Connector

062002 | Display box for LED strips 7820/C, 7820/W, 7820W/C, 7829/C, 7829A/W, 7835/EW, 7835W/W, 7880/C, 7830/RGBW, 7846/RGB, 7846/RGBW, 7839/W, 7843/W, 7844/EW, 7846/W, 7846W/W, 7846WA/W, 7844/A, 7841A/W & 7841B/W

IP20

offer

CE · 2 YEAR · 1

Requires 24V DC driver



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820/D	Daylight	6000K	4,8W/m	490lm/m	24V DC	III	40	Requires 24V DC driver
7820/C	Cool white	4000K	4,8W/m	490lm/m	24V DC	III	40	Requires 24V DC driver
7820/W	Warm white	3000K	4,8W/m	432lm/m	24V DC	III	40	Requires 24V DC driver
7820/EW	Extra warm white	2700K	4,8W/m	384lm/m	24V DC	III	40	Requires 24V DC driver
7820/UW	Ultra warm white	2200K	4,8W/m	384lm/m	24V DC	III	40	Requires 24V DC driver

The 4,8W/m Outdoor 24V

7820W | 4,8W/m | SMD 2216 | 70LEDs/m | Silicone

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR

Supplied in 5m roll.

Dimming remote control.
Order code 20030.



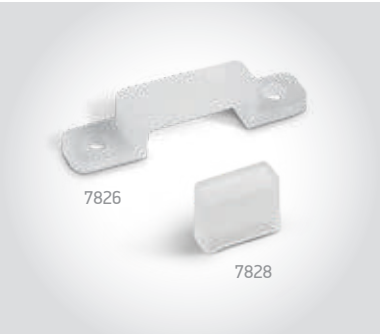

Accessories for 7820W

CE

7826 Mounting clip
7828 End cap

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820W/D	Daylight	6000K	4,8W/m	432lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/C	Cool white	4000K	4,8W/m	432lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/W	Warm white	3000K	4,8W/m	390lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/EW	Extra warm white	2700K	4,8W/m	375lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

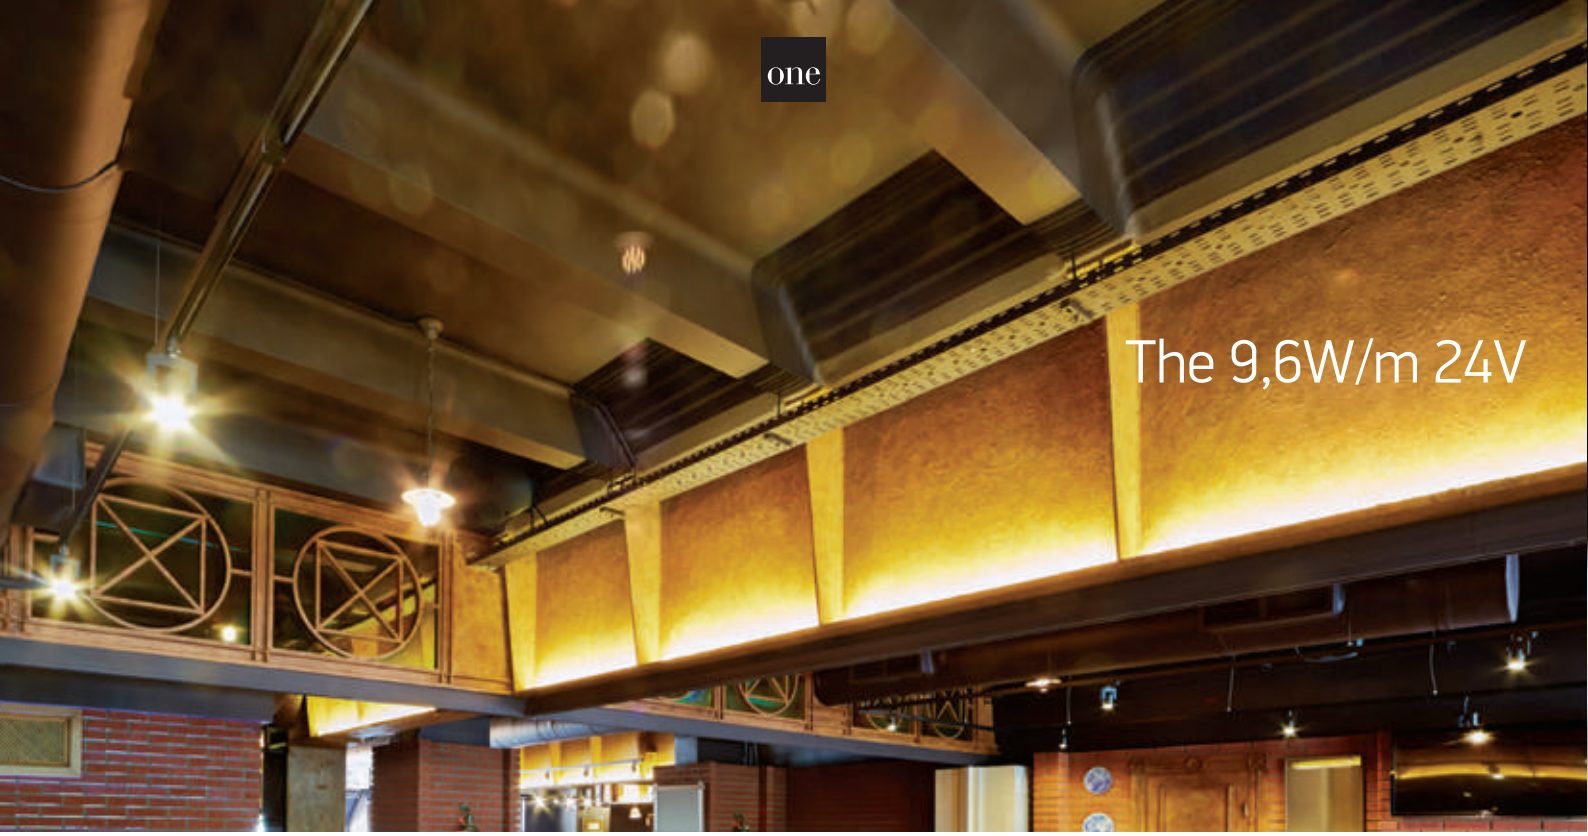

The 9,6W/m 24V

7829A | 9,6W/m | SMD 2835 | 70LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR

Supplied in 5m roll.

Dimming remote control.
Order code 20030.

Cut every 10cm
(7-LED segment)

8mm

7829 | 9,6W/m | SMD 2216 | 140LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR

Supplied in 5m roll.

Dimming remote control.
Order code 20030.

Cut every 5cm
(7-LED segment)

8mm

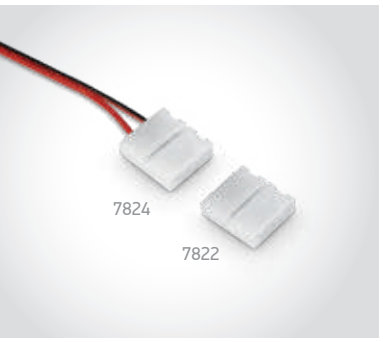

Accessories for 7829A & 7829

50cm · III · CE

7824 Power supply cable
7822 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7829A/C	Cool white	4000K	9,6W/m	990lm/m	24V DC	III	40	Requires 24V DC driver
7829A/W	Warm white	3000K	9,6W/m	970lm/m	24V DC	III	40	Requires 24V DC driver
7829A/EW	Extra warm white	2700K	9,6W/m	880lm/m	24V DC	III	40	Requires 24V DC driver
7829/C	Cool white	4000K	9,6W/m	970lm/m	24V DC	III	40	Requires 24V DC driver
7829/W	Warm white	3000K	9,6W/m	864lm/m	24V DC	III	40	Requires 24V DC driver
7829/EW	Extra warm white	2700K	9,6W/m	768lm/m	24V DC	III	40	Requires 24V DC driver

The 9,6W/m Outdoor 24V

new

IP68

7829AW | 9,6W/m | SMD 2835 | 70LEDs/m | Silicone

3M Double face adhesive.

LED BUILT IN

90 CRI

DIMMABLE

3 YEAR

Supplied in 5m roll.

Dimming remote control.
Order code 20030.

Cut every 10cm
(7-LED segment)

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7829AW/C	Cool white	4000K	9,6W/m	920lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7829AW/W	Warm white	3000K	9,6W/m	900lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7829AW/EW	Extra warm white	2700K	9,6W/m	810lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

The 14,4W/m Indoor 24V

IP20

7835 | 14,4W/m | SMD 2835 | 70LEDs/m

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR

Supplied in 5m roll.

Dimming remote control.
Order code 20030.

Cut every 10cm
(7-LED segment)

10mm

Accessories for 7835

50cm · III · CE

7835P Power supply cable
7837 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835/D	Daylight	6000K	14,4W/m	1300lm/m	24V DC	III	40	Requires 24V DC driver
7835/C	Cool white	4000K	14,4W/m	1300lm/m	24V DC	III	40	Requires 24V DC driver
7835/W	Warm white	3000K	14,4W/m	1200lm/m	24V DC	III	40	Requires 24V DC driver
7835/EW	Extra warm white	2700K	14,4W/m	1125lm/m	24V DC	III	40	Requires 24V DC driver
7835/UW	Ultra warm white	2200K	14,4W/m	1125lm/m	24V DC	III	40	Requires 24V DC driver

The 14,4W/m Outdoor 24V

7835W | 14,4W/m | SMD 2835 | 70LEDs/m | Silicone

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR

Supplied in 5m roll.

Dimming remote control.
Order code 20030.



7827 | Mounting clip for 7835W

CE

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835W/D	Daylight	6000K	14,4W/m	1170lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/C	Cool white	4000K	14,4W/m	1170lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/W	Warm white	3000K	14,4W/m	1050lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/EW	Extra warm white	2700K	14,4W/m	1050lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

The COB Strips 8mm

7839 | 4W/m | COB | 320LEDs/m

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20

Supplied in 5m roll.

Dimming remote control.
Order code 20030.



7844 | 8W/m | COB | 320LEDs/m

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP20

Supplied in 5m roll.

Dimming remote control.
Order code 20030.



7844E | 10W/m | COB | 480LEDs/m

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR · IP20

Supplied in 5m roll.

Dimming remote control.
Order code 20030.



7844B Corner connector for 7839, 7844 and 7844E

7844C Connector for 7839, 7844 and 7844E

7844P Power supply for 7839, 7844 and 7844E

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7839/C	Cool white	4000K	4W/m	400lm/m	24V DC	III	40	Requires 24V DC driver
7839/W	Warm white	3000K	4W/m	380lm/m	24V DC	III	40	Requires 24V DC driver
7839/EW	Extra warm white	2700K	4W/m	360lm/m	24V DC	III	40	Requires 24V DC driver
7844/C	Cool white	4000K	8W/m	810lm/m	24V DC	III	40	Requires 24V DC driver
7844/W	Warm white	3000K	8W/m	730lm/m	24V DC	III	40	Requires 24V DC driver
7844/EW	Extra warm white	2700K	8W/m	680lm/m	24V DC	III	40	Requires 24V DC driver
7844E/C	Cool white	4000K	10W/m	950lm/m	24V DC	III	40	Requires 24V DC driver
7844E/W	Warm white	3000K	10W/m	860lm/m	24V DC	III	40	Requires 24V DC driver
7844E/EW	Extra warm white	2700K	10W/m	820lm/m	24V DC	III	40	Requires 24V DC driver

The COB Strips 10mm

7846 | 14W/m | COB | 512LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR

Supplied in 5m roll.

Dimming remote control.
Order code 20030.

7846H | 14,5W/m | COB | 480LEDs/m | High efficiency | 150lm/W

3M Double face adhesive.

new

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR

Supplied in 5m roll.

7846B
Corner connector for 7846 and 7846H

7846C
Connector for 7846 and 7846H

7846P
Power supply for 7846 and 7846H

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7846/C	Cool white	4000K	14W/m	1470lm/m	24V DC	III	50	Requires 24V DC driver
7846/W	Warm white	3000K	14W/m	1420lm/m	24V DC	III	50	Requires 24V DC driver
7846/EW	Extra warm white	2700K	14W/m	1200lm/m	24V DC	III	50	Requires 24V DC driver
7846H/C	Cool white	4000K	14,5W/m	2175lm/m	24V DC	III	50	Requires 24V DC driver
7846H/W	Warm white	3000K	14,5W/m	2175lm/m	24V DC	III	50	Requires 24V DC driver

The IP67 COB Strips
4-8W/m

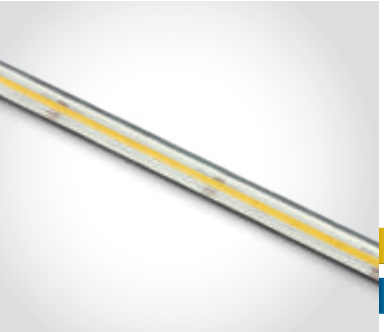

7839W | 4W/m | COB | 320LEDs/m | Silicone

3M Double face adhesive.

new

IP67

LED BUILT IN | 90 CRI | DIMMABLE | CE | 3 YEAR

Supplied in 5m roll.

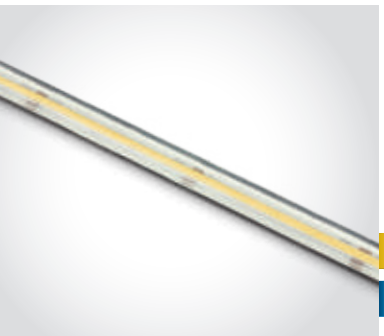

7844W | 8W/m | COB | 320LEDs/m | Silicone

3M Double face adhesive.

new

IP67

LED BUILT IN | 90 CRI | DIMMABLE | CE | 3 YEAR

Supplied in 5m roll.

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7839W/C	Cool white	4000K	4W/m	430lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7839W/W	Warm white	3000K	4W/m	410lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7844W/C	Cool white	4000K	8W/m	840lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7844W/W	Warm white	3000K	8W/m	810lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

7846WA/W

IP67 & IP68 COB Strips
10-14W/m

7846W | 14W/m | COB | 512LEDs/m | Silicone

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR · IP67

Supplied in 5m roll.

Dimming remote control. Order code 20030.

7846E End cap for 7846W

Cut every 6,25cm

12,5mm

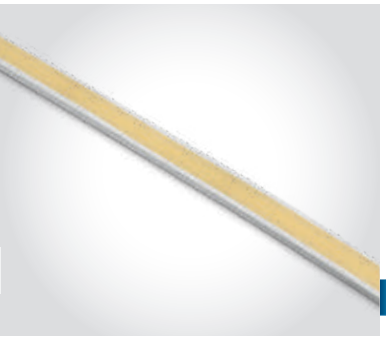

7846WA | 10W/m | COB | 512LEDs/m | Silicone

3M Double face adhesive.

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR · IP68

Supplied in 5m roll.

Dimming remote control. Order code 20030.

7846WE End cap for 7846WA

Cut every 6,25cm

10mm

7846WP 24V Power supply for 7846WA

7846WC Connector for 7846WA

7846WB Corner connector for 7846WA

7827A Mounting clip for 7846W and 7846WA

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7846W/C	Cool white	4000K	14W/m	1350lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7846W/W	Warm white	3000K	14W/m	1220lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7846WA/C	Cool white	4000K	10W/m	700lm/m	24V DC	III	50	Requires 24V DC driver / Avoid direct sunlight
7846WA/W	Warm white	3000K	10W/m	650lm/m	24V DC	III	50	Requires 24V DC driver / Avoid direct sunlight

Connect In One Length Range 24V

7844L | 7,5W/m | COB | 480LEDs/m

Can be connected in 20m full length / 3M Double face adhesive.

new

IP20

LED BUILT IN | 90 CRI | DIMMABLE | CE | 5 YEAR

Supplied in 20m roll.



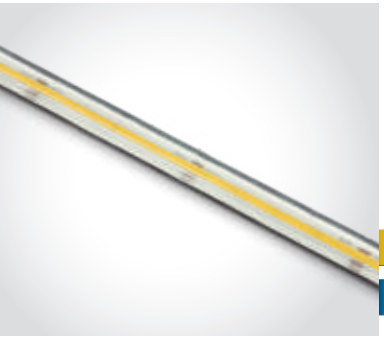

7844LW | 7,5W/m | COB | 480LEDs/m | Silicone

Can be connected in 20m full length / 3M Double face adhesive.

new

IP67

LED BUILT IN | 90 CRI | DIMMABLE | CE | 3 YEAR

Supplied in 20m roll.



7820WL | 4,8W/m | SMD 2216 | 60LEDs/m | Silicone

Can be connected in 15m full length / 3M Double face adhesive.

IP68

LED BUILT IN | 90 CRI | DIMMABLE | CE | 3 YEAR

Supplied in 15m roll.

Dimming remote control.
Order code 20030.



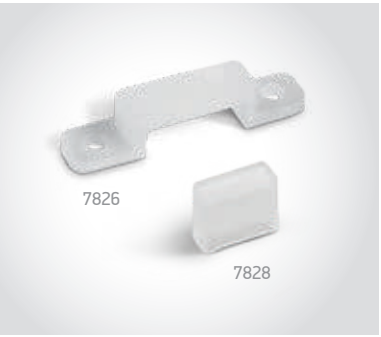

Accessories for 7820WL

CE

7826 Mounting clip
7828 End cap

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7844L/C	Cool white	4000K	7,5W/m	700lm/m	24V DC	III	10	Requires 24V DC driver
7844L/W	Warm white	3000K	7,5W/m	675lm/m	24V DC	III	10	Requires 24V DC driver
7844LW/C	Cool white	4000K	7,5W/m	700lm/m	24V DC	III	10	Requires 24V DC driver / Avoid direct sunlight
7844LW/W	Warm white	3000K	7,5W/m	675lm/m	24V DC	III	10	Requires 24V DC driver / Avoid direct sunlight
7820WL/W	Warm white	3000K	4,8W/m	302lm/m	24V DC	III	20	Requires 24V DC driver / Avoid direct sunlight

The Vertical Light Range 24V

7820V | 4,8W/m | SMD 3014 | 60LEDs/m | Vertical light

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR

Supplied in 5m roll.

Dimming remote control.
Order code 20030.

Cut every 10cm
(6-LED segment)

8mm

7835V | 14,4W/m | SMD 3014 | 120LEDs/m | Vertical light

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR

Supplied in 5m roll.

Dimming remote control.
Order code 20030.

Cut every 5cm
(6-LED segment)

8mm

Accessories for 7820V & 7835V

50cm · CE

7824 Power supply cable
7822 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820V/C	Cool white	4000K	4,8W/m	500lm/m	24V DC	III	40	Requires 24V DC driver
7820V/W	Warm white	3000K	4,8W/m	450lm/m	24V DC	III	40	Requires 24V DC driver
7835V/W	Warm white	3000K	14,4W/m	1152lm/m	24V DC	III	40	Requires 24V DC driver

The 19,2W/m Indoor 24V

7825 | 19,2W/m | SMD 2835 | 140LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR



Supplied in 5m roll.

Accessories
7835P Power supply cable & 7837 Connector.

Cut every 5cm
(7-LED segment)

10mm

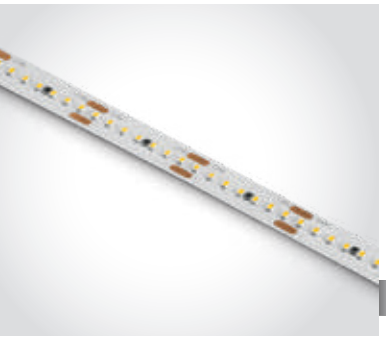

7870 | 19,2W/m | SMD 2216 | 238LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR

Supplied in 5m roll.

Accessories
7835P Power supply cable & 7837 Connector.

Cut every 2,95cm
(7-LED segment)

10mm

7875 | 19,2W/m | SMD 2216 | 240LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR

Supplied in 5m roll.

Cut every 5cm
(12-LED segment)

16mm

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7825/C	Cool white	4000K	19,2W/m	1728lm/m	24V DC	III	40	Requires 24V DC driver
7825/W	Warm white	3000K	19,2W/m	1536lm/m	24V DC	III	40	Requires 24V DC driver
7825/EW	Extra warm white	2700K	19,2W/m	1536lm/m	24V DC	III	40	Requires 24V DC driver
7870/C	Cool white	4000K	19,2W/m	1940lm/m	24V DC	III	40	Requires 24V DC driver
7870/W	Warm white	3000K	19,2W/m	1728lm/m	24V DC	III	40	Requires 24V DC driver
7875/C	Cool white	4000K	19,2W/m	1750lm/m	24V DC	III	40	Requires 24V DC driver
7875/W	Warm white	3000K	19,2W/m	1700lm/m	24V DC	III	40	Requires 24V DC driver

The 24W/m Indoor 24V

7845 | 24W/m | SMD 2216 | 280LEDs/m

3M Double face adhesive.

LED BUILT IN | 90 CRI | DIMMABLE | CE | 5 YEAR

Supplied in 5m roll.

Cut every 2,5cm
(7-LED segment)

10mm

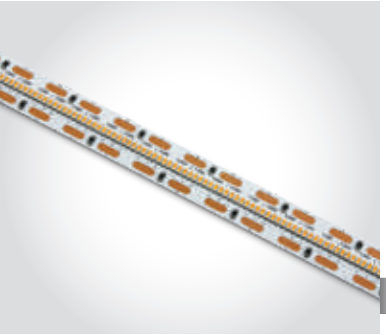

7887 | 24W/m | SMD 2110 | 700LEDs/m

3M Double face adhesive.

LED BUILT IN | 90 CRI | DIMMABLE | CE | 5 YEAR

Supplied in 5m roll.

Cut every 1cm
(7-LED segment)

12mm

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7845/C	Cool white	4000K	24W/m	2450lm/m	24V DC	III	40	Requires 24V DC driver
7845/W	Warm white	3000K	24W/m	2200lm/m	24V DC	III	40	Requires 24V DC driver
7887/W	Warm white	3000K	24W/m	2050lm/m	24V DC	III	40	Requires 24V DC driver

The High Power Strips

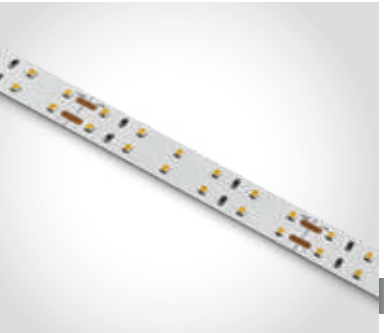

7880 | 28,8W/m | SMD 2835 | 120LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR

Supplied in 5m roll.

Cut every 10cm
(12-LED segment)

7882 | 42W/m | SMD 2835 | 240LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR

Supplied in 2m roll.

Cut every 3,33cm
(8-LED segment)

7884 | 33W/m | SMD 2835 | 320LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR

Supplied in 5m roll.

Cut every 2,5cm
(8-LED segment)

7885 | 48W/m | SMD 2835 | 294LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR

Supplied in 2m roll.

Cut every 7,14cm
(21-LED segment)



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7880/C	Cool white	4000K	28,8W/m	2304lm/m	24V DC	III	40	Requires 24V DC driver
7880/W	Warm white	3000K	28,8W/m	2260lm/m	24V DC	III	40	Requires 24V DC driver
7882/W	Warm white	3000K	42W/m	6100lm/m	24V DC	III	40	Requires 24V DC driver
7884/C	Cool white	4000K	33W/m	4700lm/m	24V DC	III	20	Requires 24V DC driver
7884/W	Warm white	3000K	33W/m	4100lm/m	24V DC	III	20	Requires 24V DC driver
7885/C	Cool white	4000K	48W/m	4850lm/m	24V DC	III	20	Requires 24V DC driver
7885/W	Warm white	3000K	48W/m	4400lm/m	24V DC	III	20	Requires 24V DC driver

The High Power COB Strips

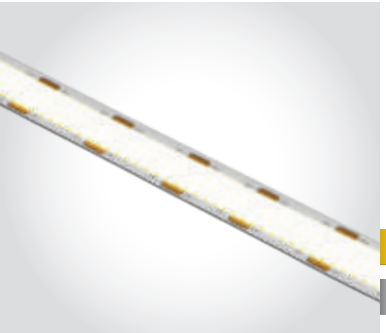

7887A | 25W/m | COB | 960LEDs/m

3M Double face adhesive.

LED BUILT IN | 90 CRI | DIMMABLE | CE | 5 YEAR

Supplied in 5m roll.

Cut every 5cm

15mm

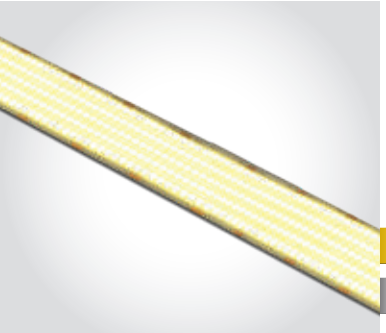

7887B | 40W/m | COB | 1600LEDs/m

3M Double face adhesive.

LED BUILT IN | 90 CRI | DIMMABLE | CE | 5 YEAR

Supplied in 5m roll.

Cut every 2,5cm

30mm

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7887A/C	Cool white	4000K	25W/m	2550lm/m	24V DC	III	50	Requires 24V DC driver
7887A/W	Warm white	3000K	25W/m	2550lm/m	24V DC	III	50	Requires 24V DC driver
7887B/C	Cool white	4000K	40W/m	4200lm/m	24V DC	III	20	Requires 24V DC driver
7887B/W	Warm white	3000K	40W/m	4200lm/m	24V DC	III	20	Requires 24V DC driver

The COB Amber Strip

7844 | 10W/m | COB | 480LEDs/m

Supplied in 5m roll / 3M Double face adhesive.

LED BUILT IN

DIMMABLE

5 YEAR

Dimming remote control.
Order code 20030.

Cut every 5cm
(24-LED segment)

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7844/A	Amber	2000K	10W/m	24V DC	III	50	Requires 24V DC driver

The Variable Colour Temperature Range

7846/DEW | 14W/m | COB | 608LEDs/m

3M Double face adhesive.

new

IP20

LED BUILT IN | 90 CRI | DIMMABLE | CE 3 YEAR

Supplied in 5m roll.

Variable colour temperature.



7835/DEW | 20W/m | SMD 2835 | 120LEDs/m

3M Double face adhesive.

IP20

LED BUILT IN | 90 CRI | DIMMABLE | CE 5 YEAR

Supplied in 5m roll.



Variable colour temperature.



20032 | 12-24V DC | Variable colour temperature controller & dimmer | 2 channels x 3A

DIMMABLE | CE 2 YEAR

IP20

Remote controller for changing colour temperature from extra warm white to daylight. Suitable for use with LED strips 7835/DEW. 50 meters range, includes dimmer control and programme mode.

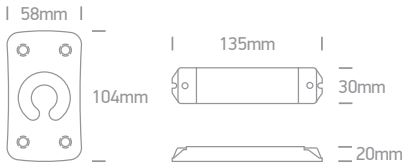

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7846/DEW	Extra warm white - Daylight	2700K-6500K	14W/m	630lm/m (EW) + 770lm/m (D)	24V DC	III	50	Requires 24V DC driver
7835/DEW	Extra warm white - Daylight	2700K-6500K	20W/m	700lm/m (EW) + 900lm/m (D)	24V DC	III	40	Requires 24V DC driver

The Blue LED Strips 24V

7820/BL | 4,8W/m | SMD 3528 | 60LEDs/m

3M Double face adhesive.

LED BUILT IN | DIMMABLE | CE | 5 YEAR

Supplied in 5m roll.

Dimming remote control.
Order code 20030.

Cut every 10cm
(6-LED segment)

7820W/BL | 4,8W/m | SMD 3528 | 60LEDs/m | Silicone

3M Double face adhesive.

LED BUILT IN | DIMMABLE | CE | 3 YEAR

Supplied in 5m roll.

Dimming remote control.
Order code 20030.

Cut every 10cm
(6-LED segment)

Order Code	Light Colour	Watts	Input	Class		Notes
7820/BL	Blue	4,8W/m	24V DC	III	40	Requires 24V DC driver
7820W/BL	Blue	4,8W/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

RGB Set

7820A/RGB | 2W/m/color | SMD 5050 | 30LEDs/m

IP20

LED BUILT IN

DIMMABLE

3 YEAR

10mm

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7820A/RGB	RGB	-	2W/m/color	230V / 12V DC		10	Set of LED strip + remote

The RGB & RGBW Strips 24V

7830/RGB | 14,4W/m | SMD 5050 | 60LEDs/m

Supplied in 5m roll / 3M Double face adhesive.

LED BUILT IN · DIMMABLE · CE · 5 YEAR · IP20

Dimming remote control.
Order code 20034.

DALI & Push to DIM controller.
Order code 89100LP.

7834/RGB
Power supply cable
7832/RGB
Connector

Cut every 10cm
(6-LED segment)

7830/RGBW | 19,2W/m | SMD 5050 | 60LEDs/m

Supplied in 5m roll / 3M Double face adhesive.

LED BUILT IN · DIMMABLE · CE · 5 YEAR · IP20

Dimming remote control.
Order code 20036.

DALI & Push to DIM controller.
Order code 89100LP.

Cut every 10cm
(6-LED segment)

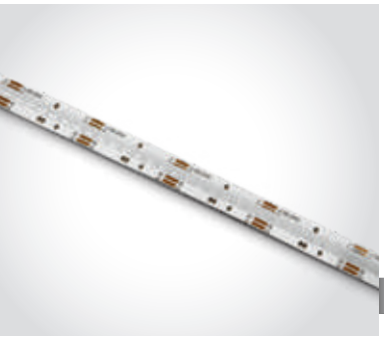

7846/RGB | 15W/m | COB | 840LEDs/m | RGB

Supplied in 5m roll / 3M Double face adhesive.

LED BUILT IN · DIMMABLE · CE · 5 YEAR · IP20

Dimming remote control.
Order code 20034.

DALI & Push to DIM controller.
Order code 89100LP.

Cut every 2,5cm
(21-LED segment)

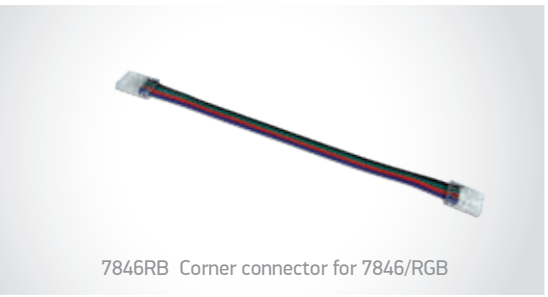

7846RB Corner connector for 7846/RGB

7846RC Connector for 7846/RGB

7846RP Power supply for 7846/RGB

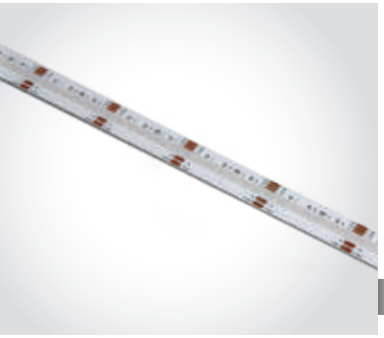

7846/RGBW | 18W/m | COB | 840LEDs/m

Supplied in 5m roll / 3M Double face adhesive.

LED BUILT IN · DIMMABLE · CE · 5 YEAR · IP20

Dimming remote control.
Order code 20036.

DALI & Push to DIM controller.
Order code 89100LP.

Cut every 3,3cm
(28-LED segment)

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7830/RGB	RGB	-	14,4W/m	-	24V DC	III	40	Requires 24V DC driver
7830/RGBW	RGB + Warm white	RGB + 3000K	RGB 14,4W/m + WW 4,8W/m	408lm/m (3000K)	24V DC	III	40	Requires 24V DC driver
7846/RGB	RGB	-	15W/m	-	24V DC	III	50	Requires 24V DC driver
7846/RGBW	RGB + Warm white	RGB + 3000K	RGB 12W/m + WW 6W/m	500lm/m (3000K)	24V DC	III	50	Requires 24V DC driver

The Outdoor RGB & RGBW Strip 24V

7830W/RGB | 14,4W/m | SMD 5050 | 60LEDs/m | Silicone

Supplied in 5m roll / 3M Double face adhesive.

LED BUILT IN · DIMMABLE · CE · 3 YEAR · IP68

Dimming remote control. Order code 20034.

DALI & Push to DIM controller. Order code 89100LP.

7827 Mounting clip for 7830W/RGB



7830W/RGBW | 19,2W/m | SMD 5050 | 60LEDs/m | Silicone

Supplied in 5m roll / 3M Double face adhesive.

LED BUILT IN · DIMMABLE · CE · 3 YEAR · IP68

Dimming remote control. Order code 20036.

DALI & Push to DIM controller. Order code 89100LP.

7827A Mounting clip for 7830W/RGBW



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7830W/RGB	RGB	-	14,4W/m	-	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7830W/RGBW	RGB + Warm white	RGB + 3000K	RGB 14,4W/m + WW 4,8W/m	367lm/m (3000K)	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

Digital SPI Strips

7940/B

7940 | Wall-to-wall kit | Aluminium | Suitable for LED Strips up to 15mm

Requires 7940A/B or 7940B/B.

CE 5 YEAR 20

1 Mounting Base
2 Rod
3 Connector

Base Diameter 62mm



7940A/B

7940A | 10m Metal belt for 7940

CE 5 YEAR 20

7940B | 20m Metal belt for 7940

Suitable for LED Strips up to 15mm.

7940B/B

7820B/RGBW | 19W/m | SMD | 60LEDs/m | SPI | TUYA

3M Double face adhesive.

new

IP20

LED BUILT IN 80 CRI DIMMABLE CE 3 YEAR

Supplied in 5m roll.

40 preprogrammed modes.

tuya

Cut every 10cm

10mm

7820C/RGBW | 19W/m | SMD | 60LEDs/m | SPI | TUYA

3M Double face adhesive.

new

IP20

LED BUILT IN 80 CRI DIMMABLE CE 3 YEAR

Supplied in 10m roll.

40 preprogrammed modes.

tuya

Cut every 10cm

10mm

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820B/RGBW	RGB + Warm white	RGB + 3000K	19W/m	292lm/m (3000K)	24V DC	III	25	Set of LED strip+remote / Requires 24V DC driver
7820C/RGBW	RGB + Warm white	RGB + 3000K	19W/m	292lm/m (3000K)	24V DC	III	25	Set of LED strip+remote / Requires 24V DC driver

The Flexible Lens Strip
Asymmetric

7890 | 18W/m | SMD | Silicone

new

IP65

LED BUILT IN

85 CRI

DIMMABLE

2 YEAR

Supplied in 5m roll.

7890E Set end caps
7890F Fixing clip
7890FL Flexible fixing profile



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7890/C	Cool white	4000K	18W/m	1620lm/m	15x45°	24V DC	III	100cm	4	Requires 24V DC driver / Avoid direct sunlight
7890/W	Warm white	3000K	18W/m	1620lm/m	15x45°	24V DC	III	100cm	4	Requires 24V DC driver / Avoid direct sunlight

The Dark Light Profiles

7903/W | 2m Surface profile + PC opal diffuser | Aluminium

5 YEAR

30

DARK LIGHT

Complete with 2 pairs end caps & 6pcs fixing clips.

Optional black diffuser. Order code 030248/B.

FOR LED STRIPS

IP20	IP65
10W/m	5W/m



The Dark Light Profiles

7903R/W | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

20

DARK LIGHT

Complete with 2 pairs end caps & 6pcs fixing clips.

Optional black diffuser. Order code 030248/B.

24x2000mm

27mm

FOR LED STRIPS

IP20	IP65
10W/m	5W/m



7903TR/W | 2m Trimless profile + PC opal diffuser | Aluminium

5 YEAR

16

DARK LIGHT

Complete with 2 pairs end caps.

Optional black diffuser. Order code 030248/B.

24x2000mm

25mm

FOR LED STRIPS

IP20	IP65
10W/m	5W/m



7903TR/B | 2m Trimless profile + PC opal diffuser | Aluminium

5 YEAR

16

DARK LIGHT

Complete with 2 pairs end caps.

Optional black diffuser. Order code 030248/B.

24x2000mm

25mm

FOR LED STRIPS

IP20	IP65
10W/m	5W/m



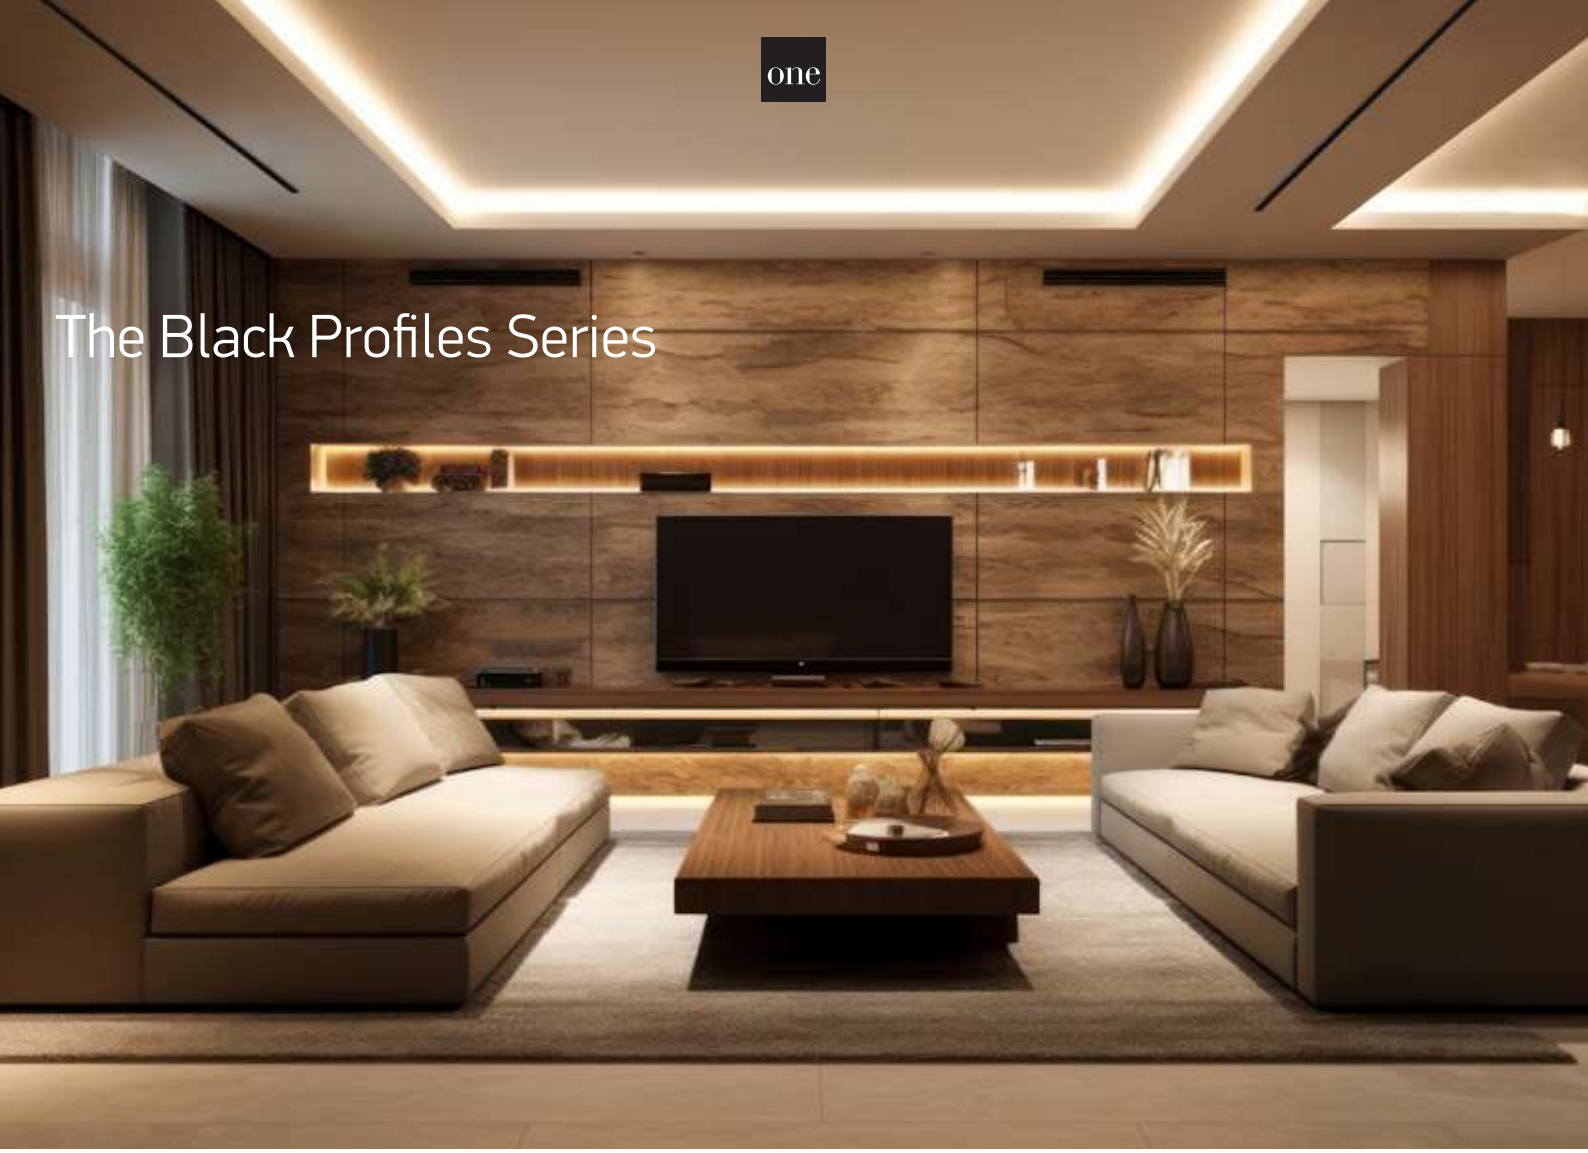

The Black Profiles Series

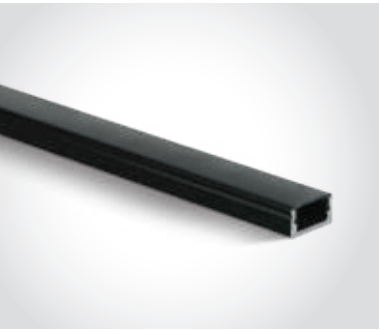

7902/B/B | 2m Surface profile + PC black diffuser | Aluminium

5 YEAR

25

Complete with 2 pairs end caps & 6pcs fixing clips.

FOR LED STRIPS

IP20
10W/m

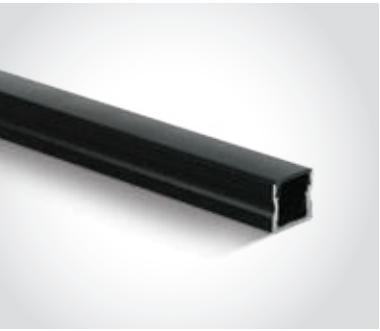

7904/B/B | 2m Surface profile + PC black diffuser | Aluminium

5 YEAR

20

Complete with 2 pairs end caps & 6pcs fixing clips.

FOR LED STRIPS

IP20	IP65
15W/m	5W/m



7912/B/B | 2m Surface / Suspended profile + PC black diffuser | Aluminium

5 YEAR

12

Complete with 2 pairs end caps.



Optional Trimless kit (10pcs). Order code 7838M.

Optional suspension wire (1pc). Order code 7900P.

Optional 180° connector. Order code 7900C.

Optional 90° connector. Order code 7900R.

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



The Black Profiles Series

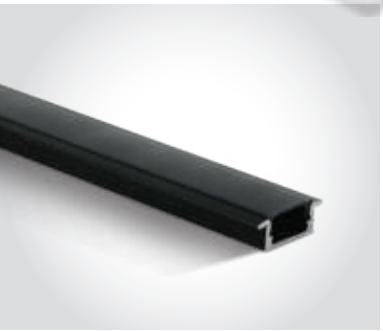

7902R/B/B | 2m Recessed profile + PC black diffuser | Aluminium

5 YEAR

25

Complete with 2 pairs end caps.

18x2000mm

10mm

FOR LED STRIPS

IP20
10W/m



7912R/B/B | 2m Recessed profile + PC black diffuser | Aluminium

5 YEAR

16

Complete with 2 pairs end caps & 6pcs fixing clips.

25x2000mm

30mm

FOR LED STRIPS

IP20	IP65
25W/m	10W/m



7910R/B/B | 2m Recessed profile + PC black diffuser | Aluminium

5 YEAR

12

Complete with 2 pairs end caps & 4pcs fixing clips with screws.

40x2000mm

40mm

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



7901TR/B | 2m Trimless profile + PC black diffuser | Aluminium

5 YEAR

2

Complete with 2 pairs end caps.

13x2000mm

FOR LED STRIPS

IP20	IP65
10W/m	5W/m



7904TR/B | 2m Trimless profile + PC black diffuser | Aluminium

5 YEAR

2

Complete with 2 pairs end caps.

30x2000mm

FOR LED STRIPS

IP20	IP65
15W/m	5W/m



Surface Slim Profiles

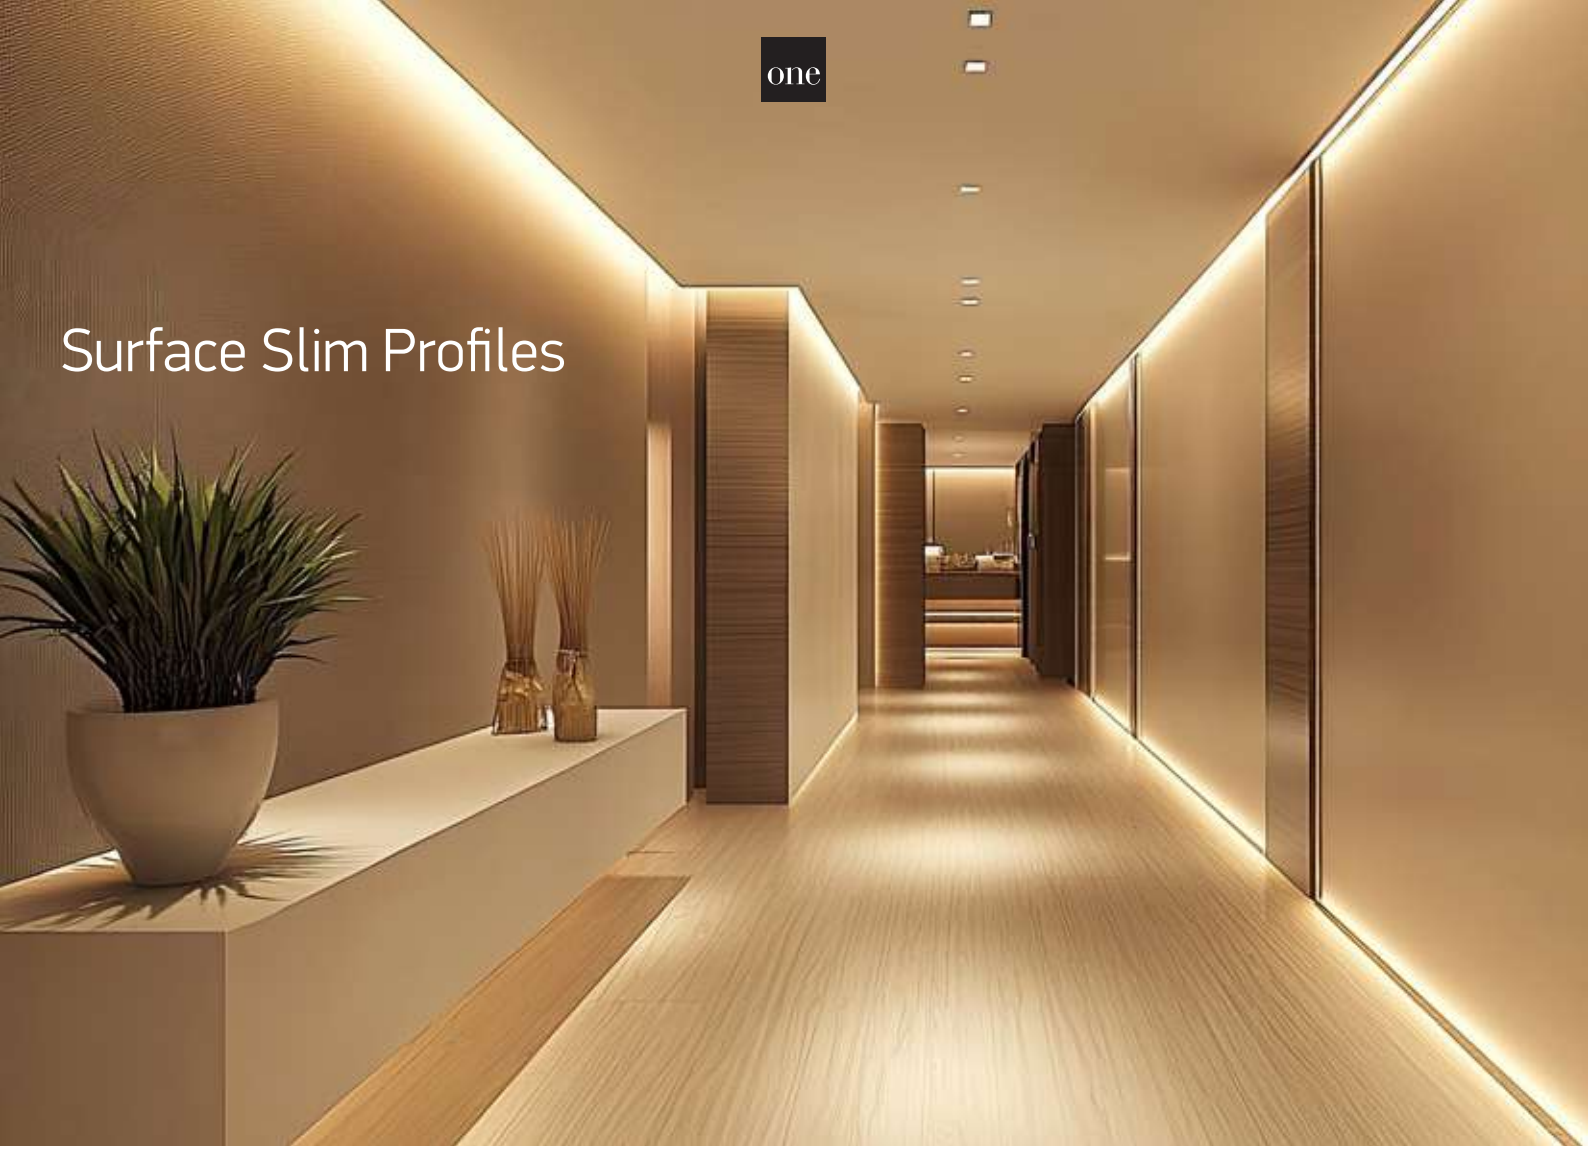

7900/W

7900 | 2m Profile for heat dissipation | Aluminium

Suitable for LED Strips 12mm.

5 YEAR

50

7900/AL

FOR LED STRIPS

IP20	IP65
30W/m	15W/m

7901/W

7901 | 2m Surface profile + PC opal diffuser | Aluminium

5 YEAR

2

7901/B

7901/AL

Complete with 2 pairs end caps & 6pcs metal fixing clips.

FOR LED STRIPS

IP20
10W/m



7902/W

7902 | 2m Surface profile + PC opal diffuser | Aluminium

5 YEAR

2

7902/B

7902/AL

Complete with 2 pairs end caps & 6pcs fixing clips.

FOR LED STRIPS

IP20
10W/m

Surface Profiles

7904/W

7904 | 2m Surface profile + PC opal diffuser | Aluminium

5 YEAR

2

7904/B

7904/AL

Complete with 2 pairs end caps & 6pcs fixing clips.

FOR LED STRIPS

IP20	IP65
15W/m	5W/m



7905/W

7905 | 2m Surface profile + PC opal diffuser | Aluminium

5 YEAR

2

7905/B

7905/AL

Complete with 2 pairs end caps & 6pcs fixing clips.

FOR LED STRIPS

IP20	IP65
15W/m	8W/m



Surface/Suspended Wide Profiles

External driver

7912/W | 2m Surface/Suspended profile + PC opal diffuser | Aluminium

5 YEAR

12

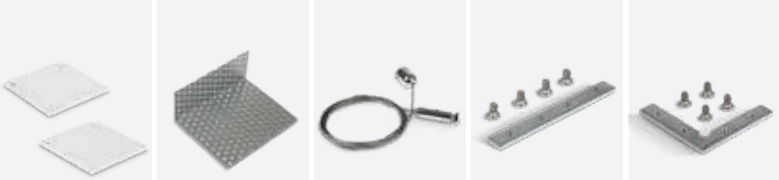

Complete with 2 pairs end caps.

Optional Trimless kit (10pcs). Order code 7838M.

Optional suspension wire (1pc). Order code 7900P.

Optional 180° connector. Order code 7900C.

Optional 90° connector. Order code 7900R.

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



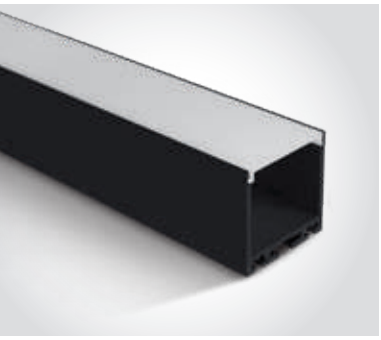

7912/B | 2m Surface/Suspended profile + PC opal diffuser | Aluminium

5 YEAR

12

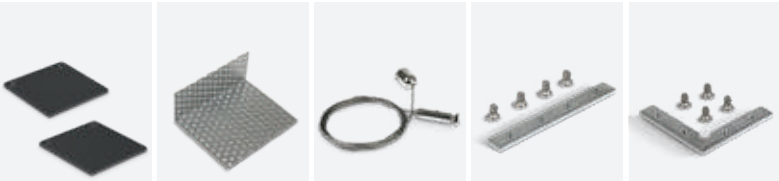

Complete with 2 pairs end caps.

Optional Trimless kit (10pcs). Order code 7838M.

Optional suspension wire (1pc). Order code 7900P.

Optional 180° connector. Order code 7900C.

Optional 90° connector. Order code 7900R.

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



7912/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

5 YEAR

12

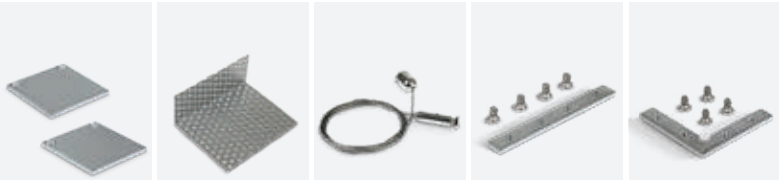

Complete with 2 pairs end caps.

Optional Trimless kit (10pcs). Order code 7838M.

Optional suspension wire (1pc). Order code 7900P.

Optional 180° connector. Order code 7900C.

Optional 90° connector. Order code 7900R.

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



7912A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

5 YEAR

6

Complete with 2 pairs end caps.

Optional Trimless kit (10pcs). Order code 7838M.

Optional suspension wire (1pc). Order code 7900P.

Optional 180° connector. Order code 7900C.

Optional 90° connector. Order code 7900R.

FOR LED STRIPS

IP20	IP65
40W/m	20W/m



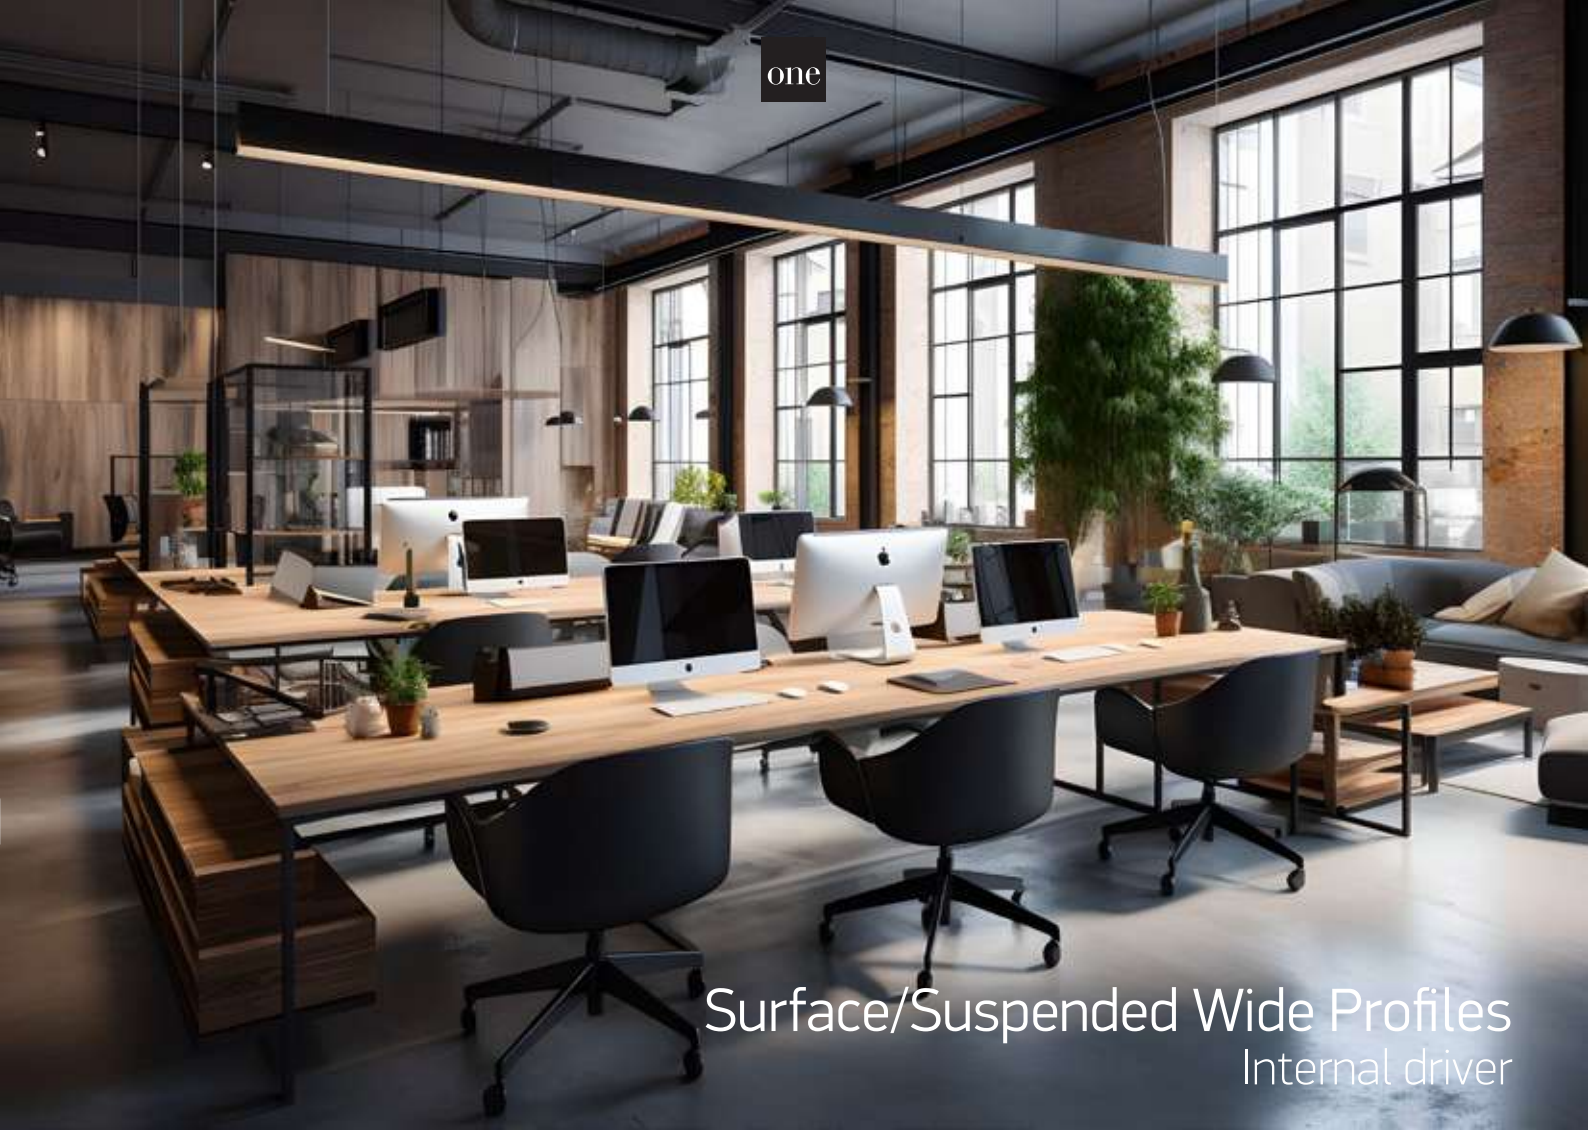

Surface/Suspended Wide Profiles
Internal driver

7910/W | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

Use drivers on pages 695, 696 & 697

5 YEAR

8

Complete with 2 pairs end caps.



Optional Trimless kit (10pcs). Order code 7838M.

Optional suspension wire (1pc). Order code 7900P.

Optional 180° connector. Order code 7900C.

Optional 90° connector. Order code 7900R.

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



7910/B | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

Use drivers on pages 695, 696 & 697

5 YEAR

8

Complete with 2 pairs end caps.



Optional Trimless kit (10pcs). Order code 7838M.

Optional suspension wire (1pc). Order code 7900P.

Optional 180° connector. Order code 7900C.

Optional 90° connector. Order code 7900R.

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



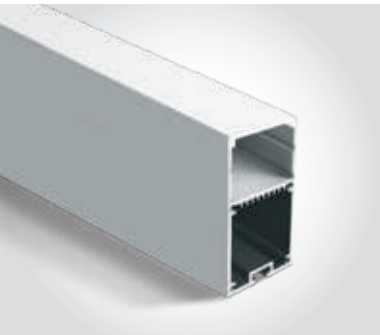

7910/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

Use drivers on pages 695, 696 & 697

5 YEAR

8

Complete with 2 pairs end caps.



Optional Trimless kit (10pcs). Order code 7838M.

Optional suspension wire (1pc). Order code 7900P.

Optional 180° connector. Order code 7900C.

Optional 90° connector. Order code 7900R.

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



Surface/Suspended Wide Profiles
Internal driver

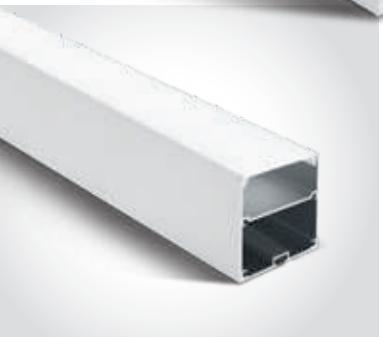

7910A/W | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

Use drivers on pages 695, 696 & 697

5 YEAR | 6

Complete with 2 pairs end caps.

Optional suspension wire (1pc). Order code 7900P.

Optional 180° connector. Order code 7900C.

Optional 90° connector. Order code 7900R.

FOR LED STRIPS

IP20	IP65
50W/m	20W/m



7910A/B | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

Use drivers on pages 695, 696 & 697

5 YEAR | 6

Complete with 2 pairs end caps.

Optional suspension wire (1pc). Order code 7900P.

Optional 180° connector. Order code 7900C.

Optional 90° connector. Order code 7900R.

FOR LED STRIPS

IP20	IP65
50W/m	20W/m



7910A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

Use drivers on pages 695, 696 & 697

5 YEAR | 6

Complete with 2 pairs end caps.

Optional suspension wire (1pc). Order code 7900P.

Optional 180° connector. Order code 7900C.

Optional 90° connector. Order code 7900R.

FOR LED STRIPS

IP20	IP65
50W/m	20W/m



050122 | Profile power supply base | With power cable | Aluminium

III

5 YEAR | 30

IP20


050122/B
Black

050122/G
Grey



Side Light Surface & Suspended Profiles

7906/AL | 2m Surface profile + PMMA opal square diffuser | Aluminium

5 YEAR

64

Complete with 2 pairs end caps.

FOR LED STRIPS

IP20	IP65
15W/m	8W/m



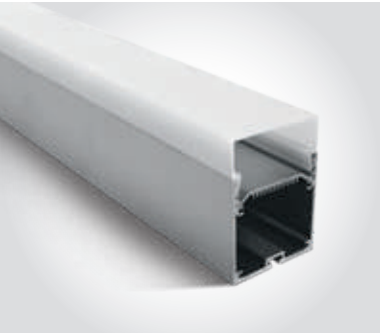

7906D/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium

Use drivers on pages 695, 696 & 697

5 YEAR

6

Complete with 2 pairs end caps.

Optional suspension wire (1pc). Order code 7900P.

FOR LED STRIPS

IP20	IP65
50W/m	20W/m



one

Recessed Profiles

7901R/W | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

30

new

Complete with 2 pairs end caps.

8x2000mm

13mm

FOR LED STRIPS
IP20
10W/m



7901R/AL | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

30

Complete with 2 pairs end caps.

8x2000mm

13mm

FOR LED STRIPS
IP20
10W/m



7902R/W | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

2

Complete with 2 pairs end caps.

18x2000mm

10mm

FOR LED STRIPS
IP20
10W/m



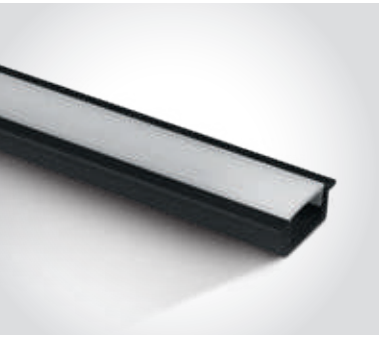

7902R/B | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

2

Complete with 2 pairs end caps.

18x2000mm

10mm

FOR LED STRIPS
IP20
10W/m



7902R/AL | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

2

Complete with 2 pairs end caps.

18x2000mm

10mm

FOR LED STRIPS
IP20
10W/m



Recessed Profiles

7904R/W | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

2

Complete with 2 pairs end caps.

18x2000mm

16mm

FOR LED STRIPS

IP20	IP65
15W/m	5W/m



7904R/B | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

2

Complete with 2 pairs end caps.

18x2000mm

16mm

FOR LED STRIPS

IP20	IP65
15W/m	5W/m



7904R/AL | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

2

Complete with 2 pairs end caps.

18x2000mm

16mm

FOR LED STRIPS

IP20	IP65
15W/m	5W/m



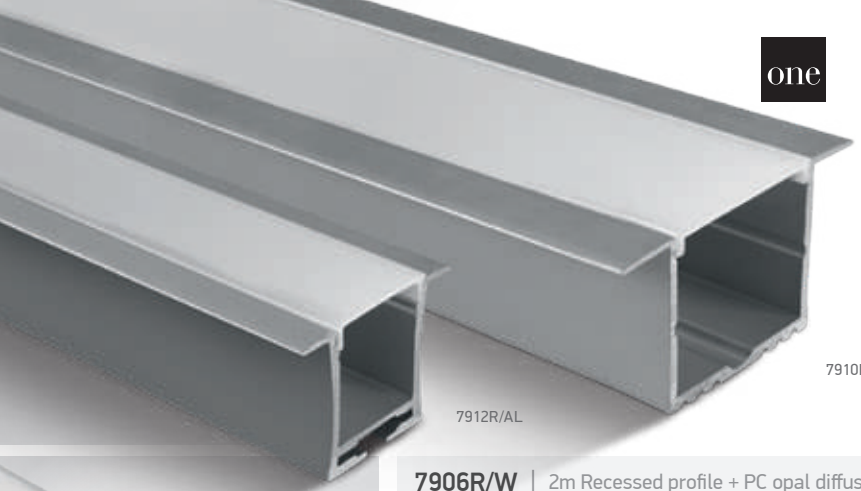

Recessed Profiles

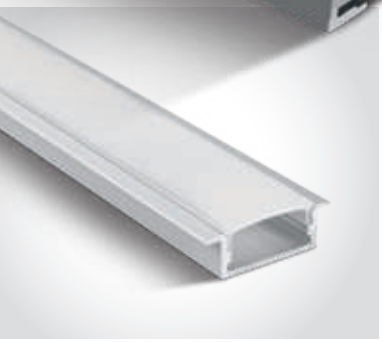

7906R/W | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

2

Complete with 2 pairs end caps.

25x2000mm

12mm

FOR LED STRIPS

IP20	IP65
15W/m	5W/m



7906R/AL | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

2

Complete with 2 pairs end caps.

25x2000mm

12mm

FOR LED STRIPS

IP20	IP65
15W/m	5W/m



7912R/W | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

16

Complete with 2 pairs end caps & 6pcs fixing clips.

25x2000mm

30mm

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



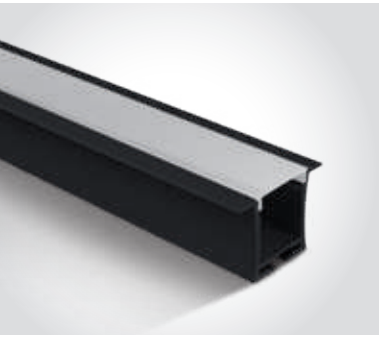

7912R/B | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

16

Complete with 2 pairs end caps & 6pcs fixing clips.

25x2000mm

30mm

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



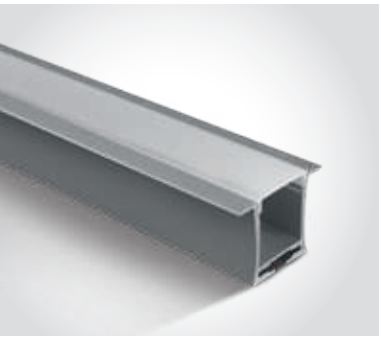

7912R/AL | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

16

Complete with 2 pairs end caps & 6pcs fixing clips.

25x2000mm

30mm

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



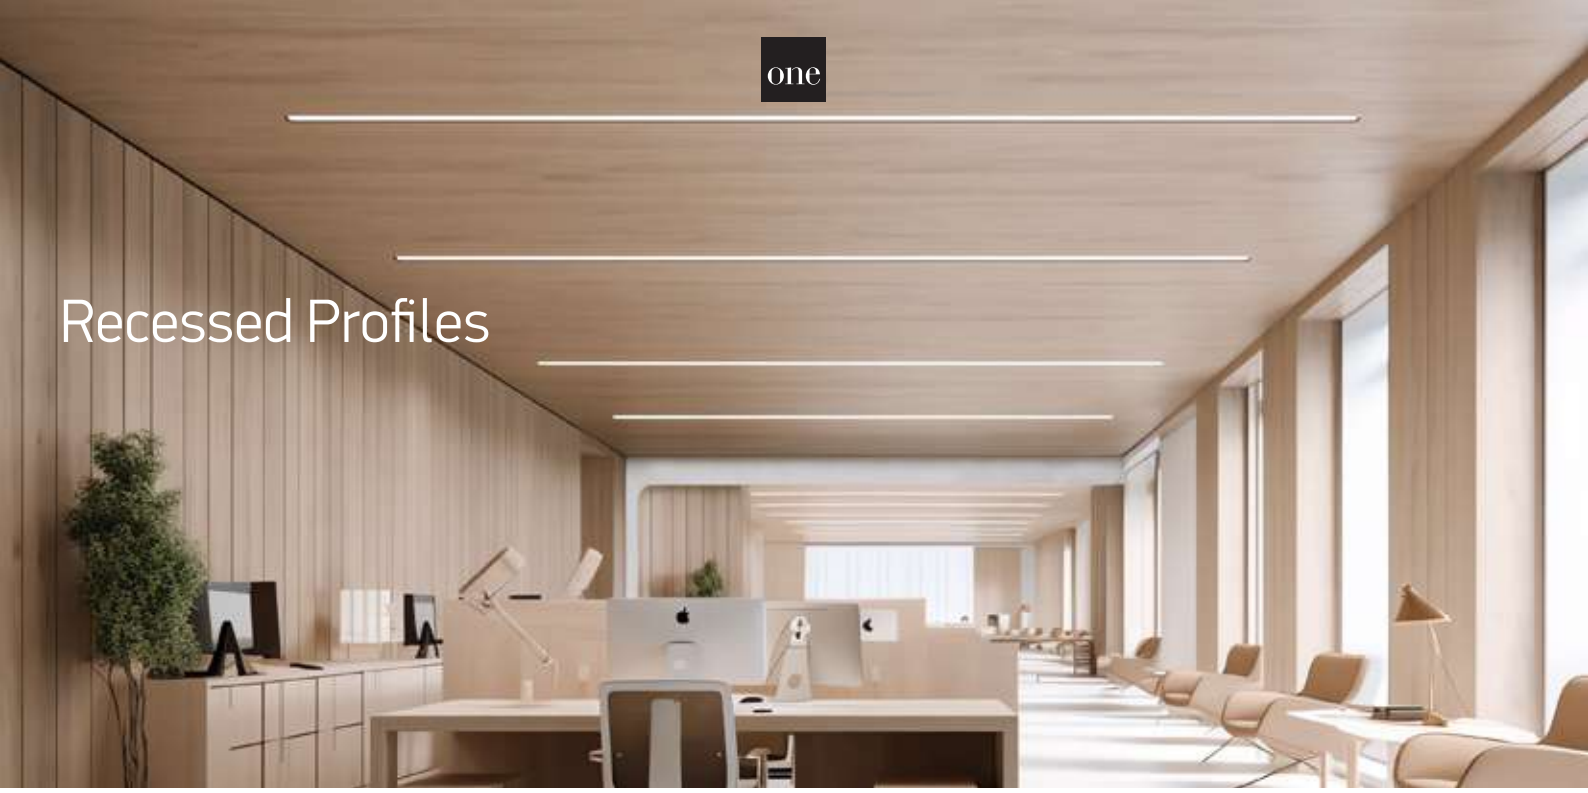

Recessed Profiles

7910R/W | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

12

Complete with 2 pairs end caps & 4pcs fixing clips with screws.

40x2000mm

40mm

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



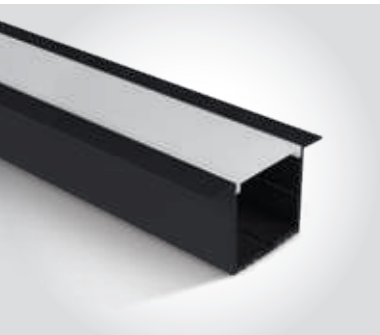

7910R/B | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

12

Complete with 2 pairs end caps & 4pcs fixing clips with screws.

40x2000mm

40mm

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



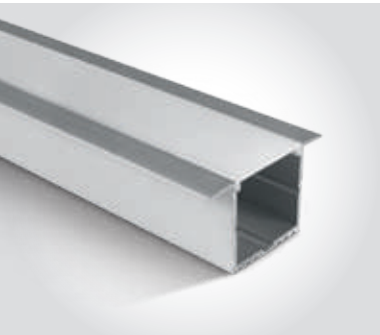

7910R/AL | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

12



Complete with 2 pairs end caps & 4pcs fixing clips with screws.

40x2000mm

40mm

FOR LED STRIPS

IP20	IP65
30W/m	15W/m



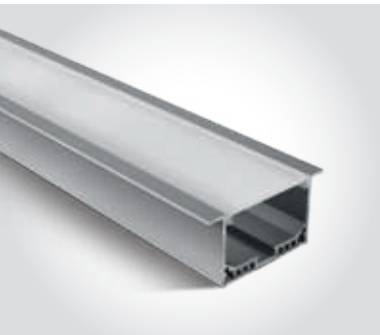

7910AR/AL | 2m Recessed profile + PC opal diffuser | Aluminium

5 YEAR

6

Complete with 2 pairs end caps & 4pcs metal fixing clips.

52x2000mm

35mm

FOR LED STRIPS

IP20	IP65
50W/m	20W/m



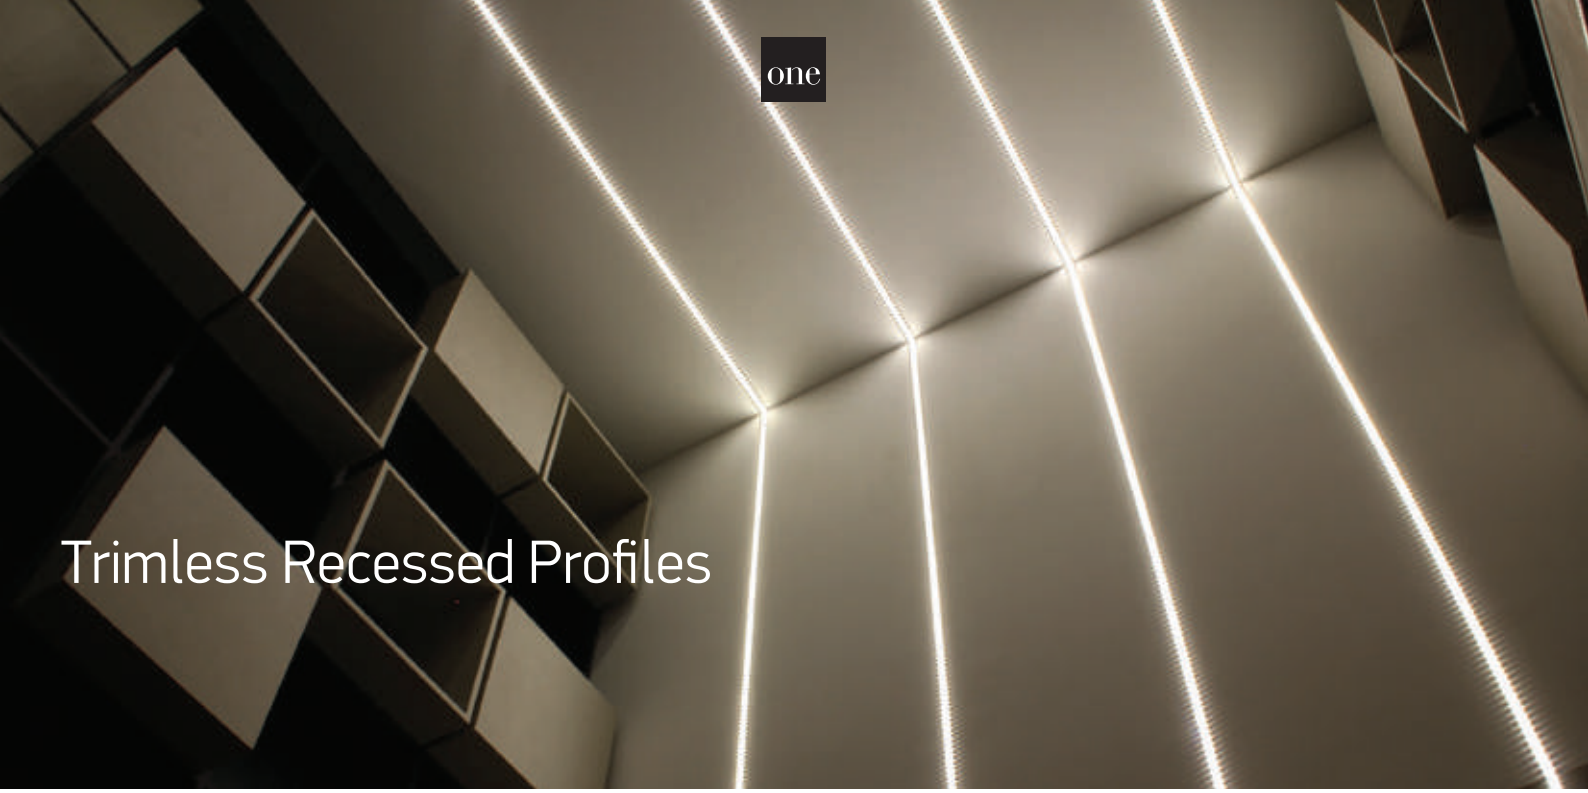

Trimless Recessed Profiles

7900TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium

5 YEAR

40

Complete with 2 pairs end caps.

9x2000mm

FOR LED STRIPS

IP20
10W/m



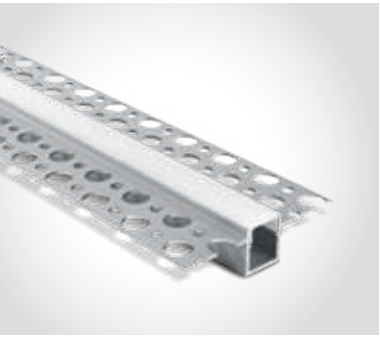

7901TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium

5 YEAR

2

Complete with 2 pairs end caps.

13x2000mm

FOR LED STRIPS

IP20	IP65
15W/m	5W/m



7904TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium

5 YEAR

4

Complete with 2 pairs end caps.

30x2000mm

FOR LED STRIPS

IP20	IP65
15W/m	5W/m



7906TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium

5 YEAR

2

Complete with 2 pairs end caps.

50x2000mm

FOR LED STRIPS

IP20	IP65
20W/m	10W/m



Trimless Edge Recessed Profile

7909TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium

5 YEAR

36

Complete with 2 pairs end caps.

25mm

FOR LED STRIPS

IP20	IP65
20W/m	10W/m



Triangular Profiles

7908A/AL | 2m Triangle profile + PC opal diffuser | Aluminium

5 YEAR

4

Complete with 2 pairs end caps & 6pcs surface mounting clips.

FOR LED STRIPS

IP20	IP65
10W/m	5W/m



Shelf illumination

7908/AL | 2m Triangle profile + PC opal diffuser | Aluminium

5 YEAR

40

Complete with 2 pairs end caps & 1pc 180° connector.

FOR LED STRIPS

IP20	IP65
20W/m	10W/m



Shelf illumination

Skirting Profile

7922/W | 2m Wall profile + PC opal diffuser | Aluminium

Suitable for LED Strips 8mm.

5 YEAR

12

Complete with 2 pairs end caps.

FOR LED STRIPS
IP20
5W/m



Special Applications Profile

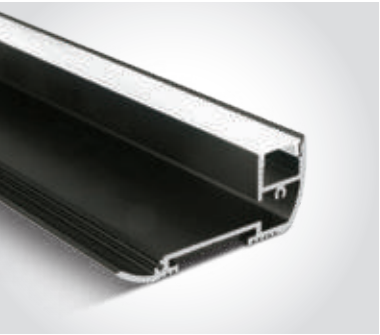

7920/B | 2m Step profile + PC opal diffuser | Aluminium

5 YEAR

10

Complete with 4pcs end caps.

FOR LED STRIPS

IP20

5W/m



IP67 & IP68 Profiles

7918/W | 2m White profile + PMMA opal diffuser | Plastic

5 YEAR

100

IP68



Complete with 2 pairs end caps & 6pcs fixing clips.

FOR LED STRIPS
IP20
10W/m



7914R/AL | 2m Inground profile + 3mm PC opal diffuser | Aluminium

5 YEAR

20

IP67

Complete with 2 pairs end caps.

23x2000mm

12mm

FOR LED STRIPS
IP20
10W/m



7915R/AL | 2m Inground profile + 3mm PC opal diffuser | Aluminium

5 YEAR

80

IP67

Complete with 2 pairs end caps.

22x2000mm

14mm

FOR LED STRIPS
IP20
10W/m



Modules For Signs

7840 | 0,72W (3LEDs x 0,24W)

Double face adhesive.

IP65 offer

LED BUILT IN · DIMMABLE · CE · 3 YEAR

Supplied in 10pcs chain.
Total length 1,7m.



7842 | 1,44W (4LEDs x 0,36W)

Double face adhesive.

IP65 offer

LED BUILT IN · DIMMABLE · CE · 3 YEAR

Supplied in 10pcs chain.
Total length 1,25m.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7840/Y	Yellow	-	0,72W	-	12V DC	III	100	Requires 12V DC driver
7842/BL	Blue	-	1,44W	-	12V DC	III	100	Requires 12V DC driver
7842/Y	Yellow	-	1,44W	-	12V DC	III	100	Requires 12V DC driver

Modules for Signs & Backlit Applications

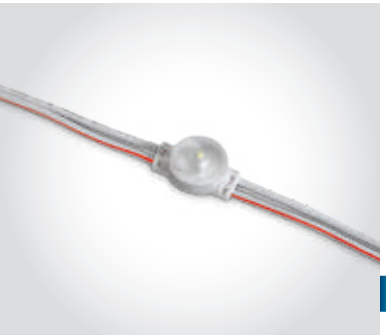

7840A | 0,5W | 2,5W/m | SMD 2835 | Plastic

Modules for signs.

LED BUILT IN · DIMMABLE · CE · 3 YEAR · IP65

Supplied in 50pcs chain.
Total length 10m.



7840B | 2x0,5W | 5W/m | SMD 2835 | Plastic

Modules for signs.

LED BUILT IN · DIMMABLE · CE · 3 YEAR · IP65

Supplied in 50pcs chain.
Total length 10m.



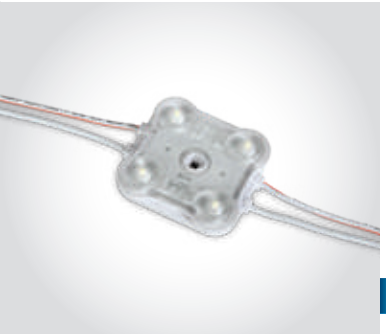

7840D | 4x0,5W | 10W/m | SMD 2835 | Plastic

Modules for signs.

LED BUILT IN · DIMMABLE · CE · 3 YEAR · IP65

Supplied in 50pcs chain.
Total length 10m.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7840A/D	Daylight	6000K	0,5W	45lm	12V DC	III	50	Requires 12V DC driver
7840B/D	Daylight	6000K	1W	90lm	12V DC	III	30	Requires 12V DC driver
7840D/D	Daylight	6000K	2W	180lm	12V DC	III	20	Requires 12V DC driver

The 230V Solid LED Strip
Plastic

38114B | 14W | SMD | Plastic

Can be connected in line / Connect 7 fittings maximum.

LED BUILT IN

80 CRI

QUICK FIX

CE

2 YEAR

IP20

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38114B/C	Cool white	4000K	14W	1540lm	230V		120cm	30	Complete with driver

The 230V Solid LED CCT V Strip
Plastic

38104B | 4W | SMD | Plastic

Can be connected in line / Connect 25 fittings maximum.

LED BUILT IN
80 CRI
CCT V
QUICK FIX
2 YEAR
IP20

38108B | 8W | SMD | Plastic

Can be connected in line / Connect 12 fittings maximum.

LED BUILT IN
80 CRI
CCT V
QUICK FIX
2 YEAR
IP20

38114B | 14W | SMD | Plastic

Can be connected in line / Connect 7 fittings maximum.

LED BUILT IN
80 CRI
CCT V
QUICK FIX
2 YEAR
IP20

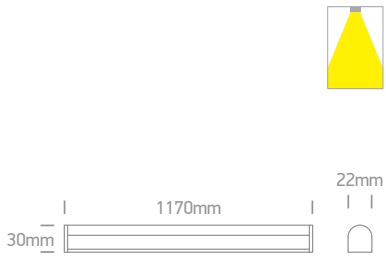

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38104B/V	CCT V	3000K-4000K-6000K	4W	440lm	230V		120cm	30	Complete with driver
38108B/V	CCT V	3000K-4000K-6000K	8W	880lm	230V		120cm	30	Complete with driver
38114B/V	CCT V	3000K-4000K-6000K	14W	1540lm	230V		120cm	30	Complete with driver

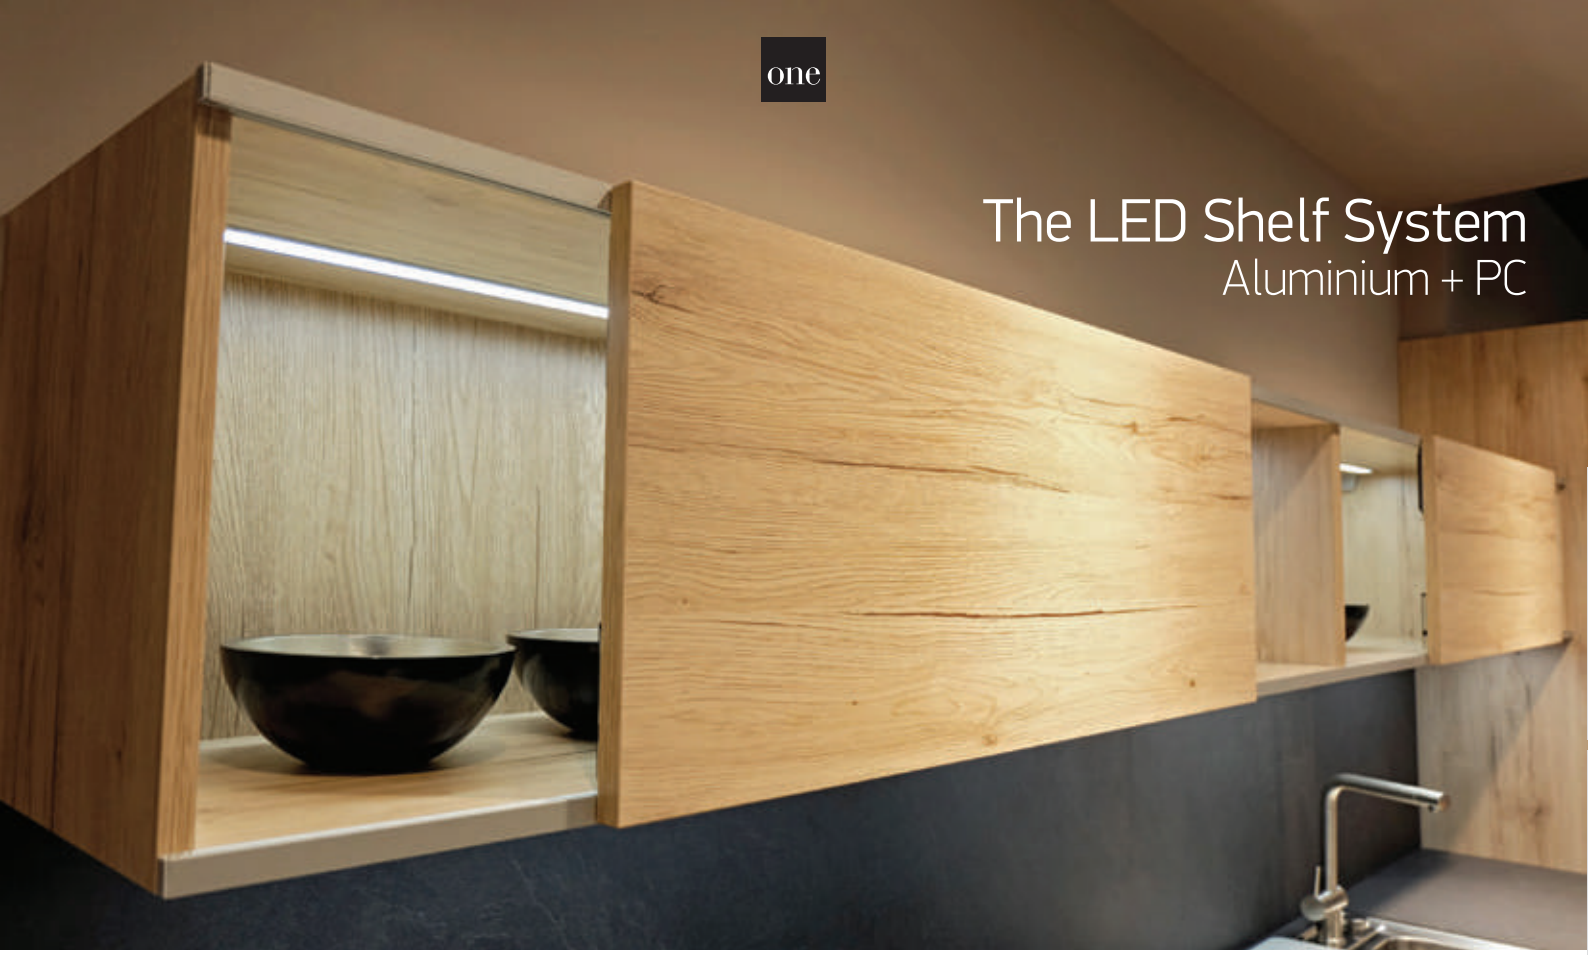

The LED Shelf System
Aluminium + PC

38103 | 3W | SMD 3014 | Aluminium + PC

LED BUILT IN
80 CRI
DIMMABLE
QUICK FIX
CE 2 YEAR
IP20

2m maximum each line.



38105 | 5W | SMD 3014 | Aluminium + PC

LED BUILT IN
80 CRI
DIMMABLE
QUICK FIX
CE 2 YEAR
IP20

2m maximum each line.



38110 | 10W | SMD 3014 | Aluminium + PC

LED BUILT IN
80 CRI
DIMMABLE
QUICK FIX
CE 2 YEAR
IP20

2m maximum each line.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38103/W	Warm white	3000K	3W	225lm	24V DC	III	100	Requires 24V DC driver / Includes mounting clips (2pcs), screws (2pcs)
38105/W	Warm white	3000K	5W	375lm	24V DC	III	50	Requires 24V DC driver / Includes mounting clips (2pcs), screws (2pcs)
38110/W	Warm white	3000K	10W	750lm	24V DC	III	25	Requires 24V DC driver / Includes mounting clips (3pcs), screws (3pcs)

The LED Shelf System Accessories

38102A | Touch ON/OFF and dimmer | Max. 60W | 24V DC

2 YEAR

10

IP20



38102B | Wave hand | Door ON/OFF | Max. 60W | 24V DC

2 YEAR

10

IP20







38102C | PIR Sensor | Max. 60W | 24V DC

Adjustable 1min / 5min.

2 YEAR

10

IP20



38101A | Connector for 38103, 38105 & 38110

IP20



38101B | Corner for 38103, 38105 & 38110

IP20



38101C | Power supply cable connector for 38103, 38105 & 38110

100cm

38101D | 8 - Way connection box | 24V DC

100cm

IP20



The 230V IP65 Range

7850 | 6W/m | SMD 2835 | 60LEDs/m | PVC

Cut every 1m.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 2 YEAR · IP65

Supplied in 100m roll.

11mm

7850C Connector

7850P
230V Power supply
for 100m

7850F Fixing clip

7850L Corner connector

7850E End cap

7860R
Shrinking sleeve

7860 | 9W/m | SMD 5730 | 60LEDs/m | PVC

Cut every 1m.

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 2 YEAR · IP65

Supplied in 50m roll.

14mm

7860C Connector

7860P
230V Power supply
for 50m

7860F Fixing clip

7860L Corner connector

7860E End cap

7860R
Shrinking sleeve

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7850/W	Warm white	3000K	6W/m	440lm/m	230V		100m roll	Requires 7850P power supply / Avoid direct sunlight
7860/D	Daylight	6000K	9W/m	750lm/m	230V		50m roll	Requires 7860P power supply / Avoid direct sunlight
7860/C	Cool white	4000K	9W/m	750lm/m	230V		50m roll	Requires 7860P power supply / Avoid direct sunlight
7860/W	Warm white	3000K	9W/m	750lm/m	230V		50m roll	Requires 7860P power supply / Avoid direct sunlight

The 230V IP65 Range

7862 | 13W/m | SMD 5730 | 120LEDs/m | PVC

Cut every 1m.

LED BUILT IN | 80 CRI | TRIAC DIMMABLE | 2 YEAR

Supplied in 30m roll.

18mm

7862C Connector

7862P
230V Power supply
for 30m

7862F Fixing clip

7862L Corner connector

7862E End cap

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7862/C	Cool white	4000K	13W/m	1050lm/m	230V		30m roll	Requires 7862P power supply / Avoid direct sunlight
7862/W	Warm white	3000K	13W/m	1000lm/m	230V		30m roll	Requires 7862P power supply / Avoid direct sunlight

230V Neon Flex Lightline

7864 | 9W/m | SMD 2835 | 120LEDs/m | PVC

Supplied in 50m roll / Cut every 1m.

7864/C

LED BUILT IN

80 CRI

TRIAC DIMMABLE

2 YEAR

IP65

7864/W

8mm

12mm

7864C
Connector + shrinking sleeve.

7864P
230V Power supply 50m max.

7864F Fixing clip.

7864E End cap.

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7864/C	Cool white	4000K	9W/m	270lm/m	230V		50m roll	Requires 7864P power supply / Avoid direct sunlight
7864/W	Warm white	3000K	9W/m	270lm/m	230V		50m roll	Requires 7864P power supply / Avoid direct sunlight

230V COB Flex Lightline

7872 | 12W/m | COB | 480LEDs/m | Silicone

3M double face adhesive.

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CE · 3 YEAR

Supplied in 50m roll.

7872C
Connector for 7872.

7872P
Power supply cable for 7872 / 50m.

7872E
End cap for 7872.

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7872/C	Cool white	4000K	12W/m	840lm/m	140°	230V		100cm	50m roll	Supplied with power supply EU plug / Avoid direct sunlight
7872/W	Warm white	3000K	12W/m	800lm/m	140°	230V		100cm	50m roll	Supplied with power supply EU plug / Avoid direct sunlight

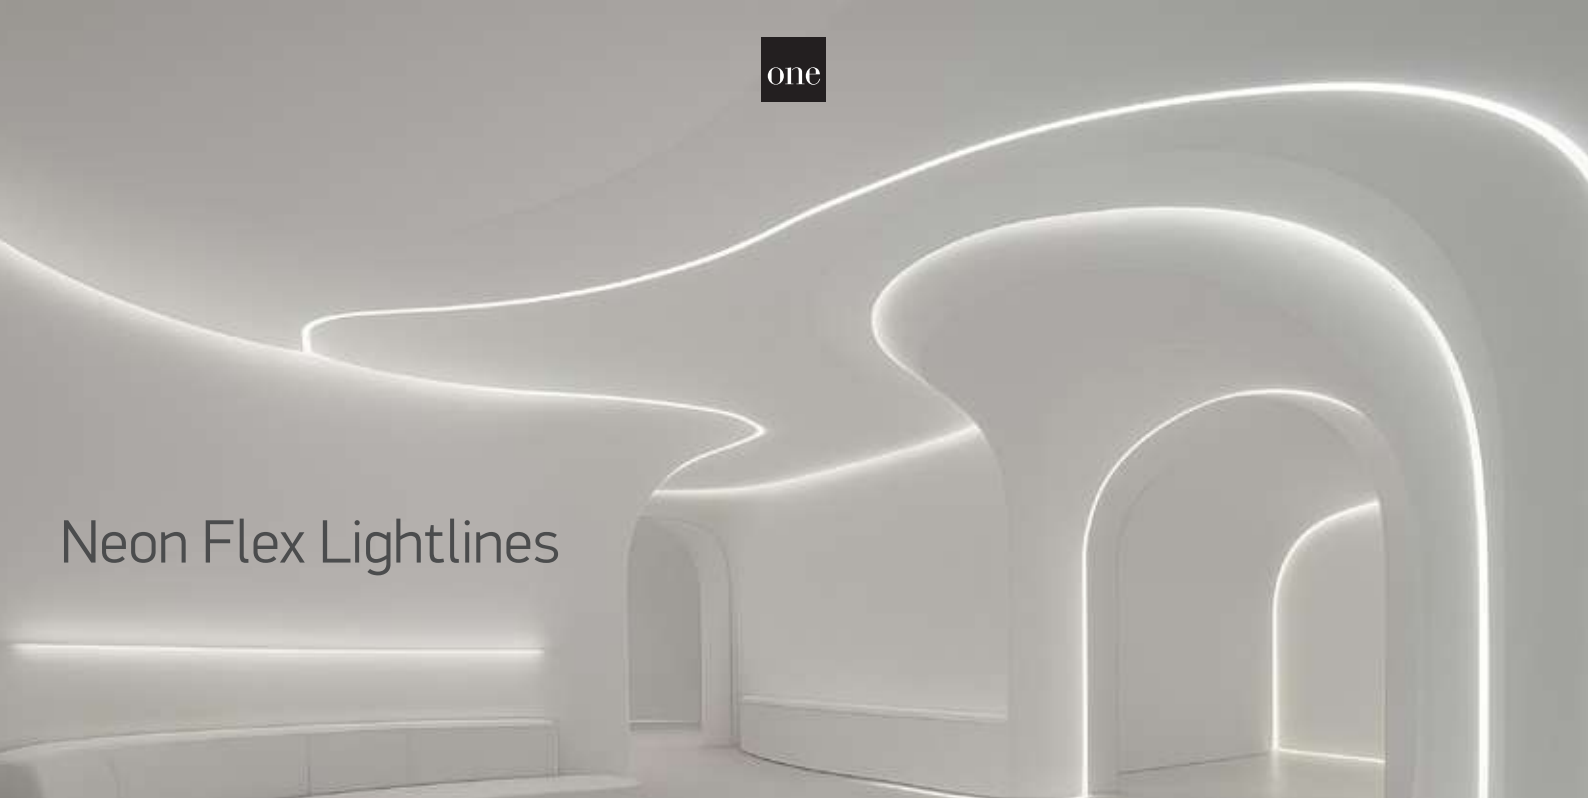

Neon Flex Lightlines

7901AATR/W | 2m Bendable trimless profile | Aluminium | Suitable for 7841A

5 YEAR

4

new

7x2000mm



7901ATR/W | 2m Bendable trimless profile | Aluminium | Suitable for 7841

5 YEAR

4

new

9x2000mm



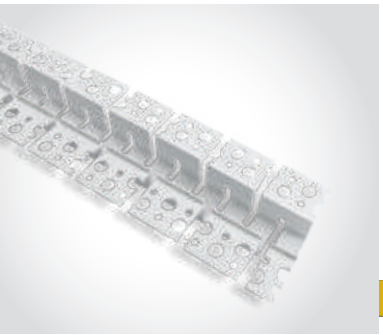

7901BATR/W | 2m Bendable trimless profile | Aluminium | Suitable for 7841B

5 YEAR

2

new

19x2000mm



7901A/W

7901A/W | 7901A/AL | 2m Surface profile | Aluminium | Suitable for 7841 LED Strip

100

new



7901A/AL

Complete with 2 pairs end caps & 6pcs metal fixing clips.



Neon Flex Lightlines

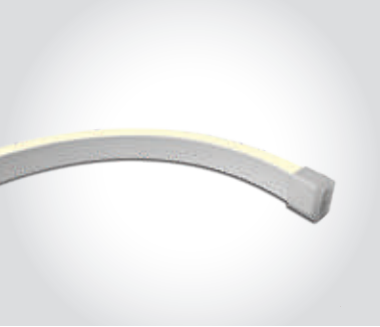

7841A | 10W/m | SMD 2835 | 180LEDs/m | Silicone

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR · IP66

Supplied in 5m roll.

Fixing clips.
Order code 7841AF.



7841 | 14,4W/m | SMD 2835 | 140LEDs/m | Silicone

LED BUILT IN · 90 CRI · DIMMABLE · CE · 5 YEAR · IP66

Supplied in 5m roll.

Fixing clips.
Order code 7841F.



7841B | 12W/m | SMD 2835 | 140LEDs/m | Silicone

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR · IP66

Supplied in 5m roll.

Fixing clips.
Order code 7841BF.



7811 | 10W/m | SMD 2216 | 192 LEDs | Silicone

LED BUILT IN · 90 CRI · DIMMABLE · CE · 3 YEAR · IP67

Supplied in 5m roll.

7811F Fixing clip
7811E End cap



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7841A/C	Cool white	4000K	10W/m	280lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7841A/W	Warm white	3000K	10W/m	280lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7841/C	Cool white	4000K	14,4W/m	360lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7841/W	Warm white	3000K	14,4W/m	320lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight
7841B/C	Cool white	4000K	12W/m	600lm/m	24V DC		10	Requires 24V DC driver / Avoid direct sunlight
7841B/W	Warm white	3000K	12W/m	550lm/m	24V DC		10	Requires 24V DC driver / Avoid direct sunlight
7811/W	Warm white	3000K	10W/m	550lm/m	24V DC		40	Requires 24V DC driver / Avoid direct sunlight

Decorative Light Tubes

7868 | 3,4W/m | LED | 30LEDs/m | Festive lighting | PVC

Connect maximum 100m / Cut every 1m.

LED BUILT IN

2 YEAR

IP65

Supplied in 50m roll.

13mm

7868P
230V Power supply for 50m.

7868F Fixing clip.

7868E End cap.

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7868/D	Daylight	6000K	3,4W/m	230V		50m roll	Complete with 7868P power supply

Decorative Light Stars

7866/BL
Supplied in 10m roll.

7866 | 7W | LED | 100LEDs | Festive lighting | PVC

Connect maximum 100m.

LED BUILT IN · CE · 2 YEAR

IP54

7866F/D
Supplied in 10m roll.

7866F | 7W | LED | 100LEDs | Flashing lights | Festive lighting | PVC

Connect maximum 100m.

LED BUILT IN · CE · 2 YEAR

IP54

7866F/BL
Supplied in 10m roll.

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7866/BL	Blue	-	7W	230V		10	Complete with power supply
7866F/D	Daylight	6000K	7W	230V		10	Complete with power supply
7866F/BL	Blue	-	7W	230V		10	Complete with power supply

Track Lights

Pages 239-272

08

Adjustable Shape Beam
Zoomable

65668T | 12W | COB | Adjustable shape beam | Aluminium

LED BUILT IN

90 CRI

ADJUSTABLE

3 YEAR

IP20



Distance from wall for smallest diameter has ratio x0,4 and for the largest x0,6.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65668T/B/W	Black	Warm white	3000K	12W	350lm	230V		10	Complete with 300mA driver

LED Track Lights
Aluminium

65306BT | 12W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20



65506BT | 20W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20



65406BT | 15W | LED | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65306BT/B/W	Black	Warm white	3000K	12W	960lm	38°	230V		30	Complete with 300mA driver
65506BT/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V		20	Complete with 500mA driver
65406BT/W/W	White	Warm white	3000K	15W	1200lm	38°	230V		24	Complete with 350mA driver

The COB Track Light Range
Aluminium

65611NT/W/W

65611NT | 15W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20



65612NT/W/C

65612NT | 30W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20

65612NT/W/W



65614NT/W/C

65614NT | 42W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20

65614NT/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65611NT/W/W	White	Warm white	3000K	15W	1200lm	38°	230V		10	Complete with 400mA driver
65612NT/W/C	White	Cool white	4000K	30W	2700lm	38°	230V		10	Complete with 750mA driver
65612NT/W/W	White	Warm white	3000K	30W	2700lm	38°	230V		10	Complete with 750mA driver
65614NT/W/C	White	Cool white	4000K	42W	3780lm	38°	230V		10	Complete with 1000mA driver
65614NT/W/W	White	Warm white	3000K	42W	3780lm	38°	230V		10	Complete with 1000mA driver

The COB Track Light Range
Aluminium

65611NT/B/C

65611NT | 15W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20

65611NT/B/W



65612NT/B/W

65612NT | 30W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20



65614NT/B/W

65614NT | 42W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65611NT/B/C	Black	Cool white	4000K	15W	1300lm	38°	230V		10	Complete with 400mA driver
65611NT/B/W	Black	Warm white	3000K	15W	1200lm	38°	230V		10	Complete with 400mA driver
65612NT/B/W	Black	Warm white	3000K	30W	2700lm	38°	230V		10	Complete with 750mA driver
65614NT/B/W	Black	Warm white	3000K	42W	3780lm	38°	230V		10	Complete with 1000mA driver

65660BT/W/W + 050300B/BS

The COB Shop Range
White

65660AT/W/W

65660AT | 20W PV | COB | Aluminium

LED BUILT IN
90 CRI
PV
ADJUSTABLE
CE 5 YEAR
IP20



050300A/W White

050300A/BS Brass

050300AH/B Black with honeycomb

0750A/15 (15°) 0750A/24 (24°)

65660BT/W/W

65660BT | 35W PV | COB | Aluminium

LED BUILT IN
90 CRI
PV
ADJUSTABLE
CE 5 YEAR
IP20



050300B/W White

050300B/BS Brass

0750B/15 (15°)

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65660AT/W/W	White	Warm white	3000K	10W-15W-20W	1200lm-1800lm-2400lm	38°	230V		20	Complete with driver
65660BT/W/W	White	Warm white	3000K	20W-25W-30W-35W	2400lm-3000lm-3600lm-4200lm	38°	230V		10	Complete with driver

The COB Shop Range Dimmable
TRIAC & DALI

65660BTT/W/W

65660BTT | 35W | COB | TRIAC Dimmable | Aluminium

IP20

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · ADJUSTABLE · CE · 5 YEAR



050300B/W White

050300B/BS Brass

0750B/15 (15°)

65660BTL/W/W

65660BTL | 35W | COB | Push to DIM | DALI | Aluminium

Use standard 3 phase track.

IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · PUSH TO DIM · ADJUSTABLE · CE · 5 YEAR

65660BTL/B/W

DALI WIRING DIAGRAM



PUSH TO DIM WIRING DIAGRAM





050300B/W White

050300B/BS Brass

0750B/15 (15°)

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65660BTT/W/C	White	Cool white	4000K	35W	4200lm	38°	230V		10	Complete with dimmable driver
65660BTT/W/W	White	Warm white	3000K	35W	4200lm	38°	230V		10	Complete with dimmable driver
65660BTL/W/C	White	Cool white	4000K	35W	4200lm	38°	230V		10	Complete with DALI driver
65660BTL/W/W	White	Warm white	3000K	35W	4200lm	38°	230V		10	Complete with DALI driver
65660BTL/B/W	Black	Warm white	3000K	35W	4200lm	38°	230V		10	Complete with DALI driver

The COB Shop Range
PV & CCT V

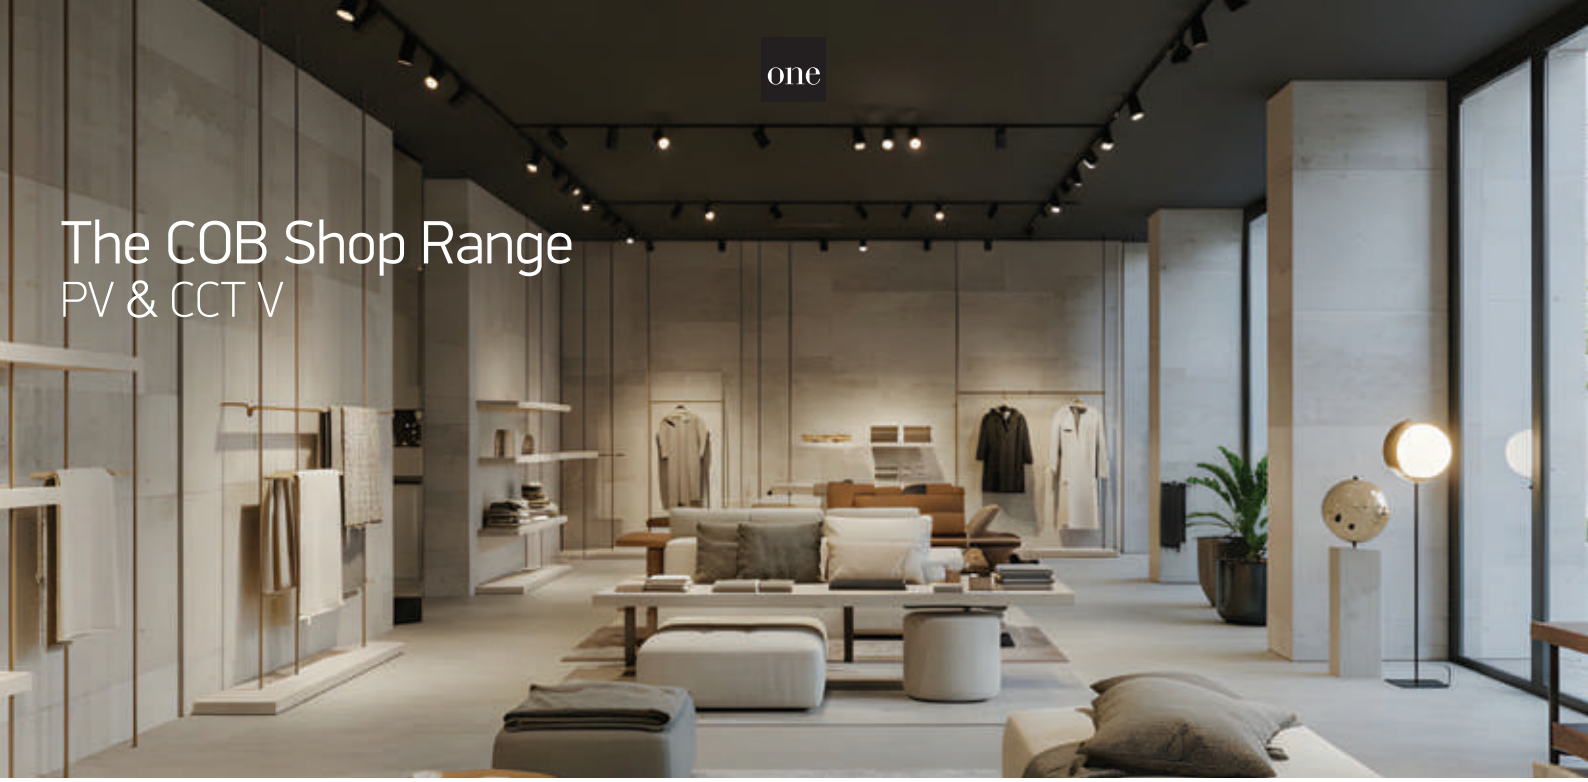

65670AT | 12W PV | COB | Aluminium

65670AT/W/V

new

IP20

LED BUILT IN · 90 CRI · CCT V · PV · ADJUSTABLE · CE · 5 YEAR

new

65670AT/B/V

65670AT/W/V Complete with White reflector.
65670AT/B/V Complete with Black reflector.



050380A/W White

050380A/B Black



050380A/BS Brass

050380AH/B
Black with honeycomb

0770A/15 (15°)

65670BT | 22W PV | COB | Aluminium

65670BT/W/V

new

IP20

LED BUILT IN · 90 CRI · CCT V · PV · ADJUSTABLE · CE · 5 YEAR

new

65670BT/B/V

65670BT/W/V Complete with White reflector.
65670BT/B/V Complete with Black reflector.





050380B/W White

050380B/B Black



050380B/BS Brass

050380BH/B
Black with honeycomb

0770B/15 (15°)

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65670AT/W/V	White	CCT V	3000K-3500K-4000K	8W-10W-12W	1440lm@12W	38°	230V		30	Complete with PV driver
65670AT/B/V	Black	CCT V	3000K-3500K-4000K	8W-10W-12W	1440lm@12W	38°	230V		30	Complete with PV driver
65670BT/W/V	White	CCT V	3000K-3500K-4000K	16W-18W-20W-22W	2640lm@22W	38°	230V		20	Complete with PV driver
65670BT/B/V	Black	CCT V	3000K-3500K-4000K	16W-18W-20W-22W	2640lm@22W	38°	230V		20	Complete with PV driver

The COB Shop Range
PV & CCT V

65670CT/W/V

65670CT | 40W PV | COB | Aluminium

new
IP20

LED BUILT IN · 90 CRI · CCT V · PV · ADJUSTABLE · CE · 5 YEAR

new
65670CT/B/V

65670CT/W/V Complete with White reflector.
65670CT/B/V Complete with Black reflector.



65670CTL/W/V

65670CTL | 40W | COB | CCT DALI Tunable | Aluminium

Use DALI track.

new
IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · CCT V · ADJUSTABLE · CE · 5 YEAR

new
65670CTL/B/V

65670CTL/W/V Complete with White reflector.
65670CTL/B/V Complete with Black reflector.



65670CTT/W/V

65670CTT | 40W | COB | TRIAC Dimmable | Aluminium

new
IP20

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · ADJUSTABLE · CE · 5 YEAR

new
65670CTT/B/V



050380C/W White

050380C/B Black

050380C/BS Brass

050380CH/B
Black with honeycomb

0770C/15 (15°)

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65670CT/W/V	White	CCT V	3000K-3500K-4000K	30W-40W	4800lm@40W	38°	230V		10	Complete with PV driver
65670CT/B/V	Black	CCT V	3000K-3500K-4000K	30W-40W	4800lm@40W	38°	230V		10	Complete with PV driver
65670CTL/W/V	White	CCT V	3000K-4000K tunable	40W	4800lm	38°	230V		10	Complete with DALI driver
65670CTL/B/V	Black	CCT V	3000K-4000K tunable	40W	4800lm	38°	230V		10	Complete with DALI driver
65670CTT/W/V	White	CCT V	3000K-3500K-4000K	40W	4800lm	38°	230V		10	Complete with dimmable driver
65670CTT/B/V	Black	CCT V	3000K-3500K-4000K	40W	4800lm	38°	230V		10	Complete with dimmable driver

The COB Cylinder Track Light
White

65642AT/W/W

65642AT | 10W | COB | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



65642BT/W/C

65642BT | 20W | COB | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



65642CT/W/C

65642CT | 30W | COB | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



050380A/W, 050380B/W,
050380C/W, White

050380A/B, 050380B/B,
050380C/B, Black

050380A/BS, 050380B/BS,
050380C/BS, Brass

050380AH/B, 050380BH/B
050380CH/B
Black with honeycomb

0770A/15 (15°), 0770B/15 (15°)
0770C/15 (15°)

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65642AT/W/C	White	Cool white	4000K	10W	1000lm	38°	230V		18	Complete with 250mA driver
65642AT/W/W	White	Warm white	3000K	10W	1000lm	38°	230V		24	Complete with 250mA driver
65642BT/W/C	White	Cool white	4000K	20W	2000lm	38°	230V		12	Complete with 500mA driver
65642BT/W/W	White	Warm white	3000K	20W	2000lm	38°	230V		12	Complete with 500mA driver
65642CT/W/C	White	Cool white	4000K	30W	3000lm	38°	230V		10	Complete with 750mA driver
65642CT/W/W	White	Warm white	3000K	30W	3000lm	38°	230V		15	Complete with 750mA driver

The COB Cylinder Track Light
Black

65642AT | 10W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR
IP20



65642BT | 20W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR
IP20



65642CT | 30W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR
IP20



050380A/W, 050380B/W,
050380C/W, White

050380A/B, 050380B/B,
050380C/B, Black



050380A/BS, 050380B/BS,
050380C/BS, Brass

050380AH/B, 050380BH/B
050380CH/B
Black with honeycomb

0770A/15 (15°), 0770B/15 (15°)
0770C/15 (15°)

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65642AT/B/C	Black	Cool white	4000K	10W	1000lm	38°	230V		24	Complete with 250mA driver
65642AT/B/W	Black	Warm white	3000K	10W	1000lm	38°	230V		18	Complete with 250mA driver
65642BT/B/C	Black	Cool white	4000K	20W	2000lm	38°	230V		12	Complete with 500mA driver
65642BT/B/W	Black	Warm white	3000K	20W	2000lm	38°	230V		12	Complete with 500mA driver
65642CT/B/C	Black	Cool white	4000K	30W	3000lm	38°	230V		10	Complete with 750mA driver
65642CT/B/W	Black	Warm white	3000K	30W	3000lm	38°	230V		10	Complete with 750mA driver

The COB Cylinder Track Light
PV & CCT V

65606AT | 10W | COB | Aluminium

new
IP20

LED BUILT IN
90 CRI
CCT V
ADJUSTABLE
CE 5 YEAR



65606BT | 20W PV | COB | Aluminium

new
IP20

LED BUILT IN
90 CRI
CCT V
PV
ADJUSTABLE
CE 5 YEAR



65606CT | 30W PV | COB | Aluminium

new
IP20

LED BUILT IN
90 CRI
CCT V
PV
ADJUSTABLE
CE 5 YEAR



65606DT | 40W PV | COB | Aluminium

new
IP20

LED BUILT IN
90 CRI
CCT V
PV
ADJUSTABLE
CE 5 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65606AT/W/V	White	CCT V	3000K-3500K-4000K	10W	1000lm	38°	230V		18	Complete with 250mA driver
65606BT/W/V	White	CCT V	3000K-3500K-4000K	10W-15W-20W	2000lm@20W	38°	230V		12	Complete with PV driver
65606CT/W/V	White	CCT V	3000K-3500K-4000K	20W-25W-30W	3000lm@30W	38°	230V		10	Complete with PV driver
65606DT/W/V	White	CCT V	3000K-3500K-4000K	30W-35W-40W	4000lm@40W	38°	230V		10	Complete with PV driver

The COB Cylinder Track Light
PV & CCT V

65606AT | 10W | COB | Aluminium

new
IP20

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 5 YEAR



65606BT | 20W PV | COB | Aluminium

new
IP20

LED BUILT IN · 90 CRI · CCT V · PV · ADJUSTABLE · CE · 5 YEAR



65606CT | 30W PV | COB | Aluminium

new
IP20

LED BUILT IN · 90 CRI · CCT V · PV · ADJUSTABLE · CE · 5 YEAR



65606DT | 40W PV | COB | Aluminium

new
IP20

LED BUILT IN · 90 CRI · CCT V · PV · ADJUSTABLE · CE · 5 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65606AT/B/V	Black	CCT V	3000K-3500K-4000K	10W	1000lm	38°	230V		18	Complete with 250mA driver
65606BT/B/V	Black	CCT V	3000K-3500K-4000K	10W-15W-20W	2000lm@20W	38°	230V		12	Complete with PV driver
65606CT/B/V	Black	CCT V	3000K-3500K-4000K	20W-25W-30W	3000lm@30W	38°	230V		10	Complete with PV driver
65606DT/B/V	Black	CCT V	3000K-3500K-4000K	30W-35W-40W	4000lm@40W	38°	230V		10	Complete with PV driver

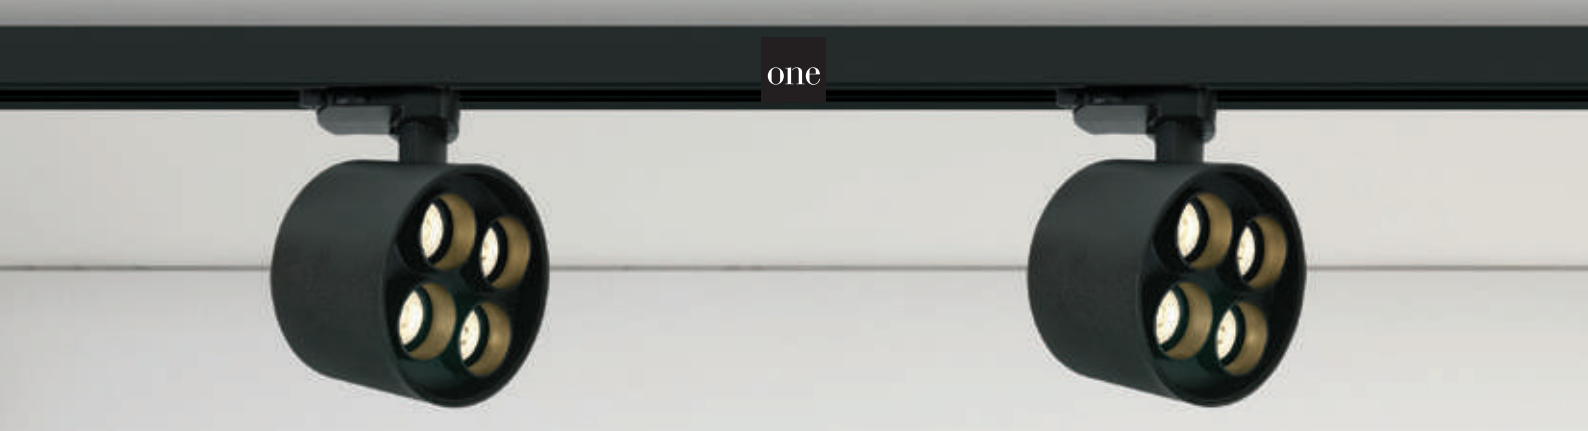

Dark Light Tubes Track Lights
White

65656AT/W/W

65656AT | 6W | SMD | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · DARK LIGHT · IP20





65656BT/W/W

65656BT | 12W | SMD | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · DARK LIGHT · IP20





65656CT/W/W

65656CT | 24W | SMD | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · DARK LIGHT · IP20





65656DT/W/W

65656DT | 36W | SMD | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · DARK LIGHT · IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65656AT/W/W	White	Warm white	3000K	6W	480lm	40°	230V		28	Complete with 150mA driver
65656BT/W/W	White	Warm white	3000K	12W	960lm	40°	230V		20	Complete with 300mA driver
65656CT/W/W	White	Warm white	3000K	24W	1920lm	40°	230V		20	Complete with 700mA driver
65656DT/W/W	White	Warm white	3000K	36W	2880lm	40°	230V		15	Complete with 850mA driver

Dark Light Tubes Track Lights
Black

65656AT/B/W

65656AT | 6W | SMD | Aluminium

DARK LIGHT
IP20

LED BUILT IN
90 CRI
ADJUSTABLE
3 YEAR





65656BT/B/W

65656BT | 12W | SMD | Aluminium

DARK LIGHT
IP20

LED BUILT IN
90 CRI
ADJUSTABLE
3 YEAR





65656DT/B/W

65656DT | 36W | SMD | Aluminium

DARK LIGHT
IP20

LED BUILT IN
90 CRI
ADJUSTABLE
3 YEAR





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65656AT/B/W	Black	Warm white	3000K	6W	480lm	40°	230V		28	Complete with 150mA driver
65656BT/B/W	Black	Warm white	3000K	12W	960lm	40°	230V		20	Complete with 300mA driver
65656DT/B/W	Black	Warm white	3000K	36W	2880lm	40°	230V		15	Complete with 850mA driver

Large Cylinder Track Light
PV & CCT V

65634BT/W/V

new

IP20

65634BT | 20W PV | COB | Aluminium

LED BUILT IN

90 CRI

CCT V

PV

ADJUSTABLE

CE

5 YEAR

new

65634BT/B/V



65634DT/W/V

new

IP20

65634DT | 35W PV | COB | Aluminium

LED BUILT IN

90 CRI

CCT V

PV

ADJUSTABLE

CE

5 YEAR

new

65634DT/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65634BT/W/V	White	CCT V	3000K-3500K-4000K	10W-15W-20W	2200lm@20W	38°	230V		12	Complete with PV driver
65634BT/B/V	Black	CCT V	3000K-3500K-4000K	10W-15W-20W	2200lm@20W	38°	230V		12	Complete with PV driver
65634DT/W/V	White	CCT V	3000K-3500K-4000K	26W-30W-35W	3500lm@35W	38°	230V		10	Complete with PV driver
65634DT/B/V	Black	CCT V	3000K-3500K-4000K	26W-30W-35W	3500lm@35W	38°	230V		10	Complete with PV driver

The Honeycomb Range

65644T | 8W | COB | Dimmable | Aluminium

Complete with honeycomb.

LED BUILT IN
90 CRI
TRIAC DIMMABLE
ADJUSTABLE
CE
2 YEAR
IP20



65652T | 30W | COB | Aluminium

Complete with honeycomb.

LED BUILT IN
80 CRI
ADJUSTABLE
CE
3 YEAR
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65644T/W/W	White	Warm white	3000K	8W	600lm	36°	230V		24	AC LED
65644T/B/W	Black	Warm white	3000K	8W	600lm	36°	230V		24	AC LED
65652T/W/W	White	Warm white	3000K	30W	1700lm	24°	230V		12	Complete with 700mA driver
65652T/B/C	Black	Cool white	4000K	30W	1800lm	24°	230V		12	Complete with 700mA driver

The COB Compact Cylinder Range
White

65646T | 8W | COB | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
ADJUSTABLE
CE 2 YEAR
IP20



65108AT | 9W | COB | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
ADJUSTABLE
CE 5 YEAR
DARK LIGHT
IP20



65108T | 8W | COB | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
ADJUSTABLE
CE 3 YEAR
DARK LIGHT
IP20



65524T | 12W | COB | Aluminium

Honeycomb.

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR
DARK LIGHT
IP20



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65646T/W/W	White	Black	Warm white	3000K	8W	650lm	36°	230V		24	AC LED
65108AT/W/W	White	Black	Warm white	3000K	9W	750lm	36°	230V		30	Complete with 200mA dimmable driver
65108T/W/W	White	Black	Warm white	3000K	8W	560lm	36°	230V		24	Complete with 300mA dimmable driver
65524T/W/W	White	Black	Warm white	3000K	12W	1080lm	36°	230V		24	Complete with 250mA driver

The COB Compact Cylinder Range
Black

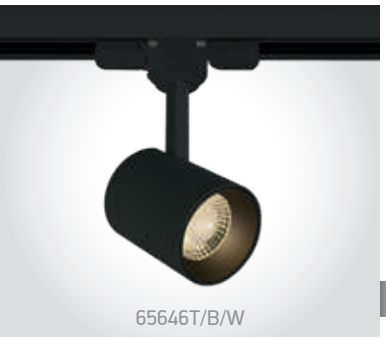
65646T/B/W

65646T | 8W | COB | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
ADJUSTABLE
CE 2 YEAR
IP20



65108AT/B/W

65108AT | 9W | COB | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
ADJUSTABLE
CE 5 YEAR
DARK LIGHT
IP20



65108T/B/W

65108T | 8W | COB | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
ADJUSTABLE
CE 3 YEAR
DARK LIGHT
IP20



65524T/B/W

65524T | 12W | COB | Aluminium

Honeycomb.

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR
DARK LIGHT
IP20


65524T/BBS/W



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65646T/B/W	Black	Black	Warm white	3000K	8W	650lm	36°	230V		24	AC LED
65108AT/B/W	Black	Black	Warm white	3000K	9W	750lm	36°	230V		30	Complete with 200mA dimmable driver
65108T/B/W	Black	Brass	Warm white	3000K	8W	560lm	36°	230V		24	Complete with 300mA dimmable driver
65524T/B/W	Black	Black	Warm white	3000K	12W	1080lm	36°	230V		24	Complete with 250mA driver
65524T/BBS/W	Brushed brass	Black	Warm white	3000K	12W	1080lm	36°	230V		24	Complete with 250mA driver

The COB Zoomable Range
White

65662AT/W/W

IP20

65662AT | 15W | COB | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.

LED BUILT IN

90 CRI

ADJUSTABLE

CE

5 YEAR

Zoomable

Removable Honeycomb



65662BT/W/W

IP20

65662BT | 25W | COB | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.

LED BUILT IN

90 CRI

ADJUSTABLE

CE

5 YEAR

Zoomable

Removable Honeycomb



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65662AT/W/W	White	Warm white	3000K	15W	1500lm	15°- 45°	230V	⧈	30	Complete with 350mA driver
65662BT/W/W	White	Warm white	3000K	25W	2500lm	15°- 45°	230V	⧈	20	Complete with 600mA driver

The COB Zoomable Range
Black

65662AT | 15W | COB | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.

LED BUILT IN

90 CRI

ADJUSTABLE

CE

5 YEAR

IP20

Zoomable


Removable Honeycomb



65662BT | 25W | COB | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.

LED BUILT IN

90 CRI

ADJUSTABLE

CE

5 YEAR

IP20

Zoomable


Removable Honeycomb



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65662AT/B/W	Black	Warm white	3000K	15W	1500lm	15°- 45°	230V		30	Complete with 350mA driver
65662BT/B/W	Black	Warm white	3000K	25W	2500lm	15°- 45°	230V		20	Complete with 600mA driver

The COB Zoomable Cylinders
White

65650AT | 15W | COB | Adjustable beam 20°- 60° | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR
IP20



65650BT | 20W | COB | Adjustable beam 20°- 60° | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR
IP20



65650CT | 30W | COB | Adjustable beam 20°- 60° | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65650AT/W/W	White	Warm white	3000K	15W	1500lm	20°-60°	230V		15	Complete with 350mA driver
65650BT/W/C	White	Cool white	4000K	20W	2000lm	20°-60°	230V		15	Complete with 500mA driver
65650BT/W/W	White	Warm white	3000K	20W	2000lm	20°-60°	230V		15	Complete with 500mA driver
65650CT/W/C	White	Cool white	4000K	30W	3000lm	20°-60°	230V		15	Complete with 700mA driver
65650CT/W/W	White	Warm white	3000K	30W	3000lm	20°-60°	230V		15	Complete with 700mA driver

The COB Zoomable Cylinders
Black

65650AT | 15W | COB | Adjustable beam 20°- 60° | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



65650BT | 20W | COB | Adjustable beam 20°- 60° | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



65650CT | 30W | COB | Adjustable beam 20°- 60° | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65650AT/B/W	Black	Warm white	3000K	15W	1500lm	20°-60°	230V		15	Complete with 350mA driver
65650BT/B/C	Black	Cool white	4000K	20W	2000lm	20°-60°	230V		15	Complete with 500mA driver
65650BT/B/W	Black	Warm white	3000K	20W	2000lm	20°-60°	230V		15	Complete with 500mA driver
65650CT/B/C	Black	Cool white	4000K	30W	3000lm	20°-60°	230V		15	Complete with 700mA driver
65650CT/B/W	Black	Warm white	3000K	30W	3000lm	20°-60°	230V		15	Complete with 700mA driver

Adjustable LED Linear Track Light

65026T/W/W

65026T | 40W | SMD | Linear track light | Aluminium + plastic

LED BUILT IN
80 CRI
±45° ADJUSTABLE
CE
3 YEAR
IP20

65026T/B/C



65026T/W/V

65026T | 40W | SMD | Linear track light | Aluminium + plastic

LED BUILT IN
90 CRI
CCT V
±45° ADJUSTABLE
CE
3 YEAR
IP20

65026T/B/V



65024T/W/W

65024T | 10x5W | COB | Linear track light | Aluminium + plastic

LED BUILT IN
80 CRI
±45° ADJUSTABLE
CE
3 YEAR
IP20

65024T/B/C

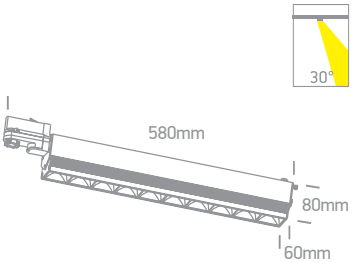

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65026T/W/W	White	Warm white	3000K	40W	3200lm	100°	230V		10	Complete with 1000mA driver
65026T/B/C	Black	Cool white	4000K	40W	3400lm	100°	230V		10	Complete with 1000mA driver
65026T/W/V	White	CCT V	3000K-4000K-5000K	40W	3400lm	100°	230V		10	Complete with 1000mA driver
65026T/B/V	Black	CCT V	3000K-4000K-5000K	40W	3400lm	100°	230V		10	Complete with 1000mA driver
65024T/W/W	White	Warm white	3000K	10x5W	5800lm	30°	230V		10	Complete with 1200mA driver
65024T/B/C	Black	Cool white	4000K	10x5W	5800lm	30°	230V		10	Complete with 1200mA driver
65024T/B/W	Black	Warm white	3000K	10x5W	5800lm	30°	230V		10	Complete with 1200mA driver

LED Linear Track Light

65024TA | 15x1W | LED | Linear track light | Aluminium

LED BUILT IN
80 CRI
±45° ADJUSTABLE
CE
3 YEAR
IP20



65018T | 16W | SMD | Linear track light | Aluminium + PC

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
IP20

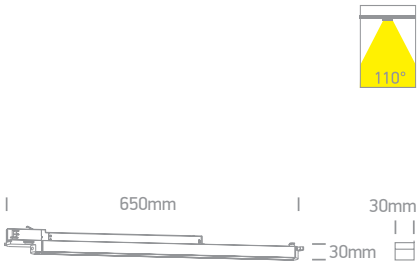

65025T | 25W | SMD | Linear track light | Aluminium + PC

LED BUILT IN
80 CRI
CE
3 YEAR
IP20

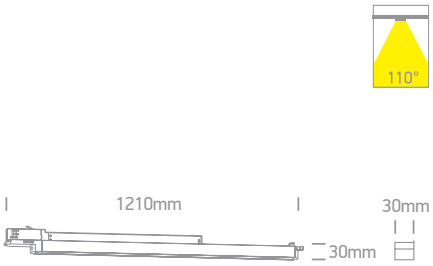

65025T | 25W | SMD | Linear track light | Aluminium + PC

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
IP20

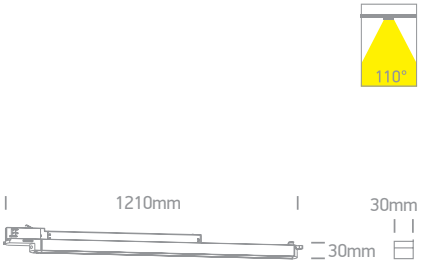

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65024TA/W/W	White	Warm white	3000K	15x1W	1200lm	30°	230V		10	AC LED
65024TA/B/W	Black	Warm white	3000K	15x1W	1200lm	30°	230V		10	AC LED
65018T/W/V	White	CCT V	3000K-4000K-5000K	16W	1600lm	110°	100-240V		12	Complete with 400mA driver
65018T/B/V	Black	CCT V	3000K-4000K-5000K	16W	1600lm	110°	100-240V		12	Complete with 400mA driver
65025T/W/C	White	Cool white	4000K	25W	2500lm	110°	100-240V		12	Complete with 600mA driver
65025T/W/V	White	CCT V	3000K-4000K-5000K	25W	2500lm	110°	100-240V		12	Complete with 600mA driver
65025T/B/V	Black	CCT V	3000K-4000K-5000K	25W	2500lm	110°	100-240V		12	Complete with 600mA driver

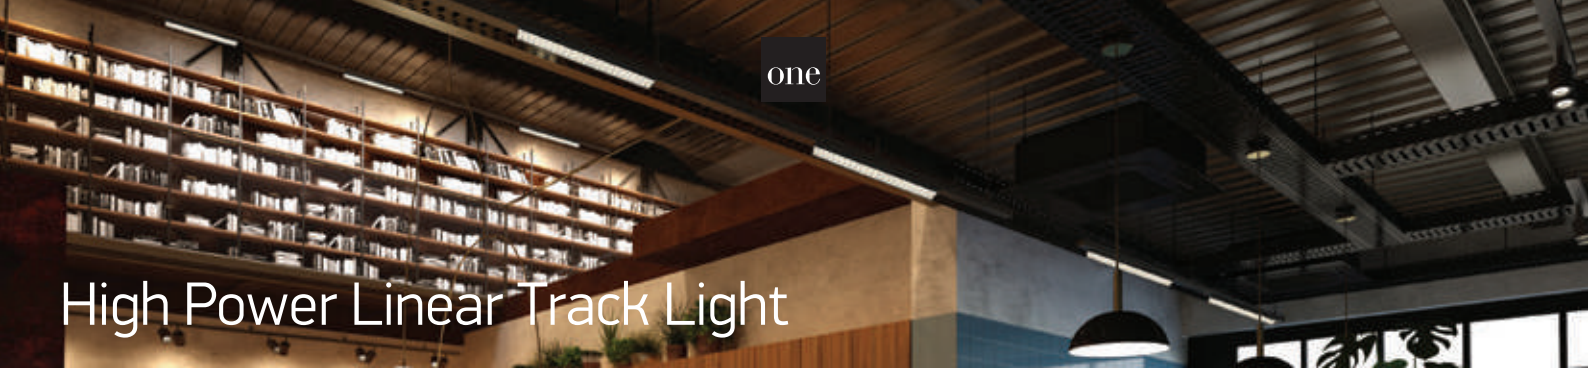

High Power Linear Track Light

65170AT | 30W | SMD | Linear track light | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20

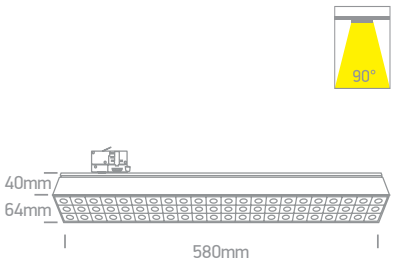

65170BT | 60W | SMD | Linear track light | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20

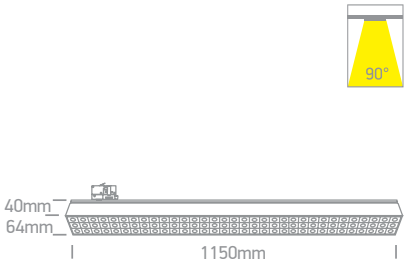

65170BT | 60W PV | SMD | Linear track light | Aluminium

LED BUILT IN · 90 CRI · CCT V · PV · CE · 3 YEAR · IP20

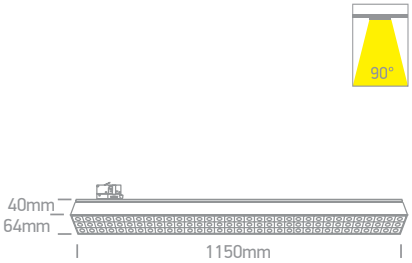

65168T | 50W | SMD | Linear track light | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 5 YEAR · IP20

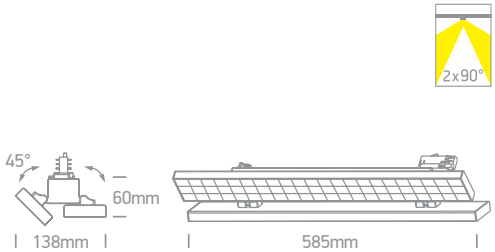

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65170AT/W/C	White	Cool white	4000K	30W	2700lm	90°	230V		12	Complete with 700mA driver
65170AT/W/W	White	Warm white	3000K	30W	2700lm	90°	230V		12	Complete with 700mA driver
65170AT/B/W	Black	Warm white	3000K	30W	2700lm	90°	230V		12	Complete with 700mA driver
65170BT/W/C	White	Cool white	4000K	60W	5400lm	90°	230V		12	Complete with 1500mA driver
65170BT/B/C	Black	Cool white	4000K	60W	5400lm	90°	230V		12	Complete with 1500mA driver
65170BT/B/W	Black	Warm white	3000K	60W	5400lm	90°	230V		12	Complete with 1500mA driver
65170BT/W/V	White	CCT V	3000K-4000K-5000K	40W-50W-60W	5400lm@60W	90°	230V		12	Complete with PV driver
65170BT/B/V	Black	CCT V	3000K-4000K-5000K	40W-50W-60W	5400lm@60W	90°	230V		12	Complete with PV driver
65168T/W/W	White	Warm white	3000K	50W	6250lm	2x90°	230V		6	Complete with 1400mA driver

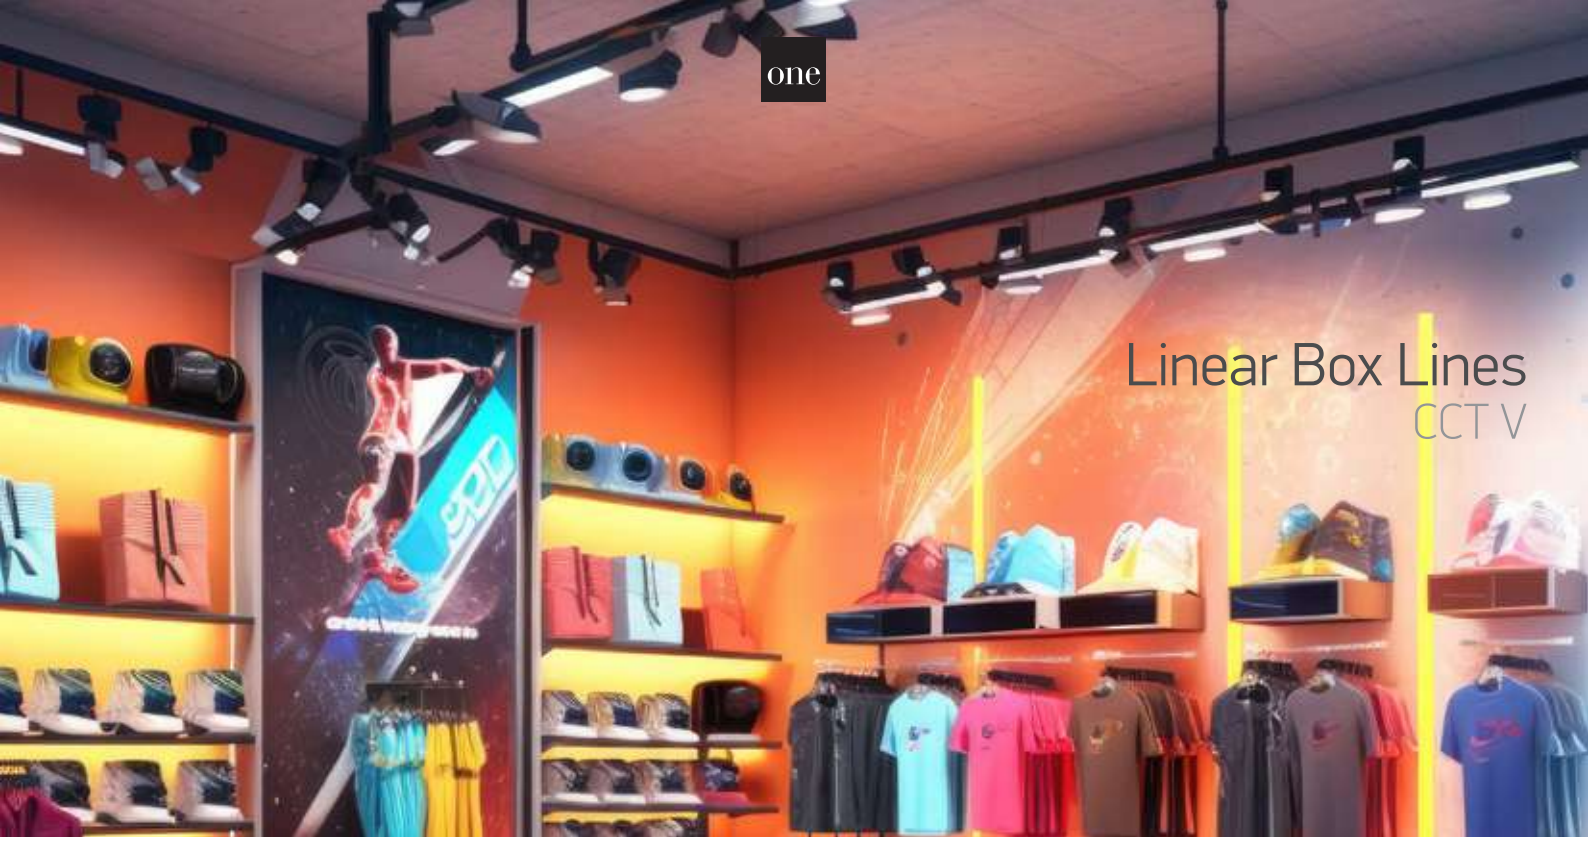

Linear Box Lines
CCT V

65028AT/W/V

65028AT | 24W | LED | Linear track light | Aluminium + PC

LED BUILT IN
90 CRI
CCT V
CE
5 YEAR
IP20

65028AT/B/V



65028BT/W/V

65028BT | 36W | LED | Linear track light | Aluminium + PC

LED BUILT IN
90 CRI
CCT V
CE
5 YEAR
IP20

65028BT/B/V



65028CT/W/V

65028CT | 48W | LED | Linear track light | Aluminium + PC

LED BUILT IN
90 CRI
CCT V
CE
5 YEAR
IP20

65028CT/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65028AT/W/V	White	CCT V	3000K-4200K-6500K	24W	2400lm	90°	230V		20	Complete with 600mA driver
65028AT/B/V	Black	CCT V	3000K-4200K-6500K	24W	2400lm	90°	230V		20	Complete with 600mA driver
65028BT/W/V	White	CCT V	3000K-4200K-6500K	36W	3600lm	90°	230V		15	Complete with 800mA driver
65028BT/B/V	Black	CCT V	3000K-4200K-6500K	36W	3600lm	90°	230V		15	Complete with 800mA driver
65028CT/W/V	White	CCT V	3000K-4200K-6500K	48W	4800lm	90°	230V		12	Complete with 800mA driver
65028CT/B/V	Black	CCT V	3000K-4200K-6500K	48W	4800lm	90°	230V		12	Complete with 800mA driver

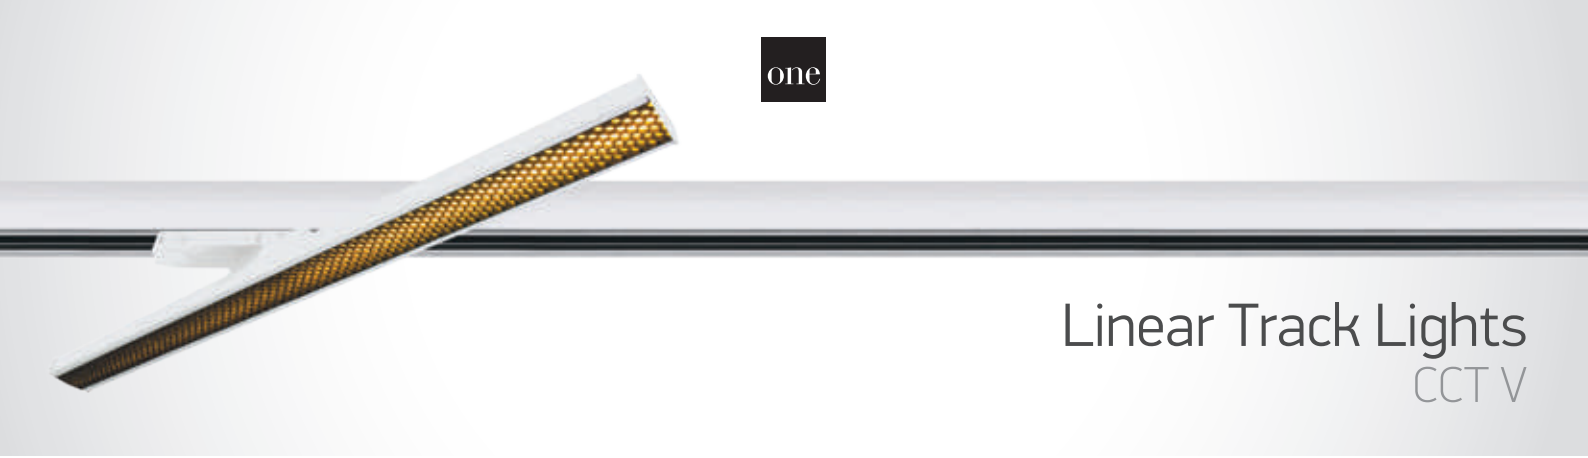

Linear Track Lights
CCT V

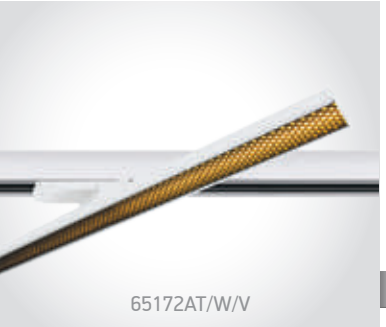
65172AT/W/V

65172AT | 30W | SMD | Linear track light | Aluminium

LED BUILT IN · 90 CRI · UGR19 · CCT V · ADJUSTABLE · CE · 3 YEAR · IP20

65172AT/B/V


Removable honeycomb.



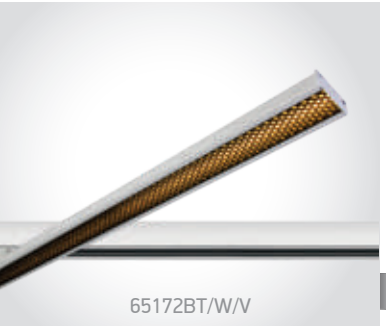
65172BT/W/V

65172BT | 40W | SMD | Linear track light | Aluminium

LED BUILT IN · 90 CRI · UGR19 · CCT V · ADJUSTABLE · CE · 3 YEAR · IP20

65172BT/B/V


Removable honeycomb.



65664AT/W/V

65664AT | 30W | SMD | Linear track light | Aluminium + PC

LED BUILT IN · 90 CRI · CCT V · IK 06 · CE · 3 YEAR · IP20

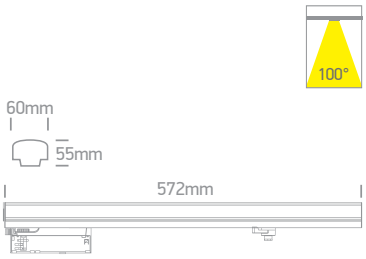

65664BT/W/V

65664BT | 40W | SMD | Linear track light | Aluminium + PC

LED BUILT IN · 90 CRI · CCT V · IK 06 · CE · 3 YEAR · IP20

65664BT/B/V

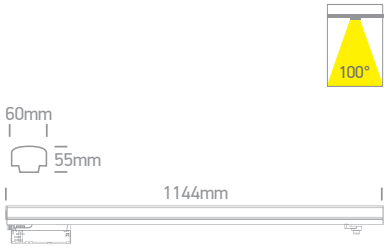

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65172AT/W/V	White	CCT V	2700K-3200K-4000K	30W	3600lm (w/o honeycomb)	120°	230V		20	Complete with 750mA driver
65172AT/B/V	Black	CCT V	2700K-3200K-4000K	30W	3600lm (w/o honeycomb)	120°	230V		20	Complete with 750mA driver
65172BT/W/V	White	CCT V	2700K-3200K-4000K	40W	4800lm (w/o honeycomb)	120°	230V		10	Complete with 950mA driver
65172BT/B/V	Black	CCT V	2700K-3200K-4000K	40W	4800lm (w/o honeycomb)	120°	230V		10	Complete with 950mA driver
65664AT/W/V	White	CCT V	3000K-3500K-4000K	30W	3600lm	100°	230V		20	Complete with 700mA driver
65664BT/W/V	White	CCT V	3000K-3500K-4000K	40W	4800lm	100°	230V		12	Complete with 1000mA driver
65664BT/B/V	Black	CCT V	3000K-3500K-4000K	40W	4800lm	100°	230V		12	Complete with 1000mA driver

The COB Cylinder Track Pendants

63108AT/W/W

63108AT | 8W | COB | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

IP20



63108AT/B/W

63108AT | 8W | COB | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

IP20



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
63108AT/W/W	White	White	Warm white	3000K	8W	560lm	36°	230V	⧈	20	Complete with 300mA driver
63108AT/B/W	Black	Black	Warm white	3000K	8W	560lm	36°	230V	⧈	20	Complete with 300mA driver

The Dark Light GU10 Range
Square

65105NAT/W

65105NAT | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

ADJUSTABLE

5 YEAR

Suitable for GU10 LED lamp.



65105NAT/B

65105NAT | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

ADJUSTABLE

5 YEAR

Suitable for GU10 LED lamp.



Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105NAT/W	White	Black	10W	100-240V		12	-
65105NAT/B	Black	Brass	10W	100-240V		12	-

The Dark Light GU10 Range
Round

65105NT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE
5 YEAR
DARK LIGHT
IP20

Suitable for GU10 LED lamp.



65105NT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE
5 YEAR
DARK LIGHT
IP20

Suitable for GU10 LED lamp.



65105NT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE
5 YEAR
DARK LIGHT
IP20

Suitable for GU10 LED lamp.



Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105NT/W	White	Black	10W	100-240V		12	-
65105NT/B	Black	Brass	10W	100-240V		12	-
65105NT/W/W	White	White	10W	100-240V		12	-
65105NT/B/B	Black	Black	10W	100-240V		12	-
65105NT/BBS	Brushed brass	Black	10W	100-240V		12	-
65105NT/MG	Metal grey	Black	10W	100-240V		12	-

The GU10 Track Lights

65105DT/W

65105DT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20

Complete with Black & White reflectors.

Suitable for GU10 LED lamp.



65105DT/B

65105DT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20

Complete with Black & Brass reflectors.

Suitable for GU10 LED lamp.



65105BT/W

65105BT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

Suitable for GU10 LED lamp.



65105BT/B

65105BT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

Suitable for GU10 LED lamp.



Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105DT/W	White	Black & White	10W	100-240V		40	-
65105DT/B	Black	Black & Brass	10W	100-240V		40	-
65105BT/W	White	-	10W	100-240V		30	-
65105BT/B	Black	-	10W	100-240V		30	-

Cone GU10 Track Lights

65105CT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20

Complete with Black & White reflectors.

Use 7306CG GU10 LED lamp.



65105CT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20

Complete with Black & Brass reflectors.

Use 7306CG GU10 LED lamp.



65105CT | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20

65105CT/MG

Use 7306CG GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
65105CT/W	White	10W	100-240V		40	-
65105CT/B	Black	10W	100-240V		40	-
65105CT/BBS	Brushed brass	10W	100-240V		40	-
65105CT/MG	Metal grey	10W	100-240V		40	-

65105GT

MR16 GU10 Track Lights

65520T/W

65520T | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

65520T/B

Suitable for GU10 LED lamp.



65522T/W

65522T | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20



65522T/B



Removable honeycomb.



65519T/W

65519T | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

Suitable for GU10 LED lamp.



65105GT

65105GT | 10W | MR16 | GU10 | Polycarbonate

ADJUSTABLE

CE 5 YEAR

IP20

Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
65520T/W	White	10W	100-240V		20	-
65520T/B	Black	10W	100-240V		20	-
65522T/W	White	10W	100-240V		24	-
65522T/B	Black	10W	100-240V		24	-
65519T/W	White	10W	100-240V		12	-
65105GT	Clear	10W	100-240V		40	-

The E27/GU10 Track Lights
Aluminium

65111AT/B

65111AT | 75W | PAR30 | E27 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

Suitable for PAR30 LED lamp.



65111AT/G

65111AT | 75W | PAR30 | E27 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

Suitable for PAR30 LED lamp.



65518T/W

65518T | 50W | R111 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

Suitable for R111 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
65111AT/B	Black	75W	100-240V		40	-
65111AT/G	Grey	75W	100-240V		40	-
65518T/W	White	50W	100-240V		12	-

Tracks & Magnetic

Pages 275-330

09

Square Track Surface

40001A/W

40001A | 16A | 1m Square track | 3-phase | Aluminium

40001A/B



40002A/W

40002A | 16A | 2m Square track | 3-phase | Aluminium

40002A/B



40003A/W

40003A | 16A | 3m Square track | 3-phase | Aluminium

40003A/B

40003A/G



40002C/W

40002C | 2m Plastic cover for square tracks

40002C/B

40002A/B + 40002C/B



Order Code	Colour	Input	Ampere	Class		Notes
40001A/W	White	100-240V	16A		10	-
40001A/B	Black	100-240V	16A		10	-
40002A/W	White	100-240V	16A		10	-
40002A/B	Black	100-240V	16A		10	-
40003A/W	White	100-240V	16A		10	-
40003A/B	Black	100-240V	16A		10	-
40003A/G	Grey	100-240V	16A		10	-

Square Track Accessories

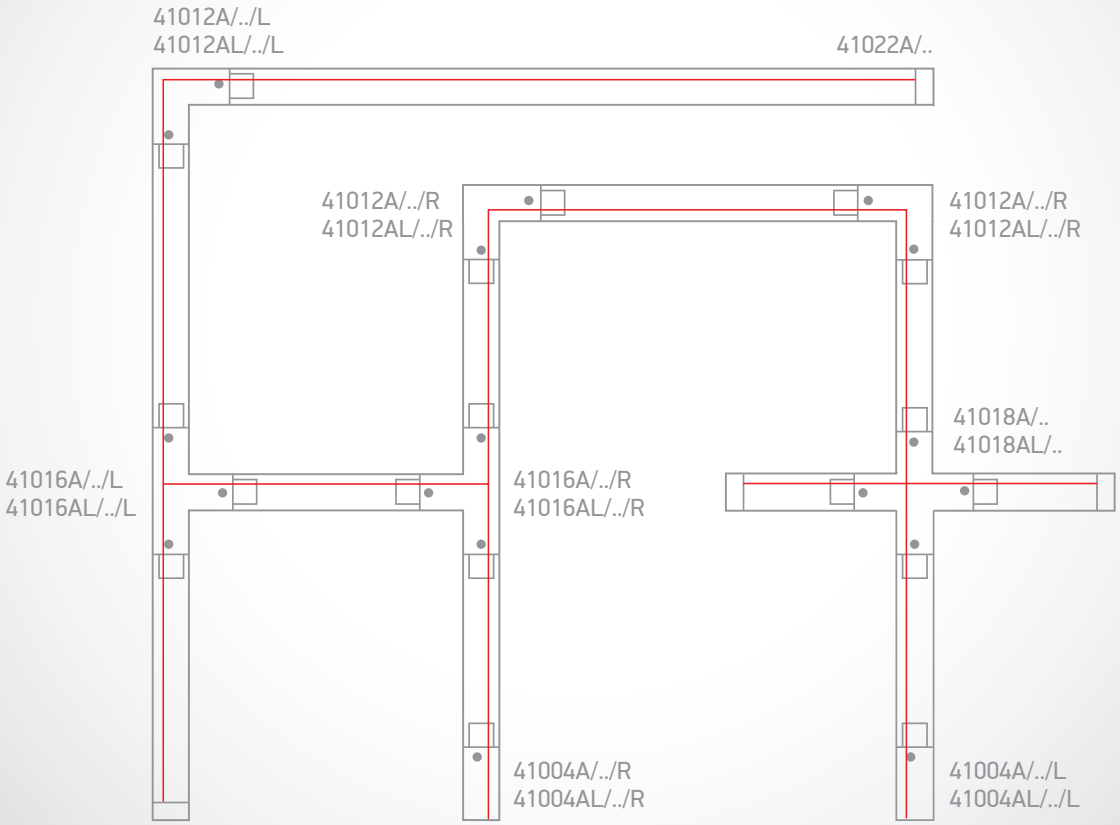

*Diagram as viewed from below (looking toward the ceiling).

41026R/W

41026R/W | Adjustable wire 2m for square track | Metal

5 YEAR
100

new

41026R/B

41026R/B | Adjustable wire 2m for square track | Metal

5 YEAR
100

new

41032/W

41032 | Connector for suspending square track

5 YEAR
100

41032/B



Square Track Accessories

41020/G

41020 | Heavy items mechanical adaptor for square track | Die cast

5 YEAR

50

41004A/W/..

41004A | 16A | Live end for square track | Plastic

5 YEAR

41004A/B/..

41004A/G/..



41010A/W

41010A | 16A | Live connector for square track | Plastic

5 YEAR

41010A/B

41010A/G



41008A/W

41008A | 16A | Connector for square track | Plastic

5 YEAR

41008A/B

41008A/G



Order Code	Colour	Direction	Input	Ampere	Class		Notes
41004A/W/L	White	Left	100-240V	16A		50	-
41004A/W/R	White	Right	100-240V	16A		50	-
41004A/B/L	Black	Left	100-240V	16A		50	-
41004A/B/R	Black	Right	100-240V	16A		50	-
41004A/G/L	Grey	Left	100-240V	16A		50	-
41004A/G/R	Grey	Right	100-240V	16A		50	-
41010A/W	White	-	100-240V	16A		50	-
41010A/B	Black	-	100-240V	16A		50	-
41010A/G	Grey	-	100-240V	16A		50	-
41008A/W	White	-	100-240V	16A		100	-
41008A/B	Black	-	100-240V	16A		100	-
41008A/G	Grey	-	100-240V	16A		100	-

Square Track Accessories

41012A/W/..

41012A | 16A | Corner for square track | Plastic

41012A/B/..

41012A/G/..



41016A/W/..

41016A | 16A | T connector for square track | Plastic

41016A/B/..

41016A/G/..



41018A/W

41018A | 16A | X Connector for square track | Plastic

41018A/B



41024A/W

41024A | 16A | Flexible connector for square track | Plastic

41024A/B

41024A/G

41022A/W

41022A | End cap for square track | Plastic

41022A/B

41022A/G



Order Code	Colour	Direction	Input	Ampere	Class		Notes
41012A/W/L	White	Left	100-240V	16A		25	-
41012A/W/R	White	Right	100-240V	16A		25	-
41012A/B/L	Black	Left	100-240V	16A		25	-
41012A/B/R	Black	Right	100-240V	16A		25	-
41012A/G/L	Grey	Left	100-240V	16A		25	-
41012A/G/R	Grey	Right	100-240V	16A		25	-
41016A/W/L	White	Left	100-240V	16A		25	-
41016A/W/R	White	Right	100-240V	16A		25	-
41016A/B/L	Black	Left	100-240V	16A		25	-
41016A/B/R	Black	Right	100-240V	16A		25	-
41016A/G/R	Grey	Right	100-240V	16A		25	-
41018A/W	White	-	100-240V	16A		10	-
41018A/B	Black	-	100-240V	16A		10	-
41024A/W	White	-	100-240V	16A		10	-
41024A/B	Black	-	100-240V	16A		10	-
41024A/G	Grey	-	100-240V	16A		10	-

Square Track Recessed

40003R/W

40003R | 16A | 3m Recessed track | 3-phase | Aluminium

Use accessories on pages 277 & 278.

5 YEAR

Recessed fixing clip.
Order code 41034R.



40003R/B

40003R | 16A | 3m Recessed track | 3-phase | Aluminium

Use accessories on pages 277 & 278.

5 YEAR

Recessed fixing clip.
Order code 41034R.



41004B/W

41004B/W | Cover for 41004A

5 YEAR

10



41008B/W | Cover for 41010A

41008B/W

10



41012B/W

41012B/W | Cover for corner 41012A

5 YEAR

10



41016B/W | Cover for T connector 41016A

41016B/W

10



Order Code	Colour	Input	Ampere	Class				Notes
40003R/W	White	100-240V	16A		40x3000mm	35mm	6	-
40003R/B	Black	100-240V	16A		40x3000mm	35mm	6	-

Track Adaptors & Accessories

41002/W

41002 | 16A | Track adaptor | Plastic

offer

41002/G



41002A/W

41002A | 6A | Track adaptor | Plastic

41002A/B



41030/W

41030 | 6A | Surface mount base for track lights | Plastic

IP20

41030/B

41030/G



Order Code	Colour	Input	Ampere	Class		Notes
41002/W	White	100-240V	16A		150	-
41002/G	Grey	100-240V	16A		150	-
41002A/W	White	100-240V	6A		50	-
41002A/B	Black	100-240V	6A		50	-
41030/W	White	100-240V	6A		40	-
41030/B	Black	100-240V	6A		40	-
41030/G	Grey	100-240V	6A		40	-

one

Square DALI Track
White

40001AL | 16A | 1m Square DALI track | 3-phase + DALI | Aluminium

CE 5 YEAR

new





40002AL | 16A | 2m Square DALI track | 3-phase + DALI | Aluminium

CE 5 YEAR

new





40003AL | 16A | 3m Square DALI track | 3-phase + DALI | Aluminium

CE 5 YEAR

new





41026R/W | Adjustable wire 2m for square track | Metal

CE 5 YEAR 100

new

41032 | Connector for suspending square track

CE 5 YEAR 100



Order Code	Colour	Input	Ampere	Class		Notes
40001AL/W	White	100-240V	16A		10	-
40002AL/W	White	100-240V	16A		10	-
40003AL/W	White	100-240V	16A		10	-

one

Square DALI Track
Black

40001AL | 16A | 1m Square DALI track | 3-phase + DALI | Aluminium

CE 5 YEAR

new





40002AL | 16A | 2m Square DALI track | 3-phase + DALI | Aluminium

CE 5 YEAR

new





40003AL | 16A | 3m Square DALI track | 3-phase + DALI | Aluminium

CE 5 YEAR

new





41026R/B | Adjustable wire 2m for square track | Metal

CE 5 YEAR 100

new

41032 | Connector for suspending square track

CE 5 YEAR 100



Order Code	Colour	Input	Ampere	Class		Notes
40001AL/B	Black	100-240V	16A		10	-
40002AL/B	Black	100-240V	16A		10	-
40003AL/B	Black	100-240V	16A		10	-

Square Track Accessories
DALI

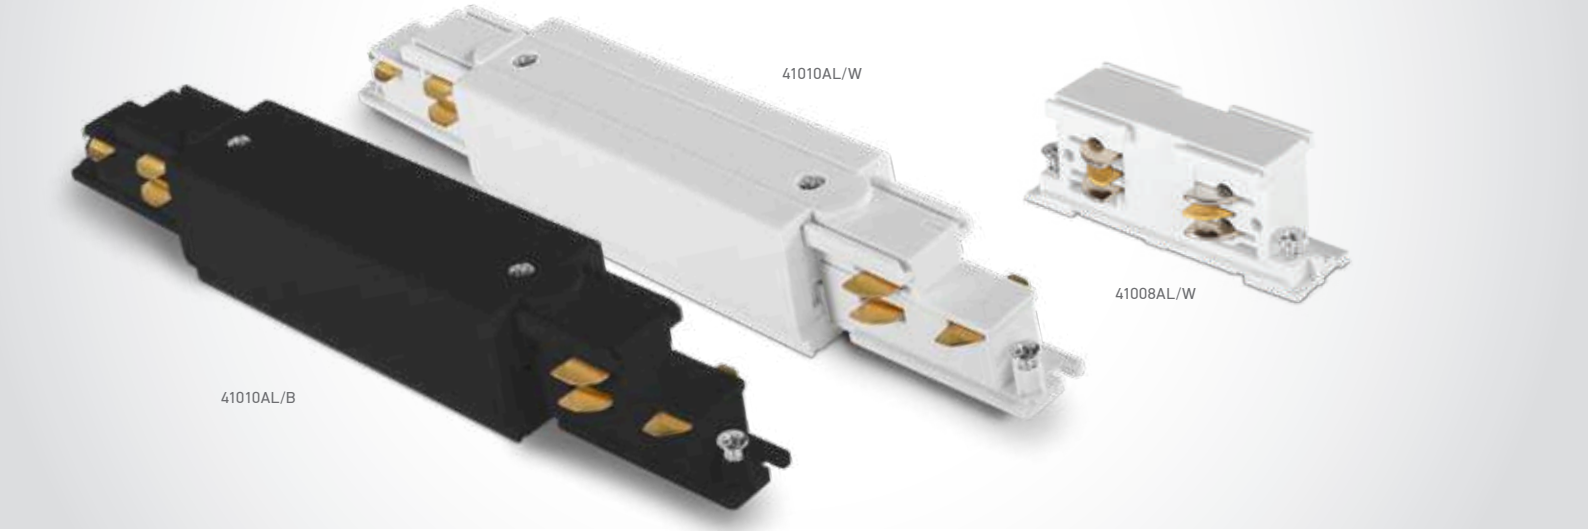

41004AL | 16A | Live end for square DALI track | DALI | Plastic

new





41010AL | 16A | Live connector for square DALI track | DALI | Plastic

new



41008AL | 16A | Connector for square DALI track | DALI | Plastic

new





Order Code	Colour	Direction	Input	Ampere	Class		Notes
41004AL/W/L	White	Left	100-240V	16A		50	For DALI track
41004AL/W/R	White	Right	100-240V	16A		50	For DALI track
41004AL/B/L	Black	Left	100-240V	16A		50	For DALI track
41004AL/B/R	Black	Right	100-240V	16A		50	For DALI track
41010AL/W	White	-	100-240V	16A		50	For DALI track
41010AL/B	Black	-	100-240V	16A		50	For DALI track
41008AL/W	White	-	100-240V	16A		100	For DALI track
41008AL/B	Black	-	100-240V	16A		100	For DALI track

one

Square Track Accessories
DALI

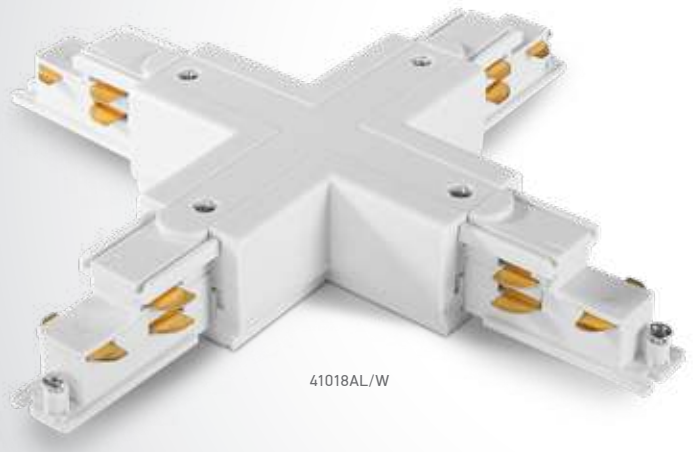
41018AL/W

41012AL/B/..

41012AL/W/..

41012AL | 16A | Corner for square DALI track | DALI | Plastic

new


41012AL/B/..





41016AL/W/..

41016AL | 16A | T-connector for square DALI track | DALI | Plastic

new

41016AL/B/..





41018AL/W

41018AL | 16A | X-Connector for square DALI track | DALI | Plastic

new

41018AL/B





Order Code	Colour	Direction	Input	Ampere	Class		Notes
41012AL/W/L	White	Left	100-240V	16A		25	For DALI track
41012AL/W/R	White	Right	100-240V	16A		25	For DALI track
41012AL/B/L	Black	Left	100-240V	16A		25	For DALI track
41012AL/B/R	Black	Right	100-240V	16A		25	For DALI track
41016AL/W/L	White	Left	100-240V	16A		25	For DALI track
41016AL/W/R	White	Right	100-240V	16A		25	For DALI track
41016AL/B/L	Black	Left	100-240V	16A		25	For DALI track
41016AL/B/R	Black	Right	100-240V	16A		25	For DALI track
41018AL/W	White	-	100-240V	16A		10	For DALI track
41018AL/B	Black	-	100-240V	16A		10	For DALI track

Magnetic Surface Profiles
MINI

42001A/B

42001A | 42002A | 48V | Magnetic profile | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.

CE 5 YEAR

42001A/W

Optional suspension kit. Order code 42026A/W.

Optional suspension kit. Order code 42026A/B.

Complete with 2pcs end caps.

Complete with 2pcs end caps.

MINI ✓



42012AA/B

42012AA | Corner for 42001A & 42002A | Aluminium

CE 5 YEAR 1

42012AA/W

Complete with 2pcs mechanical connectors.

MINI ✓



42012BA/B

42012BA | Corner wall to wall (IN) for 42001A & 42002A | Aluminium

CE 5 YEAR 1

42012BA/W

Complete with 2pcs mechanical connectors.

MINI ✓



Order Code	Colour	Length	Input	Class		Notes
42001A/B	Black	1m	48V	III	1	-
42001A/W	White	1m	48V	III	1	-
42002A/B	Black	2m	48V	III	1	-
42002A/W	White	2m	48V	III	1	-

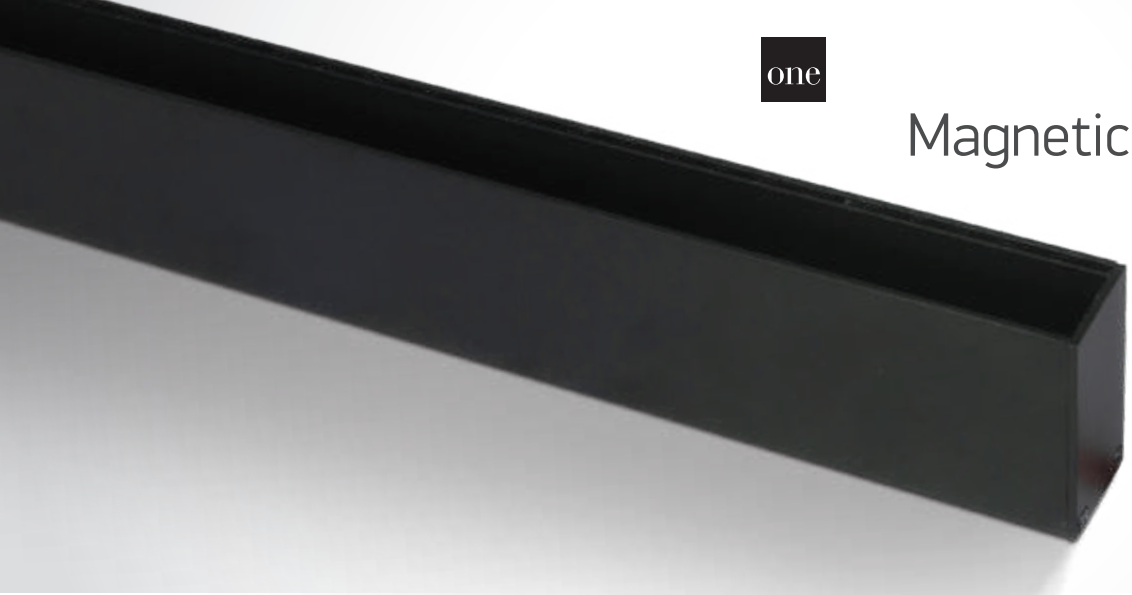

42001B/B

Magnetic Surface Profiles
MIDI

42001B/B

42001B | 42002B | 48V | Magnetic profile | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.

5 YEAR

Optional suspension kit. Order code 42026A/B.

Complete with 2pcs end caps.

Complete with cover.

MIDI



42001B/W

42001B | 42002B | 48V | Magnetic profile | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.

new

5 YEAR

new



Optional suspension kit. Order code 42026A/W.

Complete with 2pcs end caps.

Complete with cover.

MIDI



42012AB/B

42012AB | Corner for 42001B & 42002B | Aluminium

5 YEAR

1

new

42012AB/W

Complete with 2pcs mechanical connectors.

MIDI



42012BB/B

42012BB | Corner wall to wall (IN) for 42001B & 42002B | Aluminium

5 YEAR

1

new

42012BB/W

Complete with 2pcs mechanical connectors.

MIDI



Order Code	Colour	Length	Input	Class		Notes
42001B/B	Black	1m	48V	III	1	-
42001B/W	White	1m	48V	III	1	-
42002B/B	Black	2m	48V	III	1	-
42002B/W	White	2m	48V	III	1	-

Magnetic Surface Profiles
MAXI

one

42001/B

42001 | **42002** | **42003** | 48V | Magnetic profile | ON/OFF / DALI | Aluminium — Max 10m/driver | Max 400W/circuit

5 YEAR



Optional suspension kit. Order code 42026/B.



Complete with 2pcs end caps.



Complete with cover.

MAXI



42001/W

42001 | **42002** | **42003** | 48V | Magnetic profile | ON/OFF / DALI | Aluminium — Max 10m/driver | Max 400W/circuit

new

5 YEAR

new



Optional suspension kit. Order code 42026/W.



Complete with 2pcs end caps.

Complete with cover.

MAXI



42012A/B

42012A | Corner for 42001, 42002 & 42003 | Aluminium

5 YEAR — 1

new



42012A/W

Complete with 2pcs mechanical connectors.

MAXI



42012B/B

42012B | Corner wall to wall (IN) for 42001, 42002 & 42003 | Aluminium

5 YEAR — 1

new



42012B/W



Complete with 2pcs mechanical connectors.

MAXI



42012C/B

42012C | Corner wall to wall (OUT) for 42001, 42002 & 42003 | Aluminium

5 YEAR — 1

Complete with 2pcs mechanical connectors.

MAXI



Order Code	Colour	Length	Input	Class		Notes
42001/W	White	1m	48V	III	1	-
42001/B	Black	1m	48V	III	1	-
42002/W	White	2m	48V	III	1	-
42002/B	Black	2m	48V	III	1	-
42003/W	White	3m	48V	III	1	-
42003/B	Black	3m	48V	III	1	-

Magnetic Surface Profiles
MAXI

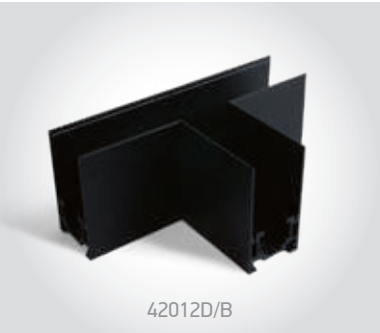

42012D/B

42012D | T-connector with live connector for 42001, 42002 & 42003 | Aluminium

5 YEAR

1

new

new

42012D/W

Complete with wiring.

MAXI



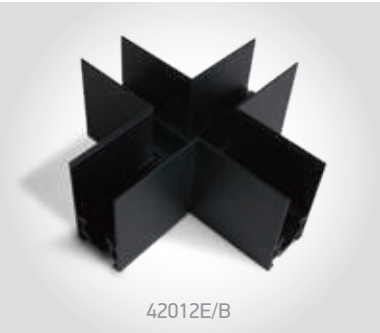

42012E/B

42012E | X-connector with live connector for 42001, 42002 & 42003 | Aluminium

5 YEAR

1

new

new



42012E/W

Complete with wiring.

MAXI



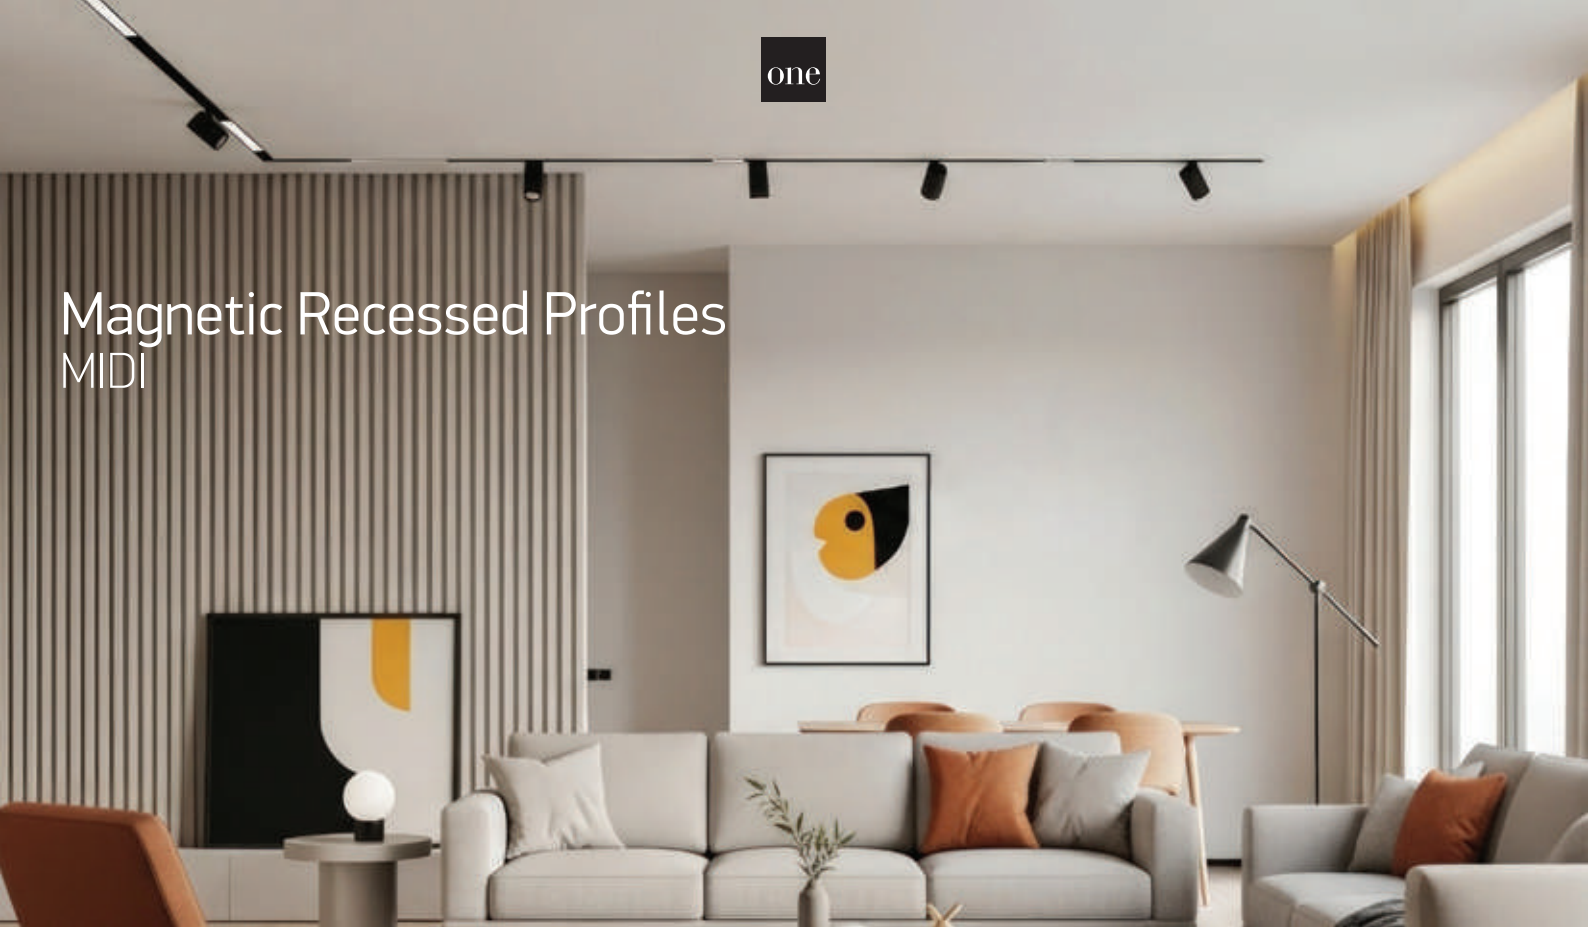

Magnetic Recessed Profiles
MIDI

42001RB/B

42001RB | 42002RB | 48V | Recessed magnetic profile | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.

CE 5 YEAR



42001RB/W

Complete with fixing clips, 1pc mechanical & 2pcs side connectors.

Complete with 2pcs end caps.

Complete with cover.

MIDI



42012ARB/B

42012ARB | Recessed corner for 42001RB & 42002RB | Aluminium

5 YEAR | 1 | CE

42012ARB/W

Complete with 2pcs mechanical connectors & 4pcs side connectors.

MIDI







42012BRB/B

42012BRB | Recessed corner wall to wall (IN) for 42001RB & 42002RB | Aluminium

5 YEAR | 1 | CE



42012BRB/W

Complete with 2pcs mechanical connectors & 4pcs side connectors.

MIDI







Order Code	Colour	Length	Input	Class				Notes
42001RB/W	White	1m	48V	III	35x1000mm	100mm	1	-
42001RB/B	Black	1m	48V	III	35x1000mm	100mm	1	-
42002RB/W	White	2m	48V	III	35x2000mm	100mm	1	-
42002RB/B	Black	2m	48V	III	35x2000mm	100mm	1	-

Magnetic Recessed Profiles
MAXI

42001R | 42002R | 48V | Recessed magnetic profile | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.

CE 5 YEAR


Complete with fixing clips, 1pc mechanical & 2pcs side connectors.


Complete with 2pcs end caps.


Complete with cover.

MAXI



42012AR | Recessed corner for 42001R & 42002R | Aluminium

5 YEAR 1 CE

Complete with 2pcs mechanical connectors & 4pcs side connectors.



MAXI



42012BR | Recessed corner wall to wall (IN) for 42001R & 42002R | Aluminium

5 YEAR 1 CE

Complete with 2pcs mechanical connectors & 4pcs side connectors.



MAXI



Order Code	Colour	Length	Input	Class				Notes
42001R/W	White	1m	48V	III	42x1000mm	120mm	1	-
42001R/B	Black	1m	48V	III	42x1000mm	120mm	1	-
42002R/W	White	2m	48V	III	42x2000mm	120mm	1	-
42002R/B	Black	2m	48V	III	42x2000mm	120mm	1	-

Magnetic Trimless Profiles
MINI

42001ATR | **42002ATR** | 48V | Trimless recessed | ON/OFF / DALI | Aluminium — Max 10m/driver | Max 400W/circuit.

new

Complete with 2 pcs mechanical connectors.

Complete with 2 pcs end caps.

MINI



42001ATR | **42002ATR** | 48V | Trimless recessed | ON/OFF / DALI | Aluminium — Max 10m/driver | Max 400W/circuit.

new

Complete with 2 pcs mechanical connectors.

Complete with 2 pcs end caps.

MINI



42012AATR | Trimless recessed corner for 42001ATR & 42002ATR | Aluminium

new

new

MINI





Order Code	Colour	Length	Input	Class				Notes
42001ATR/W	White	1m	48V	III	30x1000mm	60mm	1	-
42001ATR/B	Black	1m	48V	III	30x1000mm	60mm	1	-
42002ATR/W	White	2m	48V	III	30x2000mm	60mm	1	-
42002ATR/B	Black	2m	48V	III	30x2000mm	60mm	1	-

Magnetic Trimless Profiles
MAXI

42001TR/W

42001TR | **42002TR** | 48V | Trimless recessed | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.

new

5 YEAR

Complete with 2 pcs mechanical connectors & 4 pcs side connectors.

Complete with 2 pcs end caps.

Complete with cover.

MAXI



42001TR/B

42001TR | **42002TR** | 48V | Trimless recessed | ON/OFF / DALI | Aluminium

Max 10m/driver | Max 400W/circuit.

5 YEAR

Complete with 2 pcs mechanical connectors & 4 pcs side connectors.

Complete with 2 pcs end caps.

Complete with cover.

MAXI



42012ATR/B

42012ATR | Trimless recessed corner for 42001TR & 42002TR | Aluminium

Can not pass through cutout hole.

5 YEAR

1

new

42012ATR/W



120mm

MAXI



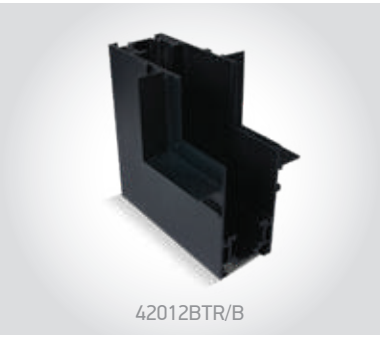

42012BTR/B

42012BTR | Trimless recessed corner wall to wall (IN) for 42001TR & 42002TR | Aluminium

Can not pass through cutout hole.

5 YEAR

1

42x42mm (x2)

120mm

MAXI



Order Code	Colour	Length	Input	Class				Notes
42001TR/W	White	1m	48V	III	42x1000mm	120mm	1	-
42001TR/B	Black	1m	48V	III	42x2000mm	120mm	1	-
42002TR/W	White	2m	48V	III	42x1000mm	120mm	1	-
42002TR/B	Black	2m	48V	III	42x2000mm	120mm	1	-

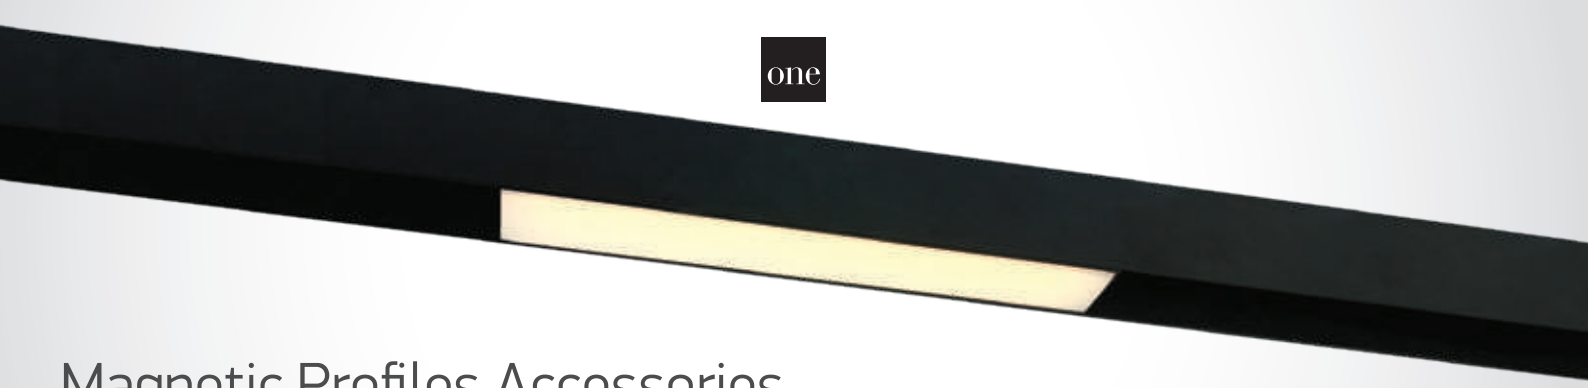

Magnetic Profiles Accessories

42032A

42032A | Mechanical connector for MINI & MIDI

5 YEAR

1

MINI ✓ MIDI ✓

42032

42032 | Mechanical connector for 42001, 42002 & 42003

5 YEAR

1

MAXI ✓

42022A/B

42022A | End caps for 42001A & 42002A

5 YEAR

1

42022A/W

MINI ✓



42022B/B

42022B | End caps for 42001B, 42002B, 42001RB & 42002RB

5 YEAR

1

42022B/W

MIDI ✓



42022/B

42022 | End caps for 42001, 42002, 42003, 42001R & 42002R

5 YEAR

1

42022/W

MAXI ✓



Magnetic Profiles Accessories

42004A/B

42004A | 48V | Power supply cable | ON/OFF / DALI | Plastic

200cm

5 YEAR

1

MINI	MIDI	MAXI
✓	✓	✓



42004C/B

42004C | 48V | Live connector/corner | ON/OFF / DALI | Plastic

5 YEAR

1

MINI	MIDI	MAXI
✓	✓	✓



42004B/B

42004B | 48V | Live connector | ON/OFF / DALI | Plastic

5 YEAR

1

MINI	MIDI	MAXI
✓	✓	✓

new

42026/B

42026 | Suspension kit 3m for 42001, 42002 & 42003

5 YEAR

1

42026/W

MAXI
✓

42006BX/B

42006BX | 250W | 48V DC | Driver for magnetic profiles

5 YEAR

42006BX/W

MINI	MIDI	MAXI
✓	✓	✓



Order Code	Input	Power	Output	Class	Dimmable		Notes
42006BX/W	230V	250W	48V DC		NO	20	-
42006BX/B	230V	250W	48V DC		NO	20	-

Magnetic Linear Lights
CCT V

42100AA/B/V

42100AA | 8W | Linear light | Aluminium + PC

LED BUILT IN · 90 CRI · CCT V · CE · 3 YEAR · new · IP20

42100AA/W/V

MINI ✓ MIDI ✓ 120°



42100BA/B/V

42100BA | 16W | Linear light | Aluminium + PC

LED BUILT IN · 90 CRI · CCT V · CE · 3 YEAR · new · IP20

42100BA/W/V

MINI ✓ MIDI ✓ 120°

42100A/B/V

42100A | 15W | Linear light | Aluminium + PC

LED BUILT IN · 90 CRI · CCT V · CE · 3 YEAR · new · IP20

42100A/W/V

MAXI ✓ 120°

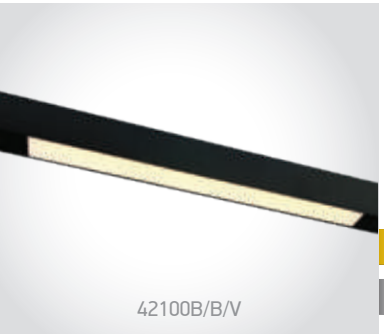
42100B/B/V

42100B | 25W | Linear light | Aluminium + PC

LED BUILT IN · 90 CRI · CCT V · CE · 3 YEAR · new · IP20

42100B/W/V

MAXI ✓ 120°

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100AA/W/V	White	CCT V	3000K-3500K-4000K	8W	640lm	120°	48V	III	50	-
42100AA/B/V	Black	CCT V	3000K-3500K-4000K	8W	640lm	120°	48V	III	50	-
42100BA/W/V	White	CCT V	3000K-3500K-4000K	16W	1280lm	120°	48V	III	40	-
42100BA/B/V	Black	CCT V	3000K-3500K-4000K	16W	1280lm	120°	48V	III	40	-
42100A/B/W	Black	Warm white	3000K	15W	1200lm	120°	48V	III	40	-
42100A/W/V	White	CCT V	3000K-3500K-4000K	15W	1200lm	120°	48V	III	40	-
42100A/B/V	Black	CCT V	3000K-3500K-4000K	15W	1200lm	120°	48V	III	40	-
42100B/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V	III	20	-
42100B/W/V	White	CCT V	3000K-3500K-4000K	25W	2000lm	120°	48V	III	20	-
42100B/B/V	Black	CCT V	3000K-3500K-4000K	25W	2000lm	120°	48V	III	20	-

Magnetic Linear Lights
DALI

42100AAL | 8W | Linear light | CCT DALI Tunable | Aluminium + PC

new
IP20

LED BUILT IN
90 CRI
DALI DIMMABLE
CCT V
CE 3 YEAR

MINI ✓ MIDI ✓ 120°



42100BAL | 16W | Linear light | CCT DALI Tunable | Aluminium + PC

new
IP20

LED BUILT IN
90 CRI
DALI DIMMABLE
CCT V
CE 3 YEAR

MINI ✓ MIDI ✓ 120°

42100AL | 15W | Linear light | CCT DALI Tunable | Aluminium + PC

new
IP20

LED BUILT IN
90 CRI
DALI DIMMABLE
CCT V
CE 3 YEAR

MAXI ✓ 120°

42100BL | 25W | Linear light | CCT DALI Tunable | Aluminium + PC

new
IP20

LED BUILT IN
90 CRI
DALI DIMMABLE
CCT V
CE 3 YEAR

MAXI ✓ 120°

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100AAL/W/V	White	CCT V	3000K-4000K tunable	8W	640lm	120°	48V	III	50	-
42100AAL/B/V	Black	CCT V	3000K-4000K tunable	8W	640lm	120°	48V	III	50	-
42100BAL/W/V	White	CCT V	3000K-4000K tunable	16W	1280lm	120°	48V	III	40	-
42100BAL/B/V	Black	CCT V	3000K-4000K tunable	16W	1280lm	120°	48V	III	40	-
42100AL/W/V	White	CCT V	3000K-4000K tunable	15W	1200lm	120°	48V	III	40	-
42100AL/B/W	Black	Warm white	3000K	15W	1200lm	120°	48V	III	40	-
42100AL/B/V	Black	CCT V	3000K-4000K tunable	15W	1200lm	120°	48V	III	40	-
42100BL/W/V	White	CCT V	3000K-4000K tunable	25W	2000lm	120°	48V	III	20	-
42100BL/B/V	Black	CCT V	3000K-4000K tunable	25W	2000lm	120°	48V	III	20	-

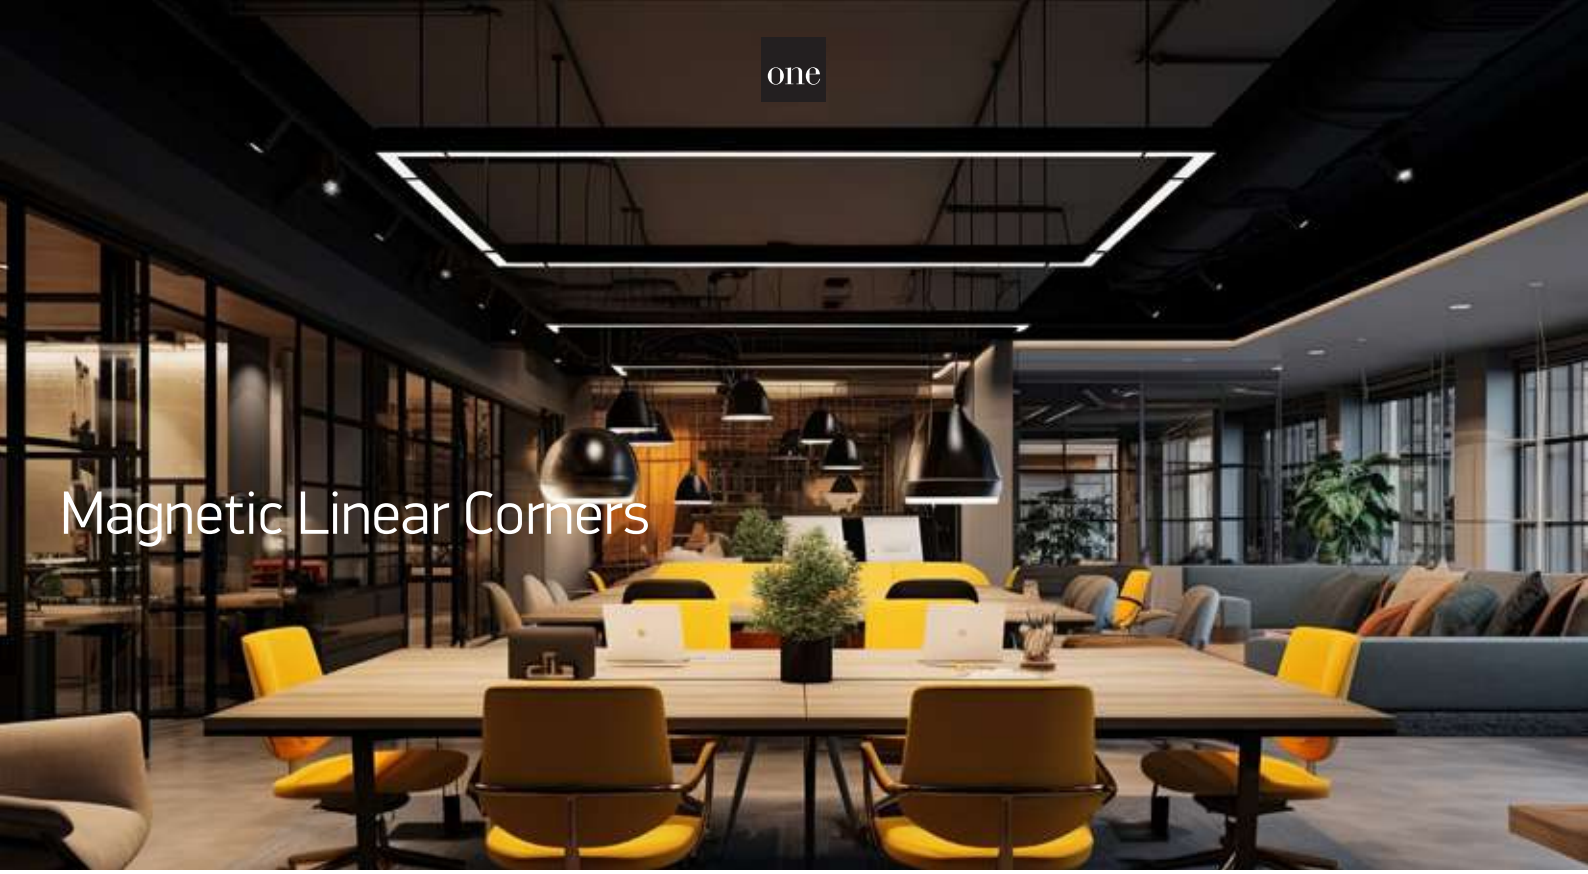

Magnetic Linear Corners

42100EA | 16W | Corner light | Aluminium + PC

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

MINI ✓ | MIDI ✓ | 120°



42100E | 25W | Corner light | Aluminium + PC

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

MAXI ✓ | 120°



42100EL | 25W | Corner light | CCT DALI Tunable | Aluminium + PC

new

IP20

LED BUILT IN

90 CRI

DALI DIMMABLE

CCT V

CE

3 YEAR

MAXI ✓ | 120°



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100EA/B/V	Black	CCT V	3000K-3500K-4000K	16W	1280lm	120°	48V	III	10	-
42100E/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V	III	12	-
42100E/B/V	Black	CCT V	3000K-3500K-4000K	25W	2000lm	120°	48V	III	12	-
42100EL/B/W	Black	Warm white	3000K	25W	2000lm	120°	48V	III	12	-
42100EL/B/V	Black	CCT V	3000K-4000K tunable	25W	2000lm	120°	48V	III	12	-

Magnetic Linear Lights

42102A/B/V

42102A | 12W | Linear spots | Aluminium

LED BUILT IN · 90 CRI · CCT V · CE · 3 YEAR · new · IP20

MAXI 38°

DALI

42102AL/B/V

42102AL | 12W | Linear spots | CCT DALI Tunable | Aluminium

LED BUILT IN · 90 CRI · DALI DIMMABLE · CCT V · CE · 3 YEAR · new · IP20

MAXI 38°



42102B/B/V

42102B | 22W | Linear spots | Aluminium

LED BUILT IN · 90 CRI · CCT V · CE · 3 YEAR · new · IP20

MAXI 38°

DALI

42102BL/B/V

42102BL | 22W | Linear spots | CCT DALI Tunable | Aluminium

LED BUILT IN · 90 CRI · DALI DIMMABLE · CCT V · CE · 3 YEAR · new · IP20

MAXI 38°

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42102A/B/W	Black	Warm white	3000K	12W	960lm	38°	48V	III	40	-
42102A/B/V	Black	CCT V	3000K-3500K-4000K	12W	960lm	38°	48V	III	40	-
42102AL/B/V	Black	CCT V	3000K-4000K tunable	12W	960lm	38°	48V	III	40	-
42102B/B/V	Black	CCT V	3000K-3500K-4000K	22W	1760lm	38°	48V	III	30	-
42102BL/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	30	-
42102BL/B/V	Black	CCT V	3000K-4000K tunable	22W	1760lm	38°	48V	III	30	-

Magnetic Adjustable Linear Spots

42106A | 12W | Linear spots | Adjustable | Aluminium

new

IP20

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE MAXI · ADJUSTABLE P&P MINI · CE · 3 YEAR



42106AL | 12W | Linear spots | CCT DALI Tunable | Adjustable | Aluminium

new

IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · CCT V · ADJUSTABLE MAXI · ADJUSTABLE P&P MINI · CE · 3 YEAR



42106B | 22W | Linear spots | Adjustable | Aluminium

new

IP20

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE MAXI · ADJUSTABLE P&P MINI · CE · 3 YEAR



42106BL | 22W | Linear spots | CCT DALI Tunable | Adjustable | Aluminium

new

IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · CCT V · ADJUSTABLE MAXI · ADJUSTABLE P&P MINI · CE · 3 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42106A/W/V	White	CCT V	3000K-3500K-4000K	12W	960lm	38°	48V	III	30	-
42106A/B/W	Black	Warm white	3000K	12W	960lm	38°	48V	III	30	-
42106A/B/V	Black	CCT V	3000K-3500K-4000K	12W	960lm	38°	48V	III	30	-
42106AL/W/V	White	CCT V	3000K-4000K tunable	12W	960lm	38°	48V	III	30	-
42106AL/B/V	Black	CCT V	3000K-4000K tunable	12W	960lm	38°	48V	III	30	-
42106B/W/V	White	CCT V	3000K-3500K-4000K	22W	1760lm	38°	48V	III	20	-
42106B/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	20	-
42106B/B/V	Black	CCT V	3000K-3500K-4000K	22W	1760lm	38°	48V	III	20	-
42106BL/W/V	White	CCT V	3000K-4000K tunable	22W	1760lm	38°	48V	III	20	-
42106BL/B/W	Black	Warm white	3000K	22W	1760lm	38°	48V	III	20	-
42106BL/B/V	Black	CCT V	3000K-4000K tunable	22W	1760lm	38°	48V	III	20	-

Magnetic Linear Spots

42112AA | 12W | Linear spots | Aluminium

new
IP20

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR

MINI ✓ | MIDI ✓ | 50°

42112AAL | 12W | Linear spots | CCT DALI Tunable | Aluminium

new
IP20

LED BUILT IN
90 CRI
DALI DIMMABLE
CCT V
CE
3 YEAR

MINI ✓ | MIDI ✓ | 50°

42112BA | 18W | Linear spots | Aluminium

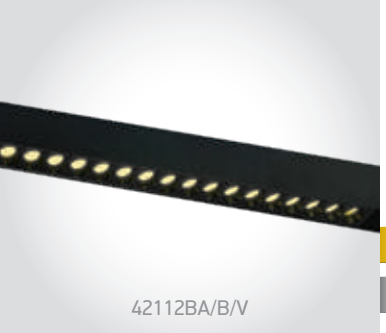

new
IP20

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR

MINI ✓ | MIDI ✓ | 50°

42112BAL | 18W | Linear spots | CCT DALI Tunable | Aluminium

new
IP20

LED BUILT IN
90 CRI
DALI DIMMABLE
CCT V
CE
3 YEAR

MINI ✓ | MIDI ✓ | 50°

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42112AA/W/V	White	CCT V	3000K-3500K-4000K	12W	960lm	50°	48V	III	50	-
42112AA/B/V	Black	CCT V	3000K-3500K-4000K	12W	960lm	50°	48V	III	50	-
42112AAL/W/V	White	CCT V	3000K-4000K tunable	12W	960lm	50°	48V	III	50	-
42112AAL/B/V	Black	CCT V	3000K-4000K tunable	12W	960lm	50°	48V	III	50	-
42112BA/W/V	White	CCT V	3000K-3500K-4000K	18W	1440lm	50°	48V	III	40	-
42112BA/B/V	Black	CCT V	3000K-3500K-4000K	18W	1440lm	50°	48V	III	40	-
42112BAL/W/V	White	CCT V	3000K-4000K tunable	18W	1440lm	50°	48V	III	40	-
42112BAL/B/V	Black	CCT V	3000K-4000K tunable	18W	1440lm	50°	48V	III	40	-

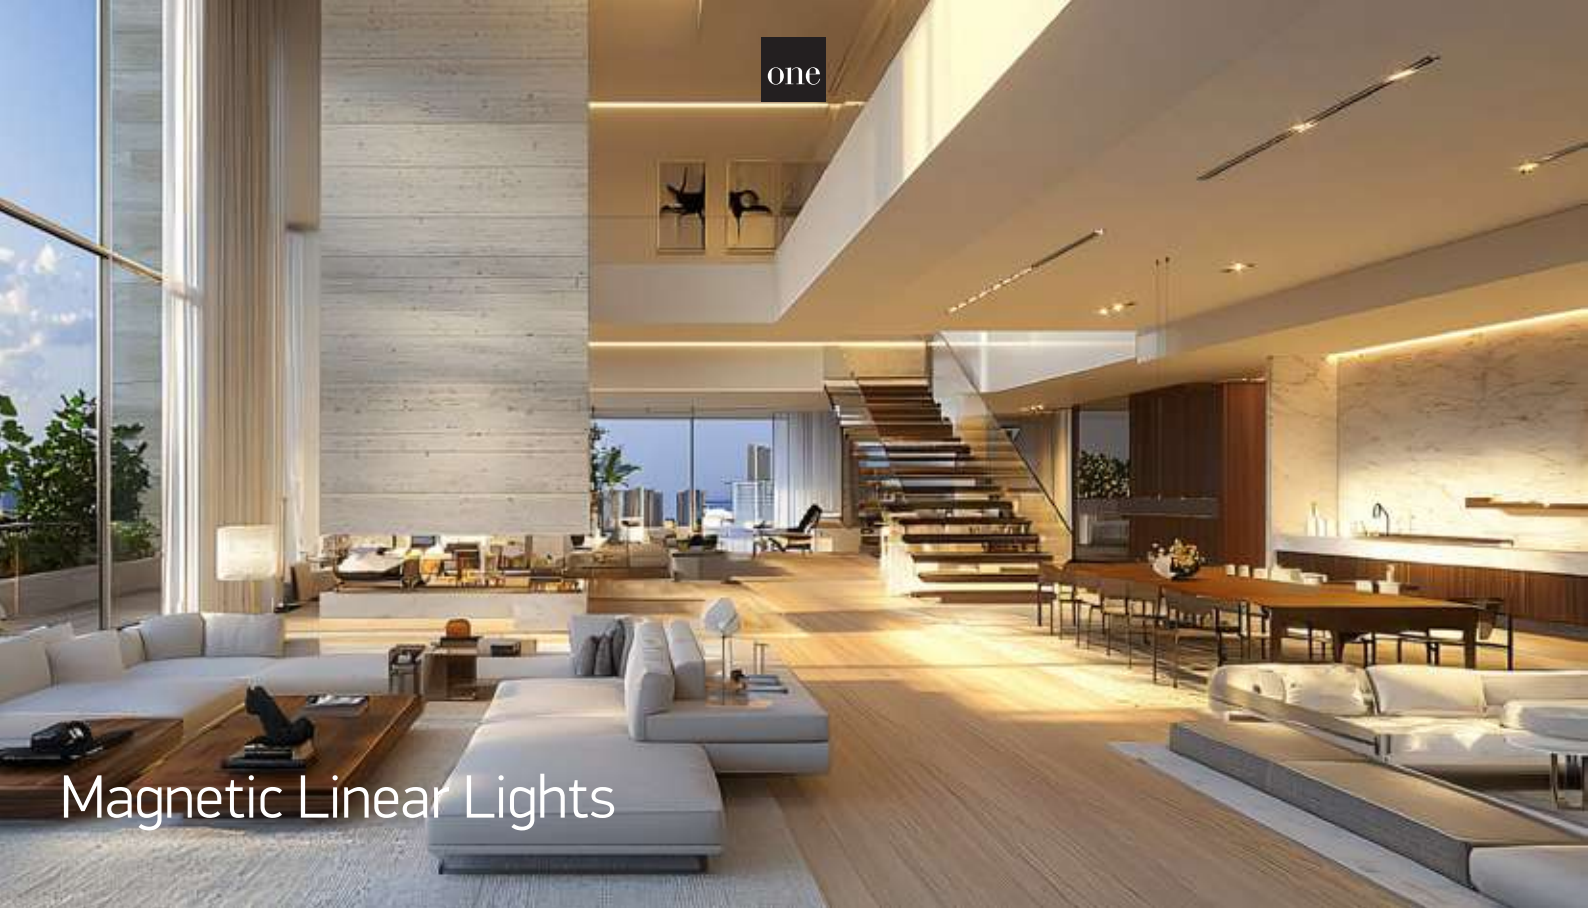

Magnetic Linear Lights

42120B/B/W

42120B | 12W | SMD | Linear light | Assymetric | Aluminium + PC

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20

MAXI ✓ 90°



42104B/B/V

42104B | 12W | Linear spots | Aluminium

new · DARK LIGHT · IP20

LED BUILT IN · 90 CRI · CCT V · CE · 3 YEAR

MAXI ✓ 36°



42104BL/B/V

42104BL | 12W | Linear spots | CCT DALI Tunable | Aluminium

new · DARK LIGHT · IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · CCT V · CE · 3 YEAR

MAXI ✓ 36°



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42120B/B/W	Black	Warm white	3000K	12W	960lm	90°	48V	III	40	-
42104B/B/W	Black	Warm white	3000K	12W	840lm	36°	48V	III	40	-
42104B/B/V	Black	CCT V	3000K-3500K-4000K	12W	840lm	36°	48V	III	40	-
42104BL/B/V	Black	CCT V	3000K-4000K tunable	12W	840lm	36°	48V	III	40	-

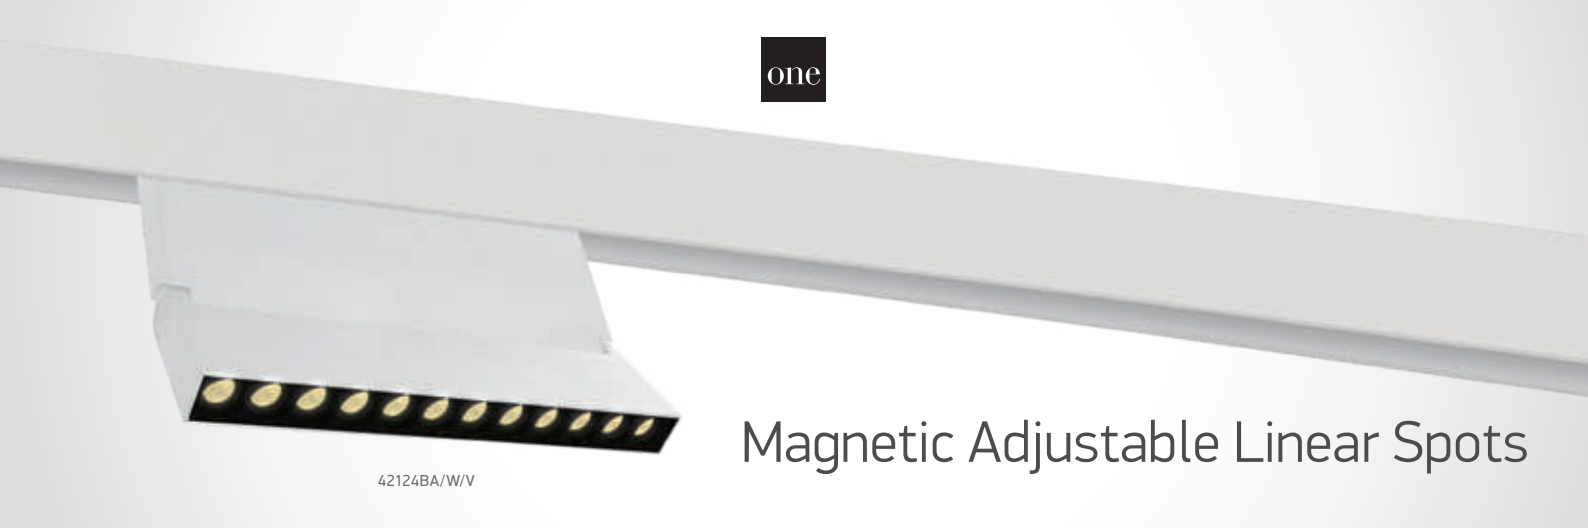

42124BA/W/V

Magnetic Adjustable Linear Spots

42124AA/W/V

42124AA | 10W | Linear spots | Adjustable | Aluminium

new

IP20

LED BUILT IN

90 CRI

CCT V

ADJUSTABLE MIDI

ADJUSTABLE MINI

CE

3 YEAR



42124AA/B/V

42124AA | 10W | Linear spots | Adjustable | Aluminium

new

IP20

LED BUILT IN

90 CRI

CCT V

ADJUSTABLE MIDI

ADJUSTABLE MINI

CE

3 YEAR



42124BA/W/V

42124BA | 20W | Linear spots | Adjustable | Aluminium

new

IP20

LED BUILT IN

90 CRI

CCT V

ADJUSTABLE MIDI

ADJUSTABLE MINI

CE

3 YEAR



42124BA/B/V

42124BA | 20W | Linear spots | Adjustable | Aluminium

new

IP20

LED BUILT IN

90 CRI

CCT V

ADJUSTABLE MIDI

ADJUSTABLE MINI

CE

3 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42124AA/W/V	White	CCT V	3000K-3500K-4000K	10W	800lm	38°	48V	III	30	-
42124AA/B/V	Black	CCT V	3000K-3500K-4000K	10W	800lm	38°	48V	III	30	-
42124BA/W/V	White	CCT V	3000K-3500K-4000K	20W	1600lm	38°	48V	III	20	-
42124BA/B/W	Black	Warm white	3000K	20W	1600lm	38°	48V	III	20	-
42124BA/B/V	Black	CCT V	3000K-3500K-4000K	20W	1600lm	38°	48V	III	20	-

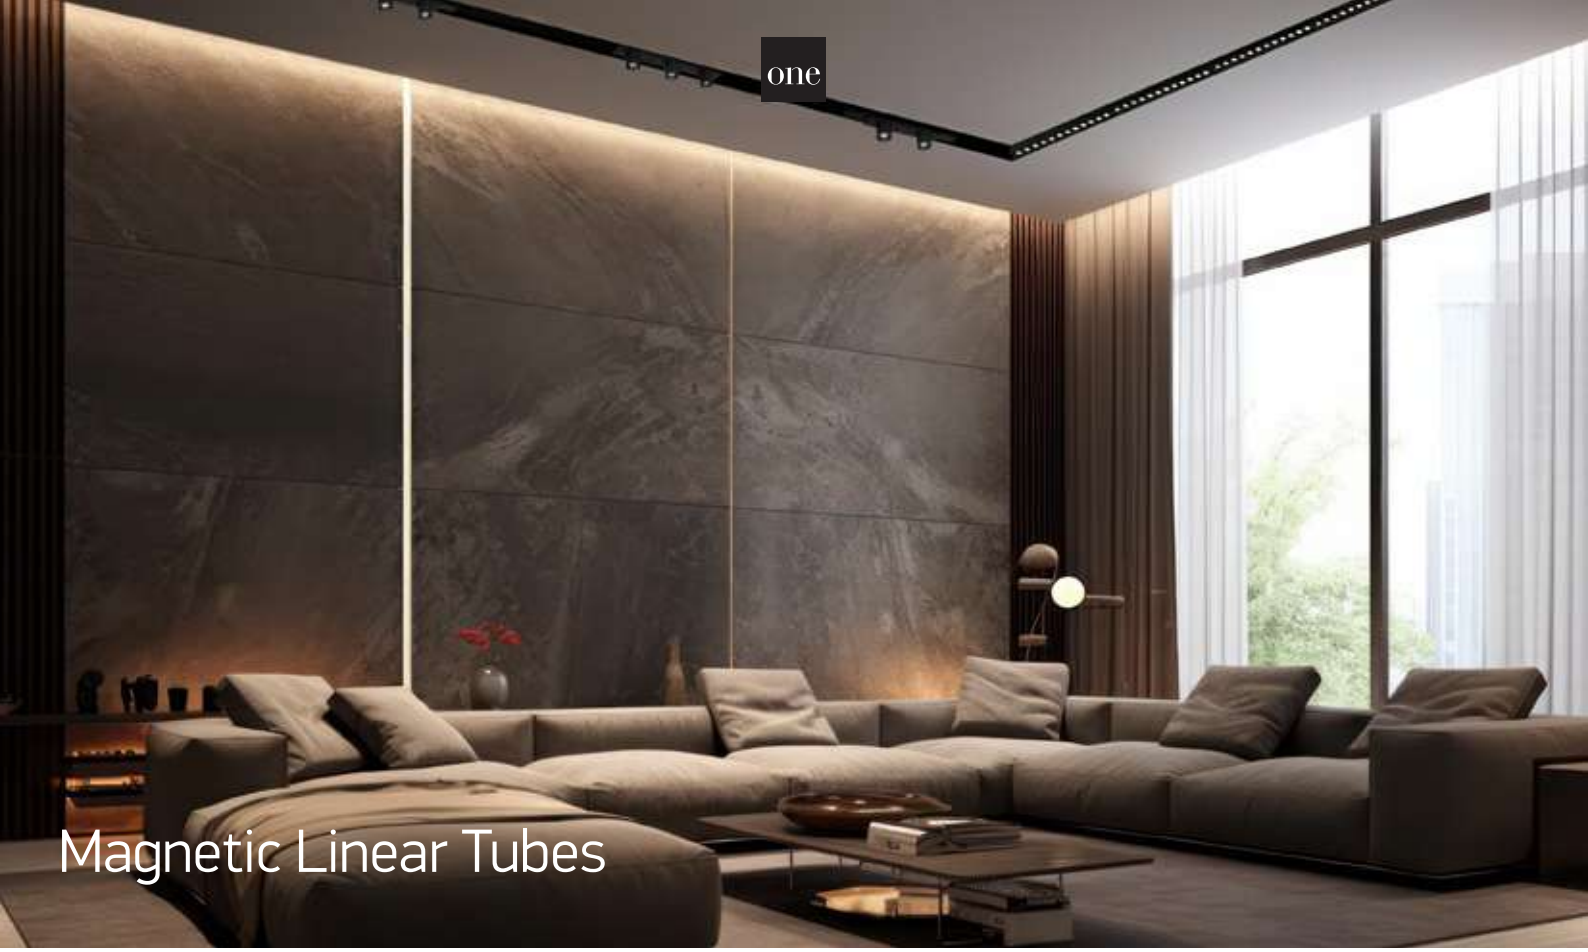

Magnetic Linear Tubes

42128A | 2x2W | SMD | Linear spots | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
IP20

MINI ✓ MIDI ✓ 36°



42128B | 3x2W | SMD | Linear spots | Aluminium

new
LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
IP20

MINI ✓ MIDI ✓ 36°

42128C | 5x2W | SMD | Linear spots | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
IP20

MINI ✓ MIDI ✓ 36°

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42128A/B/W	Black	Warm white	3000K	2x2W	200lm	36°	48V	III	50	-
42128B/B/V	Black	CCT V	3000K-3500K-4000K	3x2W	300lm	36°	48V	III	50	-
42128C/B/W	Black	Warm white	3000K	5x2W	500lm	36°	48V	III	30	-

Magnetic Ball Lights

42134 | 7W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20

MINI ✓ MIDI ✓ MAXI ✓ P&P ✓ 36°



42134A | 2x7W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
3 YEAR
IP20

MINI ✓ MIDI ✓ MAXI ✓ P&P ✓ 36°



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42134/B/W	Black	Warm white	3000K	7W	560lm	36°	48V	III	30	-
42134A/B/W	Black	Warm white	3000K	2x7W	1120lm	36°	48V	III	30	-

Magnetic Spots
CCT V

42122A | 5W | Aluminium

new

IP20

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR



42108 | 6W | Aluminium

new

IP20

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR



42108A | 2x6W | Aluminium

new

IP20

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR



42118 | 26W | COB | Aluminium

IP20

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42122A/B/W	Black	Warm white	3000K	3W	240lm	38°	48V	III	30	-
42122A/W/V	White	CCT V	3000K-3500K-4000K	5W	400lm	38°	48V	III	30	-
42122A/B/V	Black	CCT V	3000K-3500K-4000K	5W	400lm	38°	48V	III	30	-
42108/W/V	White	CCT V	3000K-3500K-4000K	6W	480lm	38°	48V	III	30	-
42108/B/V	Black	CCT V	3000K-3500K-4000K	6W	480lm	38°	48V	III	30	-
42108A/W/V	White	CCT V	3000K-3500K-4000K	2x6W	2x480lm	38°	48V	III	20	-
42108A/B/V	Black	CCT V	3000K-3500K-4000K	2x6W	2x480lm	38°	48V	III	20	-
42118/B/W	Black	Warm white	3000K	26W	2080lm	50°	48V	III	20	-

Magnetic Spots
DALI

42122AL | 5W | CCT DALI Tunable | Aluminium

new

IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · CCT V · ADJUSTABLE · CE · 3 YEAR



42108L | 6W | CCT DALI Tunable | Aluminium

new

IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · CCT V · ADJUSTABLE · CE · 3 YEAR



42108AL | 2x6W | CCT DALI Tunable | Aluminium

new

IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · CCT V · ADJUSTABLE · CE · 3 YEAR



42118L | 26W | COB | DALI | Aluminium

IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · ADJUSTABLE · CE · 3 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42122AL/W/V	White	CCT V	3000K-4000K tunable	5W	400lm	38°	48V	III	30	-
42122AL/B/V	Black	CCT V	3000K-4000K tunable	5W	400lm	38°	48V	III	30	-
42108L/W/V	White	CCT V	3000K-4000K tunable	6W	480lm	38°	48V	III	30	-
42108L/B/V	Black	CCT V	3000K-4000K tunable	6W	480lm	38°	48V	III	30	-
42108AL/W/V	White	CCT V	3000K-4000K tunable	2x6W	2x480lm	38°	48V	III	20	-
42108AL/B/V	Black	CCT V	3000K-4000K tunable	2x6W	2x480lm	38°	48V	III	20	-
42118L/B/W	Black	Warm white	3000K	26W	2080lm	50°	48V	III	20	-

Magnetic Spots
CCT V

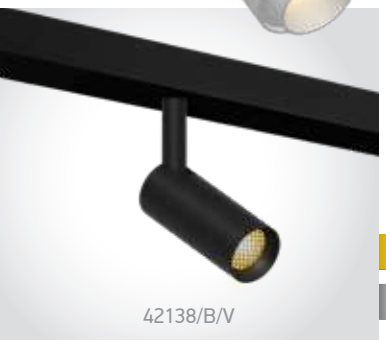
42138/B/V

42138 | 7W | Honeycomb | Aluminium

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR · new · IP20

42138/W/V

MINI ✓ | MIDI ✓ | MAXI ✓ | P&P ✓ | 38°



42110/B/V

42110 | 8W | Honeycomb | Aluminium

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR · new · DARK LIGHT · IP20

42110/W/V

MINI ✓ | MIDI ✓ | MAXI ✓ | P&P ✓ | 15°



42144/B/V

42144 | 10W | Honeycomb | Aluminium

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR · new · DARK LIGHT · IP20

42144/W/V

MINI ✓ | MIDI ✓ | MAXI ✓ | P&P ✓ | 38°



42140/B/W

42140 | 7W | Adjustable beam 10°-38° | Aluminium

Zoomable.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · new · IP20

42140/W/W

MINI ✓ | MIDI ✓ | MAXI ✓ | P&P ✓ | 10°-38°



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42138/W/V	White	CCT V	3000K-3500K-4000K	7W	560lm	38°	48V		30	-
42138/B/V	Black	CCT V	3000K-3500K-4000K	7W	560lm	38°	48V		30	-
42110/W/V	White	CCT V	3000K-3500K-4000K	8W	640lm	15°	48V		30	-
42110/B/W	Black	Warm white	3000K	8W	640lm	15°	48V		30	-
42110/B/V	Black	CCT V	3000K-3500K-4000K	8W	640lm	15°	48V		30	-
42144/W/V	White	CCT V	3000K-3500K-4000K	10W	700lm	38°	48V		20	-
42144/B/V	Black	CCT V	3000K-3500K-4000K	10W	700lm	38°	48V		20	-
42140/W/W	White	Warm white	3000K	7W	490lm	10°-38°	48V		30	-
42140/B/W	Black	Warm white	3000K	7W	490lm	10°-38°	48V		30	

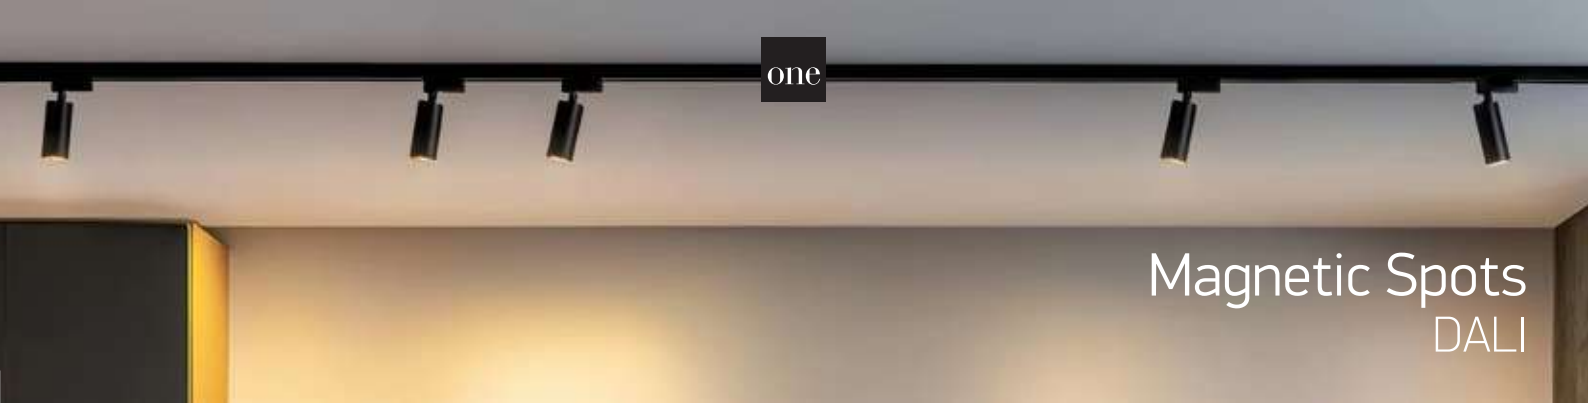

Magnetic Spots
DALI

42138L | 7W | CCT DALI Tunable | Honeycomb | Aluminium

new
IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · CCT V · ADJUSTABLE · CE · 3 YEAR

MINI ✓ | MIDI ✓ | MAXI ✓ | P&P ✓ | 38°



42110L | 8W | CCT DALI Tunable | Honeycomb | Aluminium

new
DARK LIGHT
IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · CCT V · ADJUSTABLE · CE · 3 YEAR

MINI ✓ | MIDI ✓ | MAXI ✓ | P&P ✓ | 15°



42144L | 10W | CCT DALI Tunable | Honeycomb | Aluminium

new
DARK LIGHT
IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · CCT V · ADJUSTABLE · CE · 3 YEAR

MINI ✓ | MIDI ✓ | MAXI ✓ | P&P ✓ | 38°



42140L | 7W | DALI | Adjustable beam 10°-38° | Aluminium

Zoomable.

new
IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · ADJUSTABLE · CE · 3 YEAR

MINI ✓ | MIDI ✓ | MAXI ✓ | P&P ✓ | 10°-38°



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42138L/W/V	White	CCT V	3000K-4000K tunable	7W	560lm	38°	48V	III	30	-
42138L/B/V	Black	CCT V	3000K-4000K tunable	7W	560lm	38°	48V	III	30	-
42110L/W/V	White	CCT V	3000K-4000K tunable	8W	640lm	15°	48V	III	30	-
42110L/B/V	Black	CCT V	3000K-4000K tunable	8W	640lm	15°	48V	III	30	-
42144L/W/V	White	CCT V	3000K-4000K tunable	10W	700lm	38°	48V	III	20	-
42144L/B/V	Black	CCT V	3000K-4000K tunable	10W	700lm	38°	48V	III	20	-
42140L/W/W	White	Warm white	3000K	7W	490lm	10°-38°	48V	III	30	-
42140L/B/W	Black	Warm white	3000K	7W	490lm	10°-38°	48V	III	30	-

Magnetic Spots
CCT V

42114A/B/V

42114A | 12W | Aluminium

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR · new · IP20

42114A/W/V

MINI ✓ MIDI ✓ MAXI ✓ P&P ✓ 38°



42114B/B/V

42114B | 24W | Aluminium

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR · new · IP20

42114B/W/V

MINI ✓ MIDI ✓ MAXI ✓ P&P ✓ 38°



42114C/B/V

42114C | 30W | Aluminium

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR · new · IP20

42114C/W/V

MINI ✓ MIDI ✓ MAXI ✓ P&P ✓ 38°



42116C/B/W

42116C | 15W | COB | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20

MINI ✓ MIDI ✓ MAXI ✓ 38°



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42114A/W/V	White	CCT V	3000K-3500K-4000K	12W	960lm	38°	48V	III	24	-
42114A/B/V	Black	CCT V	3000K-3500K-4000K	12W	960lm	38°	48V	III	24	-
42114B/W/V	White	CCT V	3000K-3500K-4000K	24W	1920lm	38°	48V	III	16	-
42114B/B/V	Black	CCT V	3000K-3500K-4000K	24W	1920lm	38°	48V	III	16	-
42114C/W/V	White	CCT V	3000K-3500K-4000K	30W	2400lm	38°	48V	III	16	-
42114C/B/W	Black	Warm white	3000K	30W	2400lm	38°	48V	III	16	-
42114C/B/V	Black	CCT V	3000K-3500K-4000K	30W	2400lm	38°	48V	III	16	-
42116C/B/W	Black	Warm white	3000K	15W	1200lm	38°	48V	III	16	-

Magnetic Spots
DALI

42114AL | 12W | CCT DALI Tunable | Aluminium

new

IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · CCT V · ADJUSTABLE · CE · 3 YEAR

MINI	MIDI	MAXI	P&P	
✓	✓	✓	✓	38°



42114BL | 24W | CCT DALI Tunable | Aluminium

new

IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · CCT V · ADJUSTABLE · CE · 3 YEAR

MINI	MIDI	MAXI	P&P	
✓	✓	✓	✓	38°



42114CL | 30W | CCT DALI Tunable | Aluminium

new

IP20

LED BUILT IN · 90 CRI · DALI DIMMABLE · CCT V · ADJUSTABLE · CE · 3 YEAR

MINI	MIDI	MAXI	P&P	
✓	✓	✓	✓	38°



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42114AL/W/V	White	CCT V	3000K-4000K tunable	12W	960lm	38°	48V	III	24	-
42114AL/B/V	Black	CCT V	3000K-4000K tunable	12W	960lm	38°	48V	III	24	-
42114BL/W/V	White	CCT V	3000K-4000K tunable	24W	1920lm	38°	48V	III	16	-
42114BL/B/W	Black	Warm white	3000K	24W	1920lm	38°	48V	III	16	-
42114BL/B/V	Black	CCT V	3000K-4000K tunable	24W	1920lm	38°	48V	III	16	-
42114CL/W/V	White	CCT V	3000K-4000K tunable	30W	2400lm	38°	48V	III	16	-
42114CL/B/V	Black	CCT V	3000K-4000K tunable	30W	2400lm	38°	48V	III	16	-

Magnetic Pendants

42130A/B/V

42130A | 5W | Aluminium

new | DARK LIGHT | IP20 | LED BUILT IN | 90 CRI | CCT V | CE | 3 YEAR



MINI	MIDI	MAXI	P&P	38°
✓	✓	✓	✓	

42130B/B/V

42130B | 9W | Aluminium

new | DARK LIGHT | IP20 | LED BUILT IN | 90 CRI | CCT V | CE | 3 YEAR

42130B/W/V



MINI	MIDI	MAXI	P&P	38°
✓	✓	✓	✓	

42132/B/W

42132 | 7W | COB | Aluminium

With removable tube.

DARK LIGHT | IP20 | LED BUILT IN | 90 CRI | CE | 3 YEAR

With tube.

Without tube.



MINI	MIDI	MAXI	P&P
✓	✓	✓	✓

42142/B/V

42142 | 10W | Aluminium

new | IP20 | LED BUILT IN | 90 CRI | CCT V | ADJUSTABLE | CE | 3 YEAR

42142/W/V



MINI	MIDI	MAXI	P&P	110°
✓	✓	✓	✓	

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42130A/B/V	Black	CCT V	3000K-3500K-4000K	5W	350lm	38°	48V	III	30	-
42130B/W/V	White	CCT V	3000K-3500K-4000K	9W	630lm	38°	48V	III	30	-
42130B/B/W	Black	Warm white	3000K	9W	630lm	38°	48V	III	30	-
42130B/B/V	Black	CCT V	3000K-3500K-4000K	9W	630lm	38°	48V	III	30	-
42132/B/W	Black	Warm white	3000K	7W	490lm	10° / 38°	48V	III	30	-
42142/W/V	White	CCT V	3000K-3500K-4000K	10W	700lm	110°	48V	III	20	-
42142/B/V	Black	CCT V	3000K-3500K-4000K	10W	700lm	110°	48V	III	20	-

Magnetic Pendants
DALI

42130BL/B/V

42130BL | 9W | CCT DALI Tunable | Aluminium

new | DARK LIGHT | IP20

LED BUILT IN | 90 CRI | DALI DIMMABLE | CCT V | CE | 3 YEAR

42130BL/W/V



MINI	MIDI	MAXI	P&P	38°
✓	✓	✓	✓	

42132L/B/W

42132L | 7W | COB | DALI | Aluminium

DARK LIGHT | IP20

LED BUILT IN | 90 CRI | DALI DIMMABLE | CE | 3 YEAR

With tube.

Without tube.



MINI	MIDI	MAXI	P&P
✓	✓	✓	✓

42142L/B/V

42142L | 10W | CCT DALI Tunable | Aluminium

new | IP20

LED BUILT IN | 90 CRI | DALI DIMMABLE | CCT V | ADJUSTABLE | CE | 3 YEAR

42142L/W/V



MINI	MIDI	MAXI	P&P	110°
✓	✓	✓	✓	

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42130BL/W/V	White	CCT V	3000K-4000K tunable	9W	630lm	38°	48V	III	30	-
42130BL/B/V	Black	CCT V	3000K-4000K tunable	9W	630lm	38°	48V	III	30	-
42132L/B/W	Black	Warm white	3000K	7W	490lm	10° / 38°	48V	III	30	-
42142L/W/V	White	CCT V	3000K-4000K tunable	10W	700lm	110°	48V	III	20	-
42142L/B/V	Black	CCT V	3000K-4000K tunable	10W	700lm	110°	48V	III	20	-

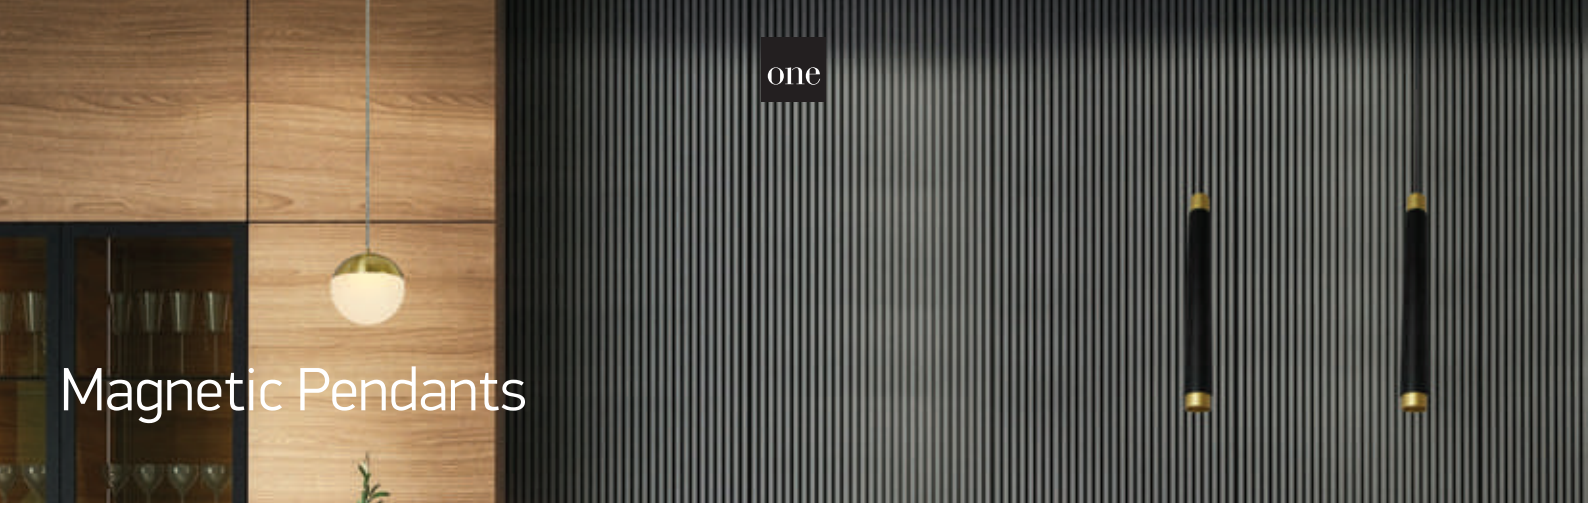

Magnetic Pendants

42126AA/B/W

42126AA | 5W | LED | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20



MINI ✓ | MIDI ✓ | MAXI ✓ | P&P ✓ | 38°

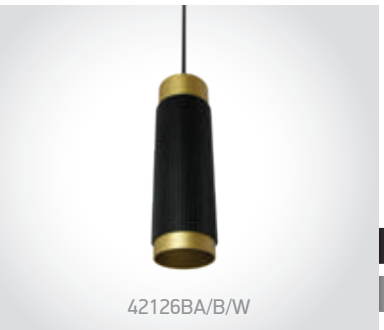
42126BA/B/W

42126BA | 12W | LED | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20



MINI ✓ | MIDI ✓ | MAXI ✓ | P&P ✓ | 38°

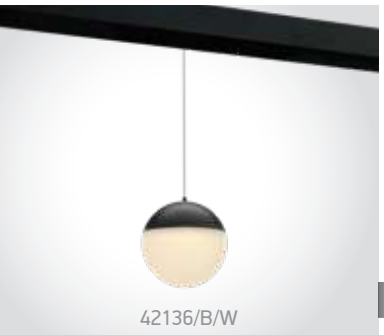
42136/B/W

42136 | 10W | SMD | Aluminium + acrylic

LED BUILT IN
90 CRI
CE
3 YEAR
IP20

42136/BBS/W

MINI ✓ | MIDI ✓ | MAXI ✓ | P&P ✓

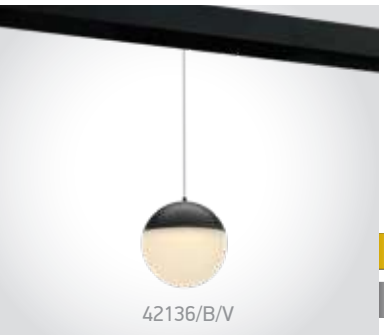
42136/B/V

42136 | 10W | Aluminium + acrylic

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
new
IP20

42136/W/V

MINI ✓ | MIDI ✓ | MAXI ✓ | P&P ✓

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42126AA/B/W	Black/Brass	Warm white	3000K	5W	350lm	38°	48V	III	50	-
42126BA/B/W	Black/Brass	Warm white	3000K	12W	840lm	38°	48V	III	25	-
42136/B/W	Black	Warm white	3000K	10W	700lm	-	48V	III	15	-
42136/BBS/W	Brushed brass	Warm white	3000K	10W	700lm	-	48V	III	15	-
42136/W/V	White	CCT V	3000K-3500K-4000K	10W	700lm	-	48V	III	15	-
42136/B/V	Black	CCT V	3000K-3500K-4000K	10W	700lm	-	48V	III	15	-

Magnetic Plafo
CCT V

42146 | 30W | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
new
CE 3 YEAR
IP20

MINI ✓ | P&P ✓



42146L | 30W | CCT DALI Tunable | Aluminium

LED BUILT IN
90 CRI
DALI DIMMABLE
UGR19
CCT V
new
CE 3 YEAR
IP20

MINI ✓ | P&P ✓



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
42146/W/V	White	CCT V	3000K-3500K-4000K	30W	2700lm	48V	III	1	-
42146/B/V	Black	CCT V	3000K-3500K-4000K	30W	2700lm	48V	III	1	-
42146L/W/V	White	CCT V	3000K-4000K tunable	30W	2700lm	48V	III	1	-
42146L/B/V	Black	CCT V	3000K-4000K tunable	30W	2700lm	48V	III	1	-

one
Plug & Play
P&P
Watch video

Plug & Play
Accessories

42004PM/B

42004PM | Surface rod 7cm | Aluminium | Compatible with all surface accessories — Plug & Play.

new IP20

5 YEAR · 50

42004PM/W

P&P



42004PN/B

42004PN | Surface rod 33cm | Aluminium | Compatible with all surface accessories — Plug & Play.

new IP20

5 YEAR · 50

42004PN/W

P&P



42004PP/B

42004PP | Surface rod 63cm | Aluminium | Compatible with all surface accessories — Plug & Play.

new IP20

5 YEAR · 25

42004PP/W

P&P



42004PA/B

42004PA | Power supply cable + end cap | ON/OFF / DALI | Aluminium — Plug & Play.

new IP20

200cm

5 YEAR · 50

42004PA/W

P&P



42004PB/B

42004PB | Suspended/surface end cap | Aluminium — Plug & Play.

new IP20

5 YEAR · 50

42004PB/W

P&P



Plug & Play
Accessories

42004PD/B

42004PD | Surface base with power supply & end cap | ON/OFF / DALI | Aluminium — Plug & Play.

new

IP20

5 YEAR — 40

42004PD/W

P&P



42004PR/B

42004PR | Recessed base with power supply cable & end cap | ON/OFF / DALI | Aluminium — Plug & Play.

new

IP20

200cm — 5 YEAR — 20

42004PR/W



P&P

42004PC/B

42004PC | Driver base + end cap | ON/OFF / DALI | Aluminium — Suitable for driver 89240XL / Driver must be ordered separately.

new

IP20

200cm — 5 YEAR — 50

42004PC/W



P&P

42004PE/B

42004PE | Power supply cable adjustable corner | ON/OFF / DALI | Aluminium — Plug & Play.

new

IP20

ADJUSTABLE — 200cm — 5 YEAR — 25

42004PE/W



P&P

42004PG/B

42004PG | Suspended/surface adjustable corner | Aluminium — Plug & Play.

new

IP20

ADJUSTABLE — 200cm — 5 YEAR — 25

42004PG/W



P&P

Plug & Play
Accessories

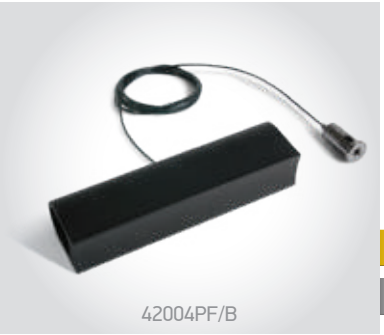
42004PF/B

42004PF | Suspended/surface connector | Aluminium

Plug & Play.

new

IP20

5 YEAR | 25

42004PF/W

P&P



42004PH/B

42004PH | Suspended/surface ceiling to wall corner | Aluminium

Plug & Play.

new

IP20

5 YEAR | 50

42004PH/W

P&P



42004PJ/B

42004PJ | Suspended/surface T-connector | Aluminium

Plug & Play.

new

IP20

5 YEAR | 25

42004PJ/W

P&P



42004PK/B

42004PK | Suspended/surface Y-connector | Aluminium

Plug & Play.

new

IP20

5 YEAR | 25

42004PK/W

P&P



42004PL/B

42004PL | Suspended/surface X-connector | Aluminium

Plug & Play.

new

IP20

5 YEAR | 25

42004PL/W

P&P



Magnetic Adjustable Profiles

Plug & Play

42001P/B

42001P | 42002P | 42003P | Magnetic profile | ON/OFF / DALI | Aluminium — Max 15m/driver | Max 250W/circuit.

ADJUSTABLE

CE 5 YEAR

P&P

new

IP20



42001P/W

42001P | 42002P | 42003P | Magnetic profile | ON/OFF / DALI | Aluminium — Max 15m/driver | Max 250W/circuit.

ADJUSTABLE

CE 5 YEAR

P&P

new

IP20



42001PA/B

42001PA | 42002PA | 42003PA | Cover for 42001P, 42002P & 42003P — Plug & Play.

CE 5 YEAR

P&P

new



42001PA/W

42001PA | 42002PA | 42003PA | Cover for 42001P, 42002P & 42003P — Plug & Play.

CE 5 YEAR

P&P

new



Order Code	Colour	Length	Input	Class		Notes
42001P/W	White	380mm	48V	III	30	Suitable for only 1pc P&P spot
42001P/B	Black	380mm	48V	III	30	Suitable for only 1pc P&P spot
42002P/W	White	620mm	48V	III	20	Suitable for only 2pcs P&P spots
42002P/B	Black	620mm	48V	III	20	Suitable for only 2pcs P&P spots
42003P/W	White	980mm	48V	III	10	Suitable for only 4pcs P&P spots
42003P/B	Black	980mm	48V	III	10	Suitable for only 4pcs P&P spots
42001PA/W	White	380mm	-	-	50	-
42001PA/B	Black	380mm	-	-	50	-
42002PA/W	White	620mm	-	-	50	-
42002PA/B	Black	620mm	-	-	50	-
42003PA/W	White	980mm	-	-	25	-
42003PA/B	Black	980mm	-	-	25	-

one

Magnetic Adjustable Linear Lights

Plug & Play / CCT V & DALI

42100PA | 42100PB | 42100PC | Adjustable | Aluminium

Max 15m/driver | Max 250W/circuit.

new

IP20

LED BUILT IN

90 CRI

CCT V

ADJUSTABLE

CE 3 YEAR

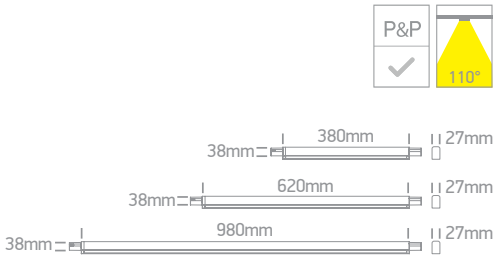

42100PAL | 42100PBL | 42100PCL | CCT DALI Tunable | Adjustable | Aluminium

Max 15m/driver | Max 250W/circuit.

new

IP20

LED BUILT IN

90 CRI

DALI DIMMABLE

CCT V

ADJUSTABLE

CE 3 YEAR

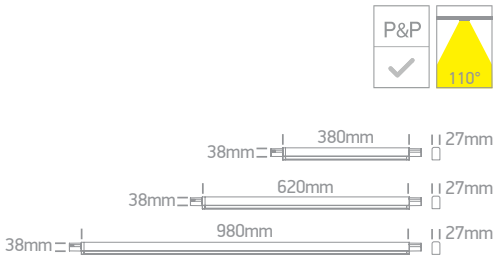

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42100PA/W/V	White	CCT V	3000K-3500K-4000K	15W	1200lm	110°	48V	III	30	380mm
42100PA/B/V	Black	CCT V	3000K-3500K-4000K	15W	1200lm	110°	48V	III	30	380mm
42100PB/W/V	White	CCT V	3000K-3500K-4000K	24W	1920lm	110°	48V	III	20	620mm
42100PB/B/V	Black	CCT V	3000K-3500K-4000K	24W	1920lm	110°	48V	III	20	620mm
42100PC/W/V	White	CCT V	3000K-3500K-4000K	32W	2560lm	110°	48V	III	10	980mm
42100PC/B/V	Black	CCT V	3000K-3500K-4000K	32W	2560lm	110°	48V	III	10	980mm
42100PAL/W/V	White	CCT V	3000K-4000K tunable	15W	1200lm	110°	48V	III	30	380mm
42100PAL/B/V	Black	CCT V	3000K-4000K tunable	15W	1200lm	110°	48V	III	30	380mm
42100PBL/W/V	White	CCT V	3000K-4000K tunable	24W	1920lm	110°	48V	III	20	620mm
42100PBL/B/V	Black	CCT V	3000K-4000K tunable	24W	1920lm	110°	48V	III	20	620mm
42100PCL/W/V	White	CCT V	3000K-4000K tunable	32W	2560lm	110°	48V	III	10	980mm
42100PCL/B/V	Black	CCT V	3000K-4000K tunable	32W	2560lm	110°	48V	III	10	980mm

one

Magnetic Adjustable Linear Spots

Plug & Play / CCT V

42112PBL/W/V

42112PC/B/V

42112PA/B/V

42112PA | 42112PB | 42112PC | Adjustable | Aluminium

Max 15m/driver | Max 250W/circuit.

LED BUILT IN

90 CRI

CCT V ADJUSTABLE

new

CE 3 YEAR

IP20

P&P

50°

38mm 380mm 27mm

38mm 620mm 27mm

38mm 980mm 27mm

42112PA/W/V

42112PA | 42112PB | 42112PC | Adjustable | Aluminium

Max 15m/driver | Max 250W/circuit.

LED BUILT IN

90 CRI

CCT V ADJUSTABLE

new

CE 3 YEAR

IP20

P&P

50°

38mm 380mm 27mm

38mm 620mm 27mm

38mm 980mm 27mm

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42112PA/W/V	White	CCT V	3000K-3500K-4000K	15W	1200lm	50°	48V	III	30	380mm
42112PA/B/V	Black	CCT V	3000K-3500K-4000K	15W	1200lm	50°	48V	III	30	380mm
42112PB/W/V	White	CCT V	3000K-3500K-4000K	24W	1920lm	50°	48V	III	20	620mm
42112PB/B/V	Black	CCT V	3000K-3500K-4000K	24W	1920lm	50°	48V	III	20	620mm
42112PC/W/V	White	CCT V	3000K-3500K-4000K	32W	2560lm	50°	48V	III	10	980mm
42112PC/B/V	Black	CCT V	3000K-3500K-4000K	32W	2560lm	50°	48V	III	10	980mm

Magnetic Adjustable Linear Spots

Plug & Play / CCT V & DALI

42112PAL/B/V

42112PAL | 42112PBL | 42112PCL | CCT DALI Tunable | Adjustable | Aluminium Max 15m/driver | Max 250W/circuit.

LED BUILT IN
90 CRI
DALI DIMMABLE
CCT V
ADJUSTABLE
CE
3 YEAR
new
IP20

P&P
50°

38mm 380mm 27mm
38mm 620mm 27mm
38mm 980mm 27mm

42112PAL/W/V

42112PAL | 42112PBL | 42112PCL | CCT DALI Tunable | Adjustable | Aluminium Max 15m/driver | Max 250W/circuit.

LED BUILT IN
90 CRI
DALI DIMMABLE
CCT V
ADJUSTABLE
CE
3 YEAR
new
IP20

P&P
50°

38mm 380mm 27mm
38mm 620mm 27mm
38mm 980mm 27mm

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
42112PAL/W/V	White	CCT V	3000K-4000K tunable	15W	1200lm	50°	48V	III	30	380mm
42112PAL/B/V	Black	CCT V	3000K-4000K tunable	15W	1200lm	50°	48V	III	30	380mm
42112PBL/W/V	White	CCT V	3000K-4000K tunable	24W	1920lm	50°	48V	III	20	620mm
42112PBL/B/V	Black	CCT V	3000K-4000K tunable	24W	1920lm	50°	48V	III	20	620mm
42112PCL/W/V	White	CCT V	3000K-4000K tunable	32W	2560lm	50°	48V	III	10	980mm
42112PCL/B/V	Black	CCT V	3000K-4000K tunable	32W	2560lm	50°	48V	III	10	980mm

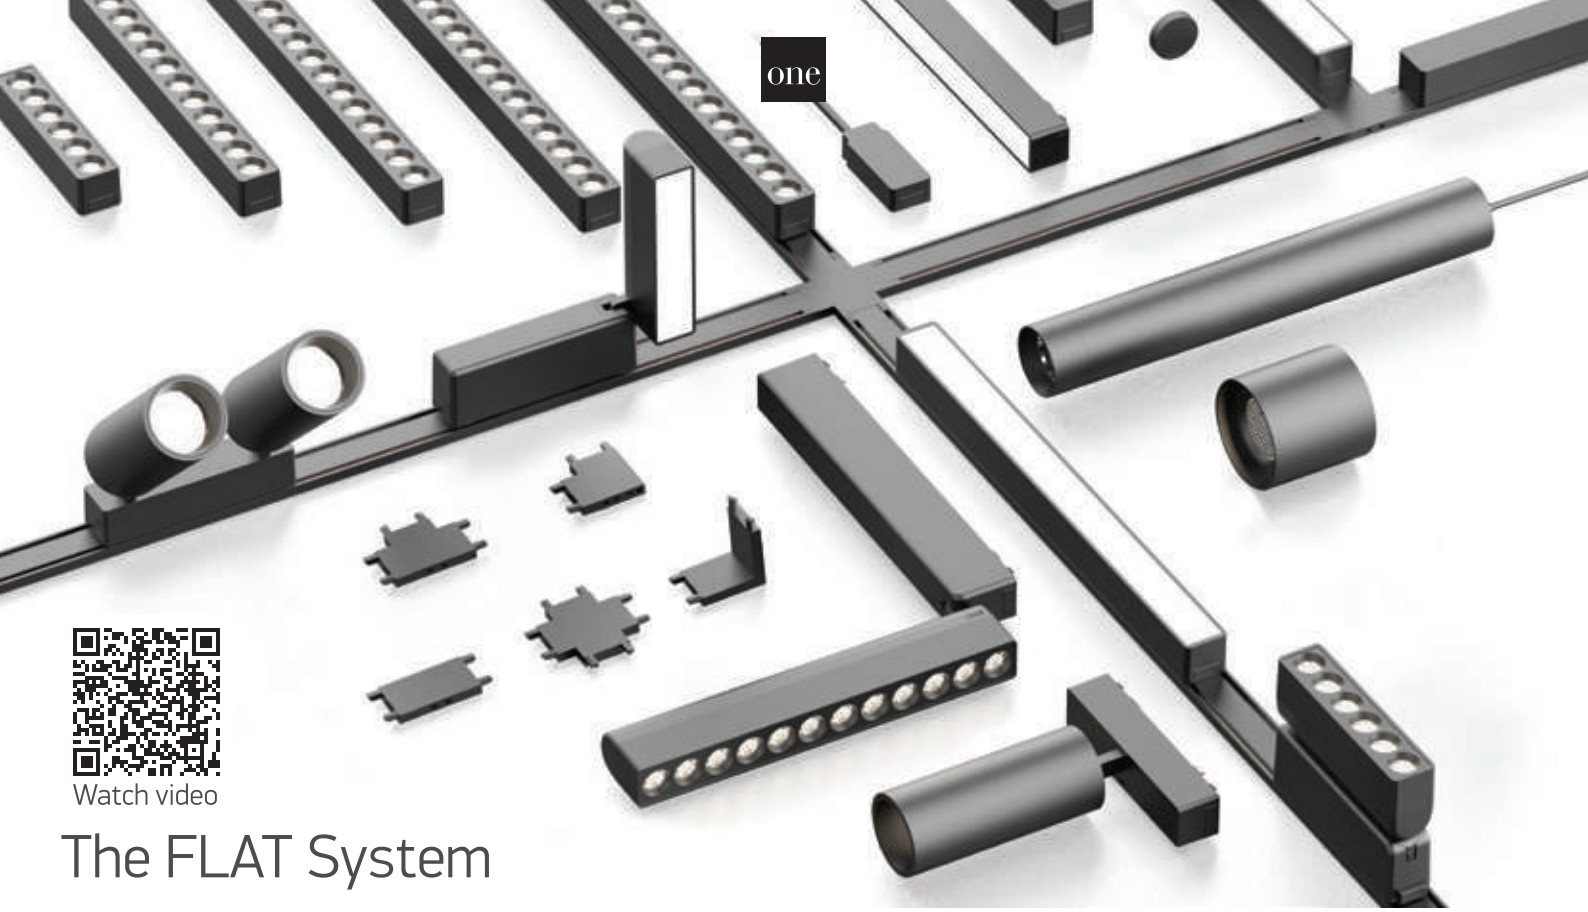

Watch video

The FLAT System

43001F/B

43001F | 43002F | 48V | Flat magnetic profile | ON/OFF | Aluminium

Max 15m/driver | Max 250W/circuit.

CE 3 YEAR

new

Optional 2m suspension kit.
43004FM/B

FLAT ✓

43006FA/B

43006FA | 90W | 48V DC | Driver for flat magnetic profile

CE 3 YEAR

new

IP20

FLAT ✓

43006FC/B

43006FC | 180W | 48V DC | Driver for flat magnetic profile

CE 3 YEAR

new

IP20

FLAT ✓



Order Code	Colour	Length	Input	Power	Output	Dimmable	Class			Notes
43001F/B	Black	1m	48V	-	-	-	III	-	30	-
43002F/B	Black	2m	48V	-	-	-	III	-	20	-
43006FA/B	Black	-	230V	90W	48V DC	NO	⏚	100cm	30	-
43006FC/B	Black	-	230V	180W	48V DC	NO	⏚	100cm	30	-

The FLAT System Accessories

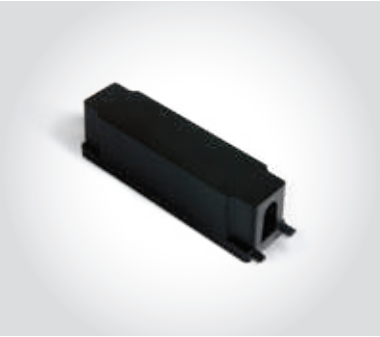

43004FA/B | End cap box for cable entry

3 YEAR | 50 | FLAT ✓

new

100mm
30mm

43004FG/B | Round corner 90º

3 YEAR | 50 | FLAT ✓

new

43004FB/B | Power supply cable

3 YEAR | 50 | FLAT ✓

new



43004FJ/B | Corner wall to ceiling | Wall to wall

3 YEAR | 50 | FLAT ✓

new

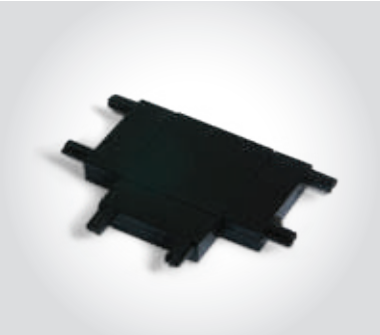

43004FK/B | T-connector

3 YEAR | 50 | FLAT ✓

new



43004FL/B | X-connector

3 YEAR | 50 | FLAT ✓

new

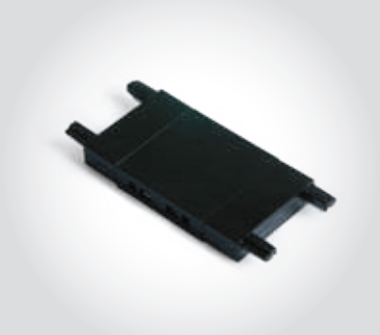

43004FF/B | Connector | Corner 90º

3 YEAR | 50

new



FLAT ✓

43100FB/B/V

Magnetic Linear Lights

FLAT System CCT V

43100FA/B/V

43100FA | 10W | Linear light | Aluminium

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

FLAT

120°

26mm

220mm

24mm

43100FB/B/V

43100FB | 10W | Linear light | Aluminium

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

FLAT

120°

26mm

300mm

24mm

43100FC/B/V

43100FC | 20W | Linear light | Aluminium

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

FLAT

120°

26mm

600mm

24mm

43100FD/B/V

43100FD | 30W | Linear light | Aluminium

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

FLAT

120°

26mm

900mm

24mm

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
43100FA/B/V	Black	CCT V	3000K-4000K-5000K	10W	800lm	120°	48V	III	30	-
43100FB/B/V	Black	CCT V	3000K-4000K-5000K	10W	800lm	120°	48V	III	30	-
43100FC/B/V	Black	CCT V	3000K-4000K-5000K	20W	1600lm	120°	48V	III	20	-
43100FD/B/V	Black	CCT V	3000K-4000K-5000K	30W	2400lm	120°	48V	III	10	-

Magnetic Linear Spots

FLAT System CCT V

43102FA | 6W | Linear spots | Aluminium

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

FLAT

24°

26mm

110mm

24mm

43102FB | 12W | Linear spots | Aluminium

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

FLAT

24°

26mm

220mm

24mm

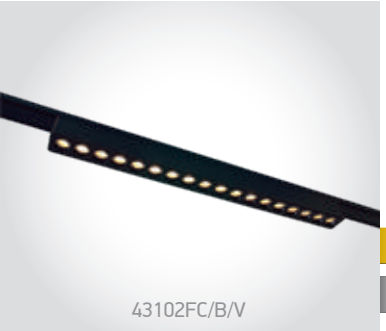

43102FC | 18W | Linear spots | Aluminium

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

FLAT

24°

26mm

330mm

24mm

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
43102FA/B/V	Black	CCT V	3000K-4000K-5000K	6W	540lm	24°	48V	III	50	-
43102FB/B/V	Black	CCT V	3000K-4000K-5000K	12W	1080lm	24°	48V	III	30	-
43102FC/B/V	Black	CCT V	3000K-4000K-5000K	18W	1620lm	24°	48V	III	30	-

Magnetic Adjustable Spots

FLAT System CCT V

one

43116F | 5W | Adjustable | Aluminium

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR · new · IP20



43122F | 7W | Adjustable | Aluminium

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR · new · IP20



43118F | 7W | Adjustable | Honeycomb | Aluminium

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR · new · IP20



43118FA | 7W | Adjustable | Aluminium

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR · new · IP20



43120F | 10W | Adjustable | Aluminium

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · CE · 3 YEAR · new · IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
43116F/B/V	Black	CCT V	3000K-4000K-5000K	5W	450lm	38°	48V	III	50	-
43122F/B/V	Black	CCT V	3000K-4000K-5000K	7W	630lm	38°	48V	III	30	-
43118F/B/V	Black	CCT V	3000K-4000K-5000K	7W	630lm	38°	48V	III	25	-
43118FA/B/V	Black	CCT V	3000K-4000K-5000K	7W	630lm	38°	48V	III	25	-
43120F/B/V	Black	CCT V	3000K-4000K-5000K	10W	900lm	38°	48V	III	30	-

Magnetic Adjustable Linear Spots

FLAT System CCT V

43106FA/B/V

43106FA | 6W | Linear spots | Adjustable | Aluminium

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · new · IP20 · CE · 3 YEAR



43106FB/B/V

43106FB | 12W | Linear spots | Adjustable | Aluminium

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · new · IP20 · CE · 3 YEAR

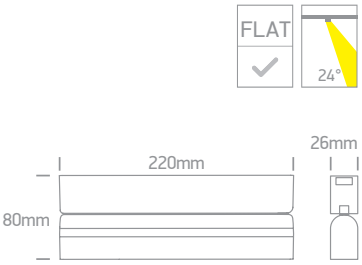

43108FA/B/V

43108FA | 5W | Linear light | Adjustable | Aluminium

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · new · IP20 · CE · 3 YEAR



43108FB/B/V

43108FB | 10W | Linear light | Adjustable | Aluminium

LED BUILT IN · 90 CRI · CCT V · ADJUSTABLE · new · IP20 · CE · 3 YEAR

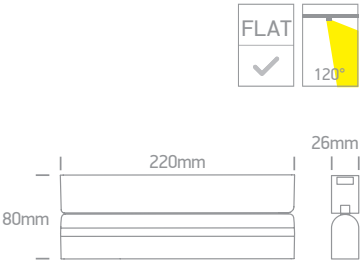

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
43106FA/B/V	Black	CCT V	3000K-4000K-5000K	6W	540lm	24°	48V	III	50	-
43106FB/B/V	Black	CCT V	3000K-4000K-5000K	12W	1080lm	24°	48V	III	30	-
43108FA/B/V	Black	CCT V	3000K-4000K-5000K	5W	400lm	120°	48V	III	50	-
43108FB/B/V	Black	CCT V	3000K-4000K-5000K	10W	800lm	120°	48V	III	30	-

Magnetic Lights
FLAT System CCT V

43110F | 6W | Honeycomb | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
new
3 YEAR
IP20

FLAT
24°

60mm
60mm

43112F | 9W | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
new
DARK LIGHT
3 YEAR
IP20

FLAT

165mm
165mm
40mm

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
43110F/B/V	Black	CCT V	3000K-4000K-5000K	6W	540lm	24°	48V	III	50	-
43112F/B/V	Black	CCT V	3000K-4000K-5000K	9W	450lm	-	48V	III	30	-

Magnetic Lights
FLAT System

43128FA/B/W

43128FA | 16W | Plastic

LED BUILT IN
90 CRI
CE
3 YEAR
new
IP20

FLAT

Φ 20mm x 1000mm

43126FA/B/V

43126FA | 10W | Adjustable | Plastic

LED BUILT IN
90 CRI
CCT V
ADJUSTABLE
CE
3 YEAR
new
IP20

FLAT



43126FB/B/V

43126FB | 20W | Adjustable | Plastic

LED BUILT IN
90 CRI
CCT V
ADJUSTABLE
CE
3 YEAR
new
IP20

FLAT



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
43128FA/B/W	Black	Warm white	3000K	16W	500lm	48V	III	10	-
43126FA/B/V	Black	CCT V	3000K-4000K-5000K	10W	900lm	48V	III	30	-
43126FB/B/V	Black	CCT V	3000K-4000K-5000K	20W	1800lm	48V	III	20	-

one

Office & Kitchen

Pages 333-354

10

The Magnifying Lens LED Lamp

61066/W

61066 | 8W | SMD | Plastic

Magnifying lens.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR

IP20





61066T | White floor stand for 61066

CE · 2 YEAR

1



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61066/W	White	Daylight	6000K	8W	760lm	230V		4	Complete with driver & SCHUKO plug

Reading LED Lamps

61108/W/V

61108 | 5,5W | SMD | Dimmable | Aluminium

LED BUILT IN
85 CRI
3-STEP DIMMABLE
CCT V
ADJUSTABLE
CE
2 YEAR
IP20

61108/B/V



61110/W/W

61110 | 5W | SMD | Dimmable | ABS

LED BUILT IN
80 CRI
3-STEP DIMMABLE
ADJUSTABLE
CE
2 YEAR
IP20

61110/B/W



61110A/W

61110A | 10W | MR16 | GU10 | ABS

ADJUSTABLE
CE
5 YEAR
IP20

61110A/B



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61108/W/V	White	CCT V	3000K-4000K- 6500K	5,5W	300lm	230V / 12V		8	With EU plug
61108/B/V	Black	CCT V	3000K-4000K-6500K	5,5W	300lm	230V / 12V		8	With EU plug
61110/W/W	White	Warm white	3000K	5W	200lm	230V / 12V		12	With EU plug
61110/B/W	Black	Warm white	3000K	5W	200lm	230V / 12V		12	With EU plug
61110A/W	White	-	-	10W	-	100-240V		12	With EU plug
61110A/B	Black	-	-	10W	-	100-240V		12	With EU plug

The LED Linear Range
CCT V

38225M/W/V

38225M | 25W | SMD | Aluminium + Plastic

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR
IP20

Optional suspension kit.
Order code 050090.



38248M/W/V

38248M | 48W | SMD | Aluminium + Plastic

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR
IP20

Optional suspension kit.
Order code 050090.



38250M/W/V

38250M | 50W | SMD | Aluminium + Plastic

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR
IP20

Optional suspension kit.
Order code 050090.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
38225M/W/V	White	CCT V	3000K-4000K-6500K	25W	2250lm	120°	230V		8	Complete with driver
38248M/W/V	White	CCT V	3000K-4000K-6500K	48W	4320lm	120°	230V		6	Complete with driver
38250M/W/V	White	CCT V	3000K-4000K-6500K	50W	4500lm	120°	230V		6	Complete with driver

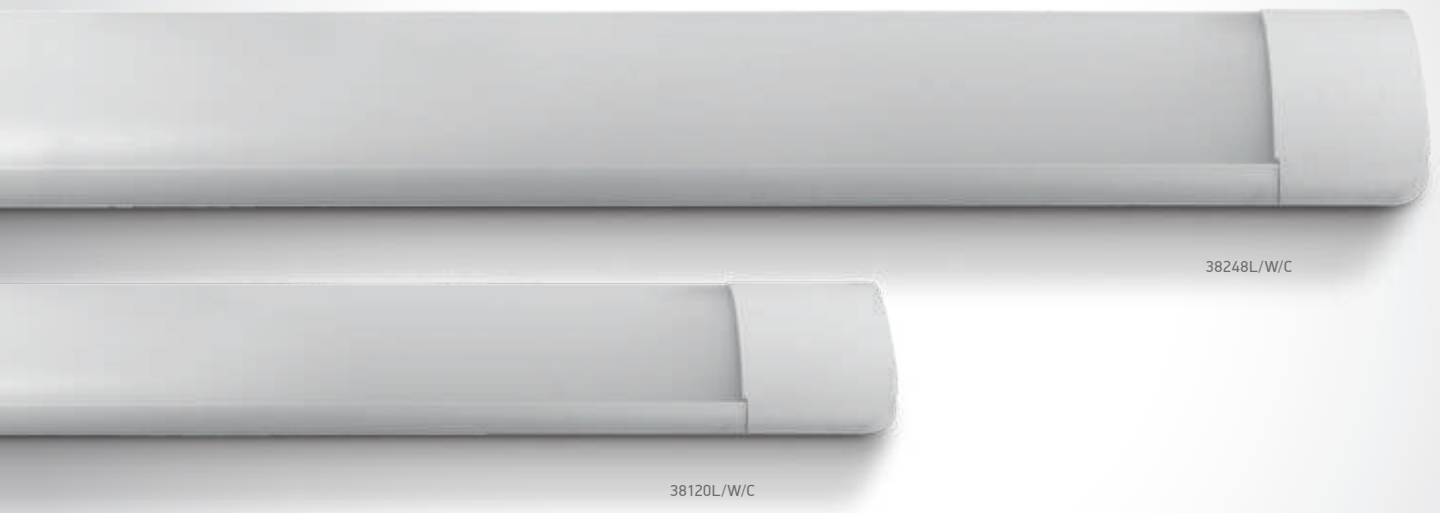

The LED Linear Range

38120L/W/W

38120L | 20W | SMD | Aluminium + PC

LED BUILT IN
80 CRI
CE
2 YEAR
IP20

Optional suspension kit.
Order code 050090.



38135L/W/W

38135L | 35W | SMD | Aluminium + PC

LED BUILT IN
80 CRI
CE
2 YEAR
IP20

Optional suspension kit.
Order code 050090.

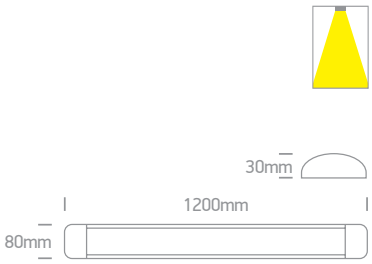

38248L/W/W

38248L | 48W | SMD | Aluminium + PC

LED BUILT IN
80 CRI
CE
2 YEAR
IP20

Optional suspension kit.
Order code 050090.

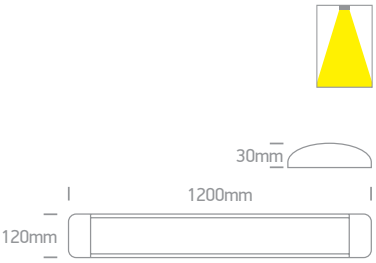

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38120L/W/C	White	Cool white	4000K	20W	1800lm	230V		12	Complete with driver
38120L/W/W	White	Warm white	3000K	20W	1700lm	230V		12	Complete with driver
38135L/W/W	White	Warm white	3000K	35W	3000lm	230V		12	Complete with driver
38248L/W/C	White	Cool white	4000K	48W	4300lm	230V		12	Complete with driver
38248L/W/W	White	Warm white	3000K	48W	4200lm	230V		12	Complete with driver

LED Linear Floating Light

38148N | 48W | SMD | Aluminium + PC

38148N/C

LED BUILT IN

80 CRI

CE

2 YEAR

IP20

38148N/W

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38148N/C	White	Cool white	4000K	48W	4800lm	230V		4	Complete with driver
38148N/W	White	Warm white	3000K	48W	4800lm	230V		4	Complete with driver

Suspended Up/Down UGR19

38012A/W/V

38012A | 40W Downlight + Uplight | SMD | 30x120 suspended panel | Aluminium + PMMA | Microprismatic

LED BUILT IN

90 CRI UGR19 CCT V

new

CE 3 YEAR

IP20

Complete with driver box.



38012B/W/V

38012B | 50W Downlight + Uplight | SMD | 30x150 suspended panel | Aluminium + PMMA | Microprismatic

LED BUILT IN

90 CRI UGR19 CCT V

new

CE 3 YEAR

IP20

Complete with driver box.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38012A/W/V	White	CCT V	3000K-4000K-5700K	40W	4000lm	230V		4	Complete with 1050mA driver
38012B/W/V	White	CCT V	3000K-4000K-5700K	50W	5000lm	230V		4	Complete with 1300mA driver

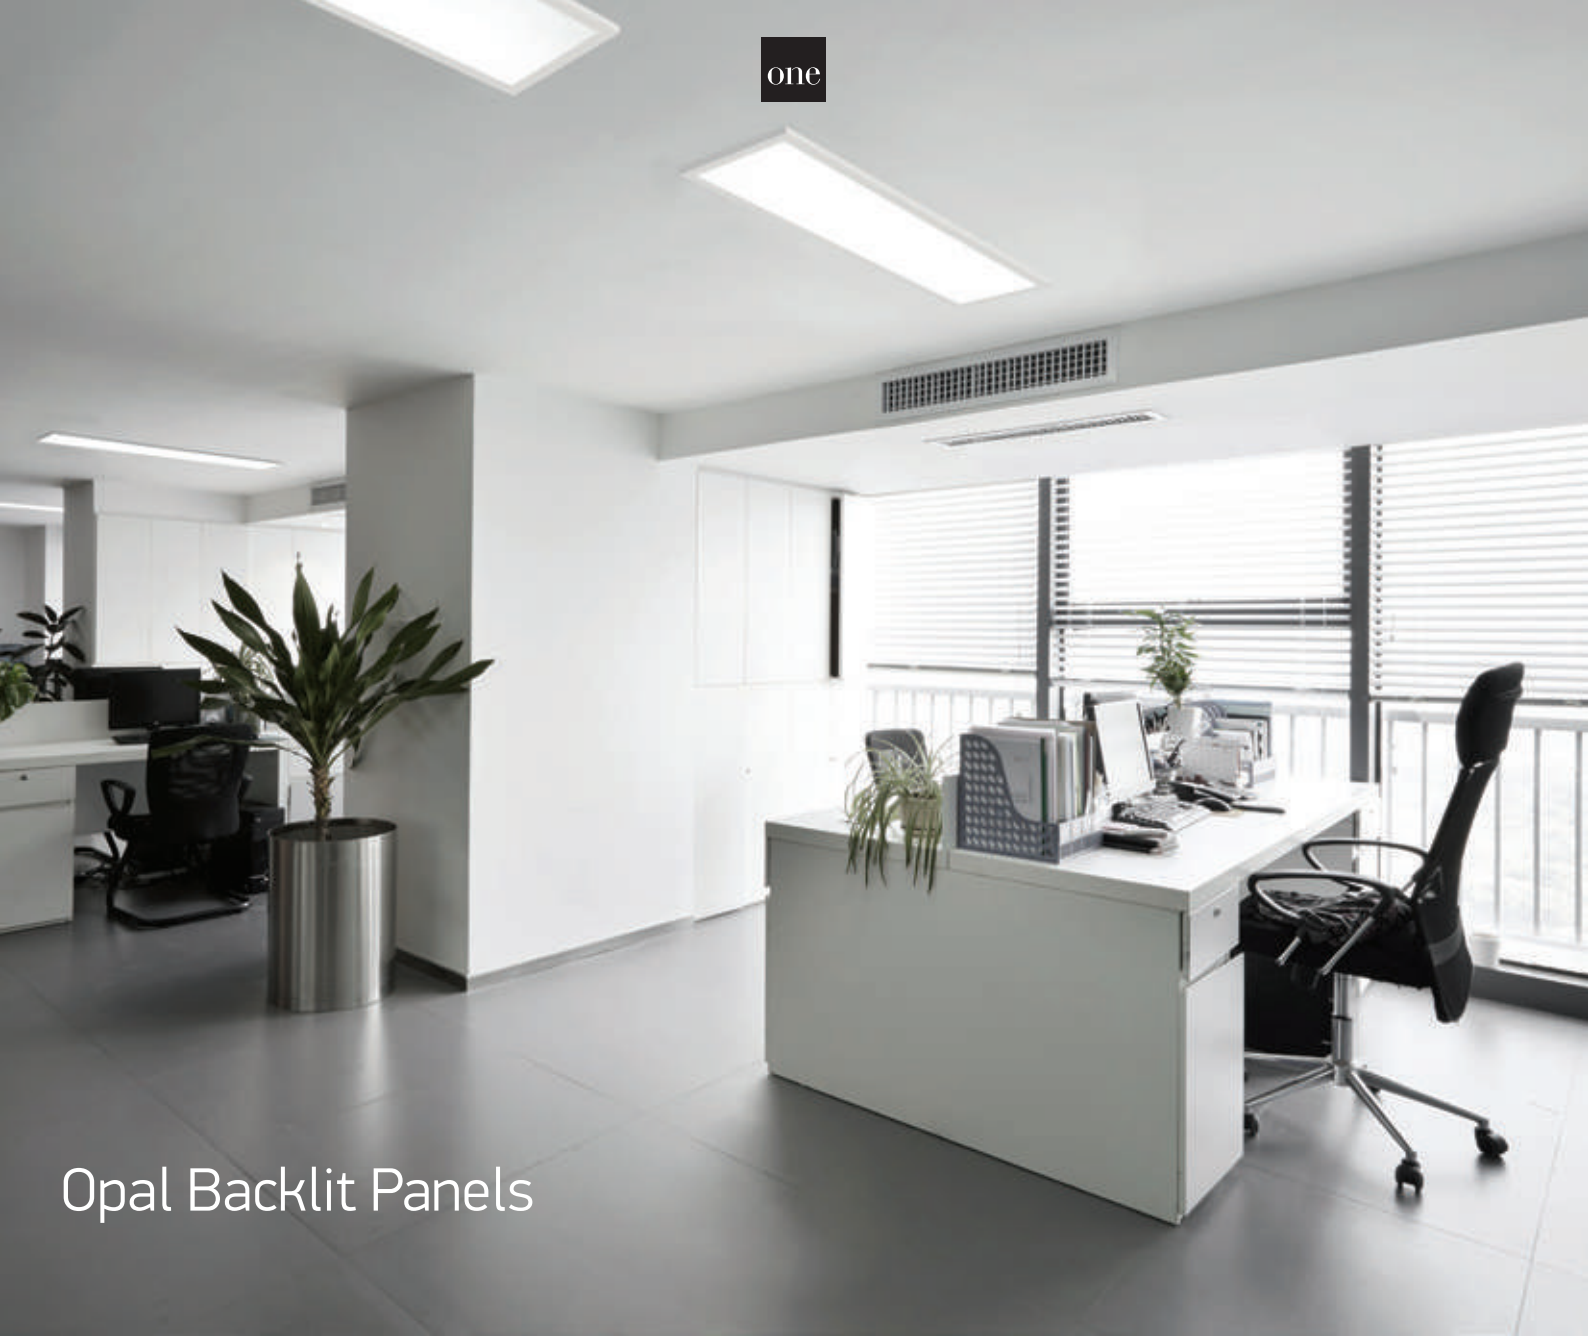

Opal Backlit Panels

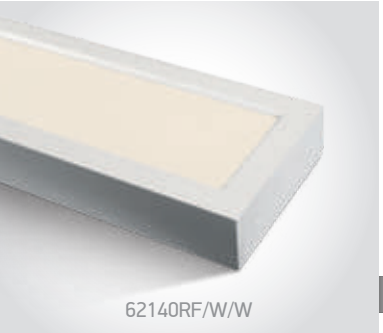

62140RF | 40W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP40



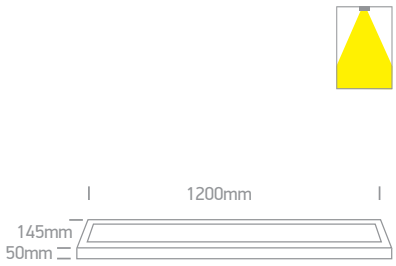

62140RE | 40W | SMD | Aluminium + steel

Backlit.

LED BUILT IN

80 CRI

CE

3 YEAR

IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140RF/W/W	White	Warm white	3000K	40W	2700lm	230V		5	Complete with 1000mA driver
62140RE/W/C	White	Cool white	4000K	40W	4000lm	230V		4	Complete with 1000mA driver

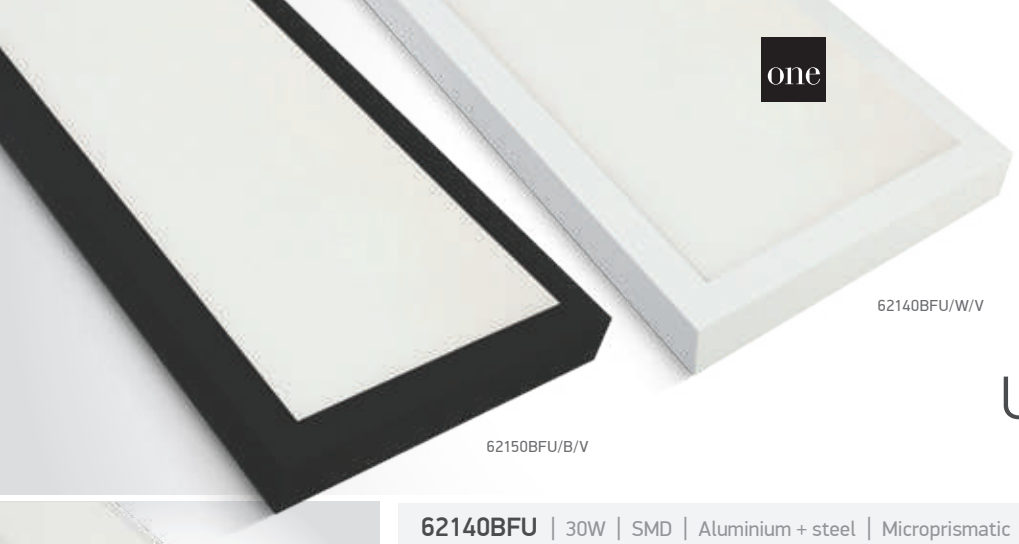

UGR19 Backlit Panels

62140BFU/W/V

62140BFU | 30W | SMD | Aluminium + steel | Microprismatic

Backlit.

LED BUILT IN
80 CRI
UGR19
CCT V
CE 3 YEAR
IP20

62150BFU/W/V

62150BFU | 40W | SMD | Aluminium + steel | Microprismatic

Backlit.

LED BUILT IN
80 CRI
UGR19
CCT V
CE 3 YEAR
IP20

62150BFU/B/V

62140BRU/W/V

62140BRU | 40W | SMD | Aluminium + steel | Microprismatic

Backlit.

LED BUILT IN
80 CRI
UGR19
CCT V
CE 3 YEAR
IP20

62150BRU/W/V

62150BRU | 50W | SMD | Aluminium + steel | Microprismatic

Backlit.

LED BUILT IN
80 CRI
UGR19
CCT V
CE 3 YEAR
IP20

62150BRU/B/V

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140BFU/W/V	White	CCT V	3000K-4000K-5700K	30W	2700lm-3000lm-2850lm	230V		4	Complete with 800mA driver
62150BFU/W/V	White	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V		4	Complete with 1000mA driver
62150BFU/B/V	Black	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V		4	Complete with 1000mA driver
62140BRU/W/V	White	CCT V	3000K-4000K-5700K	40W	3600lm-4000lm-3800lm	230V		4	Complete with 1000mA driver
62150BRU/W/V	White	CCT V	3000K-4000K-5700K	50W	4500lm-5000lm-4750lm	230V		4	Complete with 1200mA driver
62150BRU/B/V	Black	CCT V	3000K-4000K-5700K	50W	4500lm-5000lm-4750lm	230V		4	Complete with 1200mA driver

LED Linear Profiles
Medium size

38150B/W/C

38150B | 40W | 48LEDs | Linear system | Aluminium

Can be connected in line.

LED BUILT IN
90 CRI
UGR17
3 YEAR
DARK LIGHT
IP20

38150B/B/W

Complete with 4pcs fixing clips & 4pcs connectors.

DALI DRIVER Page 703

38150C/W/C

38150C | 40W | 24LEDs + Diffuser | Linear system | Aluminium

Can be connected in line.

LED BUILT IN
90 CRI
UGR19
3 YEAR
IP20

Complete with 4pcs fixing clips & 4pcs connectors.

DALI DRIVER Page 703

38150BU/W/W

38150BU | 40W + 20W Uplight | 48LEDs + Diffuser | Linear system | Aluminium

Can be connected in line.

LED BUILT IN
90 CRI
UGR17
3 YEAR
DARK LIGHT
IP20

38150BU/B/C

Complete with 4pcs fixing clips & 4pcs connectors.

DALI DRIVER Page 703

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38150B/W/C	White	Cool white	4000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150B/W/W	White	Warm white	3000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150B/B/W	Black	Warm white	3000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150C/W/C	White	Cool white	4000K	40W	3400lm	-	230V		300cm	12	Complete with 1000mA driver
38150C/W/W	White	Warm white	3000K	40W	3400lm	-	230V		300cm	12	Complete with 1000mA driver
38150BU/W/W	White	Warm white	3000K	40W-20W	3800lm-1800lm	34°-120°	230V		300cm	12	Complete with 1000mA + 500mA drivers
38150BU/B/C	Black	Cool white	4000K	40W-20W	3800lm-1800lm	34°-120°	230V		300cm	12	Complete with 1000mA + 500mA drivers

CCT V LED Linear Profiles
Medium size

38150B | 40W PV | 48LEDs | Linear system | Aluminium

Can be connected in line.

LED BUILT IN · 90 CRI · UGR17 · CCT V · PV · CE · 3 YEAR · DARK LIGHT · IP20

Complete with 4pcs fixing clips & 4pcs connectors.

38150C | 40W PV | 24LEDs + Diffuser | Linear system | Aluminium

Can be connected in line.

LED BUILT IN · 90 CRI · UGR19 · CCT V · PV · CE · 3 YEAR · IP20

Complete with 4pcs fixing clips & 4pcs connectors.

38150BU | 40W PV + 25W PV Uplight | 48LEDs + Diffuser | Linear system | Aluminium

Can be connected in line.

LED BUILT IN · 90 CRI · UGR17 · CCT V · PV · CE · 3 YEAR · DARK LIGHT · IP20

Complete with 4pcs fixing clips & 4pcs connectors.

050170 | 3m Suspension kit for 38140AU, 38150A, 38151A, 38150B, 38150BU, 38150C, 38160A & 38161A

CE · 1

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38150B/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3800lm@40W	34°	230V		300cm	12	Complete with PV driver
38150B/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W	3800lm@40W	34°	230V		300cm	12	Complete with PV driver
38150C/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	-	230V		300cm	12	Complete with PV driver
38150BU/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W+16W-20W-25W	3800lm-1800lm	34°-120°	230V		300cm	12	Complete with 2x PV drivers
38150BU/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W+16W-20W-25W	3800lm-1800lm	34°-120°	230V		300cm	12	Complete with 2x PV drivers

LED Linear Profiles
Medium size

38150A/W/C

38150A | 40W | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.

LED BUILT IN
90 CRI
UGR19
CE
3 YEAR
IP20

Complete with 4pcs fixing clips & 4pcs connectors.

DALI DRIVER
Page 703

38151A/W/W

38151A | 50W | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.

LED BUILT IN
90 CRI
UGR19
CE
3 YEAR
IP20

38151A/B/W

Complete with 4pcs fixing clips & 4pcs connectors.

DALI DRIVER
Page 703

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38150A/W/C	White	Cool white	4000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38150A/W/W	White	Warm white	3000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38151A/W/W	White	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver
38151A/B/W	Black	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver

CCT V LED Linear Profiles
Medium size

38150A/W/V

38150A | 40W PV | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.

IP20

LED BUILT IN · 90 CRI · UGR19 · CCT V · PV · CE · 3 YEAR

38150A/B/V

Complete with 4pcs fixing clips & 4pcs connectors.

38151A/W/V

38151A | 50W PV | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.

IP20

LED BUILT IN · 90 CRI · UGR19 · CCT V · PV · CE · 3 YEAR

38151A/B/V

Complete with 4pcs fixing clips & 4pcs connectors.

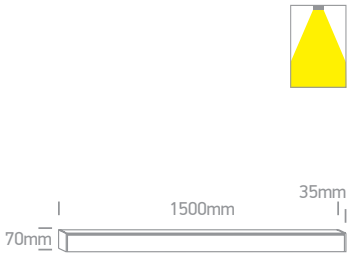

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38150A/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	230V		300cm	12	Complete with PV driver
38150A/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	230V		300cm	12	Complete with PV driver
38151A/W/V	White	CCT V	3000K-4000K-5000K	30W-40W-50W	4250lm@50W	230V		300cm	9	Complete with PV driver
38151A/B/V	Black	CCT V	3000K-4000K-5000K	30W-40W-50W	4250lm@50W	230V		300cm	9	Complete with PV driver

LED Linear Accessories
Medium size

one

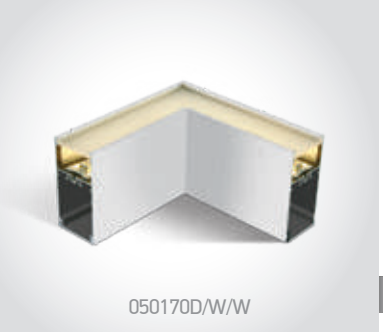
050170D/W/W

050170D | 8W | SMD | Corner for 38150A & 38151A | Diffuser | Aluminium | Microprismatic

LED BUILT IN · 90 CRI · UGR19 · CE · 3 YEAR · IP20

050170D/B/C



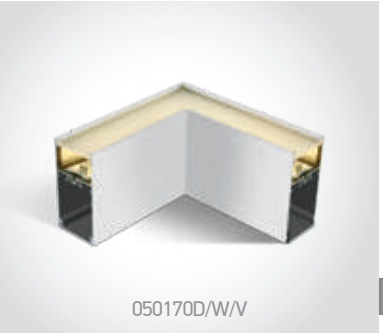
050170D/W/V

050170D | 14W PV | SMD | Corner for 38150A & 38151A | Diffuser | Aluminium | Microprismatic

LED BUILT IN · 90 CRI · UGR19 · CCT V · PV · CE · 3 YEAR · IP20

050170D/B/V



38150E/W

38150E | 1m Profile for 38150A, 38150B, 38150BU, 38150C & 38151A

Can be connected in line.

CE · 5 YEAR · 12 · IP20

38150E/B

Complete with 4pcs fixing clips & 4pcs connectors.

050170C/W

050170C | Corner for 38150A, 38150B, 38150BU, 38150C & 38151A

CE · 5 YEAR · 2 · IP20

050170C/B



050170 | 3m Suspension kit for 38140AU, 38150A, 38151A, 38150B, 38150BU, 38150C, 38160A & 38161A

CE · 1

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
050170D/W/C	White	Cool white	4000K	8W	680lm	230V		150cm	10	Complete with 250mA driver
050170D/W/W	White	Warm white	3000K	8W	680lm	230V		150cm	10	Complete with 250mA driver
050170D/B/C	Black	Cool white	4000K	8W	680lm	230V		150cm	10	Complete with 250mA driver
050170D/W/V	White	CCT V	3000K-4000K-5000K	6W-8W-10W-14W	680lm@8W	230V		150cm	10	Complete with PV driver
050170D/B/V	Black	CCT V	3000K-4000K-5000K	6W-8W-10W-14W	680lm@8W	230V		150cm	10	Complete with PV driver

Up & Down LED Linear Profiles

38140AU/W/C

38140AU | 40W Downlight + Uplight | SMD | Linear suspended | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

IP20

Complete with 3m suspension kit.

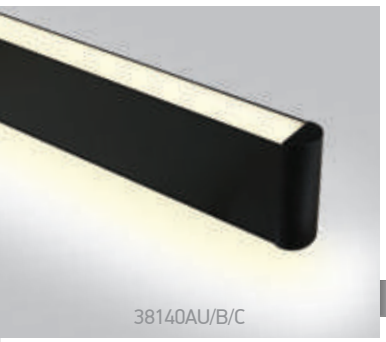

38140AU/B/C

38140AU | 40W Downlight + Uplight | SMD | Linear suspended | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

IP20

Complete with 3m suspension kit.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38140AU/W/C	White	Cool white	4000K	40W	3600lm	230V		12	Complete with 900mA driver
38140AU/W/W	White	Warm white	3000K	40W	3600lm	230V		12	Complete with 900mA driver
38140AU/B/C	Black	Cool white	4000K	40W	3600lm	230V		12	Complete with 900mA driver
38140AU/B/W	Black	Warm white	3000K	40W	3600lm	230V		12	Complete with 900mA driver

LED Linear Profiles
Large size

38160A/W/W

38160A | 40W | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.

LED BUILT IN
90 CRI
UGR19
3 YEAR
IP20

Complete with 4pcs fixing clips & 4pcs connectors.

DALI DRIVER Page 703



38161A/W/C

38161A | 50W | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.

LED BUILT IN
90 CRI
UGR19
3 YEAR
IP20

38161A/B/W

Complete with 5pcs fixing clips & 4pcs connectors.

DALI DRIVER Page 703

050170 | 3m Suspension kit for 38140AU, 38150A, 38151A, 38150B, 38150BU, 38150C, 38160A & 38161A

1

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38160A/W/C	White	Cool white	4000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38160A/W/W	White	Warm white	3000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38161A/W/C	White	Cool white	4000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver
38161A/W/W	White	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver
38161A/B/W	Black	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver

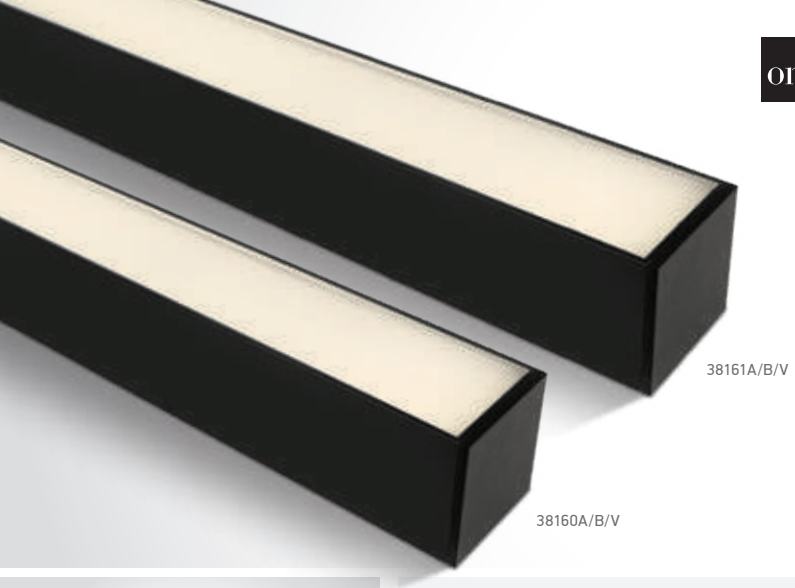

CCT V LED Linear Profiles
Large size

38160A | 40W PV | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.

LED BUILT IN
90 CRI
UGR19
CCT V
PV
CE
3 YEAR
IP20

Complete with 4pcs fixing clips & 4pcs connectors.

38160A | 40W PV | SMD | Linear system | Diffuser | Aluminium | Microprismatic

Can be connected in line.

LED BUILT IN
90 CRI
UGR19
CCT V
PV
CE
3 YEAR
IP20

Complete with 4pcs fixing clips & 4pcs connectors.

38161A | 50W PV | SMD | Linear System | Diffuser | Aluminium | Microprismatic

Can be connected in line.

LED BUILT IN
90 CRI
UGR19
CCT V
PV
CE
3 YEAR
IP20

Complete with 5pcs fixing clips & 4pcs connectors.

38161A | 50W PV | SMD | Linear System | Diffuser | Aluminium | Microprismatic

Can be connected in line.

LED BUILT IN
90 CRI
UGR19
CCT V
PV
CE
3 YEAR
IP20

Complete with 5pcs fixing clips & 4pcs connectors.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38160A/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	230V		300cm	12	Complete with PV driver
38160A/B/V	Black	CCT V	3000K-4000K-5000K	20W-30W-40W	3400lm@40W	230V		300cm	12	Complete with PV driver
38161A/W/V	White	CCT V	3000K-4000K-5000K	30W-40W-50W	4250lm@50W	230V		300cm	9	Complete with PV driver
38161A/B/V	Black	CCT V	3000K-4000K-5000K	30W-40W-50W	4250lm@50W	230V		300cm	9	Complete with PV driver

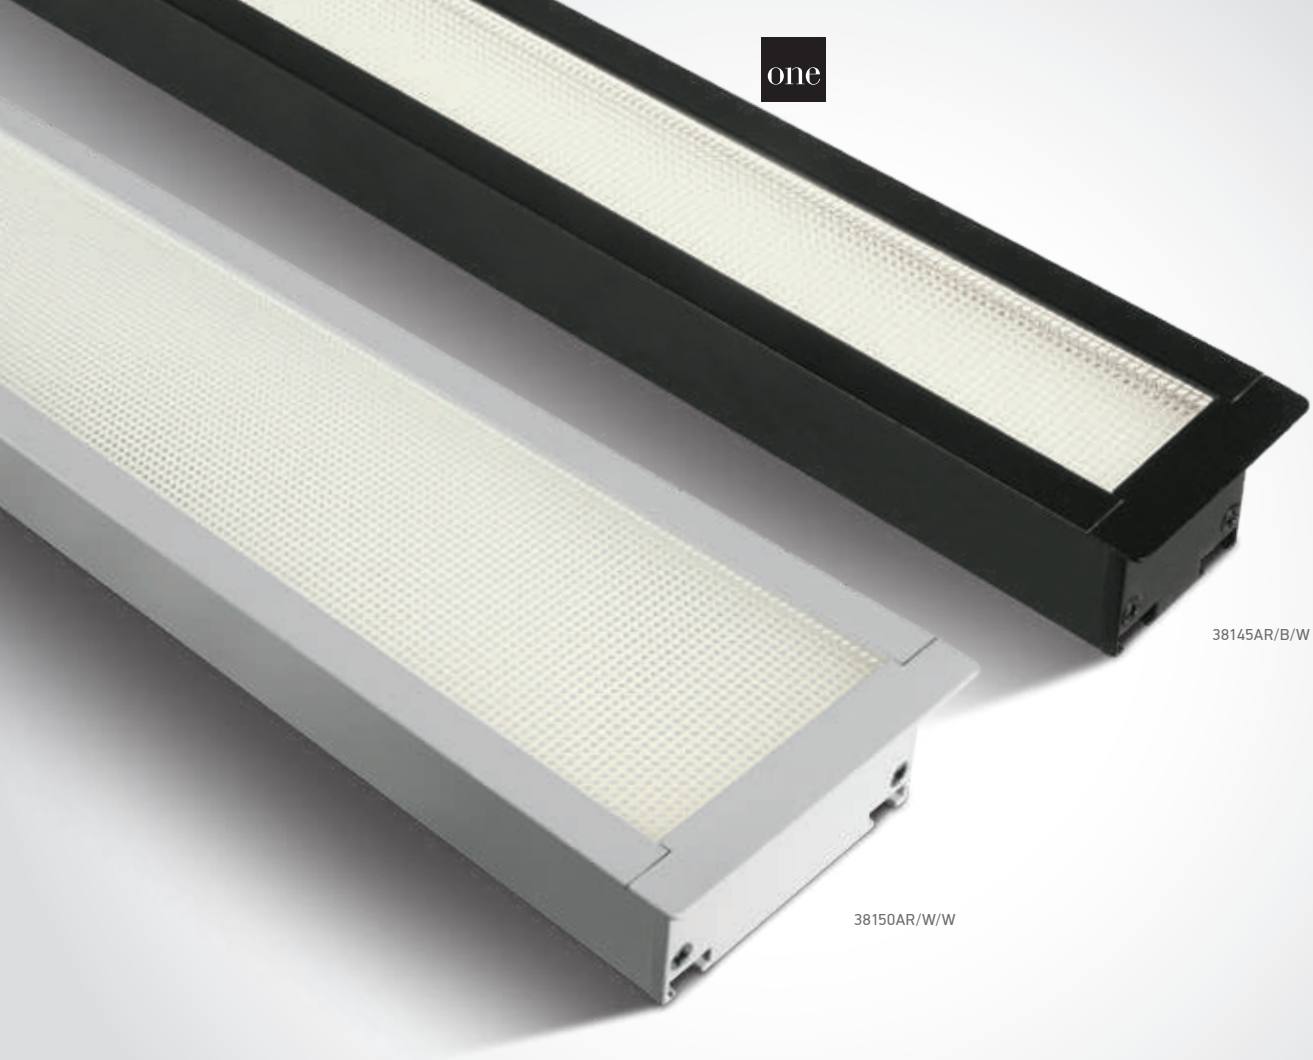

UGR19 Recessed LED Linear Profiles

38145AR/B/C

38145AR | 40W | SMD | Recessed linear system | Aluminium | Microprismatic

Can be connected in line.

LED BUILT IN
90 CRI
UGR19
3 YEAR
IP20

Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.

DALI DRIVER
Page 703



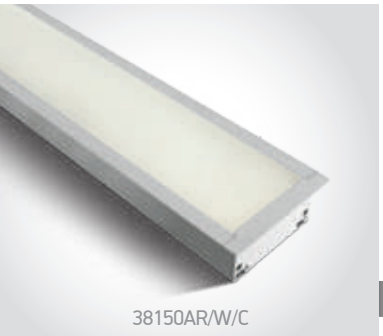
38150AR/W/C

38150AR | 40W | SMD | Recessed linear system | Aluminium | Microprismatic

Can be connected in line.

LED BUILT IN
90 CRI
UGR19
3 YEAR
IP20

Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.

DALI DRIVER
Page 703



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
38145AR/W/W	White	Warm white	3000K	40W	3800lm	230V		1200x37mm	80mm	12	Complete with 1000mA driver
38145AR/B/C	Black	Cool white	4000K	40W	3800lm	230V		1200x37mm	80mm	12	Complete with 1000mA driver
38145AR/B/W	Black	Warm white	3000K	40W	3800lm	230V		1200x37mm	80mm	12	Complete with 1000mA driver
38150AR/W/C	White	Cool white	4000K	40W	3600lm	230V		1200x68mm	80mm	12	Complete with 1000mA driver
38150AR/W/W	White	Warm white	3000K	40W	3600lm	230V		1200x68mm	80mm	12	Complete with 1000mA driver

UGR19 Recessed LED Linear Profile
CCT V

38145AR | 40W PV | SMD | Recessed linear system | Aluminium | Microprismatic

Can be connected in line.

LED BUILT IN

90 CRI

UGR19

CCT V

PV

CE

3 YEAR

IP20

Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
38145AR/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3800lm@40W	230V		1200x37mm	80mm	12	Complete with PV driver

Opal Recessed LED Linear Profiles

38152R/W/C

38152R | 40W | SMD | Recessed linear system | Aluminium

Can be connected in line.

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20

38152R/B/W

Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.



38152RC/W/C

38152RC | 8W | SMD | Corner for 38152R | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20


38152RC/W/W

Complete with 4pcs fixing clips & 4pcs connectors.



38152RL/W/C

38152RL | 10W | SMD | Ceiling to wall corner for 38152R | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20

38152RL/W/W

Complete with 4pcs fixing clips & 4pcs connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
38152R/W/C	White	Cool white	4000K	40W	3600lm	120°	230V		1200x60mm	80mm	12	Complete with 1000mA driver
38152R/B/W	Black	Warm white	3000K	40W	3600lm	120°	230V		1200x60mm	80mm	12	Complete with 1000mA driver
38152RC/W/C	White	Cool white	4000K	8W	720lm	120°	230V		160x160x60mm	80mm	10	Complete with 200mA driver
38152RC/W/W	White	Warm white	3000K	8W	720lm	120°	230V		160x160x60mm	80mm	10	Complete with 200mA driver
38152RL/W/C	White	Cool white	4000K	10W	900lm	120°	230V		100x100x60mm	80mm	6	Complete with 200mA driver
38152RL/W/W	White	Warm white	3000K	10W	900lm	120°	230V		100x100x60mm	80mm	6	Complete with 200mA driver

Opal Recessed LED Linear Profiles
CCT V

38152R/W/V

38152R | 40W PV | SMD | Recessed linear system | Aluminium

Can be connected in line.

LED BUILT IN

90 CRI

CCT V

PV

CE 3 YEAR

IP20

Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.



38152RC/W/V

38152RC | 14W PV | SMD | Corner for 38152R | Aluminium

LED BUILT IN

90 CRI

CCT V

PV

CE 3 YEAR

IP20

Complete with 4pcs fixing clips, 4pcs connectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
38152R/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	3600lm@40W	120°	230V		1200x60mm	80mm	12	Complete with PV driver
38152RC/W/V	White	CCT V	3000K-4000K-5000K	6W-8W-10W-14W	720lm@8W	120°	230V		211x211x60mm	80mm	10	Complete with PV driver

38150BR/B/C

UGR17 Recessed LED Linear Profiles

38145BR/W/V

38145BR | 40W PV | SMD | Recessed linear system | Aluminium

Can be connected in line.

LED BUILT IN
90 CRI
UGR17
CCT V
PV
CE
3 YEAR
DARK LIGHT
IP20

Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.



38150BR/W/C

38150BR | 40W | SMD | Recessed linear system | Aluminium

Can be connected in line.

LED BUILT IN
90 CRI
UGR17
CE
3 YEAR
DARK LIGHT
IP20

38150BR/B/C

Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
38145BR/W/V	White	CCT V	3000K-4000K-5000K	20W-30W-40W	4000lm@40W	34°	230V		1280x37mm	80mm	12	Complete with PV driver
38150BR/W/C	White	Cool white	4000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver
38150BR/W/W	White	Warm white	3000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver
38150BR/B/C	Black	Cool white	4000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver
38150BR/B/W	Black	Warm white	3000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver

one

The Office Floor Stand Range
Aluminium

36002/W/C

36002 | 60W | LED | Touch switch | Aluminium

EU Plug.

IP20

LED BUILT IN

80 CRI

DIMMABLE

UGR17

CE 3 YEAR

36002/B/C

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
36002/W/C	White	Cool white	4000K	60W	8000lm	230V		1	Complete with 2x700mA drivers
36002/B/C	Black	Cool white	4000K	60W	8000lm	230V		1	Complete with 2x700mA drivers

Wall & Ceiling

Pages 357-392

11

The GU10 MR11 Cylinders
Aluminium

12103G/W

12103G | 5W | MR11 | GU10 | Aluminium

new

IP20

5 YEAR

Suitable for MR11 GU10 LED lamp.



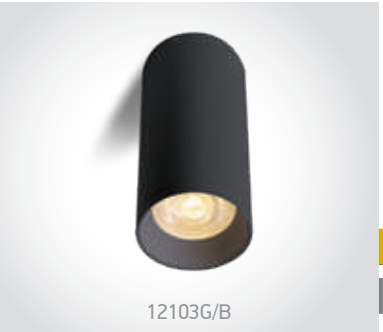

12103G/B

12103G | 5W | MR11 | GU10 | Aluminium

new

IP20

5 YEAR

Suitable for MR11 GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
12103G/W	White	5W	100-240V		100	-
12103G/B	Black	5W	100-240V		100	-

The Decorative Cylinders
Aluminium

12105F/W

12105F | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
CE 5 YEAR


12105F/BBS

12105F/MG



12105L/W

12105L | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
CE 5 YEAR


12105L/BBS

12105L/DC



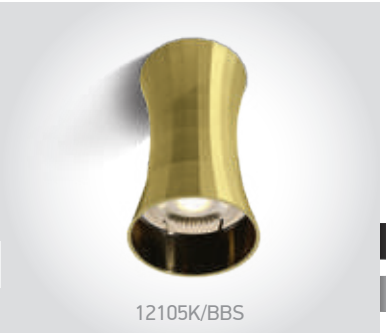
12105K/BBS

12105K | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
CE 5 YEAR


12105K/DC

Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
12105F/W	White	10W	100-240V		30	-
12105F/BBS	Brushed brass	10W	100-240V		30	-
12105F/MG	Metal grey	10W	100-240V		30	-
12105L/W	White	10W	100-240V		30	-
12105L/BBS	Brushed brass	10W	100-240V		30	-
12105L/DC	Dark chrome	10W	100-240V		30	-
12105K/BBS	Brushed brass	10W	100-240V		30	-
12105K/DC	Dark chrome	10W	100-240V		30	-

The Decorative Cylinders
Aluminium

12105H/BS

12105H/DC

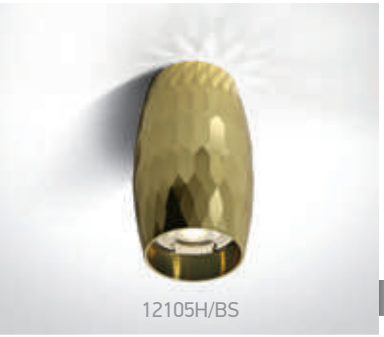

12105H/BS

12105H | 10W | MR16 | GU10 | Aluminium

IP20

Suitable for GU10 LED lamp.



12105H/DC

12105H | 10W | MR16 | GU10 | Aluminium

IP20

Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
12105H/BS	Brass	10W	100-240V		30	-
12105H/DC	Dark chrome	10W	100-240V		30	-

Decorative Cut Cylinders
Aluminium

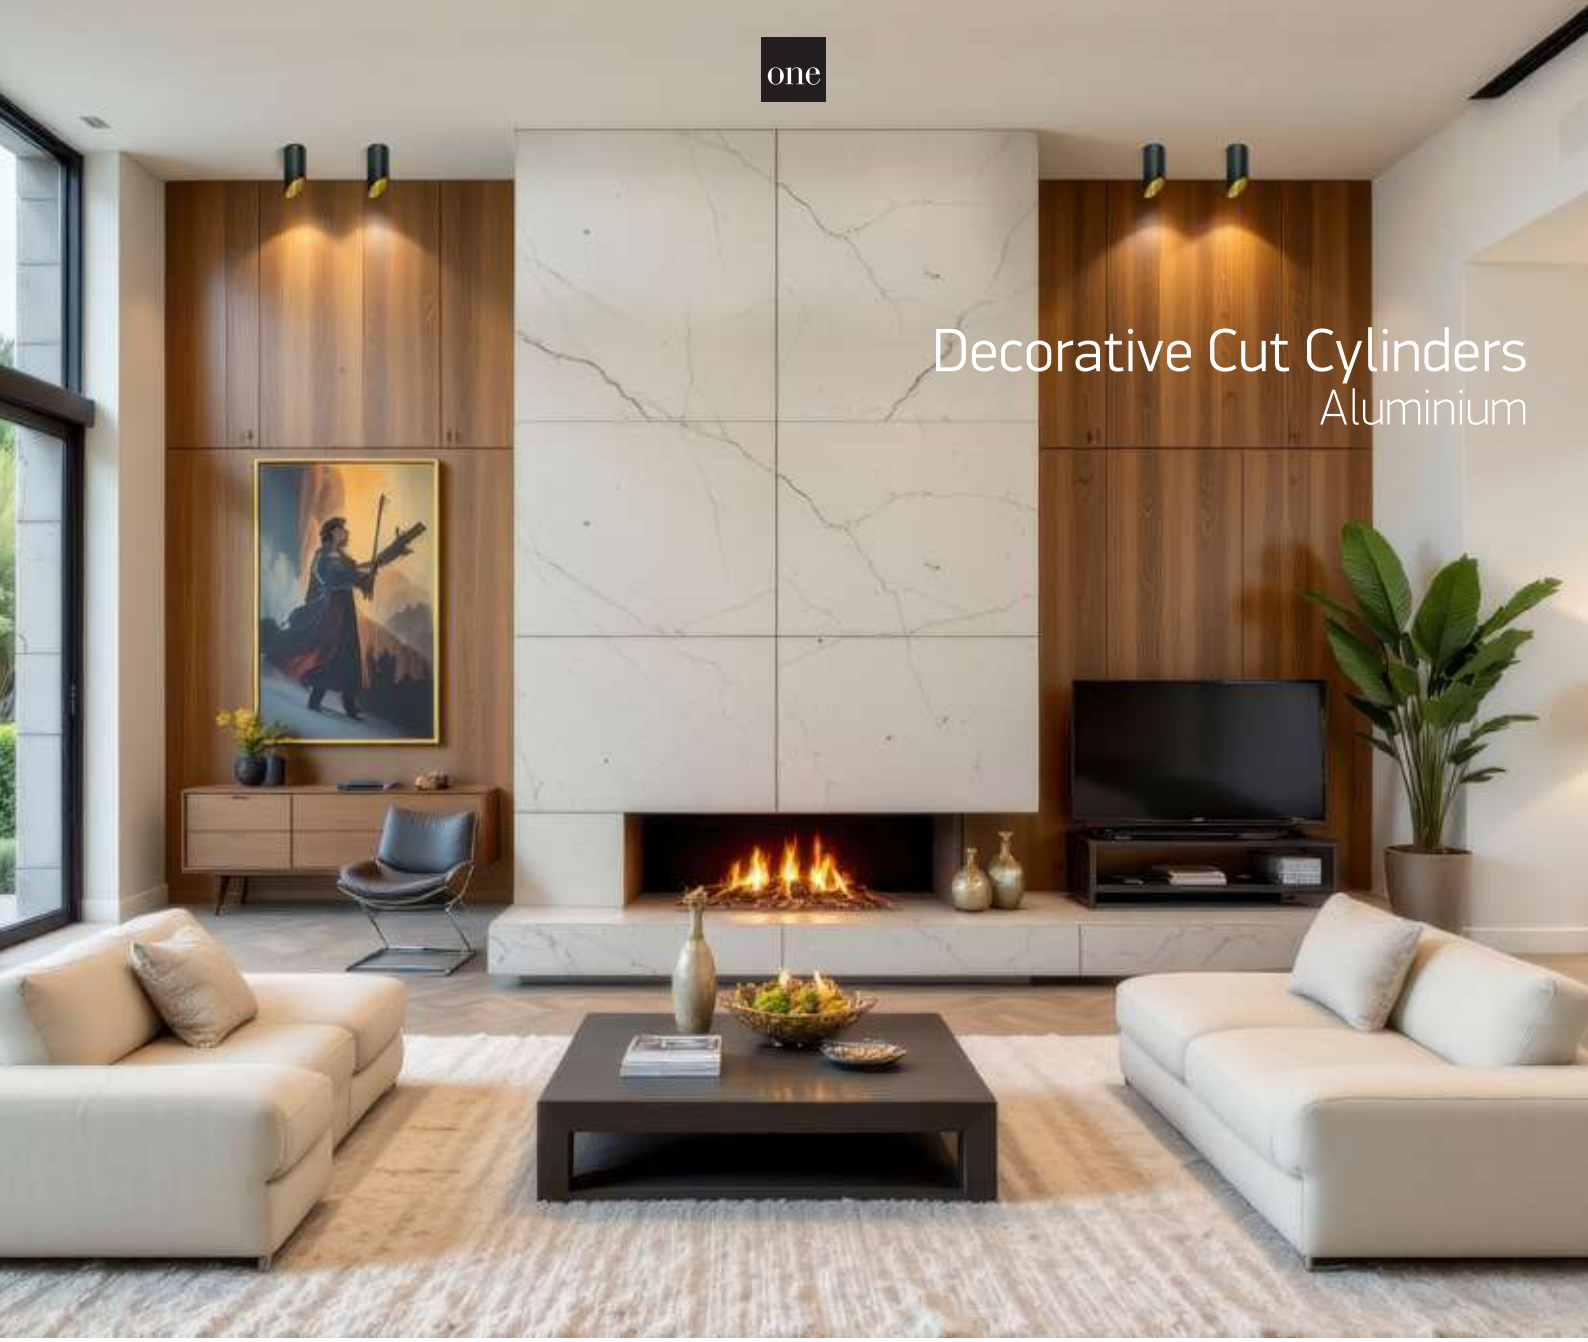

12105E1/B/GL

12105E1 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20



12105E2/W/B

12105E2 | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105E1/B/GL	Black	Gold	10W	100-240V		20	-
12105E2/W/B	White	Black	10W	100-240V		20	-

The Chill Out Cylinder
Aluminium

12105M/B + 050112/BS

12105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

CE 5 YEAR

12105M/W + 050112/B

12105M/BBS + 050112/B

12105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

CE 5 YEAR

12105M/MG + 050112/B



050112/W White

050112/B Black

050112/G Grey



050112/BS Brass

050112/ABS Antique brass

050112/GL Gold

050112/DC Dark chrome

Order Code	Colour	Watts	Input	Class		Notes
12105M/W	White	10W	100-240V		20	-
12105M/B	Black	10W	100-240V		20	-
12105M/BBS	Brushed brass	10W	100-240V		20	-
12105M/MG	Metal grey	10W	100-240V		20	-

one

The Chill Out Cylinder
Aluminium

12105MA/W + 050112/GL

12105MA | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20


12105MA/B + 050112/BS



12105MA/BBS + 050112/B

12105MA | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20


050112/W White

050112/B Black

050112/G Grey


050112/BS Brass


050112/ABS Antique brass


050112/GL Gold

050112/DC Dark chrome

Order Code	Colour	Watts	Input	Class		Notes
12105MA/W	White	10W	100-240V		20	-
12105MA/B	Black	10W	100-240V		20	-
12105MA/BBS	Brushed brass	10W	100-240V		20	-

The GU10 Dark Light
Aluminium

12105N/W

12105N | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

CE 5 YEAR

12105N/W/W

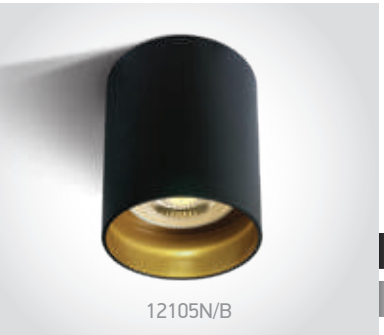

12105N/B

12105N | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

CE 5 YEAR



12105N/B/B



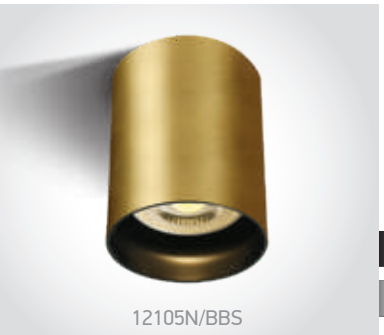

12105N/BBS

12105N | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

CE 5 YEAR



12105N/MG

Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105N/W	White	Black	10W	100-240V		36	-
12105N/W/W	White	White	10W	100-240V		36	-
12105N/B	Black	Brass	10W	100-240V		36	-
12105N/B/B	Black	Black	10W	100-240V		36	-
12105N/BBS	Brushed brass	Black	10W	100-240V		36	-
12105N/MG	Metal grey	Black	10W	100-240V		36	-

The GU10 Dark Light
Aluminium

12105NA | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20





12205NA | 2x10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20





Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105NA/W	White	Black	10W	100-240V		36	-
12105NA/B	Black	Brass	10W	100-240V		36	-
12205NA/W	White	Black	2x10W	100-240V		24	-
12205NA/B	Black	Brass	2x10W	100-240V		24	-

GU10 Decorative Cylinders
Aluminium

12105T/W

12105T | 10W | MR16 | GU10 | Aluminium

IP20



12105T/B



12105TA/W

12105TA | 10W | MR16 | GU10 | Aluminium

IP20



12105TA/B



12205TA/W

12205TA | 2x10W | MR16 | GU10 | Aluminium

IP20



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105T/W	White	Brass	10W	100-240V		20	-
12105T/B	Black	Brass	10W	100-240V		20	-
12105TA/W	White	Brass	10W	100-240V		20	-
12105TA/B	Black	Brass	10W	100-240V		20	-
12205TA/W	White	Brass	2x10W	100-240V		20	-

The Dark Light Cylinders
Aluminium

12105E/W

12105E | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20

CE 5 YEAR


12105E/B



12105AL/W/B

12105AL | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20

CE 5 YEAR

12105AL/W/W

12105AL/W/BS


12105AL/B/B



12105D1/W

12105D1 | 10W | MR16 | GU10 | Aluminium

new
DARK LIGHT
IP20

CE 5 YEAR

12105D1/B



Order Code	Colour	Reflector	Watts	Input	Class		Notes
12105E/W	White	-	10W	100-240V		20	-
12105E/B	Black	-	10W	100-240V		20	-
12105AL/W/B	White	Black	10W	100-240V		20	-
12105AL/W/W	White	White	10W	100-240V		20	-
12105AL/W/BS	White	Brass	10W	100-240V		20	-
12105AL/B/B	Black	Black	10W	100-240V		20	-
12105D1/W	White	White	10W	100-240V		36	-
12105D1/B	Black	Black	10W	100-240V		36	-

The GU10 Ceiling Lights

12105AB/W

12105AB | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20

Suitable for GU10 LED lamp.



12105AC/W

12105AC | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

IP20

12105AC/B

12105AC/AL

Suitable for GU10 LED lamp.



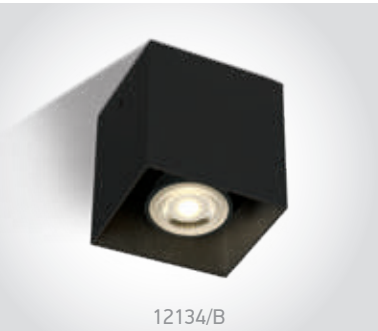

12134/B

12134 | 10W | MR16 | GU10 | Aluminium

5 YEAR

IP20

offer



Order Code	Colour	Watts	Input	Class		Notes
12105AB/W	White	10W	100-240V		20	-
12105AC/W	White	10W	100-240V		10	-
12105AC/B	Black	10W	100-240V		10	-
12105AC/AL	Aluminium	10W	100-240V		10	-
12134/B	Black	10W	100-240V		20	-

one

The GU10 Adjustable Lights
Aluminium

12105Y/W

12105Y | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

12105Y/W/W

12105Y/B



12105YA/W

12105YA | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20



12205YA/W

12205YA | 2x10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

IP20

12205YA/B



Order Code	Colour	Watts	Input	Class		Notes
12105Y/W	White	10W	100-240V		20	-
12105Y/W/W	White	10W	100-240V		20	-
12105Y/B	Black	10W	100-240V		20	-
12105YA/W	White	10W	100-240V		20	-
12205YA/W	White	2x10W	100-240V		20	-
12205YA/B	Black	2x10W	100-240V		20	-

R111 GU10 Ceiling Lights

12144/W

12144 | 15W | R111 | GU10 | Aluminium

IP20



12144/B

12144 | 15W | R111 | GU10 | Aluminium

IP20



12142/W

12142 | 15W | R111 | GU10 | Aluminium

ADJUSTABLE

IP20

Suitable for R111 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
12144/W	White	15W	100-240V		20	-
12144/B	Black	15W	100-240V		20	-
12142/W	White	15W	100-240V		20	-

The Retro Square GU10 Spots

65105NB/B

65105NB | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20

65105NB/W

Suitable for GU10 LED lamp.



65105NBA/B

65105NBA | 10W | MR16 | GU10 | Aluminium

With switch.

ADJUSTABLE

CE 5 YEAR

DARK LIGHT

IP20

65105NBA/W

Suitable for GU10 LED lamp.



Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105NB/W	White	Black	10W	100-240V		12	-
65105NB/B	Black	Brass	10W	100-240V		12	-
65105NBA/W	White	Black	10W	100-240V		12	-
65105NBA/B	Black	Brass	10W	100-240V		12	-

The Retro GU10 Spots

one

65105N/B

65105N | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
CE 5 YEAR

65105N/W

65105N/W/W

65105N/B/B



65205N/B

65205N | 2x10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
CE 5 YEAR

65205N/W



65305N/B

65305N | 3x10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
CE 5 YEAR

65305N/W



65405N/B

65405N | 4x10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
CE 5 YEAR

65405N/W



65505N/B

65505N | 5x10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
CE 5 YEAR

65505N/W

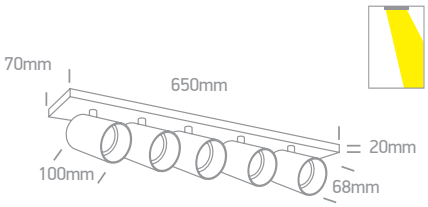

Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105N/W	White	Black	10W	100-240V		12	-
65105N/W/W	White	White	10W	100-240V		12	-
65105N/B	Black	Brass	10W	100-240V		12	-
65105N/B/B	Black	Black	10W	100-240V		12	-
65205N/W	White	Black	2x10W	100-240V		6	-
65205N/B	Black	Brass	2x10W	100-240V		6	-
65305N/W	White	Black	3x10W	100-240V		6	-
65305N/B	Black	Brass	3x10W	100-240V		6	-
65405N/W	White	Black	4x10W	100-240V		6	-
65405N/B	Black	Brass	4x10W	100-240V		6	-
65505N/W	White	Black	5x10W	100-240V		6	-
65505N/B	Black	Brass	5x10W	100-240V		6	-

The Retro GU10 Spots

65105N | 10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
5 YEAR



65205N | 2x10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
5 YEAR



65305N | 3x10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
5 YEAR



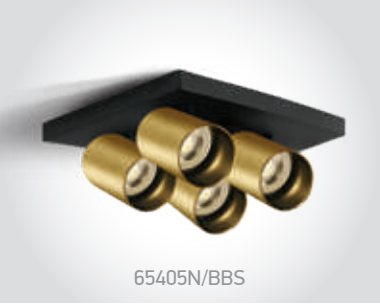

65405N | 4x10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
5 YEAR



65505N | 5x10W | MR16 | GU10 | Aluminium

DARK LIGHT
IP20
ADJUSTABLE
5 YEAR

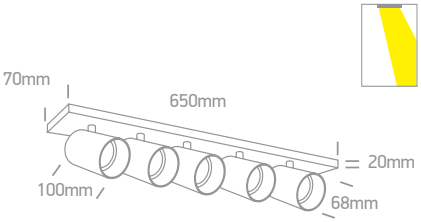

Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105N/BBS	Brushed brass	Black	10W	100-240V		12	-
65105N/MG	Metal grey	Black	10W	100-240V		12	-
65205N/BBS	Brushed brass	Black	2x10W	100-240V		6	-
65205N/MG	Metal grey	Black	2x10W	100-240V		6	-
65305N/BBS	Brushed brass	Black	3x10W	100-240V		6	-
65305N/MG	Metal grey	Black	3x10W	100-240V		6	-
65405N/BBS	Brushed brass	Black	4x10W	100-240V		6	-
65505N/BBS	Brushed brass	Black	5x10W	100-240V		6	-
65505N/MG	Metal grey	Black	5x10W	100-240V		6	-

one

Decorative Directional Spots
GU10

12105E4/W

12105E4 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

Suitable for 7306CG GU10 LED lamp.

Complete with Black & Brass reflectors.



12105E4/B

12105E4 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

Suitable for 7306CG GU10 LED lamp.

Complete with Black & Brass reflectors.



12105E6/W

12105E6 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

Suitable for 7306CG GU10 LED lamp.

Complete with Black & Brass reflectors.



12105E6/B

12105E6 | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

Suitable for 7306CG GU10 LED lamp.

Complete with Black & Brass reflectors.



Order Code	Colour	Watts	Input	Class		Notes
12105E4/W	White	10W	100-240V		30	-
12105E4/B	Black	10W	100-240V		30	-
12105E6/W	White	10W	100-240V		30	-
12105E6/B	Black	10W	100-240V		30	-

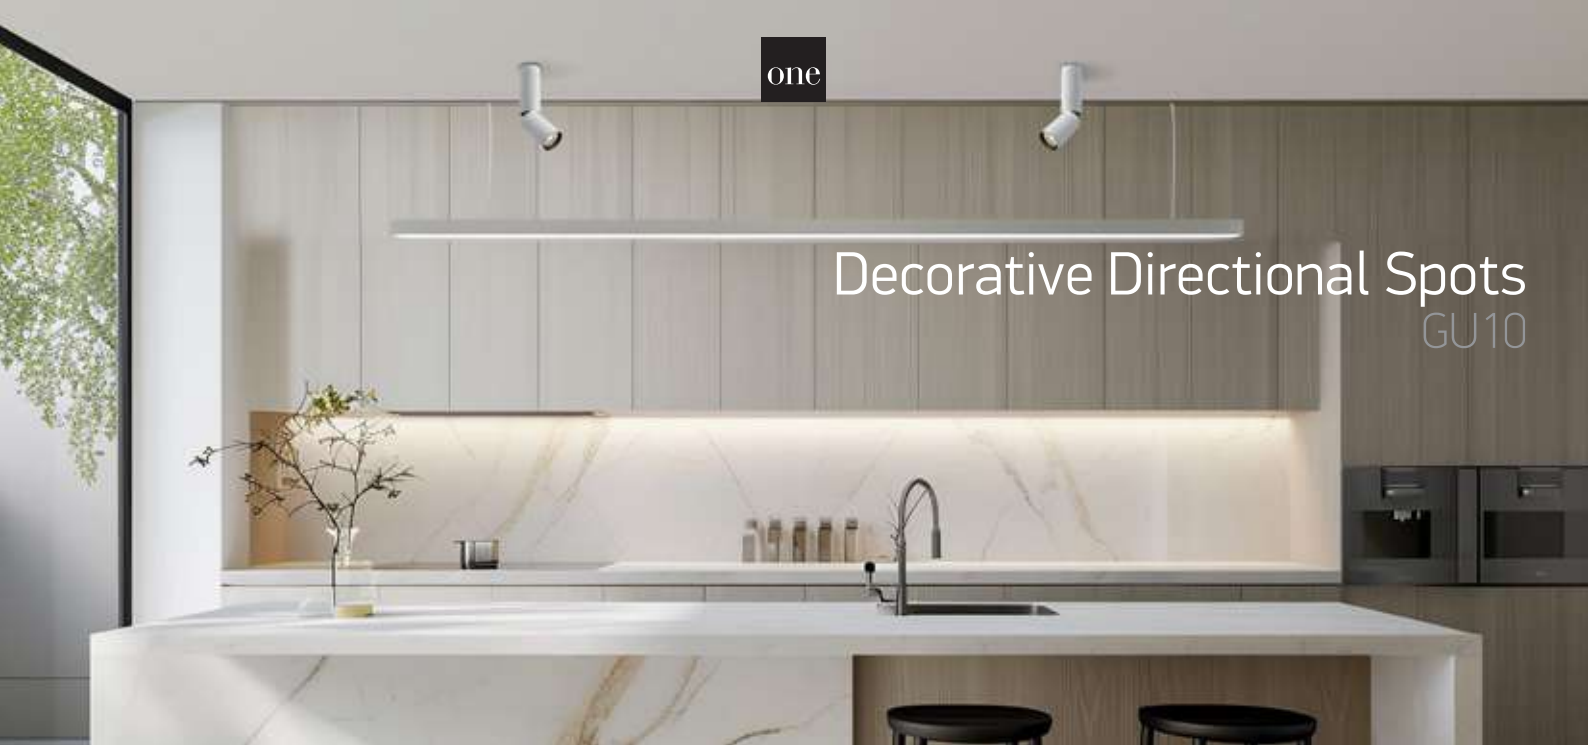

Decorative Directional Spots
GU10

65105E/W

65105E | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20



65105E/B

65105E/CH



65205E/W

65205E | 2x10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

65205E/B

65205E/CH



65105EA/W

65105EA | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

65105EA/B



Order Code	Colour	Watts	Input	Class		Notes
65105E/W	White	10W	100-240V		20	Complete with white, black & brass reflectors
65105E/B	Black	10W	100-240V		20	Complete with black & brass reflectors
65105E/CH	Champagne	10W	100-240V		20	Complete with black & brass reflectors
65205E/W	White	2x10W	100-240V		12	Complete with black & brass reflectors
65205E/B	Black	2x10W	100-240V		12	Complete with black & brass reflectors
65205E/CH	Champagne	2x10W	100-240V		12	Complete with black & brass reflectors
65105EA/W	White	10W	100-240V		20	Complete with white, black & brass reflectors
65105EA/B	Black	10W	100-240V		20	Complete with black & brass reflectors

G9 Decorative Wall Lights
Aluminium

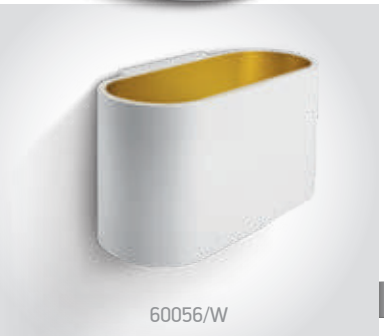
60056/W

60056 | 10W | G9 | Aluminium

IP20

5 YEAR

60056/B

Use lamp 7103ALG / 7103ALGD.



6017/W

6017 | 10W | G9 | Aluminium

IP20

5 YEAR

6017/B

Use lamp 7103ALG / 7103ALGD.



6017A/W

6017A | 10W | G9 | Aluminium

IP20

5 YEAR

6017A/B

Use lamp 7103ALG / 7103ALGD.



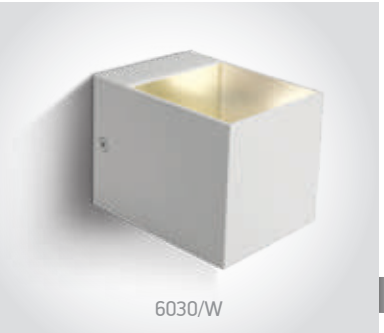
6030/W

6030 | 10W | G9 | Mirror reflector | Aluminium

IP20

5 YEAR

6030/B

Use lamp 7103ALG / 7103ALGD.



Order Code	Colour	Reflector	Watts	Input	Class		Notes
60056/W	White	Brass	10W	100-240V		20	-
60056/B	Black	Brass	10W	100-240V		20	-
6017/W	White	Brass	10W	100-240V		20	-
6017/B	Black	Brass	10W	100-240V		20	-
6017A/W	White	Brass	10W	100-240V		20	-
6017A/B	Black	Brass	10W	100-240V		20	-
6030/W	White	White	10W	100-240V		20	-
6030/B	Black	Black	10W	100-240V		20	-

one

67518/AN

67518/W

E27 Indoor/Outdoor Wall Light

67518/W

67518 | 12W | E27 | ABS + PC

IP65



67518/AN

67518 | 12W | E27 | ABS + PC

IP65



Order Code	Colour	Watts	Input	Class		Notes
67518/W	White	12W	100-240V		10	-
67518/AN	Anthracite	12W	100-240V		10	-

The GU10 Outdoor Cylinder Lights
ABS + PC

67142A/W

67142A | 6W | MR16 | GU10 | ABS + PC

IP65

67142A/AN

67142A/B



67142B/W

67142B | 10W | MR16 | GU10 | ABS + PC

IP65

67142B/AN

67142B/B



Order Code	Colour	Watts	Input	Class		Notes
67142A/W	White	6W	100-240V		20	-
67142A/AN	Anthracite	6W	100-240V		20	-
67142A/B	Black	6W	100-240V		20	-
67142B/W	White	10W	100-240V		20	-
67142B/AN	Anthracite	10W	100-240V		20	-
67142B/B	Black	10W	100-240V		20	-

one

The GU10 Outdoor Cylinder Lights

ABS + PC

67142F/W

67142F | 6W | MR16 | GU10 | ABS + PC

IP65

67142F/AN


67142F/B



67142G/W

67142G | 2x6W | MR16 | GU10 | ABS + PC

IP65

67142G/AN

67142G/B



67536A/W

67536A | 6W | MR16 | GU10 | ABS + PC

IP65

67536A/AN

67536A/B



67536B/W

67536B | 2x6W | MR16 | GU10 | ABS + PC

IP65


67536B/AN

67536B/B



Order Code	Colour	Watts	Input	Class		Notes
67142F/W	White	6W	100-240V		20	-
67142F/AN	Anthracite	6W	100-240V		20	-
67142F/B	Black	6W	100-240V		20	-
67142G/W	White	2x6W	100-240V		20	-
67142G/AN	Anthracite	2x6W	100-240V		20	-
67142G/B	Black	2x6W	100-240V		20	-
67536A/W	White	6W	100-240V		24	-
67536A/AN	Anthracite	6W	100-240V		24	-
67536A/B	Black	6W	100-240V		24	-
67536B/W	White	2x6W	100-240V		20	-
67536B/AN	Anthracite	2x6W	100-240V		20	-
67536B/B	Black	2x6W	100-240V		20	-

The GU10 Outdoor Cube Lights
ABS + PC

67142D/W

67142D | 6W | MR16 | GU10 | ABS + PC

IP65

Suitable for GU10 LED lamp.



67142D/AN

67142D | 6W | MR16 | GU10 | ABS + PC

IP65

Suitable for GU10 LED lamp.



67142D/B

67142D | 6W | MR16 | GU10 | ABS + PC

IP65

Suitable for GU10 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
67142D/W	White	6W	100-240V		20	-
67142D/AN	Anthracite	6W	100-240V		20	-
67142D/B	Black	6W	100-240V		20	-

The GU10 Outdoor Cube Lights

ABS + PC

67142H/W

67142H | 6W | MR16 | GU10 | ABS + PC

IP65

67142H/AN

67142H/B



67142K/W

67142K | 2x6W | MR16 | GU10 | ABS + PC

IP65

67142K/AN

67142K/B



Order Code	Colour	Watts	Input	Class		Notes
67142H/W	White	6W	100-240V		20	-
67142H/AN	Anthracite	6W	100-240V		20	-
67142H/B	Black	6W	100-240V		20	-
67142K/W	White	2x6W	100-240V		20	-
67142K/AN	Anthracite	2x6W	100-240V		20	-
67142K/B	Black	2x6W	100-240V		20	-

GU10 Outdoor Cylinders
Aluminium

67130C/W

67130C | 10W | MR16 | GU10 | Aluminium

IP54

Suitable for GU10 LED lamp.



67130C/AN

67130C | 10W | MR16 | GU10 | Aluminium

IP54

Suitable for GU10 LED lamp.

67130C/B

67130C | 10W | MR16 | GU10 | Aluminium

IP54

Suitable for GU10 LED lamp.



67130C/BR

67130C | 10W | MR16 | GU10 | Aluminium

IP54

Suitable for GU10 LED lamp.

Order Code	Colour	Watts	Input	Class		Notes
67130C/W	White	10W	100-240V		30	-
67130C/AN	Anthracite	10W	100-240V		30	-
67130C/B	Black	10W	100-240V		30	-
67130C/BR	Rust brown	10W	100-240V		30	-

The GU10 Outdoor Wall Lights
Aluminium

67400A/W

67400A | 10W | MR16 | GU10 | Aluminium

CE 3 YEAR

IP54

67400A/AN

67400A/B

67400A/G

67400A/BR



67400B/W

67400B | 2x10W | MR16 | GU10 | Aluminium

CE 3 YEAR

IP54

67400B/AN

67400B/B

67400B/G

67400B/BR



Order Code	Colour	Watts	Input	Class		Notes
67400A/W	White	10W	100-240V		12	-
67400A/AN	Anthracite	10W	100-240V		12	-
67400A/B	Black	10W	100-240V		12	-
67400A/G	Grey	10W	100-240V		12	-
67400A/BR	Rust brown	10W	100-240V		12	-
67400B/W	White	2x10W	100-240V		12	-
67400B/AN	Anthracite	2x10W	100-240V		12	-
67400B/B	Black	2x10W	100-240V		12	-
67400B/G	Grey	2x10W	100-240V		12	-
67400B/BR	Rust brown	2x10W	100-240V		12	-

The GU10 Outdoor Wall Cylinders
Aluminium

67130E/AN

67130E | 10W | MR16 | GU10 | Aluminium

IP54

67130E/W

67130E/B

67130E/G

67130E/BR



67130/AN

67130 | 2x10W | MR16 | GU10 | Aluminium

IP54

67130/W

67130/B

67130/G

67130/BR



Order Code	Colour	Watts	Input	Class		Notes
67130E/W	White	10W	100-240V		18	-
67130E/AN	Anthracite	10W	100-240V		18	-
67130E/B	Black	10W	100-240V		18	-
67130E/G	Grey	10W	100-240V		18	-
67130E/BR	Rust brown	10W	100-240V		18	-
67130/W	White	2x10W	100-240V		18	-
67130/AN	Anthracite	2x10W	100-240V		18	-
67130/B	Black	2x10W	100-240V		18	-
67130/G	Grey	2x10W	100-240V		18	-
67130/BR	Rust brown	2x10W	100-240V		18	-

The GU10 Outdoor Wall Cube Lights
Aluminium

67426 | 10W | MR16 | GU10 | Aluminium

IP65



67426A | 2x10W | MR16 | GU10 | Aluminium

IP65



Order Code	Colour	Watts	Input	Class		Notes
67426/W	White	10W	100-240V		18	-
67426/AN	Anthracite	10W	100-240V		18	-
67426/B	Black	10W	100-240V		18	-
67426A/W	White	2x10W	100-240V		12	-
67426A/AN	Anthracite	2x10W	100-240V		12	-
67426A/B	Black	2x10W	100-240V		12	-
67426A/G	Grey	2x10W	100-240V		12	-

The GU10 Outdoor Cubes
Aluminium

67130D/G

67130D | 10W | MR16 | GU10 | Aluminium

IP54



67426D/W

67426D | 10W | MR16 | GU10 | Aluminium

IP54

67426D/AN

67426D/B

67426D/G

67426D/BR



Order Code	Colour	Watts	Input	Class		Notes
67130D/G	Grey	10W	100-240V		20	-
67426D/W	White	10W	100-240V		18	-
67426D/AN	Anthracite	10W	100-240V		18	-
67426D/B	Black	10W	100-240V		18	-
67426D/G	Grey	10W	100-240V		18	-
67426D/BR	Rust brown	10W	100-240V		18	-

one

The GU10 Outdoor Cubes
Aluminium

67130F/W

67130F | 10W | MR16 | GU10 | Aluminium

CE 3 YEAR

IP54

67130F/G



67426B/W

67426B | 10W | MR16 | GU10 | Aluminium

IK 06

CE 3 YEAR

IP54

67426B/B

67426B/G

67426B/BR



67426C/W

67426C | 2x10W | MR16 | GU10 | Aluminium

IK 06

CE 3 YEAR

IP54

67426C/AN

67426C/G

67426C/BR



Order Code	Colour	Watts	Input	Class		Notes
67130F/W	White	10W	100-240V		20	-
67130F/G	Grey	10W	100-240V		20	-
67426B/W	White	10W	100-240V		18	-
67426B/B	Black	10W	100-240V		18	-
67426B/G	Grey	10W	100-240V		18	-
67426B/BR	Rust brown	10W	100-240V		18	-
67426C/W	White	2x10W	100-240V		18	-
67426C/AN	Anthracite	2x10W	100-240V		18	-
67426C/G	Grey	2x10W	100-240V		18	-
67426C/BR	Rust brown	2x10W	100-240V		18	-

PAR30 Outdoor Cylinders

67132C/W

67132C | 20W | PAR30 | E27 | Aluminium

IP54

67132C/AN 67132C/B 67132C/BR

67142C/W

67142C | 10W | PAR30 | E27 | ABS + PC

IP65

67142C/AN 67142C/B



Order Code	Colour	Watts	Input	Class		Notes
67132C/W	White	20W	100-240V		18	-
67132C/AN	Anthracite	20W	100-240V		18	-
67132C/B	Black	20W	100-240V		18	-
67132C/BR	Rust brown	20W	100-240V		18	-
67142C/W	White	10W	100-240V		20	-
67142C/AN	Anthracite	10W	100-240V		20	-
67142C/B	Black	10W	100-240V		20	-

one

The PAR30 Outdoor Wall Lights
Aluminium

67400D/W

67400D | 20W | PAR30 | E27 | Aluminium

IK06 · CE · 3 YEAR · IP65

67400D/AN

67400D/B

67400D/G



67400E/W

67400E | 2x20W | PAR30 | E27 | Aluminium

IK06 · CE · 3 YEAR · IP65

67400E/AN

67400E/B



Order Code	Colour	Watts	Input	Class		Notes
67400D/W	White	20W	100-240V		6	-
67400D/AN	Anthracite	20W	100-240V		6	-
67400D/B	Black	20W	100-240V		6	-
67400D/G	Grey	20W	100-240V		6	-
67400E/W	White	2x20W	100-240V		6	-
67400E/AN	Anthracite	2x20W	100-240V		6	-
67400E/B	Black	2x20W	100-240V		6	-

PAR30 Outdoor Cubes
Aluminium

67132D/AN

67132D | 20W | PAR30 | E27 | Aluminium

IP54

Suitable for PAR30 LED lamp.



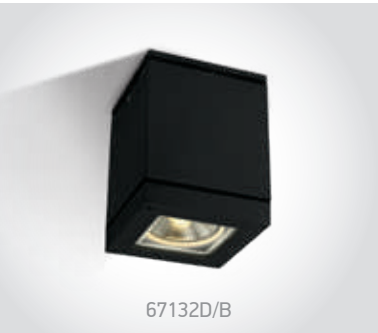

67132D/B

67132D | 20W | PAR30 | E27 | Aluminium

IP54

Suitable for PAR30 LED lamp.



67132D/G

67132D | 20W | PAR30 | E27 | Aluminium

IP54

Suitable for PAR30 LED lamp.



67132A/W

67132A | 2x20W | PAR30 | E27 | Aluminium

IP54

67132A/G



Order Code	Colour	Watts	Input	Class		Notes
67132D/AN	Anthracite	20W	100-240V		18	-
67132D/B	Black	20W	100-240V		18	-
67132D/G	Grey	20W	100-240V		18	-
67132A/W	White	2x20W	100-240V		12	-
67132A/G	Grey	2x20W	100-240V		12	-

one

67420/W

Outdoor E27 Square
Aluminium

67328/G

67328 | 12W | E27 | Aluminium + PC

IP54

67328/AN



67420/W

67420 | 12W | E27 | Aluminium + frosted glass

IP54

67420/AN

67420/B

67420/G



67420B/W

67420B | 2x12W | E27 | Aluminium + frosted glass

IP54

67420B/AN

67420B/B



Order Code	Colour	Watts	Input	Class		Notes
67328/AN	Anthracite	12W	100-240V		8	-
67328/G	Grey	12W	100-240V		8	-
67420/W	White	12W	100-240V		6	-
67420/AN	Anthracite	12W	100-240V		6	-
67420/B	Black	12W	100-240V		6	-
67420/G	Grey	12W	100-240V		6	-
67420B/W	White	2x12W	100-240V		4	-
67420B/AN	Anthracite	2x12W	100-240V		4	-
67420B/B	Black	2x12W	100-240V		4	-

The E27 Outdoor Plafo
Aluminium

67204B/B

67204B | 2x10W | E27 | Aluminium

IP54

67204B/AN



67204/W

67204 | 12W | E27 | Aluminium

IP54

67204/AN

67204/B



67216/G

67216 | 2x20W | E27 | Aluminium

IP54

Suitable for
E27 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
67204B/AN	Anthracite	2x10W	100-240V		10	-
67204B/B	Black	2x10W	100-240V		10	-
67204/W	White	12W	100-240V		6	-
67204/AN	Anthracite	12W	100-240V		6	-
67204/B	Black	12W	100-240V		6	-
67216/G	Grey	2x20W	100-240V		6	-

The Square E27 Outdoor Plafo
Aluminium

67208B | 2x10W | E27 | Aluminium

IP54

67208 | 12W | E27 | Aluminium

IP54

67210 | 2x10W | E27 | Aluminium

IP54

Order Code	Colour	Watts	Input	Class		Notes
67208B/AN	Anthracite	2x10W	100-240V		10	-
67208/W	White	12W	100-240V		8	-
67210/W	White	2x10W	100-240V		6	-

Wall & Ceiling LED

Pages 395-458

12

Zoomable Moving Heads
COB

12115G/W/W

12115G | 15W | COB | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.

LED BUILT IN

90 CRI

ADJUSTABLE

CE

5 YEAR

IP20

Zoomable

Removable Honeycomb



12115G/B/W

12115G | 15W | COB | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.

LED BUILT IN

90 CRI

ADJUSTABLE

CE

5 YEAR

IP20

Zoomable

Removable Honeycomb



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12115G/W/W	White	Warm white	3000K	15W	1500lm	15°-45°	230V		40	Complete with 350mA driver
12115G/B/W	Black	Warm white	3000K	15W	1500lm	15°-45°	230V		40	Complete with 350mA driver

one

The COB Adjustable Display Spots

12108LA/B/V

12108LA | 8W | COB | Aluminium

LED BUILT IN
90 CRI
CCT V
ADJUSTABLE
CE
5 YEAR
new
IP20

12108LA/W/V



12208LA/B/W

12208LA | 2x8W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR
IP20



12208LA/B/V

12208LA | 2x8W | COB | Aluminium

LED BUILT IN
90 CRI
CCT V
ADJUSTABLE
CE
5 YEAR
new
IP20

12208LA/W/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12108LA/W/V	White	CCT V	3000K-3500K-4000K	8W	600lm	25°	230V		24	Complete with 350mA driver
12108LA/B/V	Black	CCT V	3000K-3500K-4000K	8W	600lm	25°	230V		24	Complete with 350mA driver
12208LA/B/W	Black	Warm white	3000K	2x8W	2x600lm	25°	230V		18	Complete with 2x700mA drivers
12208LA/W/V	White	CCT V	3000K-3500K-4000K	2x8W	2x600lm	25°	230V		18	Complete with 2x350mA drivers
12208LA/B/V	Black	CCT V	3000K-3500K-4000K	2x8W	2x600lm	25°	230V		18	Complete with 2x350mA drivers

one

The COB Cylinder Spots

65004B/B/W

65004A/W/W

65004A | 5W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR
IP20

Complete with Black, Brass & White reflectors.



65004A/B/W

65004A | 5W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR
IP20

Complete with Black, Brass & White reflectors.



65004B/W/W

65004B | 2x5W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR
IP20

Complete with Black, Brass & White reflectors.



65004B/B/W

65004B | 2x5W | COB | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
CE
5 YEAR
IP20

Complete with Black, Brass & White reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65004A/W/W	White	Warm white	3000K	5W	450lm	36°	230V	⏚	30	Complete with 500mA driver
65004A/B/W	Black	Warm white	3000K	5W	450lm	36°	230V	⏚	30	Complete with 500mA driver
65004B/W/W	White	Warm white	3000K	2x5W	900lm	36°	230V	⏚	24	Complete with 250mA driver
65004B/B/W	Black	Warm white	3000K	2x5W	900lm	36°	230V	⏚	24	Complete with 250mA driver

The COB Cylinder Spots

65004C/W/W

65004C | 3x5W | COB | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20

65004C/B/W

Complete with Black, Brass & White reflectors.

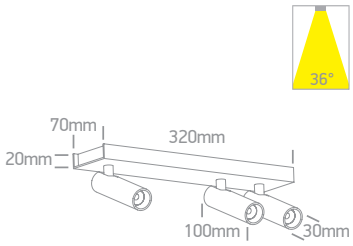

65004D/W/W

65004D | 3x5W | COB | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20

65004D/B/W

Complete with Black, Brass & White reflectors.



65004E/W/W

65004E | 4x5W | COB | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · IP20

65004E/B/W

Complete with Black, Brass & White reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65004C/W/W	White	Warm white	3000K	3x5W	1350lm	36°	230V		12	Complete with 500mA driver
65004C/B/W	Black	Warm white	3000K	3x5W	1350lm	36°	230V		12	Complete with 500mA driver
65004D/W/W	White	Warm white	3000K	3x5W	1350lm	36°	230V		8	Complete with 500mA driver
65004D/B/W	Black	Warm white	3000K	3x5W	1350lm	36°	230V		8	Complete with 500mA driver
65004E/W/W	White	Warm white	3000K	4x5W	1800lm	36°	230V		6	Complete with 500mA driver
65004E/B/W	Black	Warm white	3000K	4x5W	1800lm	36°	230V		6	Complete with 500mA driver

Indirect Wall Light
CCT V

38010A/B/V

38010A | 12W | SMD | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
new
IP20

38010A/W/V



38010B/B/V

38010B | 23W | SMD | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
new
IP20

38010B/W/V

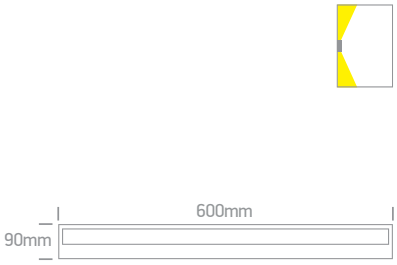

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38010A/W/V	White	CCT V	2700K-3100K-3500K	12W	720lm	230V		10	Complete with 300mA driver
38010A/B/V	Black	CCT V	2700K-3100K-3500K	12W	720lm	230V		10	Complete with 300mA driver
38010B/W/V	White	CCT V	2700K-3100K-3500K	23W	1380lm	230V		10	Complete with 700mA driver
38010B/B/V	Black	CCT V	2700K-3100K-3500K	23W	1380lm	230V		10	Complete with 700mA driver

one

67466C/W/W

67466B/B/W

The Backlight Wall Range
Aluminium

67466A/W/W

67466A | 6W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20

67466A/B/W



67466B/W/W

67466B | 6W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20

67466B/B/W



67466C/W/W

67466C | 12W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20

67466C/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67466A/W/W	White	Warm white	3000K	6W	400lm	230V		12	Complete with 300mA driver
67466A/B/W	Black	Warm white	3000K	6W	400lm	230V		12	Complete with 300mA driver
67466B/W/W	White	Warm white	3000K	6W	400lm	230V		12	Complete with 300mA driver
67466B/B/W	Black	Warm white	3000K	6W	400lm	230V		12	Complete with 300mA driver
67466C/W/W	White	Warm white	3000K	12W	800lm	230V		12	Complete with 300mA driver
67466C/B/W	Black	Warm white	3000K	12W	800lm	230V		12	Complete with 300mA driver

one

12107KA/W/W + 050106/B

12107K/B/W + 050106/BS

12107K/W/W + 050106/W

The Chill Out LED Cylinders
Dimmable

12107K/B/W + 050106/BS

12107K | 7W | COB | Dimmable | Aluminium

Ring must be ordered separately.

LED BUILT IN

90 CRI

TRIAC DIMMABLE

CE

2 YEAR

IP20

12107K/W/W + 050106/B

12107KA/B/W + 050106/BS

12107KA | 7W | COB | Dimmable | Aluminium

Ring must be ordered separately.

LED BUILT IN

90 CRI

TRIAC DIMMABLE

CE

2 YEAR

IP20

12107KA/W/W + 050106/B



050106/W White

050106/B Black

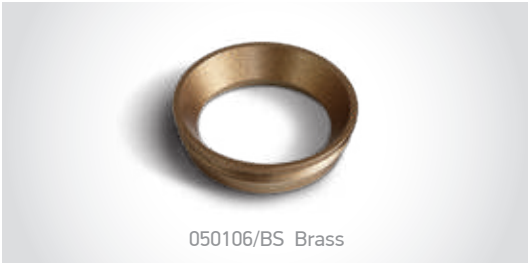

050106/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12107K/W/W	White	Warm white	3000K	7W	500lm	35°	230V		30	AC LED
12107K/B/W	Black	Warm white	3000K	7W	500lm	35°	230V		30	AC LED
12107KA/W/W	White	Warm white	3000K	7W	500lm	35°	230V		30	AC LED
12107KA/B/W	Black	Warm white	3000K	7W	500lm	35°	230V		30	AC LED

one

12115D/B/W

LED Decorative Cylinders

12110D/W/W

12110D | 10W | COB | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20



12115D/B/W

12115D | 15W | COB | Aluminium + plastic

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20

12115D/W/W



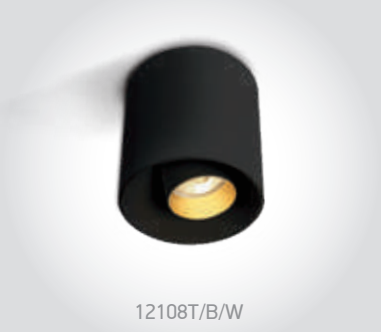
12108T/B/W

12108T | 8W | COB | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP20


12108T/W/W


Complete with
Black & Brass reflectors.



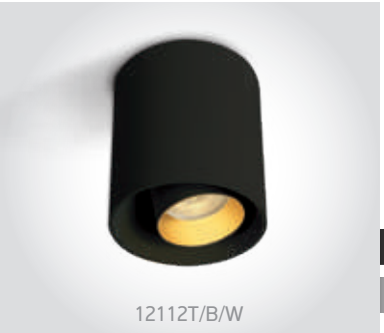
12112T/B/W

12112T | 12W | COB | Aluminium

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 5 YEAR · DARK LIGHT · IP20

12112T/W/W


Complete with
Black & Brass reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12110D/W/W	White	Warm white	3000K	10W	800lm	36°	230V		18	Complete with 500mA driver
12115D/W/W	White	Warm white	3000K	15W	1200lm	45°	230V		24	Complete with 350mA driver
12115D/B/W	Black	Warm white	3000K	15W	1200lm	45°	230V		24	Complete with 350mA driver
12108T/W/W	White	Warm white	3000K	8W	720lm	36°	230V		30	Complete with 700mA driver
12108T/B/W	Black	Warm white	3000K	8W	720lm	36°	230V		30	Complete with 700mA driver
12112T/W/W	White	Warm white	3000K	12W	1080lm	36°	230V		20	Complete with 350mA driver
12112T/B/W	Black	Warm white	3000K	12W	1080lm	36°	230V		20	Complete with 350mA driver

LED Fashion Cylinders

12107V | 7W | LED | Dimmable | Aluminium

12107V/B/W

LED BUILT IN | 90 CRI | TRIAC DIMMABLE | CE | 3 YEAR | IP20

12107V/W/W



12107VA | 7W | LED | Dimmable | Aluminium

12107VA/B/W

new | LED BUILT IN | 90 CRI | TRIAC DIMMABLE | CE | 3 YEAR | IP20

12107VA/W/W



12112F | 12W | COB | Aluminium

12112F/W/V

new | LED BUILT IN | 90 CRI | CCT V | CE | 3 YEAR | IP20

12112F/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12107V/W/W	White	Warm white	3000K	7W	500lm	40°	230V		20	AC LED
12107V/B/W	Black	Warm white	3000K	7W	500lm	40°	230V		20	AC LED
12107VA/W/W	White	Warm white	3000K	7W	500lm	40°	230V		20	AC LED
12107VA/B/W	Black	Warm white	3000K	7W	500lm	40°	230V		20	AC LED
12112F/W/V	White	CCT V	3000K-3500K-4000K	12W	960lm	120°	230V		50	Complete with 300mA driver
12112F/B/V	Black	CCT V	3000K-3500K-4000K	12W	960lm	120°	230V		50	Complete with 300mA driver

COB Ceiling Cylinders

12108C/B/V

12108C | 8W | COB | Aluminium

new

IP20

LED BUILT IN · 90 CRI · CCT V · CE · 5 YEAR

12108C/W/V



12122C/B/W

12122C | 22W | COB | Aluminium

IP20

LED BUILT IN · 90 CRI · CE · 5 YEAR



12122C/B/V

12122C | 22W | COB | Aluminium

new

IP20

LED BUILT IN · 90 CRI · CCT V · CE · 5 YEAR

12122C/W/V



12108X/W/W

12108X | 8W | COB | Dimmable | Aluminium

IP20

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · ADJUSTABLE · CE · 3 YEAR



12208XA/W/W

12108XA | 8W | COB | Dimmable | Aluminium

IP20

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · ADJUSTABLE · CE · 3 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12108C/W/V	White	CCT V	3000K-3500K-4000K	8W	650lm	38°	230V		50	Complete with 350mA driver
12108C/B/V	Black	CCT V	3000K-3500K-4000K	8W	650lm	38°	230V		50	Complete with 350mA driver
12122C/B/W	Black	Warm white	3000K	22W	1500lm	38°	230V		20	Complete with 500mA driver
12122C/W/V	White	CCT V	3000K-3500K-4000K	22W	1760lm	38°	230V		20	Complete with 500mA driver
12122C/B/V	Black	CCT V	3000K-3500K-4000K	22W	1760lm	38°	230V		20	Complete with 500mA driver
12108X/W/W	White	Warm white	3000K	8W	640lm	36°	230V		36	Complete with 350mA dimmable driver
12108XA/W/W	White	Warm white	3000K	8W	640lm	36°	230V		36	Complete with 350mA dimmable driver

12122D/W/W + 050208/BS

12108D/BBS/W + 050206/B

Dark Light Cylinders Tubes
Aluminium

12108D/W/W + 050206/W

12108D | 8W | COB | Aluminium

Reflector must be ordered separately.

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20



12108D/B/W + 050206/B



12108D/BBS/W + 050206/B

12108D | 8W | COB | Aluminium

Reflector must be ordered separately.

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20

12108D/MG/W + 050206/B



12108DB/W/W + 050206/B

12108DB | 8W | LED | Backlit | Aluminium

Reflector must be ordered separately.

LED BUILT IN · 90 CRI · CE · 5 YEAR · DARK LIGHT · IP20



050206/W White

050206/B Black

050206/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12108D/W/W	White	Warm white	3000K	8W	560lm	24°	230V		50	Complete with 700mA driver
12108D/B/W	Black	Warm white	3000K	8W	560lm	24°	230V		50	Complete with 700mA driver
12108D/BBS/W	Brushed brass	Warm white	3000K	8W	560lm	24°	230V		50	Complete with 700mA driver
12108D/MG/W	Metal grey	Warm white	3000K	8W	560lm	24°	230V		50	Complete with 700mA driver
12108DB/W/W	White	Warm white	3000K	8W	320+100lm	36°	230V		50	Complete with 700mA driver

Dark Light Cylinders Tubes
Aluminium

12122D/W/W + 050208/BS

12122D | 22W | COB | Aluminium

Reflector must be ordered separately.

LED BUILT IN

90 CRI

CE

5 YEAR

DARK LIGHT

IP20



12122D/B/W + 050208/B



12122D/BBS/W + 050208/B

12122D | 22W | COB | Aluminium

Reflector must be ordered separately.

LED BUILT IN

90 CRI

CE

5 YEAR

DARK LIGHT

IP20



12122D/MG/W + 050208/B



050208/W White

050208/B Black

050208/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12122D/W/W	White	Warm white	3000K	22W	1540lm	24°	230V		20	Complete with 500mA driver
12122D/B/W	Black	Warm white	3000K	22W	1540lm	24°	230V		20	Complete with 500mA driver
12122D/BBS/W	Brushed brass	Warm white	3000K	22W	1540lm	24°	230V		20	Complete with 500mA driver
12122D/MG/W	Metal grey	Warm white	3000K	22W	1540lm	24°	230V		20	Complete with 500mA driver

The Retro Dark Light Cylinders

12112Z/B/W

12112Z | 12W | COB | Aluminium + Plastic

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20

12112Z/W/W

Complete with Black & Brass reflectors. Optional White reflector code 050378B/W.

12120Z/B/W

12120Z | 20W | COB | Aluminium + Plastic

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20

12120Z/W/W

Complete with Black & Brass reflectors. Optional White reflector code 050378C/W.

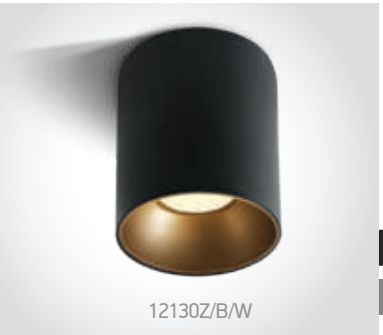

12130Z/B/W

12130Z | 30W | COB | Aluminium + Plastic

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20

Complete with Black & Brass reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12112Z/W/W	White	Warm white	3000K	12W	960lm	45°	230V		30	Complete with 300mA driver
12112Z/B/W	Black	Warm white	3000K	12W	960lm	45°	230V		30	Complete with 300mA driver
12120Z/W/W	White	Warm white	3000K	20W	1600lm	45°	230V		24	Complete with 500mA driver
12120Z/B/W	Black	Warm white	3000K	20W	1600lm	45°	230V		24	Complete with 500mA driver
12130Z/B/W	Black	Warm white	3000K	30W	2400lm	45°	230V		12	Complete with 700mA driver

The Retro Dark Light Cylinders
CCT V

12112Z/B/V + 050378B/BS

12112Z | 12W | COB | Aluminium

Reflector must be ordered separately.

new

DARK LIGHT

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

new

12112Z/W/V + 050378B/W

050378B/W White

050378B/B Black

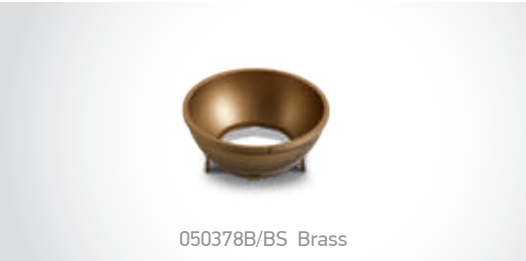

050378B/BS Brass

12120Z/B/V + 050378C/BS

12120Z | 20W | COB | Aluminium

Reflector must be ordered separately.

new

DARK LIGHT

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

new

12120Z/W/V + 050378C/W



050378C/W White

050378C/B Black

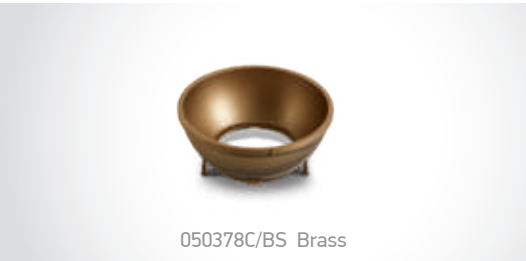

050378C/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12112Z/W/V	White	CCT V	3000K-3500K-4000K	12W	960lm	45°	230V		30	Complete with 300mA driver
12112Z/B/V	Black	CCT V	3000K-3500K-4000K	12W	960lm	45°	230V		30	Complete with 300mA driver
12120Z/W/V	White	CCT V	3000K-3500K-4000K	20W	1600lm	45°	230V		24	Complete with 500mA driver
12120Z/B/V	Black	CCT V	3000K-3500K-4000K	20W	1600lm	45°	230V		24	Complete with 500mA driver

one

The Retro Dark Light Cubes

12110HA/W/W

12110HA | 10W | COB | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20



12115HA/W/W

12115HA | 15W | COB | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20



12112ZA/B/W

12112ZA | 12W | COB | Aluminium + Plastic

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20

12112ZA/W/W


Complete with
Black & Brass reflectors.



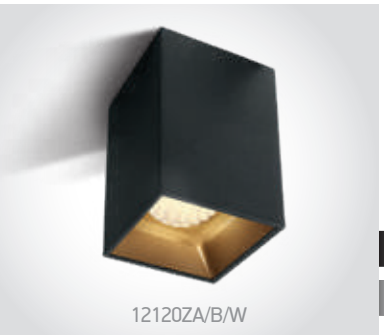
12120ZA/B/W

12120ZA | 20W | COB | Aluminium + Plastic

LED BUILT IN
80 CRI
CE
3 YEAR
DARK LIGHT
IP20

12120ZA/W/W


Complete with
Black & Brass reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12110HA/W/W	White	Warm white	3000K	10W	800lm	60°	230V		48	Complete with 250mA driver
12115HA/W/W	White	Warm white	3000K	15W	1200lm	60°	230V		48	Complete with 350mA driver
12112ZA/W/W	White	Warm white	3000K	12W	960lm	45°	230V		30	Complete with 300mA driver
12112ZA/B/W	Black	Warm white	3000K	12W	960lm	45°	230V		30	Complete with 300mA driver
12120ZA/W/W	White	Warm white	3000K	20W	1600lm	45°	230V		24	Complete with 500mA driver
12120ZA/B/W	Black	Warm white	3000K	20W	1600lm	45°	230V		24	Complete with 500mA driver

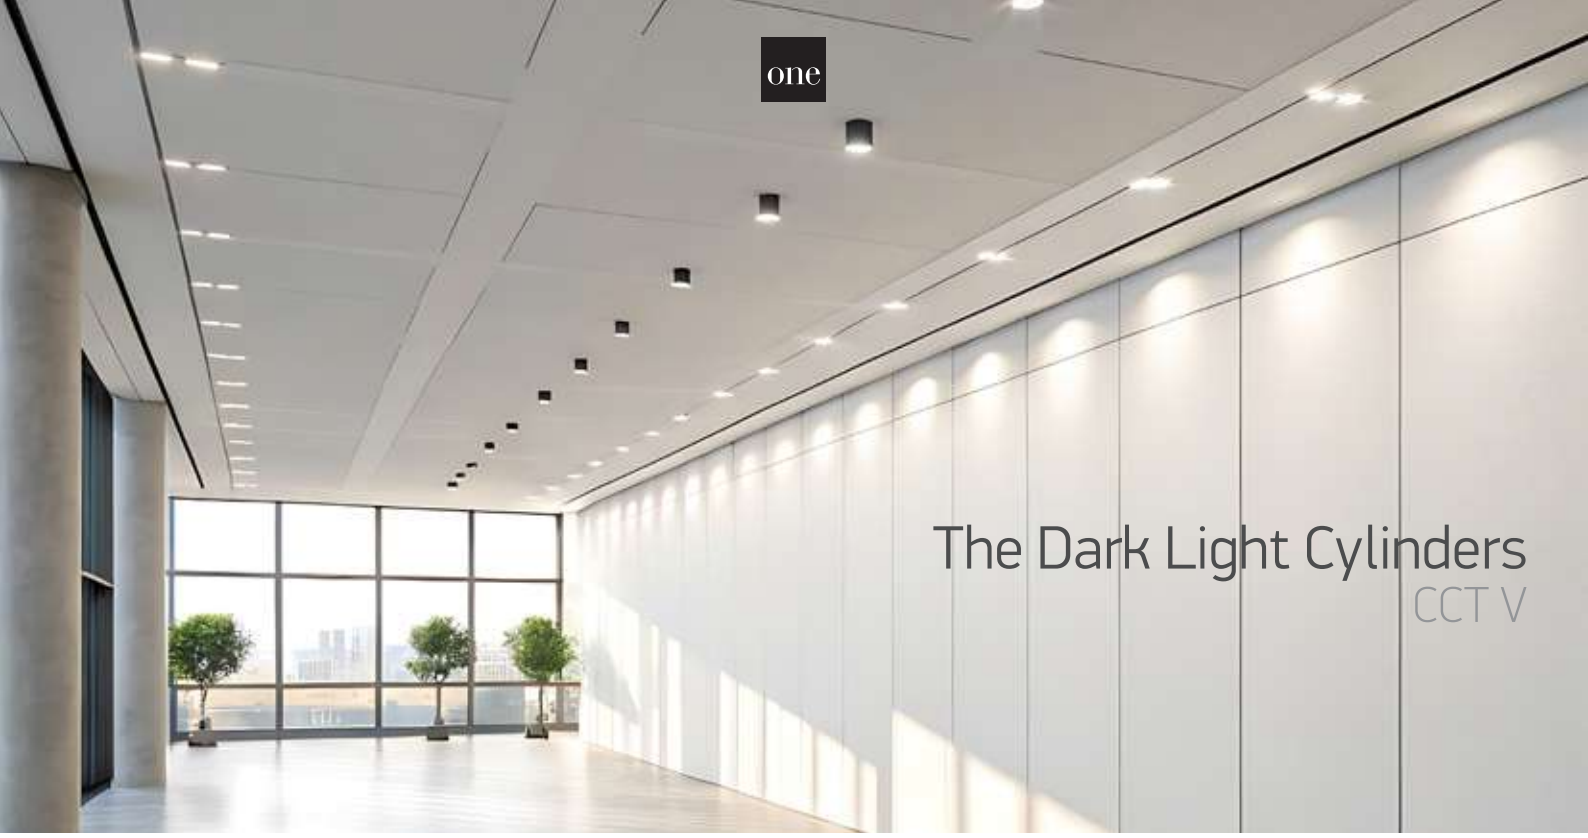

The Dark Light Cylinders
CCT V

12106E/W/V

12106E | 6W | COB | Aluminium

new
DARK LIGHT
IP20

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR

12106E/B/V



12112E/W/V

12112E | 12W | COB | Aluminium

new
DARK LIGHT
IP20

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR

12112E/B/V



12114E/W/V

12114E | 14W | COB | Aluminium

new
DARK LIGHT
IP20

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR

12114E/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12106E/W/V	White	CCT V	3000K-3500K-4000K	6W	420lm	38°	230V		50	Complete with 150mA driver
12106E/B/V	Black	CCT V	3000K-3500K-4000K	6W	420lm	38°	230V		50	Complete with 150mA driver
12112E/W/V	White	CCT V	3000K-3500K-4000K	12W	840lm	38°	230V		50	Complete with 300mA driver
12112E/B/V	Black	CCT V	3000K-3500K-4000K	12W	840lm	38°	230V		50	Complete with 300mA driver
12114E/W/V	White	CCT V	3000K-3500K-4000K	14W	980lm	38°	230V		50	Complete with 350mA driver
12114E/B/V	Black	CCT V	3000K-3500K-4000K	14W	980lm	38°	230V		50	Complete with 350mA driver

The Backlight Cylinders

12112A/W/W

12112A | 10W+2W | COB | Aluminium

Downlight + Uplight.

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20


12112A/B/W



12120A/W/W

12120A | 18W+2W | COB | Aluminium

Downlight + Uplight.

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20


12120A/B/W



12128A/W/W

12128A | 26W+2W | COB | Aluminium

Downlight + Uplight.

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20

12128A/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12112A/W/W	White	Warm white	3000K	10W+2W	1000lm	60°	230V		40	Complete with 300mA driver
12112A/B/W	Black	Warm white	3000K	10W+2W	1000lm	60°	230V		40	Complete with 300mA driver
12120A/W/W	White	Warm white	3000K	18W+2W	1800lm	60°	230V		30	Complete with 500mA driver
12120A/B/W	Black	Warm white	3000K	18W+2W	1800lm	60°	230V		30	Complete with 500mA driver
12128A/W/W	White	Warm white	3000K	26W+2W	2600lm	60°	230V		20	Complete with 700mA driver
12128A/B/W	Black	Warm white	3000K	26W+2W	2600lm	60°	230V		20	Complete with 700mA driver

The PRO Cylinders Range

12120F/B/W

12120F/W/W

12112A/W/W

12115F/B/W

12115F | 15W | COB | Aluminium

LED BUILT IN

90 CRI

CE

5 YEAR

DARK LIGHT

IP20

0750A/15 (15°)
0750A/24 (24°)



12120F/W/W

12120F | 20W | COB | Aluminium

LED BUILT IN

90 CRI

CE

5 YEAR

DARK LIGHT

IP20

12120F/B/W

0750B/15 (15°)



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12115F/B/W	Black	Warm white	3000K	15W	1800lm	38°	230V		20	Complete with 350mA driver
12120F/W/W	White	Warm white	3000K	20W	2400lm	38°	230V		10	Complete with 450mA driver
12120F/B/W	Black	Warm white	3000K	20W	2400lm	38°	230V		10	Complete with 450mA driver

The Interchangeable Reflectors Cylinders
CCT V

12110R/W/V

12110R | 10W | COB | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
5 YEAR
new
IP20

12110R/B/V

Optional White reflector code 050106B/W.


Optional Brass reflector code 050106B/BS.

12118R/W/V

12118R | 18W | COB | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
5 YEAR
new
IP20


12118R/B/V

Optional White reflector code 050106C/W.

Optional Brass reflector code 050106C/BS.



12125R/W/V

12125R | 25W | COB | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
5 YEAR
new
IP20

12125R/B/V

Optional White reflector code 050106D/W.

Optional Brass reflector code 050106D/BS.



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12110R/W/V	White	Black	CCT V	3000K-3500K-4000K	10W	1000lm	38°	230V		30	Complete with 250mA driver
12110R/B/V	Black	Black	CCT V	3000K-3500K-4000K	10W	1000lm	38°	230V		30	Complete with 250mA driver
12118R/W/V	White	Black	CCT V	3000K-3500K-4000K	18W	1800lm	38°	230V		20	Complete with 450mA driver
12118R/B/V	Black	Black	CCT V	3000K-3500K-4000K	18W	1800lm	38°	230V		20	Complete with 450mA driver
12125R/W/V	White	Black	CCT V	3000K-3500K-4000K	25W	2500lm	38°	230V		18	Complete with 650mA driver
12125R/B/V	Black	Black	CCT V	3000K-3500K-4000K	25W	2500lm	38°	230V		18	Complete with 650mA driver

one

The Interchangeable Reflectors Cylinders

12107R/W/W

12107R | 7W | COB | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CE · 5 YEAR · IP20

12107R/B/W

Optional White reflector code 050106A/W.

Optional Brass reflector code 050106A/BS.

12110R/B/W

12110R | 10W | COB | Aluminium

LED BUILT IN · 90 CRI · CE · 5 YEAR · IP20

Optional White reflector code 050106B/W.

Optional Brass reflector code 050106B/BS.

12118R/B/W

12118R | 18W | COB | Aluminium

LED BUILT IN · 90 CRI · CE · 5 YEAR · IP20

Optional White reflector code 050106C/W.

Optional Brass reflector code 050106C/BS.



12125R/W/W

12125R | 25W | COB | Aluminium

LED BUILT IN · 90 CRI · CE · 5 YEAR · IP20

12125R/B/W

Optional White reflector code 050106D/W.

Optional Brass reflector code 050106D/BS.



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12107R/W/W	White	Black	Warm white	3000K	7W	500lm	38°	230V		50	AC LED
12107R/B/W	Black	Black	Warm white	3000K	7W	500lm	38°	230V		50	AC LED
12110R/B/W	Black	Black	Warm white	3000K	10W	1000lm	38°	230V		30	Complete with 250mA driver
12118R/B/W	Black	Black	Warm white	3000K	18W	1800lm	38°	230V		20	Complete with 450mA driver
12125R/W/W	White	Black	Warm white	3000K	25W	2500lm	38°	230V		18	Complete with 650mA driver
12125R/B/W	Black	Black	Warm white	3000K	25W	2500lm	38°	230V		18	Complete with 650mA driver

The Dark Light Mirror Cylinders
Aluminium

12106X/W/W

12106X | 6W | SMD | Aluminium

LED BUILT IN
90 CRI
CE
5 YEAR
DARK LIGHT
IP20



12112X/B/W

12112X | 12W | SMD | Aluminium

LED BUILT IN
90 CRI
CE
5 YEAR
DARK LIGHT
IP20



12120X/B/W

12120X | 20W | SMD | Aluminium

LED BUILT IN
90 CRI
CE
5 YEAR
DARK LIGHT
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12106X/W/W	White	Warm white	3000K	6W	480lm	38°	230V		40	Complete with 150mA driver
12112X/B/W	Black	Warm white	3000K	12W	960lm	38°	230V		40	Complete with 300mA driver
12120X/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V		30	Complete with 450mA driver

one

The Dark Light Ceiling Lights
Aluminium

12110HB/W/W

12112H/B/W

12110H | 10W | SMD | Aluminium

12110H/B/W

LED BUILT IN
90 CRI
CE
5 YEAR
DARK LIGHT
IP20

12110H/W/W



12110HB | 10W | SMD | Aluminium

12110HB/B/W

LED BUILT IN
90 CRI
CE
5 YEAR
DARK LIGHT
IP20

12110HB/W/W



12112H | 12W | SMD | Aluminium

12112H/B/W

LED BUILT IN
90 CRI
CE
5 YEAR
DARK LIGHT
IP20

12112H/W/W



12124H | 24W | SMD | Aluminium

12124H/B/W

LED BUILT IN
90 CRI
CE
5 YEAR
DARK LIGHT
IP20

12124H/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12110H/W/W	White	Warm white	3000K	10W	700lm	38°	230V		30	Complete with 700mA driver
12110H/B/W	Black	Warm white	3000K	10W	700lm	38°	230V		30	Complete with 700mA driver
12110HB/W/W	White	Warm white	3000K	10W	700lm	38°	230V		30	Complete with 700mA driver
12110HB/B/W	Black	Warm white	3000K	10W	700lm	38°	230V		30	Complete with 700mA driver
12112H/W/W	White	Warm white	3000K	12W	840lm	38°	230V		40	Complete with 700mA driver
12112H/B/W	Black	Warm white	3000K	12W	840lm	38°	230V		40	Complete with 700mA driver
12124H/W/W	White	Warm white	3000K	24W	1700lm	38°	230V		30	Complete with 700mA driver
12124H/B/W	Black	Warm white	3000K	24W	1700lm	38°	230V		30	Complete with 700mA driver

one

Surface Shop Square Boxes
Aluminium

12107B/W/W

12107B | 7W | COB | Dimmable | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
CE
3 YEAR
IP20



12207B/W/W

12207B | 2x7W | COB | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
IP20



12307B/W/W

12307B | 3x7W | COB | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12107B/W/W	White	Warm white	3000K	7W	550lm	36°	230V		36	Complete with 350mA driver
12207B/W/W	White	Warm white	3000K	2x7W	1100lm	36°	100-240V		24	Complete with 350mA driver
12307B/W/W	White	Warm white	3000K	3x7W	1650lm	36°	100-240V		12	Complete with 350mA driver

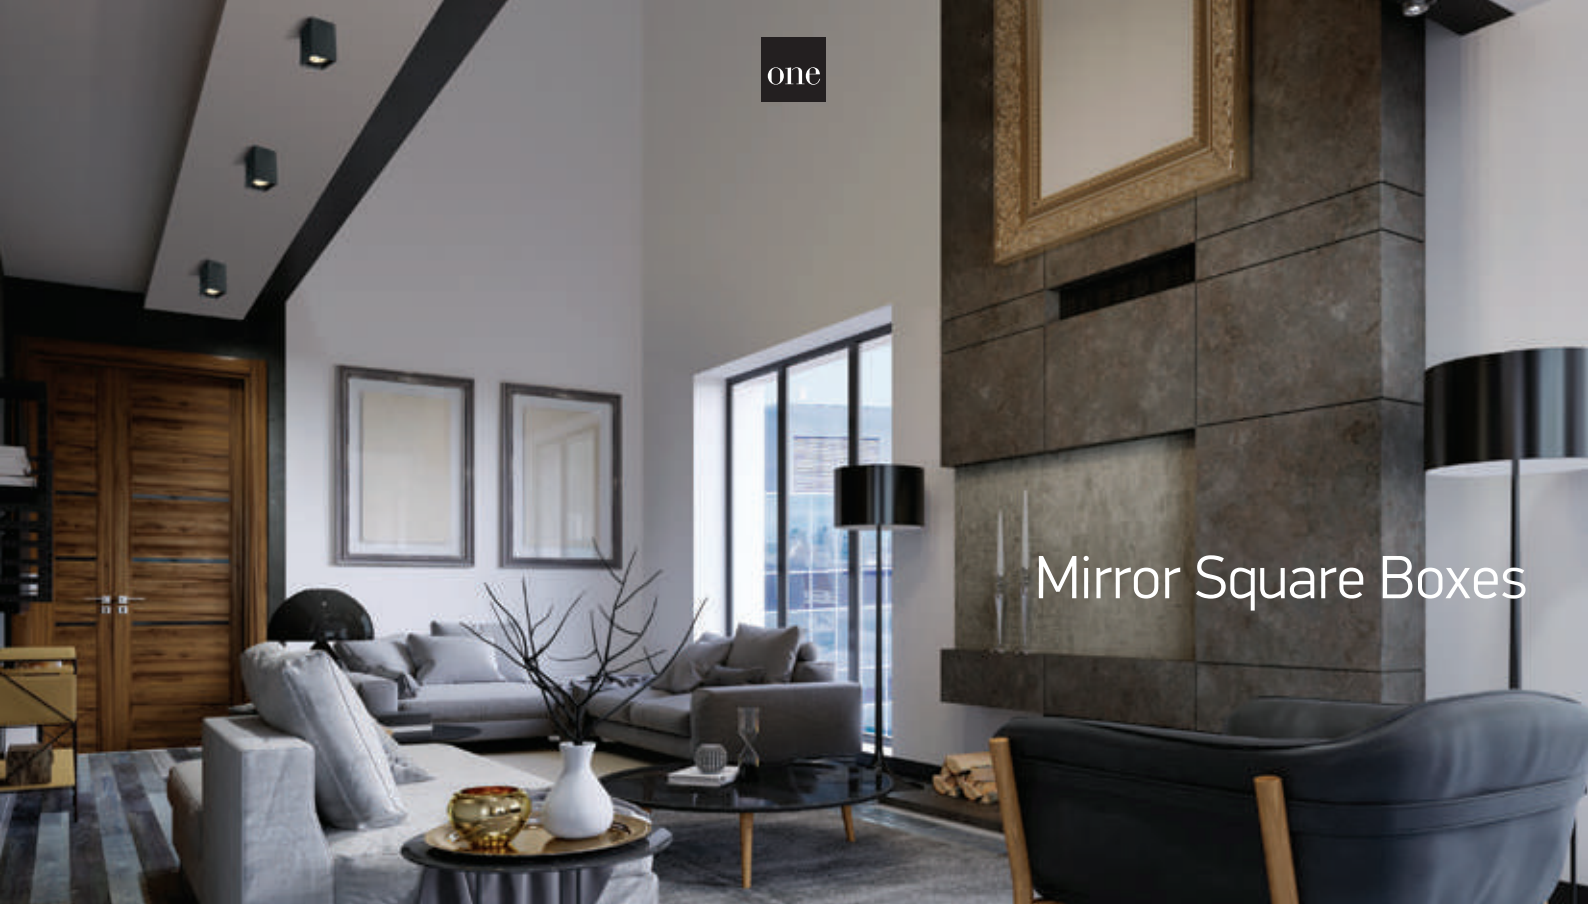

Mirror Square Boxes

12106B | 6W | COB | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

IP20





12406B | 15W | COB | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

IP20





12906B | 30W | COB | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12106B/W/W	White	Warm white	3000K	6W	480lm	38°	230V		60	Complete with 120mA driver
12106B/B/W	Black	Warm white	3000K	6W	480lm	38°	230V		60	Complete with 120mA driver
12406B/W/W	White	Warm white	3000K	15W	1200lm	38°	230V		30	Complete with 350mA driver
12906B/W/W	White	Warm white	3000K	30W	2400lm	38°	230V		12	Complete with 700mA driver

Dark Light Ceiling Tubes

12406C | 10W | SMD | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20



12606C | 15W | SMD | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20



12906C | 20W | SMD | Aluminium

LED BUILT IN
90 CRI
CE
3 YEAR
DARK LIGHT
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12406C/W/W	White	Warm white	3000K	10W	800lm	25°	230V		40	Complete with 700mA driver
12406C/B/W	Black	Warm white	3000K	10W	800lm	25°	230V		40	Complete with 700mA driver
12606C/B/W	Black	Warm white	3000K	15W	1200lm	25°	230V		30	Complete with 700mA driver
12906C/W/W	White	Warm white	3000K	20W	1600lm	25°	230V		20	Complete with 700mA driver
12906C/B/W	Black	Warm white	3000K	20W	1600lm	25°	230V		20	Complete with 700mA driver

The Hidden Light Cylinders Range

12108FD/W/V

12108FD | 8W | SMD | Aluminium

new
DARK LIGHT
IP20
LED BUILT IN
90 CRI
CCT V
CE
3 YEAR



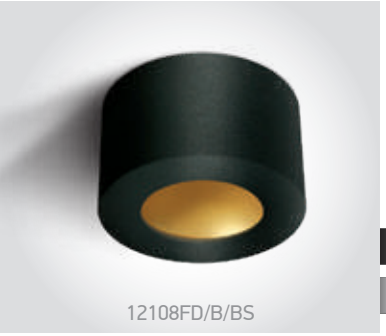
12108FD/B/BS

12108FD | 8W | SMD | Aluminium

DARK LIGHT
IP20
LED BUILT IN
80 CRI
CE
3 YEAR





12116FD/W/W

12116FD | 16W | SMD | Aluminium

DARK LIGHT
IP20
LED BUILT IN
80 CRI
CE
3 YEAR



12116FD/B/BS

12116FD | 16W | SMD | Aluminium

DARK LIGHT
IP20
LED BUILT IN
80 CRI
CE
3 YEAR



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
12108FD/W/V	White	White	CCT V	3000K-3500K-4000K	8W	560lm	230V		36	Complete with 300mA driver
12108FD/B/BS	Black	Brass	Warm white	3000K	8W	400lm	230V		36	Complete with 300mA driver
12116FD/W/W	White	White	Warm white	3000K	16W	1100lm	230V		20	Complete with 300mA driver
12116FD/B/BS	Black	Brass	Warm white	3000K	16W	800lm	230V		20	Complete with 300mA driver

one

The UGR19 Cylinders
CCT V White

12112D/W/V

12112D | 12W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
CE 5 YEAR
IP44



12120D/W/V

12120D | 20W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
CE 5 YEAR
IP44



12125D/W/V

12125D | 25W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
CE 5 YEAR
IP44



12130D/W/V

12130D | 30W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
CE 5 YEAR
IP44



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12112D/W/V	White	CCT V	3000K-4000K-5000K	12W	1200lm	120°	230V		30	Complete with 300mA driver
12120D/W/V	White	CCT V	3000K-4000K-5000K	20W	2000lm	120°	230V		30	Complete with 500mA driver
12125D/W/V	White	CCT V	3000K-4000K-5000K	25W	2500lm	120°	230V		20	Complete with 650mA driver
12130D/W/V	White	CCT V	3000K-4000K-5000K	30W	3000lm	120°	230V		12	Complete with 750mA driver

The UGR19 Cylinders
CCT V Black

12112D/B/V

12112D | 12W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
CE 5 YEAR
IP44



12120D/B/V

12120D | 20W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
CE 5 YEAR
IP44



12125D/B/V

12125D | 25W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
CE 5 YEAR
IP44



12130D/B/V

12130D | 30W | SMD | Aluminium

LED BUILT IN
90 CRI
UGR19
CCT V
CE 5 YEAR
IP44



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12112D/B/V	Black	CCT V	3000K-4000K-5000K	12W	1200lm	120°	230V		30	Complete with 300mA driver
12120D/B/V	Black	CCT V	3000K-4000K-5000K	20W	2000lm	120°	230V		30	Complete with 500mA driver
12125D/B/V	Black	CCT V	3000K-4000K-5000K	25W	2500lm	120°	230V		20	Complete with 650mA driver
12130D/B/V	Black	CCT V	3000K-4000K-5000K	30W	3000lm	120°	230V		12	Complete with 750mA driver

The Opal Diffuser Cylinders
CCT V

12109M | 9W | SMD | Aluminium

new
IP20

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR

12114M | 14W | SMD | Aluminium

new
IP20

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR



12120M | 20W | SMD | Aluminium

new
IP20

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12109M/W/V	White	CCT V	3000K-4000K-5000K	9W	720lm	120°	230V		50	Complete with 220mA driver
12109M/B/V	Black	CCT V	3000K-4000K-5000K	9W	720lm	120°	230V		50	Complete with 220mA driver
12114M/W/V	White	CCT V	3000K-4000K-5000K	14W	1120lm	120°	230V		30	Complete with 350mA driver
12114M/B/V	Black	CCT V	3000K-4000K-5000K	14W	1120lm	120°	230V		30	Complete with 350mA driver
12120M/W/V	White	CCT V	3000K-4000K-5000K	20W	1600lm	120°	230V		20	Complete with 500mA driver
12120M/B/V	Black	CCT V	3000K-4000K-5000K	20W	1600lm	120°	230V		20	Complete with 500mA driver

Outdoor Ceiling Cylinders
Aluminium

67138C/W/W

67138C | 6W | COB | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54

67138C/AN/W

67138C/B/W



67138D/AN/W

67138D | 6W | COB | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54

67138D/B/W

67138D/G/W



67380/W/W

67380 | 10W | COB | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



67516C/W/W

67516C | 40W | COB | Aluminium

LED BUILT IN
90 CRI
CE
2 YEAR
DARK LIGHT
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138C/W/W	White	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138C/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138C/B/W	Black	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138D/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138D/B/W	Black	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67138D/G/W	Grey	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with 500mA driver
67380/W/W	White	Warm white	3000K	10W	730lm	60°	230V		24	Complete with 230mA driver
67516C/W/W	White	Warm white	3000K	40W	3200lm	40°	230V		6	Complete with 1000mA driver

The IP65 Cylinders12-25W

67540A/W/W + 050406A/B

67540B/B/W

67540C/W/V

67540A/W/W

67540A | 12W | COB | Aluminium

new

DARK LIGHT

IP65

LED BUILT IN

90 CRI

CE

2 YEAR

67540A/B/W

Optional Black reflector for 67540A/W/W. Order code 050406A/B.

67540B/W/W

67540B | 18W | COB | Aluminium

new

DARK LIGHT

IP65

LED BUILT IN

90 CRI

CE

2 YEAR

67540B/B/W

Optional Black reflector for 67540B/W/W. Order code 050406B/B.



67540C/W/V

67540C | 25W | COB | Aluminium

new

DARK LIGHT

IP65

LED BUILT IN

90 CRI

CCT V

CE

2 YEAR

67540C/B/V

Optional Black reflector for 67540C/W/V. Order code 050406C/B.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67540A/W/W	White	Warm white	3000K	12W	1200lm	40°	230V		40	Complete with 300mA driver
67540A/B/W	Black	Warm white	3000K	12W	1200lm	40°	230V		40	Complete with 300mA driver
67540B/W/W	White	Warm white	3000K	18W	1800lm	40°	230V		20	Complete with 450mA driver
67540B/B/W	Black	Warm white	3000K	18W	1800lm	40°	230V		20	Complete with 450mA driver
67540C/W/V	White	CCT V	3000K-3500K-4000K	25W	2500lm	40°	230V		10	Complete with 600mA driver
67540C/B/V	Black	CCT V	3000K-3500K-4000K	25W	2500lm	40°	230V		10	Complete with 600mA driver

The IP65 Cylinders 35-40W
CCT V

67540D/W/V

67540D | 35W | COB | Aluminium

new

DARK LIGHT

IP65

LED BUILT IN

90 CRI

CCT V

CE

2 YEAR

67540D/B/V

Optional Black reflector for 67540D/W/V. Order code 050406D/B.



67540E/W/V

67540E | 40W | COB | Aluminium

new

DARK LIGHT

IP65

LED BUILT IN

90 CRI

CCT V

CE

2 YEAR

67540E/B/V

Optional Black reflector for 67540E/W/V. Order code 050406E/B.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67540D/W/V	White	CCT V	3000K-3500K-4000K	35W	3500lm	40°	230V		10	Complete with 900mA driver
67540D/B/V	Black	CCT V	3000K-3500K-4000K	35W	3500lm	40°	230V		10	Complete with 900mA driver
67540E/W/V	White	CCT V	3000K-3500K-4000K	40W	4000lm	40°	230V		10	Complete with 1000mA driver
67540E/B/V	Black	CCT V	3000K-3500K-4000K	40W	4000lm	40°	230V		10	Complete with 1000mA driver

Outdoor Wall Cylinders
Down beam

67138E/W/W

67138E | 6W | COB | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



67138E/AN/W

67138E | 6W | COB | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



67138E/B/W

67138E | 6W | COB | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



67138E/G/W

67138E | 6W | COB | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138E/W/W	White	Warm white	3000K	6W	440lm	35°	100-240V		12	Complete with 500mA driver
67138E/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V		12	Complete with 500mA driver
67138E/B/W	Black	Warm white	3000K	6W	440lm	35°	100-240V		12	Complete with 500mA driver
67138E/G/W	Grey	Warm white	3000K	6W	440lm	35°	100-240V		12	Complete with 500mA driver

one

Outdoor Wall Cylinders
Down beam

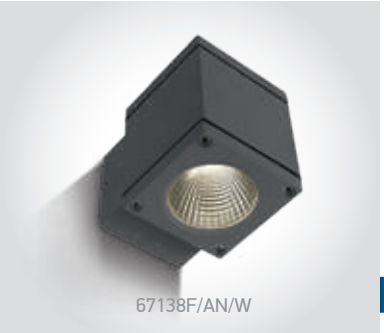

67138F | 6W | COB | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



67138F | 6W | COB | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138F/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V	⏚	12	Complete with 500mA driver
67138F/G/W	Grey	Warm white	3000K	6W	440lm	35°	100-240V	⏚	12	Complete with 500mA driver

Outdoor Wall Cylinders
Up & down beam

67138/AN/W

67138 | 2x6W | COB | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54

67138/W/W

67138/B/W

67138/G/W



67138A/AN/W

67138A | 2x6W | COB | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54

67138A/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138/W/W	White	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138/AN/W	Anthracite	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138/B/W	Black	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138/G/W	Grey	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138A/AN/W	Anthracite	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver
67138A/B/W	Black	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with 500mA driver

Outdoor Wall Cylinders High Power

67138EL/AN/C

67138EL | 20W | COB | Aluminium

LED BUILT IN
TRIAC DIMMABLE
80 CRI
2 YEAR
IP65

67138EL/AN/W



67138L/AN/C

67138L | 2x20W | COB | Aluminium

LED BUILT IN
TRIAC DIMMABLE
80 CRI
2 YEAR
IP65

67138L/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138EL/AN/C	Anthracite	Cool white	4000K	20W	1400lm	35°	230V		4	AC LED
67138EL/AN/W	Anthracite	Warm white	3000K	20W	1400lm	35°	230V		4	AC LED
67138L/AN/C	Anthracite	Cool white	4000K	2x20W	2x1400lm	35°	230V		2	AC LED
67138L/AN/W	Anthracite	Warm white	3000K	2x20W	2x1400lm	35°	230V		2	AC LED

Indoor/Outdoor Wall Lights
Aluminium

67480A | 6W | COB | Aluminium

LED BUILT IN
80 CRI
IK 06
CE
2 YEAR
IP65



67480B | 2x6W | COB | Aluminium

LED BUILT IN
80 CRI
IK 06
CE
2 YEAR
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67480A/AN/W	Anthracite	Warm white	3000K	6W	480lm	230V		8	Complete with 500mA driver
67480B/AN/W	Anthracite	Warm white	3000K	2x6W	960lm	230V		8	Complete with 500mA driver

67524A/AN/W

67524B/AN/W

The Cube Wall Lights
Aluminium

67524A/AN/W

67524A | 6W | COB | Aluminium

LED BUILT IN

80 CRI

IK 10

CE

2 YEAR

IP65

67524A/W/W



67524B/AN/W

67524B | 2x6W | COB | Aluminium

LED BUILT IN

80 CRI

IK 10

CE

2 YEAR

IP65

67524B/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67524A/W/W	White	Warm white	3000K	6W	500lm	36°	230V		12	Complete with 500mA driver
67524A/AN/W	Anthracite	Warm white	3000K	6W	500lm	36°	230V		12	Complete with 500mA driver
67524B/W/W	White	Warm white	3000K	2x6W	1000lm	36°	230V		12	Complete with 500mA driver
67524B/AN/W	Anthracite	Warm white	3000K	2x6W	1000lm	36°	230V		12	Complete with 500mA driver

Wall Adjustable Beams

67440/AN/W

67440 | 9W | SMD | Adjustable beam | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP54

67440/W/W



67440A/AN/W

67440A | 11W | SMD | Adjustable beam | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67440/W/W	White	Warm white	3000K	9W	600lm	230V		8	Complete with 350mA driver
67440/AN/W	Anthracite	Warm white	3000K	9W	600lm	230V		8	Complete with 350mA driver
67440A/AN/W	Anthracite	Warm white	3000K	11W	700lm	230V		8	Complete with 350mA driver

The Glass Face Wall Lights

67076A/W/W

67076/W/W

67076 | 4W | SMD | Glass + metal

LED BUILT IN

80 CRI

CE

2 YEAR

DARK LIGHT

IP65



67076A/W/W

67076A | 5W | SMD | Glass + metal

LED BUILT IN

80 CRI

CE

2 YEAR

DARK LIGHT

IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67076/W/W	White	Warm white	3000K	4W	300lm	230V		12	AC LED
67076A/W/W	White	Warm white	3000K	5W	350lm	230V		12	AC LED

one

Outdoor Wall Up & Down Lights
Aluminium

67374 | 2x3W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



67374 | 2x3W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



67374A | 2x6W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



67374A | 2x6W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67374/W/W	White	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with 350mA driver
67374/AN/W	Anthracite	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with 350mA driver
67374A/W/W	White	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver
67374A/AN/W	Anthracite	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver

Outdoor Wall Lights

67492/AN/V

67492 | 12W | SMD | Plastic + PC

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR
new
IP54



67492P/AN/W

67492P | 12W | SMD | Sensor | Plastic + PC

LED BUILT IN
80 CRI
CE
2 YEAR
IP54





65748/B/C

65748 | 12W | SMD | Solar powered | Night sensor + PIR sensor | ABS + PC

4 modes of operation.

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR
Solar
IP54

Mode 1: 100% output for 18 seconds when motion detected.
Mode 2: Fixed 30 lumen output. 100% output for 18 seconds when motion detected.
Mode 3: Fixed 30 lumen output.
Mode 4: Sleep mode.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67492/AN/V	Anthracite	CCT V	2700K-3300K-4000K	12W	720lm	230V		12	Complete with 300mA driver
67492P/AN/W	Anthracite	Warm white	3000K	12W	600lm	230V		12	Complete with 300mA driver
65748/B/C	Black	Cool white	4000K	12W	1600lm	-	-	20	2x2200mAh lithium battery

Outdoor Wall Up & Down Light

67474A/AN/W

67474A | 10W | LED | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67474A/AN/W	Anthracite	Warm white	3000K	10W	700lm	230V		12	AC LED

one

67474A/AN/W

Outdoor Wall Up & Down Lights

67362C/AN/W

67362C | 2x4,5W | SMD | Aluminium

LED BUILT IN

80 CRI CE 2 YEAR

IP54



67392/AN/W

67392 | 7W | SMD | ABS + PC

LED BUILT IN

80 CRI CE 2 YEAR

IP65



67392/AN/V

67392 | 7W | SMD | ABS+PC

LED BUILT IN

80 CRI CCT V CE

new

2 YEAR

IP65



67392/W/V

67392 | 7W | SMD | ABS+PC

LED BUILT IN

80 CRI CCT V CE

new

2 YEAR

IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67362C/AN/W	Anthracite	Warm white	3000K	2x4,5W	2x315lm	230V		12	Complete with 350mA driver
67392/AN/W	Anthracite	Warm white	3000K	7W	400lm	230V		20	Complete with 500mA driver
67392/W/V	White	CCT V	2700K-3300K-4000K	7W	490lm	230V		20	Complete with 500mA driver
67392/AN/V	Anthracite	CCT V	2700K-3300K-4000K	7W	490lm	230V		20	Complete with 500mA driver

Linear Outdoor Series
Single Sided

67526A1 | 8W | SMD | Aluminium

67526A1/W/W

LED BUILT IN
80 CRI
IK 07
CE
2 YEAR
IP65

67526A1/AN/W



67526A2 | 9W | SMD | Aluminium

67526A2/W/W

LED BUILT IN
80 CRI
IK 07
CE
2 YEAR
IP65


67526A2/AN/W



67526A3 | 13W | SMD | Aluminium

67526A3/W/W

LED BUILT IN
80 CRI
IK 07
CE
2 YEAR
IP65

67526A3/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67526A1/W/W	White	Warm white	3000K	8W	480lm	230V		12	Complete with 350mA driver
67526A1/AN/W	Anthracite	Warm white	3000K	8W	480lm	230V		12	Complete with 350mA driver
67526A2/W/W	White	Warm white	3000K	9W	540lm	230V		6	Complete with 500mA driver
67526A2/AN/W	Anthracite	Warm white	3000K	9W	540lm	230V		6	Complete with 500mA driver
67526A3/W/W	White	Warm white	3000K	13W	780lm	230V		4	Complete with 700mA driver
67526A3/AN/W	Anthracite	Warm white	3000K	13W	780lm	230V		4	Complete with 700mA driver

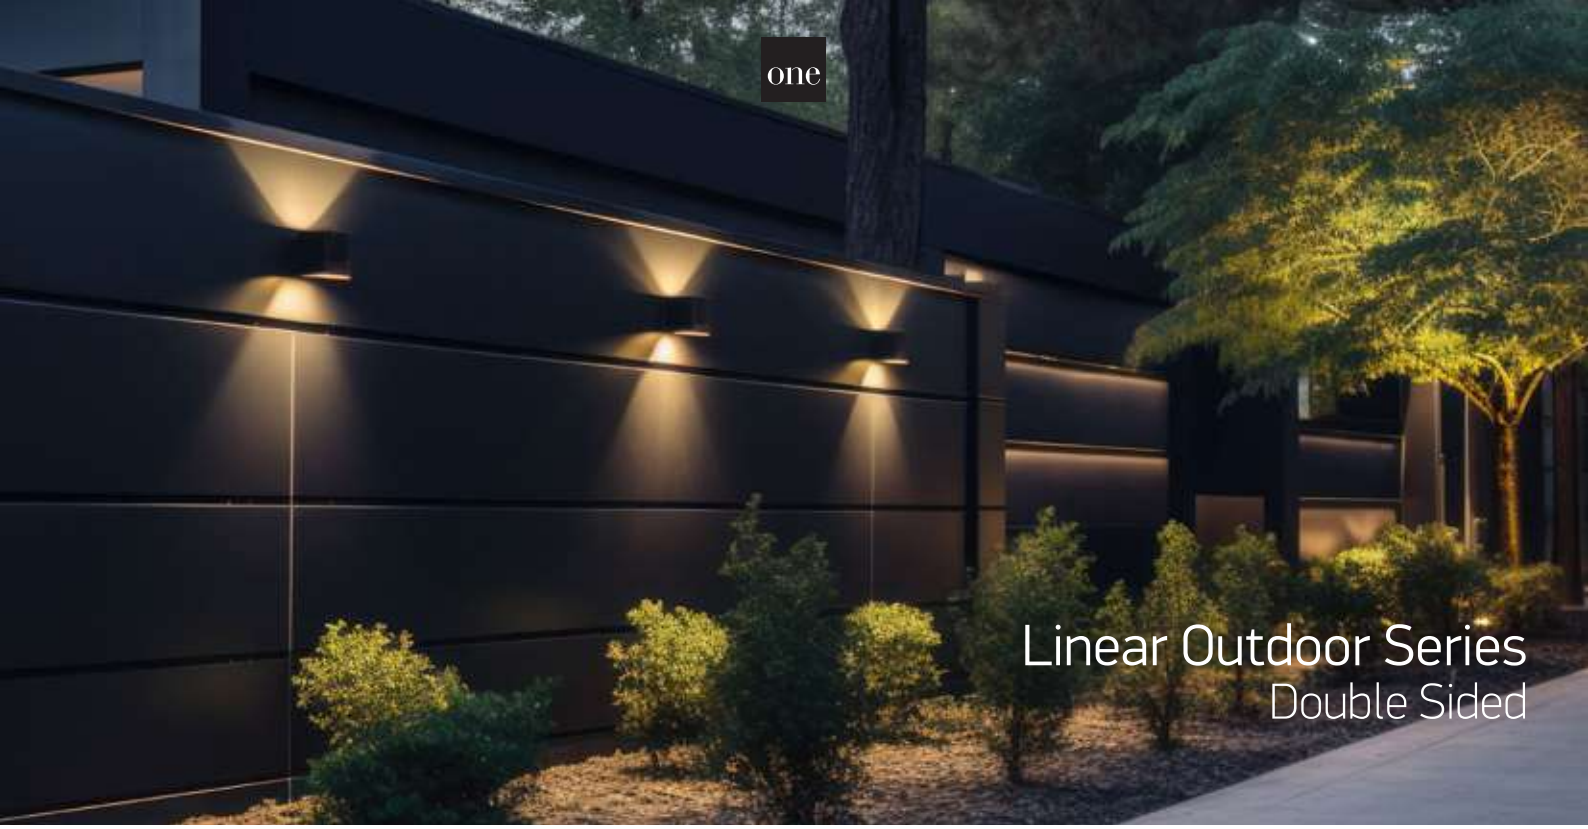

Linear Outdoor Series
Double Sided

67526B1/W/W

67526B1 | 2x6W | SMD | Aluminium

LED BUILT IN
80 CRI
IK07
CE
2 YEAR
IP65

67526B1/AN/W



67526B2/W/W

67526B2 | 2x10W | SMD | Aluminium

LED BUILT IN
80 CRI
IK07
CE
2 YEAR
IP65

67526B2/AN/W



67526B3/W/W

67526B3 | 2x13W | SMD | Aluminium

LED BUILT IN
80 CRI
IK07
CE
2 YEAR
IP65

67526B3/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67526B1/W/W	White	Warm white	3000K	2x6W	2x360lm	230V		12	Complete with 300mA driver
67526B1/AN/W	Anthracite	Warm white	3000K	2x6W	2x360lm	230V		12	Complete with 300mA driver
67526B2/W/W	White	Warm white	3000K	2x10W	2x600lm	230V		6	Complete with 500mA driver
67526B2/AN/W	Anthracite	Warm white	3000K	2x10W	2x600lm	230V		6	Complete with 500mA driver
67526B3/W/W	White	Warm white	3000K	2x13W	2x780lm	230V		4	Complete with 700mA driver
67526B3/AN/W	Anthracite	Warm white	3000K	2x13W	2x780lm	230V		4	Complete with 700mA driver

Outdoor General Lighting
ABS + PC

67394/W/V

67394 | 3,5W | SMD | ABS+PC

LED BUILT IN
80 CRI
CCT V
IK 08
new
CE
2 YEAR
IP65



67394/AN/V

67394 | 3,5W | SMD | ABS+PC

LED BUILT IN
80 CRI
CCT V
IK 08
new
CE
2 YEAR
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67394/W/V	White	CCT V	2700K-3300K-4000K	3,5W	280lm	230V		24	AC LED
67394/AN/V	Anthracite	CCT V	2700K-3300K-4000K	3,5W	280lm	230V		24	AC LED

Indoor/Outdoor Wall Lights
ABS + PC

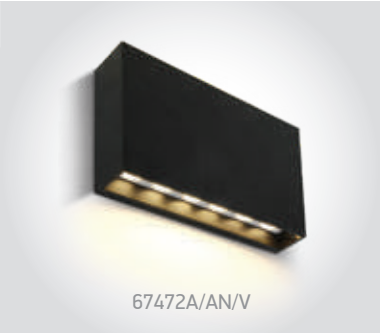

67472A | 6W | SMD | ABS + PC

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR
new
IP65



67472 | 2x6W | SMD | ABS + PC

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR
new
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67472A/AN/V	Anthracite	CCT V	2700K-3300K-4000K	6W	500lm	230V		20	Complete with 300mA driver
67472/AN/V	Anthracite	CCT V	2700K-3300K-4000K	2x6W	2x500lm	230V		20	Complete with 300mA driver

Outdoor Slim Oval Range
Up & down beam

67378A/W/W

67378A | 2x6W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP54

67378A/AN/W

67378A | 2x6W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP54

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67378A/W/W	White	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver
67378A/AN/W	Anthracite	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver

one

Outdoor Slim Range

Up & down beam

67376 | 2x3W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54

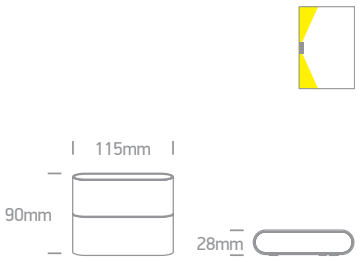

67376A | 2x6W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54

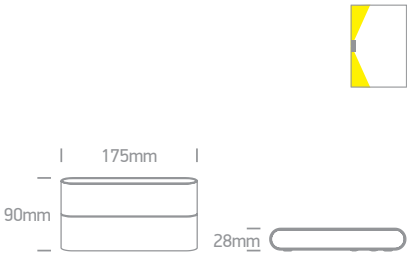

67412 | 2x6W | COB | Adjustable beam | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67376/W/W	White	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with 350mA driver
67376/AN/W	Anthracite	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with 350mA driver
67376A/W/W	White	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver
67376A/AN/W	Anthracite	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with 300mA driver
67412/W/W	White	Warm white	3000K	2x6W	2x400lm	230V		12	Complete with 500mA driver
67412/AN/W	Anthracite	Warm white	3000K	2x6W	2x400lm	230V		12	Complete with 500mA driver

Adjustable Beams
Indoor/Outdoor

67340A | 2x3W | LED | Adjustable beam | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



67340A | 2x3W | LED | Adjustable beam | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67340A/W/W	White	Warm white	3000K	2x3W	2x210lm	230V		8	Complete with 700mA driver
67340A/AN/W	Anthracite	Warm white	3000K	2x3W	2x210lm	230V		8	Complete with 700mA driver

Outdoor Wall Dark Lights
Aluminium

67398 | 3W | COB | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP54



67398A | 2x3W | LED | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP54



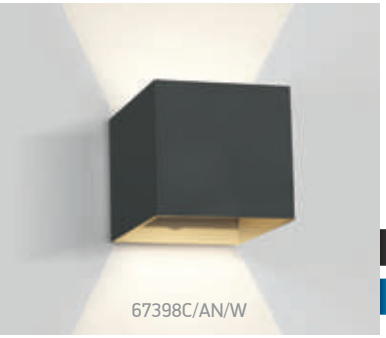

67398C | 2x3W | LED | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67398/W/W	White	Warm white	3000K	3W	200lm	100-240V		24	Complete with 350mA driver
67398/AN/W	Anthracite	Warm white	3000K	3W	200lm	100-240V		24	Complete with 350mA driver
67398A/W/W	White	Warm white	3000K	2x3W	2x200lm	100-240V		12	Complete with 350mA driver
67398A/AN/W	Anthracite	Warm white	3000K	2x3W	2x200lm	100-240V		12	Complete with 350mA driver
67398A/B/W	Black	Warm white	3000K	2x3W	2x200lm	100-240V		12	Complete with 350mA driver
67398C/W/W	White	Warm white	3000K	2x3W	2x200lm	100-240V		18	Complete with 350mA driver
67398C/AN/W	Anthracite	Warm white	3000K	2x3W	2x200lm	100-240V		18	Complete with 350mA driver
67398C/B/W	Black	Warm white	3000K	2x3W	2x200lm	100-240V		18	Complete with 350mA driver

The Backlight Range

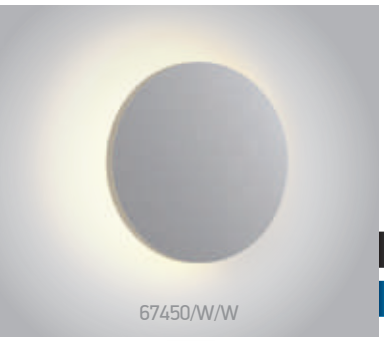

67450 | 7W | SMD | ABS + PC

LED BUILT IN
80 CRI
IK 08
CE
2 YEAR
DARK LIGHT
IP54

67532 | 15W | SMD | Dimmable | Aluminium + PC

LED BUILT IN
80 CRI
TRIAC DIMMABLE
IK 06
CE
2 YEAR
DARK LIGHT
IP65



67450A | 7W | SMD | ABS + PC

LED BUILT IN
80 CRI
IK 08
CE
2 YEAR
DARK LIGHT
IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67450/W/W	White	Warm white	3000K	7W	600lm	230V		24	Complete with 300mA driver
67450/AN/W	Anthracite	Warm white	3000K	7W	600lm	230V		24	Complete with 300mA driver
67532/W/W	White	Warm white	3000K	15W	1100lm	230V		12	Complete with 190mA dimmable driver
67532/B/W	Black	Warm white	3000K	15W	1100lm	230V		12	Complete with 190mA dimmable driver
67450A/W/W	White	Warm white	3000K	7W	600lm	230V		24	Complete with 300mA driver
67450A/AN/W	Anthracite	Warm white	3000K	7W	600lm	230V		24	Complete with 300mA driver

The Roof Tile Range

67422/W/W

67422 | 6W | COB | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54

67422/AN/W



67422A/W/W

67422A | 2x6W | COB | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54

67422A/AN/W



67512/W/V

67512 | 8W | SMD | ABS + PC

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR
new
IP65

67512/AN/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67422/W/W	White	Warm white	3000K	6W	400lm	230V		24	Complete with 500mA driver
67422/AN/W	Anthracite	Warm white	3000K	6W	400lm	230V		24	Complete with 500mA driver
67422A/W/W	White	Warm white	3000K	2x6W	2x400lm	230V		12	Complete with 500mA driver
67422A/AN/W	Anthracite	Warm white	3000K	2x6W	2x400lm	230V		12	Complete with 500mA driver
67512/W/V	White	CCT V	2700K-3300K-4000K	8W	400lm	230V		20	Complete with 350mA driver
67512/AN/V	Anthracite	CCT V	2700K-3300K-4000K	8W	400lm	230V		20	Complete with 350mA driver

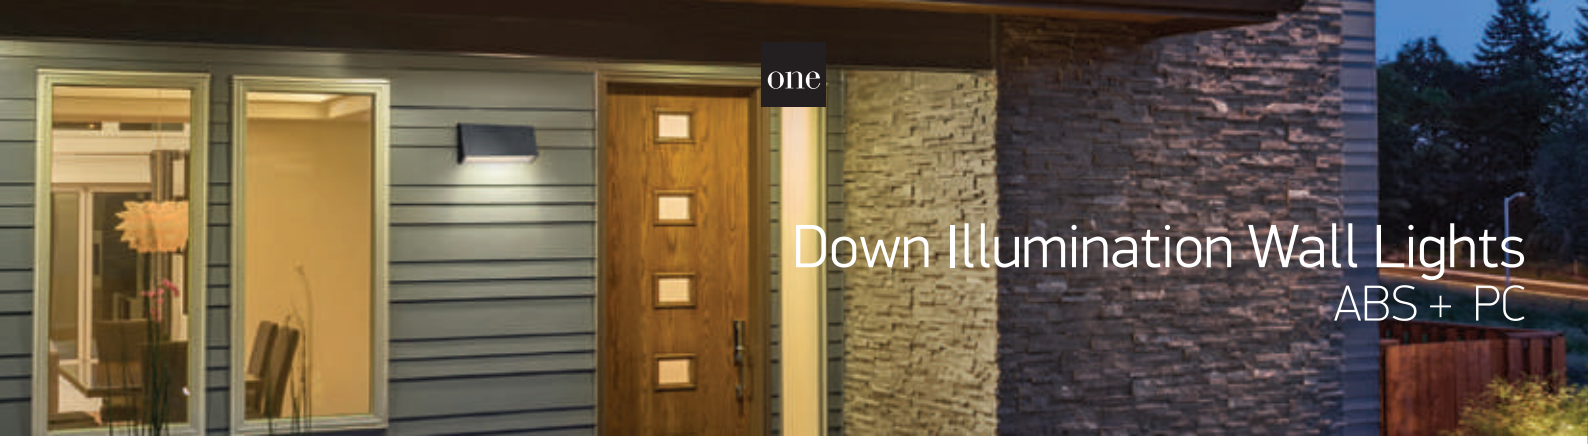

Down Illumination Wall Lights
ABS + PC

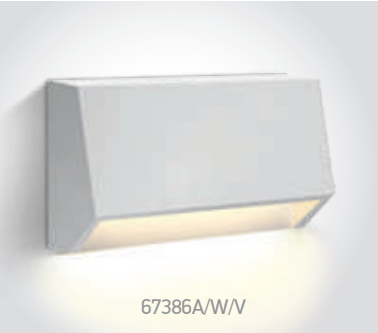
67386A/W/V

67386A | 1,5W | SMD | ABS + PC

new
DARK LIGHT
IP65

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR

67386A/AN/V



67386C/W/V

67386C | 4W | SMD | ABS + PC

new
DARK LIGHT
IP65

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR

67386C/AN/V



67396/W/V

67396 | 6W | SMD | ABS + PC

new
IP65

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR

67396/AN/V



67396A/AN/V

67396A | 6W | SMD | Sensor | ABS + PC

new
IP65

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67386A/W/V	White	CCT V	2700K-3300K-4000K	1,5W	80lm	230V		40	AC LED
67386A/AN/V	Anthracite	CCT V	2700K-3300K-4000K	1,5W	80lm	230V		40	AC LED
67386C/W/V	White	CCT V	2700K-3300K-4000K	4W	220lm	230V		20	AC LED
67386C/AN/V	Anthracite	CCT V	2700K-3300K-4000K	4W	220lm	230V		20	AC LED
67396/W/V	White	CCT V	2700K-3300K-4000K	6W	420lm	230V		20	AC LED
67396/AN/V	Anthracite	CCT V	2700K-3300K-4000K	6W	420lm	230V		20	AC LED
67396A/AN/V	Anthracite	CCT V	2700K-3300K-4000K	6W	420lm	230V		20	AC LED

one

Outdoor Dark Lights
ABS + PC

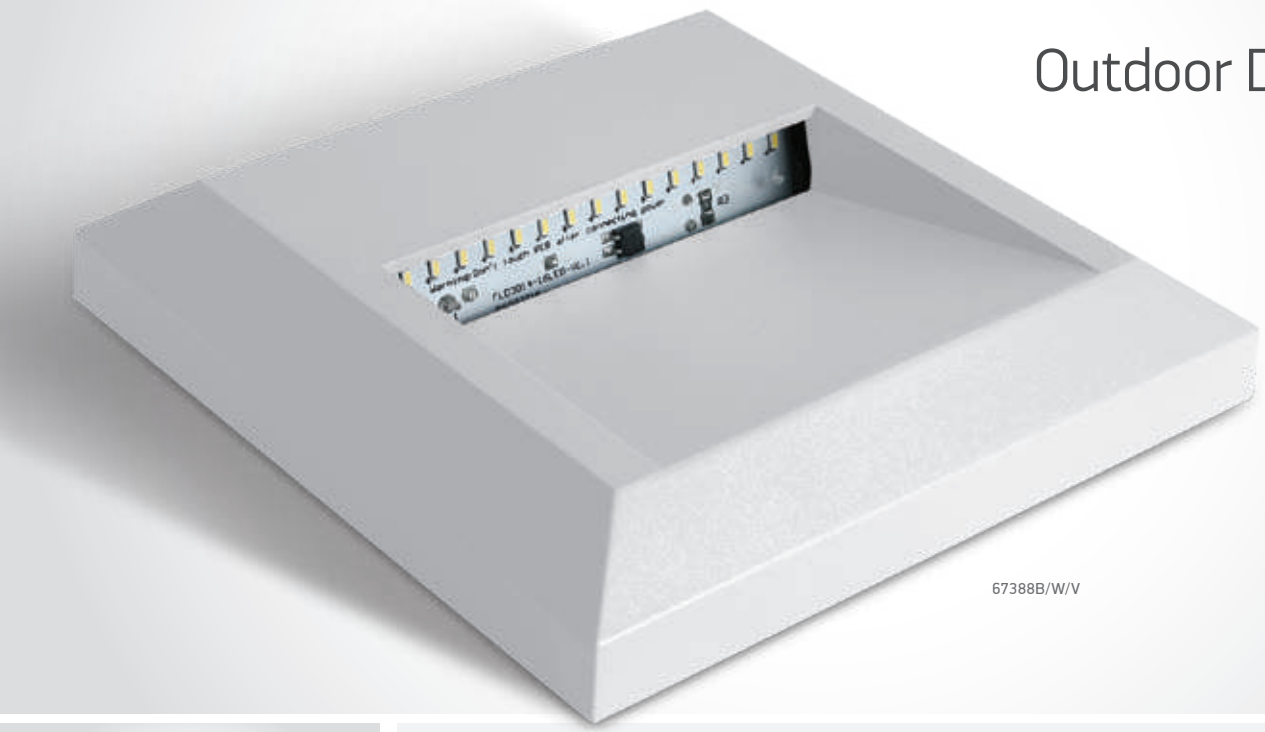

67388B/W/V

67388B/W/W

67388B | 2W | SMD | ABS + PC

LED BUILT IN
80 CRI
IK 08
CE
2 YEAR
DARK LIGHT
IP65



67388B/W/V

67388B | 2W | SMD | ABS+PC

new
LED BUILT IN
80 CRI
CCT V
IK 08
CE
2 YEAR
DARK LIGHT
IP65

67388B/AN/V



67388C/W/V

67388C | 2W | SMD | ABS+PC

new
LED BUILT IN
80 CRI
CCT V
IK 08
CE
2 YEAR
DARK LIGHT
IP65

67388C/AN/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67388B/W/W	White	Warm white	3000K	2W	60lm	230V		40	AC LED
67388B/W/V	White	CCT V	2700K-3300K-4000K	2W	60lm	230V		40	AC LED
67388B/AN/V	Anthracite	CCT V	2700K-3300K-4000K	2W	60lm	230V		40	AC LED
67388C/W/V	White	CCT V	2700K-3300K-4000K	2W	75lm	230V		24	AC LED
67388C/AN/V	Anthracite	CCT V	2700K-3300K-4000K	2W	75lm	230V		24	AC LED

one

67418/W/V

67414/AN/V

Outdoor Dark Lights

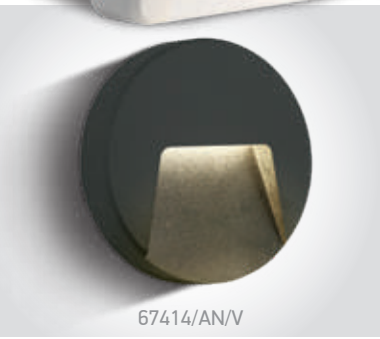

67414/AN/V

67414 | 3W | SMD | ABS + PC

new

DARK LIGHT

IP65

LED BUILT IN

80 CRI

CCT V

IK 08

CE 2 YEAR

67414/W/V



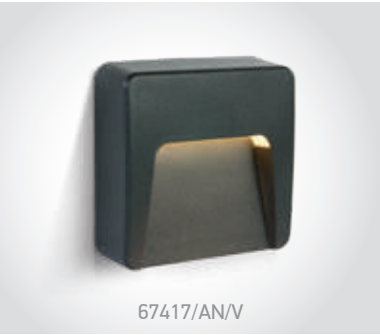

67417/AN/V

67417 | 1,5W | SMD | ABS + PC

new

DARK LIGHT

IP65

LED BUILT IN

80 CRI

CCT V

IK 08

CE 2 YEAR

67417/W/V



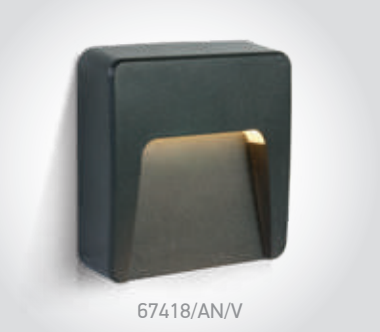

67418/AN/V

67418 | 3W | SMD | ABS + PC

new

DARK LIGHT

IP65

LED BUILT IN

80 CRI

CCT V

IK 08

CE 2 YEAR

67418/W/V



67430A/AN/V

67430A | 8W | SMD | ABS + PC

new

DARK LIGHT

IP65

LED BUILT IN

80 CRI

CCT V

IK 08

CE 2 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67414/W/V	White	CCT V	2700K-3300K-4000K	3W	100lm	230V		40	AC LED
67414/AN/V	Anthracite	CCT V	2700K-3300K-4000K	3W	100lm	230V		40	AC LED
67417/W/V	White	CCT V	2700K-3300K-4000K	1,5W	60lm	230V		20	AC LED
67417/AN/V	Anthracite	CCT V	2700K-3300K-4000K	1,5W	60lm	230V		20	AC LED
67418/W/V	White	CCT V	2700K-3300K-4000K	3W	100lm	230V		40	AC LED
67418/AN/V	Anthracite	CCT V	2700K-3300K-4000K	3W	100lm	230V		40	AC LED
67430A/W/W	White	Warm white	3000K	8W	350lm	230V		20	Complete with 300mA driver
67430A/AN/V	Anthracite	CCT V	2700K-3300K-4000K	8W	400lm	230V		20	Complete with 300mA driver

Round Indoor/Outdoor Wall Dark Lights
Aluminium

67359/AN/W

67359 | 3W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP54



67359/AN/V

67359 | 3W | SMD | Aluminium

new
LED BUILT IN
80 CRI
CCT V
CE
2 YEAR
DARK LIGHT
IP65

67359/W/V



67360/W/W

67360 | 9W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67359/AN/W	Anthracite	Warm white	3000K	3W	200lm	100-240V		30	Complete with 350mA driver
67359/W/V	White	CCT V	2200K-2700K-3000K-4000K	3W	200lm	230V		32	Complete with 350mA driver
67359/AN/V	Anthracite	CCT V	2200K-2700K-3000K-4000K	3W	200lm	230V		32	Complete with 350mA driver
67360/W/W	White	Warm white	3000K	9W	350lm	230V		12	Complete with 700mA driver

one

Square Wall Dark Lights
Aluminium

67359C/AN/V

67359C | 3W | SMD | Aluminium

new
DARK LIGHT
IP65

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR

67359C/W/V



67359A/AN/V

67359A | 3W | SMD | Aluminium

new
DARK LIGHT
IP65

LED BUILT IN
80 CRI
CCT V
CE
2 YEAR

67359A/W/V



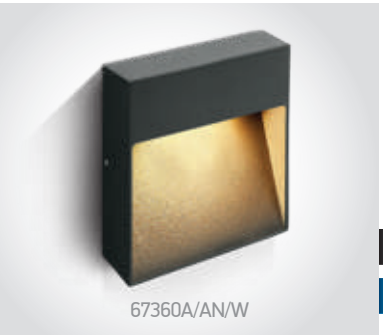
67360A/AN/W

67360A | 9W | SMD | Aluminium

DARK LIGHT
IP54

LED BUILT IN
80 CRI
CE
2 YEAR

67360A/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67359C/W/V	White	CCT V	2200K-2700K-3000K-4000K	3W	200lm	230V		12	Complete with 350mA driver
67359C/AN/V	Anthracite	CCT V	2200K-2700K-3000K-4000K	3W	200lm	230V		12	Complete with 350mA driver
67359A/W/V	White	CCT V	2200K-2700K-3000K-4000K	3W	200lm	230V		30	Complete with 350mA driver
67359A/AN/V	Anthracite	CCT V	2200K-2700K-3000K-4000K	3W	200lm	230V		30	Complete with 350mA driver
67360A/W/W	White	Warm white	3000K	9W	450lm	230V		12	Complete with 700mA driver
67360A/AN/W	Anthracite	Warm white	3000K	9W	450lm	230V		12	Complete with 700mA driver

Square Wall Dark Lights
Aluminium

67359B | 7W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP54



67359B | 6W | SMD | Aluminium

LED BUILT IN
80 CRI
CCT V
IK 06
CE
2 YEAR
new
DARK LIGHT
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67359B/W/W	White	Warm white	3000K	7W	400lm	230V		24	Complete with 350mA driver
67359B/AN/W	Anthracite	Warm white	3000K	7W	400lm	230V		24	Complete with 350mA driver
67359B/AN/V	Anthracite	CCT V	2200K-2700K-3000K-4000K	6W	400lm	230V		24	Complete with 300mA driver

Outdoor Wall Bricks

67176/G/W

67176 | 3W | LED | Aluminium

LED BUILT IN

80 CRI

2 YEAR

IP54



67502B/W/W

67502B | 6W | SMD | ABS + PC

LED BUILT IN

80 CRI

2 YEAR

DARK LIGHT

IP65

Removable front part.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67176/G/W	Grey	Warm white	3000K	3W	-	230V		12	Complete with driver
67502B/W/W	White	Warm white	3000K	6W	110lm	230V		20	AC LED

one

The Classic Outdoor Range
Aluminium

67444C | 10W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



67442B | 10W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



67442 | 10W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



67442 | 10W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67444C/B/W	Black	Warm white	3000K	10W	600lm	230V		12	AC LED
67442B/B/W	Black	Warm white	3000K	10W	600lm	230V		12	AC LED
67442/W/W	White	Warm white	3000K	10W	600lm	230V		12	AC LED
67442/B/W	Black	Warm white	3000K	10W	600lm	230V		12	AC LED

Indoor/Outdoor Light Points

67484/W/W

67484 | 6W | LED | Dimmable | Aluminium

LED BUILT IN
80 CRI
TRIAC DIMMABLE
IK 06
CE
2 YEAR
IP65

67484/B/W



67478/W/W

67478 | 12W | SMD | Aluminium + PC

LED BUILT IN
80 CRI
IK 06
CE
2 YEAR
DARK LIGHT
IP65

67478/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67484/W/W	White	Warm white	3000K	6W	480lm	230V		12	AC LED
67484/B/W	Black	Warm white	3000K	6W	480lm	230V		12	AC LED
67478/W/W	White	Warm white	3000K	12W	325lm	230V		6	Complete with 300mA driver
67478/B/W	Black	Warm white	3000K	12W	325lm	230V		6	Complete with 300mA driver

Window Frame Illumination

67454 | 6W | LED | Aluminium

Window frame illumination.

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67454/AN/W	Anthracite	Warm white	3000K	6W	330lm	270°	100-240V		18	Complete with 500mA driver

Plafo

Pages 461-496

13

The LED Opal Plafo Range

CCT V

62026C/V

62026A/V

62026A | 15W | SMD | Metal + PMMA

LED BUILT IN

80 CRI

CCT V

CE

new

3 YEAR

IP20



62026B/V

62026B | 24W | SMD | Metal + PMMA

LED BUILT IN

80 CRI

CCT V

CE

new

3 YEAR

IP20



62026C/V

62026C | 30W | SMD | Metal + PMMA

LED BUILT IN

80 CRI

CCT V

CE

new

3 YEAR

IP20



62026D/V

62026D | 50W | SMD | Metal + PMMA

LED BUILT IN

80 CRI

CCT V

CE

new

3 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62026A/V	White	CCT V	3000K-4000K-5000K	15W	1200lm	230V		5	Complete with driver
62026B/V	White	CCT V	3000K-4000K-5000K	24W	1920lm	230V		5	Complete with driver
62026C/V	White	CCT V	3000K-4000K-5000K	30W	2400lm	230V		5	Complete with driver
62026D/V	White	CCT V	3000K-4000K-5000K	50W	4000lm	230V		5	Complete with driver

The LED Opal Plafo Range

62026C/W

62026B/W

62026B/W

62026B | 24W | SMD | Metal + PMMA

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



62026C/W

62026C | 30W | SMD | Metal + PMMA

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



62026D/W/W

62026D | 50W | SMD | Metal + PMMA

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62026B/W	White	Warm white	3000K	24W	1700lm	230V		5	Complete with driver
62026C/W	White	Warm white	3000K	30W	2150lm	230V		5	Complete with driver
62026D/W/C	White	Cool white	4000K	50W	3750lm	230V		5	Complete with driver
62026D/W/W	White	Warm white	3000K	50W	3750lm	230V		5	Complete with driver

The Super Slim Range
CCT V

62006/W/V

62006 | 18W | SMD | ABS Body

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
IP20

62006/B/V



62006A/W/V

62006A | 24W | SMD | ABS Body

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
IP20

62006A/B/V



62006B/W/V

62006B | 32W | SMD | ABS Body

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
IP20

62006B/B/V



62006BD/W/V

62006BD | 32W | SMD | Dimmable | ABS Body

LED BUILT IN
90 CRI
TRIAC DIMMABLE
CCT V
CE
3 YEAR
new
IP20

62006BD/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62006/W/V	White	CCT V	2700K-3200K-4000K	18W	1620lm	230V		10	Complete with driver
62006/B/V	Black	CCT V	2700K-3200K-4000K	18W	1620lm	230V		10	Complete with driver
62006A/W/V	White	CCT V	2700K-3200K-4000K	24W	2160lm	230V		10	Complete with driver
62006A/B/V	Black	CCT V	2700K-3200K-4000K	24W	2160lm	230V		10	Complete with driver
62006B/W/V	White	CCT V	2700K-3200K-4000K	32W	2880lm	230V		10	Complete with driver
62006B/B/V	Black	CCT V	2700K-3200K-4000K	32W	2880lm	230V		10	Complete with driver
62006BD/W/V	White	CCT V	2700K-3200K-4000K	32W	2880lm	230V		10	Complete with dimmable driver
62006BD/B/V	Black	CCT V	2700K-3200K-4000K	32W	2880lm	230V		10	Complete with dimmable driver

The Super Slim Range
CCT V

62006C/W/V

62006C | 40W | SMD | ABS Body

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
IP20

62006C/B/V



62006CD/W/V

62006CD | 40W | SMD | Dimmable | ABS Body

new
IP20

LED BUILT IN
90 CRI
TRIAC DIMMABLE
CCT V
CE
3 YEAR

new

62006CD/B/V



62006D/W/V

62006D | 50W | SMD | ABS Body

IP20

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR

62006D/B/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62006C/W/V	White	CCT V	2700K-3200K-4000K	40W	3600lm	230V		8	Complete with driver
62006C/B/V	Black	CCT V	2700K-3200K-4000K	40W	3600lm	230V		8	Complete with driver
62006CD/W/V	White	CCT V	2700K-3200K-4000K	40W	3600lm	230V		8	Complete with dimmable driver
62006CD/B/V	Black	CCT V	2700K-3200K-4000K	40W	3600lm	230V		8	Complete with dimmable driver
62006D/W/V	White	CCT V	2700K-3200K-4000K	50W	4500lm	230V		4	Complete with driver
62006D/B/V	Black	CCT V	2700K-3200K-4000K	50W	4500lm	230V		4	Complete with driver

The Super Slim UGR19 Range
Round CCT V

62020AU/W/V

62020AU | 12W | SMD | ABS

Prismatic diffuser.

new

IP20

LED BUILT IN

90 CRI

UGR19

CCT V

CE

3 YEAR

62020AU/B/V

Suspension base.
Order code 050138A/W,
050138A/B.



62020BU/W/V

62020BU | 18W | SMD | ABS

Prismatic diffuser.

new

IP20

LED BUILT IN

90 CRI

UGR19

CCT V

CE

3 YEAR

62020BU/B/V

Suspension base.
Order code 050138A/W,
050138A/B.



62020CU/W/V

62020CU | 24W | SMD | ABS

Prismatic diffuser.

new

IP20

LED BUILT IN

90 CRI

UGR19

CCT V

CE

3 YEAR

62020CU/B/V

Suspension base.
Order code 050138A/W,
050138A/B.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62020AU/W/V	White	CCT V	2800K-3300K-4000K	12W	1020lm	230V		10	Complete with driver
62020AU/B/V	Black	CCT V	2800K-3300K-4000K	12W	1020lm	230V		10	Complete with driver
62020BU/W/V	White	CCT V	2800K-3300K-4000K	18W	1530lm	230V		10	Complete with driver
62020BU/B/V	Black	CCT V	2800K-3300K-4000K	18W	1530lm	230V		10	Complete with driver
62020CU/W/V	White	CCT V	2800K-3300K-4000K	24W	2040lm	230V		10	Complete with driver
62020CU/B/V	Black	CCT V	2800K-3300K-4000K	24W	2040lm	230V		10	Complete with driver

one

The Super Slim UGR19 Range

Round CCT V

62020CU/B/V

62020AU/W/V

62020DU/W/V

62020DU | 32W | SMD | ABS

Prismatic diffuser.

LED BUILT IN

90 CRI UGR19 CCT V

new

CE 3 YEAR

IP20

62020DU/B/V

Suspension base.
Order code 050138A/W, 050138A/B.



62020EU/W/V

62020EU | 40W | SMD | ABS

Prismatic diffuser.

LED BUILT IN

90 CRI UGR19 CCT V

new

CE 3 YEAR

IP20

62020EU/B/V

Suspension base.
Order code 050138A/W, 050138A/B.



62020FU/W/V

62020FU | 50W | SMD | ABS

Prismatic diffuser.

LED BUILT IN

90 CRI UGR19 CCT V

new

CE 3 YEAR

IP20

62020FU/B/V

Suspension base.
Order code 050138A/W, 050138A/B.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62020DU/W/V	White	CCT V	2800K-3300K-4000K	32W	2720lm	230V		10	Complete with driver
62020DU/B/V	Black	CCT V	2800K-3300K-4000K	32W	2720lm	230V		10	Complete with driver
62020EU/W/V	White	CCT V	2800K-3300K-4000K	40W	3400lm	230V		5	Complete with driver
62020EU/B/V	Black	CCT V	2800K-3300K-4000K	40W	3400lm	230V		5	Complete with driver
62020FU/W/V	White	CCT V	2800K-3300K-4000K	50W	4250lm	230V		5	Complete with driver
62020FU/B/V	Black	CCT V	2800K-3300K-4000K	50W	4250lm	230V		5	Complete with driver

The Super Slim UGR19 Range
Square CCT V

62020JU/W/V

62020HU | 18W | SMD | ABS

Prismatic diffuser.

62020HU/W/V

LED BUILT IN
90 CRI
UGR19
CCT V
new
CE 3 YEAR
IP20

new

62020HU/B/V

Suspension base.
Order code 050138B/W,
050138B/B.



62020JU | 24W | SMD | ABS

Prismatic diffuser.

62020JU/W/V

LED BUILT IN
90 CRI
UGR19
CCT V
new
CE 3 YEAR
IP20

new

62020JU/B/V

Suspension base.
Order code 050138B/W,
050138B/B.



62020KU | 32W | SMD | ABS

Prismatic diffuser.

62020KU/W/V

LED BUILT IN
90 CRI
UGR19
CCT V
new
CE 3 YEAR
IP20

new

62020KU/B/V

Suspension base.
Order code 050138B/W,
050138B/B.



62020LU | 40W | SMD | ABS

Prismatic diffuser.

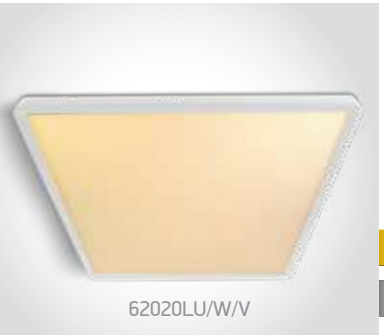

62020LU/W/V

LED BUILT IN
90 CRI
UGR19
CCT V
new
CE 3 YEAR
IP20

new

62020LU/B/V

Suspension base.
Order code 050138B/W,
050138B/B.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62020HU/W/V	White	CCT V	2800K-3300K-4000K	18W	1440lm	230V		10	Complete with driver
62020HU/B/V	Black	CCT V	2800K-3300K-4000K	18W	1440lm	230V		10	Complete with driver
62020JU/W/V	White	CCT V	2800K-3300K-4000K	24W	1920lm	230V		10	Complete with driver
62020JU/B/V	Black	CCT V	2800K-3300K-4000K	24W	1920lm	230V		10	Complete with driver
62020KU/W/V	White	CCT V	2800K-3300K-4000K	32W	2560lm	230V		10	Complete with driver
62020KU/B/V	Black	CCT V	2800K-3300K-4000K	32W	2560lm	230V		10	Complete with driver
62020LU/W/V	White	CCT V	2800K-3300K-4000K	40W	3200lm	230V		5	Complete with driver
62020LU/B/V	Black	CCT V	2800K-3300K-4000K	40W	3200lm	230V		5	Complete with driver

one

The Super Slim UGR19 Range
Rectangular CCT V

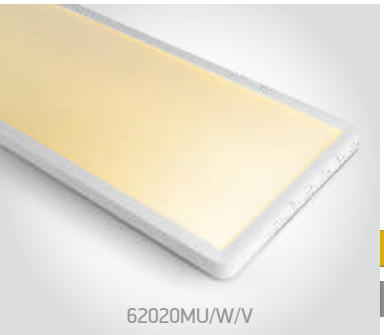

62020MU/W/V

62020MU | 50W | SMD | ABS

Prismatic diffuser.

new

IP20

LED BUILT IN

90 CRI

UGR19

CCT V

CE

3 YEAR

62020MU/B/V

Suspension base.
Order code 050138B/W,
050138B/B.



62020PU/W/V

62020PU | 60W | SMD | ABS

Prismatic diffuser.

new

IP20

LED BUILT IN

90 CRI

UGR19

CCT V

CE

3 YEAR

62020PU/B/V

Suspension base.
Order code 050138B/W,
050138B/B.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62020MU/W/V	White	CCT V	2800K-3300K-4000K	50W	3750lm	230V		5	Complete with driver
62020MU/B/V	Black	CCT V	2800K-3300K-4000K	50W	3750lm	230V		5	Complete with driver
62020PU/W/V	White	CCT V	2800K-3300K-4000K	60W	4200lm	230V		4	Complete with driver
62020PU/B/V	Black	CCT V	2800K-3300K-4000K	60W	4200lm	230V		4	Complete with driver

one

62030F/W/W

62018AF/W/W

The Ultra Slim LED Panel Plafo

62018AF/W/W

62018AF | 18W | SMD | Aluminium + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP40





62030F/W/W

62030F | 30W | SMD | Aluminium + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP40



62038F/W/W

62038F | 38W | SMD | Aluminium + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP40



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62018AF/W/W	White	Warm white	3000K	18W	1400lm	230V	⏚	20	Complete with driver
62030F/W/W	White	Warm white	3000K	30W	2300lm	230V	⏚	10	Complete with driver
62038F/W/W	White	Warm white	3000K	38W	2900lm	230V	⏚	5	Complete with driver

The Ring Plafo

67402/W/W

67402 | 25W | SMD | Aluminium + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP40



67402/B/W

67402 | 25W | SMD | Aluminium + PC

LED BUILT IN

80 CRI

CE

2 YEAR

IP40



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67402/W/W	White	Warm white	3000K	25W	1850lm	100-240V		10	Complete with driver
67402/B/W	Black	Warm white	3000K	25W	1850lm	100-240V		10	Complete with driver

one

62115F/W/V

62130F/B/V

The LED Panel Plafo
Round

62115F/W/V

62115F | 15W | SMD | Aluminium

LED BUILT IN

90 CRI

CCT V

CE

2 YEAR

new

IP40

new

62115F/B/V

62130F/W/V

62130F | 30W | SMD | Aluminium

LED BUILT IN

90 CRI

CCT V

CE

2 YEAR

new

IP40

new

62130F/B/V

62140F/W/V

62140F | 40W | SMD | Aluminium

LED BUILT IN

90 CRI

CCT V

CE

2 YEAR

new

IP40



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62115F/W/V	White	CCT V	2700K-3000K-4000K	15W	1350lm	230V		10	Complete with 350mA driver
62115F/B/V	Black	CCT V	2700K-3000K-4000K	15W	1350lm	230V		10	Complete with 350mA driver
62130F/W/V	White	CCT V	2700K-3000K-4000K	30W	2700lm	230V		10	Complete with 700mA driver
62130F/B/V	Black	CCT V	2700K-3000K-4000K	30W	2700lm	230V		10	Complete with 700mA driver
62140F/W/V	White	CCT V	2700K-3000K-4000K	40W	3700lm	230V		5	Complete with 1000mA driver

one

The LED Panel Plafo
Square

62122F/W/W

62122F | 22W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP40

62122F/B/W

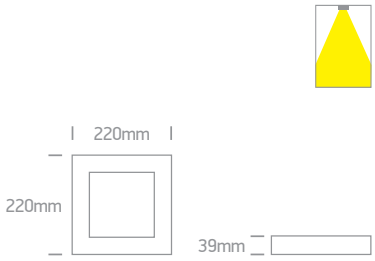

62122F/W/V

62122F | 22W | SMD | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
new
2 YEAR
IP40

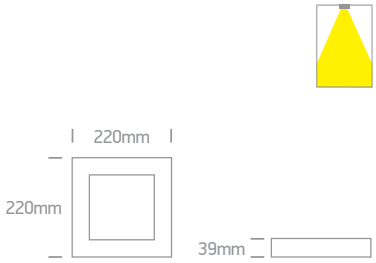

62130AF/W/W

62130AF | 30W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP40

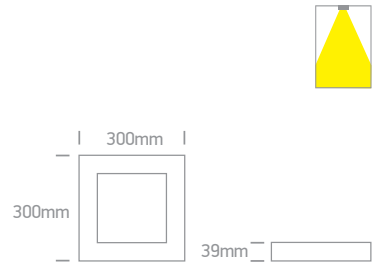

62130AF/W/V

62130AF | 30W | SMD | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
new
2 YEAR
IP40

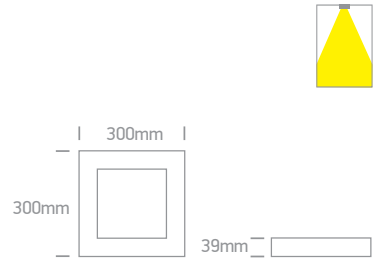

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62122F/W/W	White	Warm white	3000K	22W	1870lm	230V		10	Complete with 700mA driver
62122F/B/W	Black	Warm white	3000K	22W	1870lm	230V		10	Complete with 700mA driver
62122F/W/V	White	CCT V	2700K-3000K-4000K	22W	2000lm	230V		10	Complete with 500mA driver
62130AF/W/W	White	Warm white	3000K	30W	2550lm	230V		10	Complete with 700mA driver
62130AF/W/V	White	CCT V	2700K-3000K-4000K	30W	2700lm	230V		10	Complete with 700mA driver

The LED Slim Line Plafo

62146/B/W

62146 | 55W | SMD | Metal + PS

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



62146A/B/W

62146A | 50W | SMD | Metal + PS

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62146/B/W	Black	Warm white	3000K	55W	4100lm	230V		1	Complete with 600mA driver
62146A/B/W	Black	Warm white	3000K	50W	3800lm	230V		1	Complete with 480mA driver

The LED Slim Line Plafo

62160/W/W

62160 | 62W | SMD | Metal

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



62160A/B/W

62160A | 62W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20

62160A/W/W

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62160/W/W	White	Warm white	3000K	62W	3600lm	120°	230V		1	Complete with 1500mA driver
62160A/W/W	White	Warm white	3000K	62W	3600lm	120°	230V		1	Complete with 1500mA driver
62160A/B/W	Black	Warm white	3000K	62W	3600lm	120°	230V		1	Complete with 1500mA driver

The Floating Plafo
Aluminium

62160FB | 60W | SMD | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

IP20



62160FB | 60W | SMD | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62160FB/W/C	White	Cool white	4000K	60W	5300lm	230V	⏚	3	Complete with 1500mA driver
62160FB/W/W	White	Warm white	3000K	60W	5300lm	230V	⏚	3	Complete with 1500mA driver
62160FB/B/C	Black	Cool white	4000K	60W	5300lm	230V	⏚	3	Complete with 1500mA driver

62002C/B/V

one

The Floating Backlit Plafo
CCT V

62002A | 22W+3W | SMD | ABS + PC

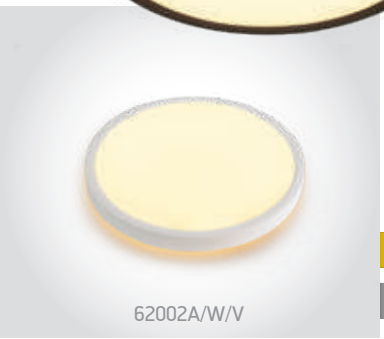

62002A/W/V

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

new

62002A/B/V



Backlit.



62002B | 30W+3W | SMD | ABS + PC

TRIAC dimmable version 62002BD.

62002B/W/V

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

new

62002B/B/V



Backlit.



62002C | 38W+4W | SMD | ABS + PC

TRIAC dimmable version 62002CD.

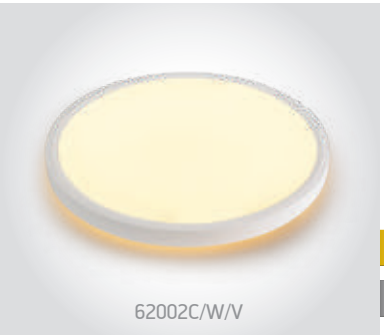

62002C/W/V

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

new

62002C/B/V



Backlit.



62002D | 45W+5W | SMD | ABS + PC

62002D/W/V

new

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

new

62002D/B/V



Backlit.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62002A/W/V	White	CCT V	2700K-3200K-4000K	22W+3W	2400lm	230V		10	Complete with driver
62002A/B/V	Black	CCT V	2700K-3200K-4000K	22W+3W	2400lm	230V		10	Complete with driver
62002B/W/V	White	CCT V	2700K-3200K-4000K	30W+3W	2880lm	230V		10	Complete with driver
62002B/B/V	Black	CCT V	2700K-3200K-4000K	30W+3W	2880lm	230V		10	Complete with driver
62002BD/W/V	White	CCT V	2700K-3200K-4000K	30W+3W	2880lm	230V		10	Complete with dimmable driver
62002BD/B/V	Black	CCT V	2700K-3200K-4000K	30W+3W	2880lm	230V		10	Complete with dimmable driver
62002C/W/V	White	CCT V	2700K-3200K-4000K	38W+4W	3400lm	230V		8	Complete with driver
62002C/B/V	Black	CCT V	2700K-3200K-4000K	38W+4W	3400lm	230V		8	Complete with driver
62002CD/W/V	White	CCT V	2700K-3200K-4000K	38W+4W	3400lm	230V		8	Complete with dimmable driver
62002CD/B/V	Black	CCT V	2700K-3200K-4000K	38W+4W	3400lm	230V		8	Complete with dimmable driver
62002D/W/V	White	CCT V	2700K-3200K-4000K	45W+5W	4500lm	230V		4	Complete with driver
62002D/B/V	Black	CCT V	2700K-3200K-4000K	45W+5W	4500lm	230V		4	Complete with driver

The LED Plafo Range

62024C/W

62024C | 26W | SMD | Metal + plastic

LED BUILT IN

CE 2 YEAR

IP20



62154/W/W

62154 | 24W | SMD | Metal + Plastic

LED BUILT IN

80 CRI

CE 2 YEAR

IP20

62154/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62024C/W	White	Warm white	3000K	26W	1600lm	230V		5	Complete with 700mA driver
62154/W/W	White	Warm white	3000K	24W	1560lm	230V		10	Complete with 200mA driver
62154/B/W	Black	Warm white	3000K	24W	1560lm	230V		10	Complete with 200mA driver

The LED Project Plafo

62118D/W/W

62118D | 20W | SMD | Metal

LED BUILT IN
80 CRI
CE
3 YEAR
IP20



62125D/W/C

62125D | 25W | SMD | Metal

LED BUILT IN
80 CRI
CE
3 YEAR
IP20



62125D/W/V

62125D | 25W | SMD | Metal

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
new
IP20



62150D/W/W

62150D | 50W | SMD | Metal

LED BUILT IN
80 CRI
CE
3 YEAR
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62118D/W/W	White	Warm white	3000K	20W	1700lm	120°	230V		1	Complete with 500mA driver
62125D/W/C	White	Cool white	4000K	25W	2125lm	120°	230V		1	Complete with 700mA driver
62125D/W/V	White	CCT V	2700K-3000K-4000K	25W	2125lm	120°	230V		1	Complete with 700mA driver
62150D/W/C	White	Cool white	4000K	50W	4250lm	120°	230V		1	Complete with 1400mA driver
62150D/W/W	White	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1400mA driver

The LED Decorative Plafo
Round CCT V

62130N/W/V

62130N | 20W | SMD | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
IP20

62130N/AN/V



62132N/W/V

62132N | 32W | SMD | Aluminium

LED BUILT IN
90 CRI
CCT V
CE
3 YEAR
IP20

62132N/AN/V



62142N/W/V

62142N | 42W | SMD | Dimmable | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
CCT V
CE
3 YEAR
IP20

new

62142N/AN/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62130N/W/V	White	CCT V	2700K-3000K-4000K	20W	1700lm	120°	230V		1	Complete with 500mA driver
62130N/AN/V	Anthracite	CCT V	2700K-3000K-4000K	20W	1700lm	120°	230V		1	Complete with 500mA driver
62132N/W/V	White	CCT V	2700K-3000K-4000K	32W	2720lm	120°	230V		1	Complete with 800mA driver
62132N/AN/V	Anthracite	CCT V	2700K-3000K-4000K	32W	2720lm	120°	230V		1	Complete with 800mA driver
62142N/W/V	White	CCT V	2700K-3000K-4000K	42W	3570lm	120°	230V		1	Complete with 1050mA dimmable driver
62142N/AN/V	Anthracite	CCT V	2700K-3000K-4000K	42W	3570lm	120°	230V		1	Complete with 1050mA dimmable driver

one

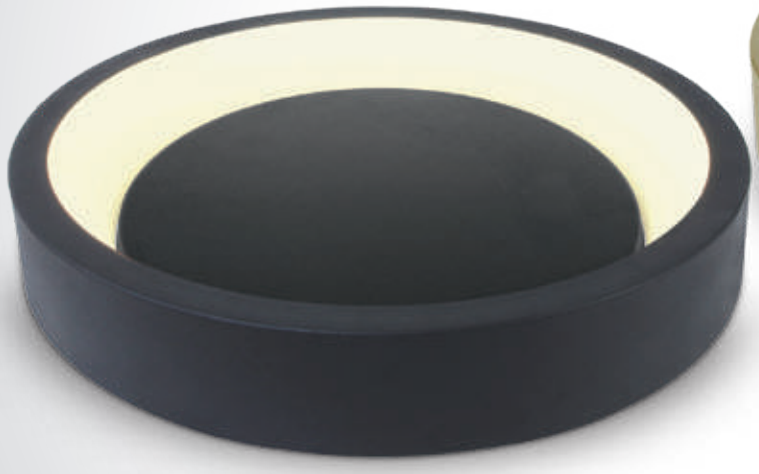

62142N/AN/W

62132N/BBSW

The LED Decorative Plafo
Round

62132N/BBS/W

62132N | 32W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20

120°

455mm

132mm

62132N/MG/W

62132N | 32W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20

120°

455mm

132mm

62142N/AN/W

62142N | 42W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20

120°

600mm

132mm

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62132N/BBS/W	Brushed brass	Warm white	3000K	32W	2720lm	120°	230V		1	Complete with 800mA driver
62132N/MG/W	Metal grey	Warm white	3000K	32W	2720lm	120°	230V		1	Complete with 800mA driver
62142N/AN/W	Anthracite	Warm white	3000K	42W	3570lm	120°	230V		1	Complete with 1050mA driver

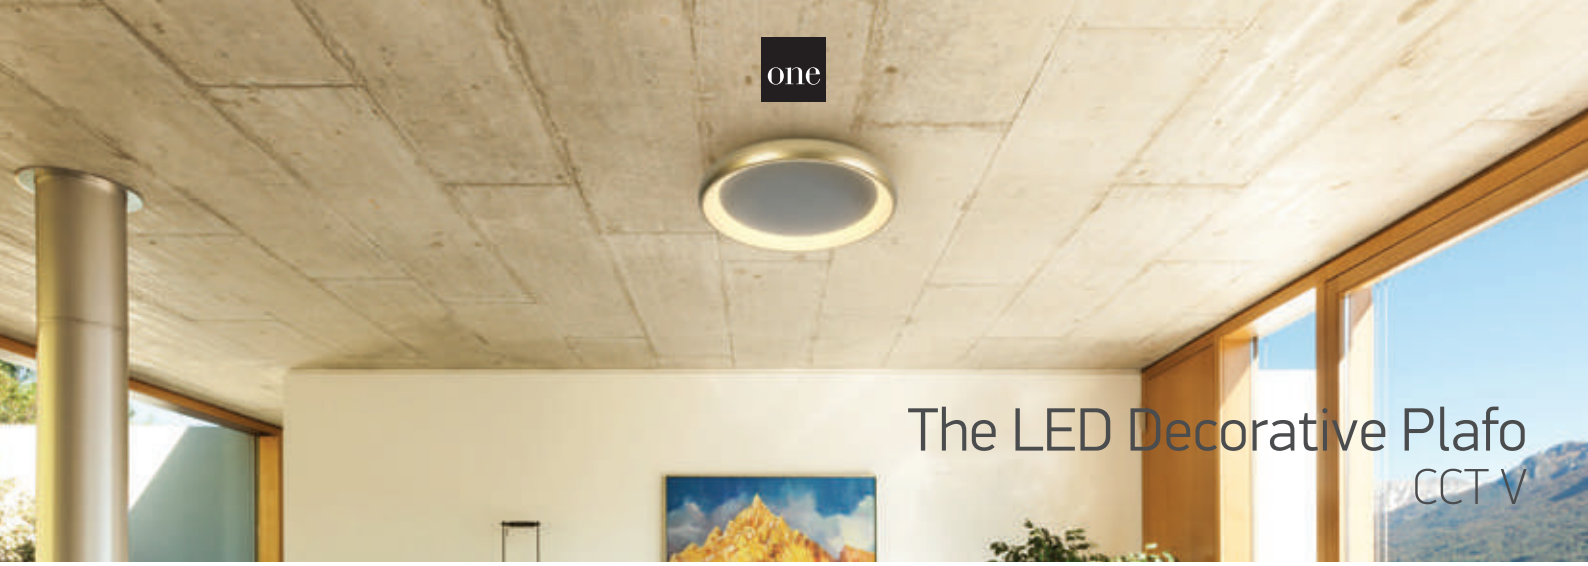

The LED Decorative Plafo
CCT V

62134N/W/V

62134N | 30W | SMD | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · IP20



62134N/B/V

62134N | 30W | SMD | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · IP20



62134N/BBS/V

62134N | 30W | SMD | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · IP20



62134N/BGL/V

62134N | 30W | SMD | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62134N/W/V	White	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver
62134N/B/V	Black	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver
62134N/BBS/V	Brushed brass	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver
62134N/BGL/V	Brushed gold	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V		1	Complete with 700mA dimmable driver

one

The LED Decorative Plafo

62144N/B/V

62144N/BGL/W

62144N/W/V

62144N | 50W | SMD | Dimmable | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
CCT V
new
CE 3 YEAR
IP20



62144N/B/V

62144N | 50W | SMD | Dimmable | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
CCT V
new
CE 3 YEAR
IP20



62144N/BBS/W

62144N | 50W | SMD | Aluminium

LED BUILT IN
80 CRI
CE 3 YEAR
IP20



62144N/BGL/W

62144N | 50W | SMD | Aluminium

LED BUILT IN
80 CRI
CE 3 YEAR
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62144N/W/V	White	CCT V	2700K-3000K-4000K	50W	4250lm	120°	230V		1	Complete with 1200mA dimmable driver
62144N/B/V	Black	CCT V	2700K-3000K-4000K	50W	4250lm	120°	230V		1	Complete with 1200mA dimmable driver
62144N/BBS/W	Brushed brass	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1200mA driver
62144N/BGL/W	Brushed gold	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1200mA driver

one

The LED Decorative Plafo
CCT V

62130L/B/V

62130L/BGL/V

62130L/W/V

62130L | 30W | SMD | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · IP20



62130L/B/V

62130L | 30W | SMD | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · IP20



62130L/BBS/V

62130L | 30W | SMD | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · IP20



62130L/BGL/V

62130L | 30W | SMD | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62130L/W/V	White	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V	⏚	1	Complete with 700mA dimmable driver
62130L/B/V	Black	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V	⏚	1	Complete with 700mA dimmable driver
62130L/BBS/V	Brushed brass	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V	⏚	1	Complete with 700mA dimmable driver
62130L/BGL/V	Brushed gold	CCT V	2700K-3000K-4000K	30W	2550lm	120°	230V	⏚	1	Complete with 700mA dimmable driver

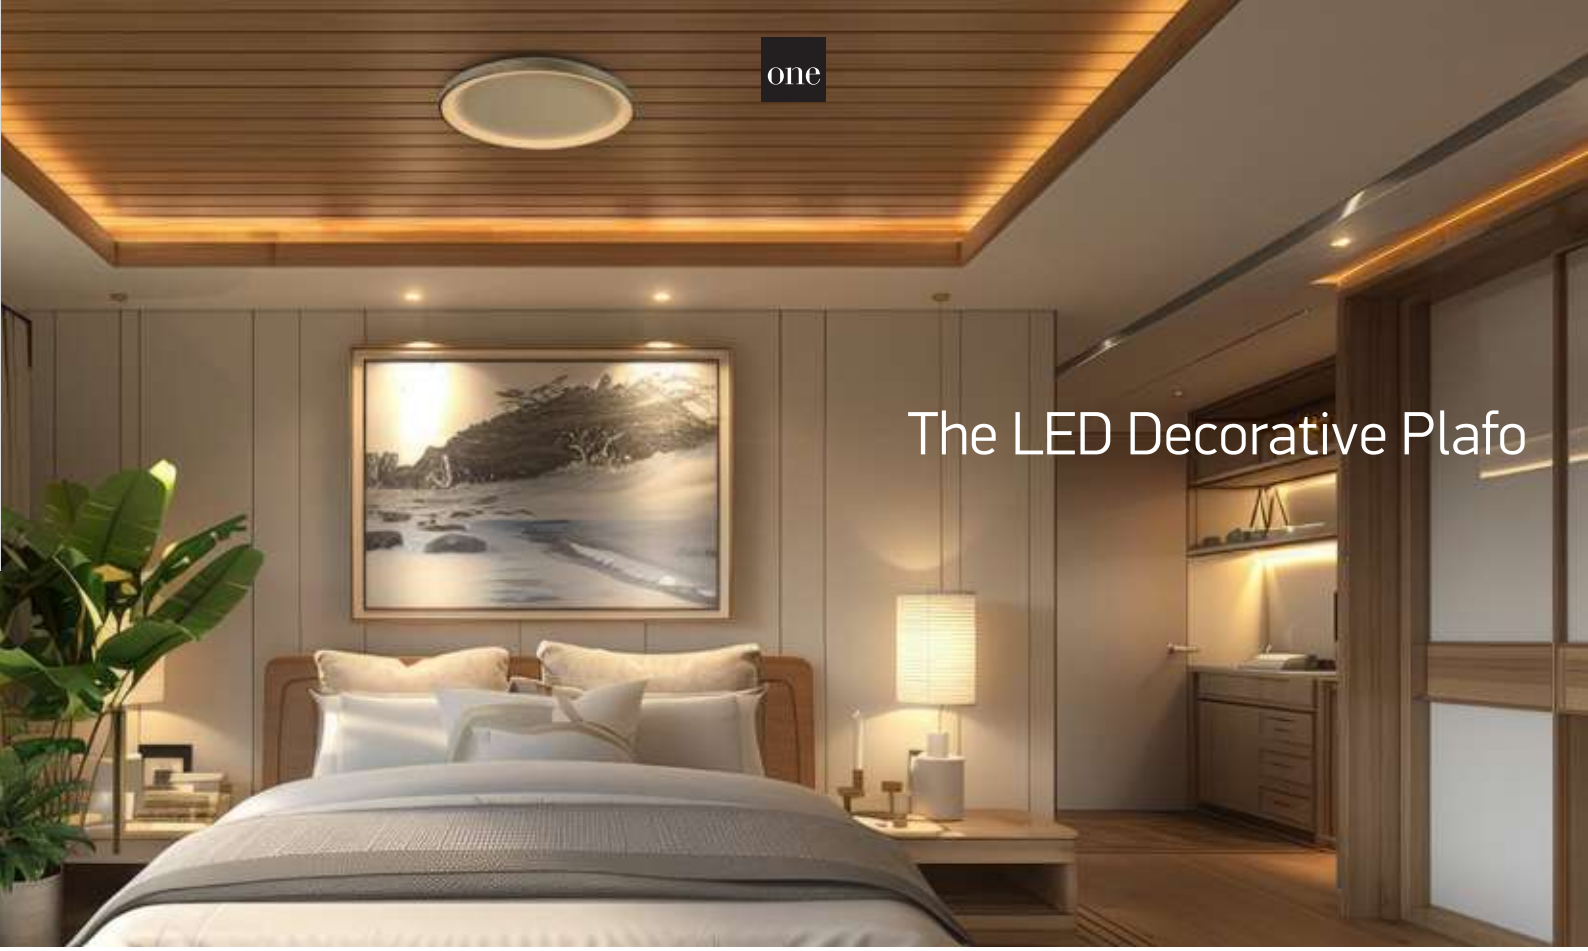

The LED Decorative Plafo

62148L/W/V

62148L | 48W | SMD | Dimmable | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
CCT V
CE 3 YEAR
IP20



62148L/B/V

62148L | 48W | SMD | Dimmable | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
CCT V
CE 3 YEAR
IP20



62148L/BGL/W

62148L | 48W | SMD | Aluminium

LED BUILT IN
80 CRI
CE 3 YEAR
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62148L/W/V	White	CCT V	2700K-3000K-4000K	48W	4080lm	120°	230V		1	Complete with 1200mA dimmable driver
62148L/B/V	Black	CCT V	2700K-3000K-4000K	48W	4080lm	120°	230V		1	Complete with 1200mA dimmable driver
62148L/BGL/W	Brushed gold	Warm white	3000K	48W	4080lm	120°	230V		1	Complete with 1200mA driver

Decorative Plafo
Round

62182/BAN/W

62182 | 40W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



62182A/BAN/W

62182A | 50W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20

62182A/BGL/W

62182A/BBR/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62182/BAN/W	Brushed anthracite	Warm white	3000K	40W	3400lm	230V		1	Complete with 1050mA driver
62182A/BAN/W	Brushed anthracite	Warm white	3000K	50W	4250lm	230V		1	Complete with 1400mA driver
62182A/BGL/W	Brushed gold	Warm white	3000K	50W	4250lm	230V		1	Complete with 1400mA driver
62182A/BBR/W	Brushed brown	Warm white	3000K	50W	4250lm	230V		1	Complete with 1400mA driver

The LED Decorative Plafo
Square

62132NA/W/V

62132NA | 38W | SMD | Dimmable | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
CCT V
CE 3 YEAR
IP20



62132NA/B/V

62132NA | 38W | SMD | Dimmable | Aluminium

LED BUILT IN
90 CRI
TRIAC DIMMABLE
CCT V
CE 3 YEAR
IP20



62142NA/W/W

62142NA | 50W | SMD | Aluminium

LED BUILT IN
80 CRI
CE 3 YEAR
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62132NA/W/V	White	CCT V	2700K-3000K-4000K	38W	3230lm	120°	230V		1	Complete with 1050mA dimmable driver
62132NA/B/V	Black	CCT V	2700K-3000K-4000K	38W	3230lm	120°	230V		1	Complete with 1050mA dimmable driver
62142NA/W/W	White	Warm white	3000K	50W	4250lm	120°	230V		1	Complete with 1200mA driver

Decorative Plafo

67452/W/V

67452 | 35W | SMD | Aluminium

new

DARK LIGHT

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR



67452/B/V

67452 | 35W | SMD | Aluminium

new

DARK LIGHT

IP20

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67452/W/V	White	CCT V	2700K-3000K-4000K	35W	2700lm	230V		1	Complete with 800mA driver
67452/B/V	Black	CCT V	2700K-3000K-4000K	35W	2700lm	230V		1	Complete with 800mA driver

The LED Slim Bathroom Range
PC

67366/W/V

67366 | 12W | SMD | PC

Emergency version 67366E/W/V.

LED BUILT IN
80 CRI
CCT V
IK 08
CE 2 YEAR
IP54



67368/W/V

67368 | 18W | SMD | PC

LED BUILT IN
80 CRI
CCT V
IK 08
CE 2 YEAR
IP54



67370/W/V

67370 | 25W | SMD | PC

LED BUILT IN
80 CRI
CCT V
IK 08
CE 2 YEAR
IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67366/W/V	White	CCT V	3000K-4000K-5000K	12W	1000lm	230V		20	Complete with 160mA driver
67368/W/W	White	Warm white	3000K	18W	1350lm	230V		10	Complete with 225mA driver
67368/W/V	White	CCT V	3000K-4000K-5000K	18W	1500lm	230V		10	Complete with 250mA driver
67370/W/C	White	Cool white	4000K	25W	2000lm	230V		10	Complete with 300mA driver
67370/W/V	White	CCT V	3000K-4000K-5000K	25W	2000lm	230V		10	Complete with 300mA driver

Outdoor Project LED Plafo
Aluminium

67384/AN/W

67384 | 30W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54

67384/W/W



67384A/AN/W

67384A | 30W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP54

67384A/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67384/W/W	White	Warm white	3000K	30W	2500lm	230V		4	Complete with 700mA driver
67384/AN/W	Anthracite	Warm white	3000K	30W	2500lm	230V		4	Complete with 700mA driver
67384A/W/W	White	Warm white	3000K	30W	2500lm	230V		4	Complete with 700mA driver
67384A/AN/W	Anthracite	Warm white	3000K	30W	2500lm	230V		4	Complete with 700mA driver

Outdoor Slim LED Plafo
Aluminium

67362 | 20W | SMD | Aluminium

67362/AN/W

LED BUILT IN
80 CRI
CE
2 YEAR
IP54

67362/W/W



67363 | 30W | SMD | Aluminium

67363/AN/W

LED BUILT IN
80 CRI
CE
2 YEAR
IP54

67363/W/W



67362A | 20W | SMD | Aluminium

67362A/AN/W

LED BUILT IN
80 CRI
CE
2 YEAR
IP54

67362A/W/W



67363A | 30W | SMD | Aluminium

67363A/AN/W

LED BUILT IN
80 CRI
CE
2 YEAR
IP54

67363A/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67362/W/W	White	Warm white	3000K	20W	1600lm	230V		8	Complete with 500mA driver
67362/AN/W	Anthracite	Warm white	3000K	20W	1600lm	230V		8	Complete with 500mA driver
67363/W/W	White	Warm white	3000K	30W	2500lm	230V		6	Complete with 700mA driver
67363/AN/W	Anthracite	Warm white	3000K	30W	2500lm	230V		6	Complete with 700mA driver
67362A/W/W	White	Warm white	3000K	20W	1600lm	230V		8	Complete with 500mA driver
67362A/AN/W	Anthracite	Warm white	3000K	20W	1600lm	230V		8	Complete with 500mA driver
67363A/W/W	White	Warm white	3000K	30W	2500lm	230V		6	Complete with 700mA driver
67363A/AN/W	Anthracite	Warm white	3000K	30W	2500lm	230V		6	Complete with 700mA driver

The E27 Plafo Outdoor Range
Square

67282E/B

67282E | 12W | E27 | ABS + PC

IK08

CE 2 YEAR

IP65

67282E/W

67282E/G

67282E/AN

221x221mm

93mm

67282EA/B

67282EA | 2x12W | E27 | ABS + PC

IK08

CE 2 YEAR

IP65

67282EA/W

67282EA/G

67282EA/AN

295x295mm

105mm

Order Code	Colour	Watts	Input	Class		Notes
67282E/W	White	12W	100-240V		10	-
67282E/AN	Anthracite	12W	100-240V		10	-
67282E/B	Black	12W	100-240V		10	-
67282E/G	Grey	12W	100-240V		10	-
67282EA/W	White	2x12W	100-240V		10	-
67282EA/AN	Anthracite	2x12W	100-240V		10	-
67282EA/B	Black	2x12W	100-240V		10	-
67282EA/G	Grey	2x12W	100-240V		10	-

The E27 Plafo Outdoor Range
Round

67280E/B

67280E | 12W | E27 | ABS + PC

IP65

67280E/W

67280E/G

67280E/AN



67280EA/B

67280EA | 2x12W | E27 | ABS + PC

IP65

67280EA/W

67280EA/AN



Order Code	Colour	Watts	Input	Class		Notes
67280E/W	White	12W	100-240V		10	-
67280E/AN	Anthracite	12W	100-240V		10	-
67280E/B	Black	12W	100-240V		10	-
67280E/G	Grey	12W	100-240V		10	-
67280EA/W	White	2x12W	100-240V		10	-
67280EA/AN	Anthracite	2x12W	100-240V		10	-
67280EA/B	Black	2x12W	100-240V		10	-

67280N/W/W

The LED Plafo Outdoor

67280N | 16W | SMD | ABS + PC

67280N/W/W

LED BUILT IN
80 CRI
IK 08
CE
2 YEAR
IP65

67280N/AN/W

67280N/G/W



67280AN | 24W | SMD | ABS + PC

Emergency version 67280ANE/G/W on page 667.

67280AN/W/W

LED BUILT IN
80 CRI
IK 08
CE
2 YEAR
IP65

67280AN/AN/W



67282N | 16W | SMD | ABS + PC

67282N/W/W

LED BUILT IN
80 CRI
IK 08
CE
2 YEAR
IP65

67282N/AN/W



67282AN | 24W | SMD | ABS + PC

Emergency version 67282ANE/G/W on page 667.

67282AN/AN/W

LED BUILT IN
80 CRI
IK 08
CE
2 YEAR
IP65

67282AN/G/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67280N/W/W	White	Warm white	3000K	16W	960lm	230V		10	Complete with 500mA driver
67280N/AN/W	Anthracite	Warm white	3000K	16W	960lm	230V		10	Complete with 500mA driver
67280N/G/W	Grey	Warm white	3000K	16W	960lm	230V		10	Complete with 500mA driver
67280AN/W/W	White	Warm white	3000K	24W	1440lm	230V		10	Complete with 600mA driver
67280AN/AN/W	Anthracite	Warm white	3000K	24W	1440lm	230V		10	Complete with 600mA driver
67282N/W/W	White	Warm white	3000K	16W	960lm	230V		10	Complete with 500mA driver
67282N/AN/W	Anthracite	Warm white	3000K	16W	960lm	230V		10	Complete with 500mA driver
67282AN/AN/W	Anthracite	Warm white	3000K	24W	1440lm	230V		10	Complete with 600mA driver
67282AN/G/W	Grey	Warm white	3000K	24W	1440lm	230V		10	Complete with 600mA driver

The IP65 Flat Plafo

67498/W/V

67498 | 20W | SMD | ABS + PC

LED BUILT IN
80 CRI
CCT V
IK 06
CE
2 YEAR
IP65



67498/B/V

67498 | 20W | SMD | ABS + PC

LED BUILT IN
80 CRI
CCT V
IK 06
CE
2 YEAR
IP65



67390/AN/W

67390 | 21W | SMD | ABS + PC

LED BUILT IN
80 CRI
IK 08
CE
2 YEAR
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67498/W/V	White	CCT V	3000K-4000K-6500K	20W	1300lm	230V		10	Complete with 500mA driver.
67498/AN/V	Anthracite	CCT V	3000K-4000K-6500K	20W	1300lm	230V		10	Complete with 500mA driver.
67390/AN/W	Anthracite	Warm white	3000K	21W	1300lm	230V		10	Complete with 500mA driver

The IK10 Industrial Range
IP65

67220A/W/V

67220A | 26W | SMD | PC

LED BUILT IN
80 CRI
CCT V
IK 10
CE 3 YEAR
IP65

67220A/B/V



67220B/W/V

67220B | 35W | SMD | PC

LED BUILT IN
80 CRI
CCT V
IK 10
CE 3 YEAR
IP65

67220B/B/V



67220E/W/V

67220E | 35W | SMD | PC

LED BUILT IN
80 CRI
CCT V
IK 10
CE 3 YEAR
IP65

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67220A/W/V	White	CCT V	3000K-4000K-6000K	26W	2750lm	230V		5	Complete with 145mA driver
67220A/B/V	Black	CCT V	3000K-4000K-6000K	26W	2750lm	230V		5	Complete with 145mA driver
67220B/W/V	White	CCT V	3000K-4000K-6000K	35W	3675lm	230V		5	Complete with 145mA driver
67220B/B/V	Black	CCT V	3000K-4000K-6000K	35W	3675lm	230V		5	Complete with 145mA driver
67220E/W/V	White	CCT V	3000K-4000K-6000K	35W	3675lm	230V		5	Complete with 140mA driver

The IK10 Industrial Range
IP65

67218/W/V

67218 | 15W | SMD | Plastic

Emergency version 67218E/W.

LED BUILT IN · 80 CRI · CCT V · IK 10 · CE · 3 YEAR · IP65

Optional ring.
Order code 67218R/B Black.



67218E/W/V

67218E | 15W | SMD | Emergency 3Hrs Maintained | Plastic

LED BUILT IN · 80 CRI · CCT V · IK 10 · CE · 3 YEAR · IP65

Optional ring.
Order code 67218R/B Black.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67218/W/V	White	CCT V	3000K-4000K-6500K	15W	1600lm	230V		6	Complete with 180mA driver
67218E/W/V	White	CCT V	3000K-4000K-6500K	15W	1600lm	230V		6	Supplied with battery

Pendants

Pages 499-512

14

Cylinder Pendants

63105M/W + 050112/GL

63105M | 10W | MR16 | GU10 | Aluminium + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

CE 5 YEAR

63105M/B + 050112/W



63105M/BBS + 050112/B

63105M | 10W | MR16 | GU10 | Aluminium + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

CE 5 YEAR



050112/W White

050112/B Black

050112/G Grey

050112/BS Brass

050112/ABS Antique brass

050112/GL Gold

050112/DC Dark chrome

Order Code	Colour	Watts	Input	Class		Notes
63105M/W	White	10W	100-240V		12	-
63105M/B	Black	10W	100-240V		12	-
63105M/BBS	Brushed brass	10W	100-240V		12	-

one

Cylinder Pendants

63105MA/B + 050112/W

63105MA | 10W | MR16 | GU10 | Aluminium + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

CE 5 YEAR

63105MA/W + 050112/GL



63105MA/MG + 050112/DC

63105MA | 10W | MR16 | GU10 | Aluminium + plastic reflector

Reflector must be ordered separately.

DARK LIGHT

IP20

CE 5 YEAR


63105MA/BBS + 050112/B



050112/W White

050112/B Black

050112/G Grey


050112/BS Brass

050112/ABS Antique brass

050112/GL Gold

050112/DC Dark chrome

Order Code	Colour	Watts	Input	Class		Notes
63105MA/W	White	10W	100-240V		12	-
63105MA/B	Black	10W	100-240V		12	-
63105MA/BBS	Brushed brass	10W	100-240V		12	-
63105MA/MG	Metal grey	10W	100-240V		12	-

one

Cylinder Pendants

63105N | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

CE 5 YEAR



63105N | 10W | MR16 | GU10 | Aluminium

DARK LIGHT

IP20

CE 5 YEAR



Order Code	Colour	Reflector	Watts	Input	Class		Notes
63105N/W	White	Black	10W	100-240V	⏚	24	-
63105N/B	Black	Brass	10W	100-240V	⏚	24	-

LED Pendant Tubes

63108A/W/W

63108A | 6W | COB | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
IP20

63108A/B/W



63108B/W/W

63108B | 6W | COB | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
IP20

63108B/B/W



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
63108A/W/W	White	Black	Warm white	3000K	6W	420lm	30°	230V		12	Complete with 700mA driver
63108A/B/W	Black	Brass	Warm white	3000K	6W	420lm	30°	230V		12	Complete with 700mA driver
63108B/W/W	White	Black	Warm white	3000K	6W	420lm	30°	230V		12	Complete with 700mA driver
63108B/B/W	Black	Brass	Warm white	3000K	6W	420lm	30°	230V		12	Complete with 700mA driver

E27 Pendants

63124/BBS

63124 | 20W | E27 | Aluminium

IP20



63124C/BBS

63124C | 5x20W | E27 | Aluminium

IP20



63126/W

63126 | 20W | E27 | Aluminium

Suitable for shade or glass.

IP20


63126/CU



63126A/W

63126A | 20W | E27 | Aluminium

Suitable for shade or glass.

IP20


63126A/BBS


63126A/CU



Order Code	Colour	Watts	Input	Class		Notes
63124/BBS	Brushed brass	20W	100-240V		20	-
63124C/BBS	Brushed brass	5x20W	100-240V		1	-
63126/W	White	20W	100-240V		20	-
63126/CU	Copper	20W	100-240V		20	-
63126A/W	White	20W	100-240V		20	-
63126A/BBS	Brushed brass	20W	100-240V		20	-
63126A/CU	Copper	20W	100-240V		20	-

E27 Pendants

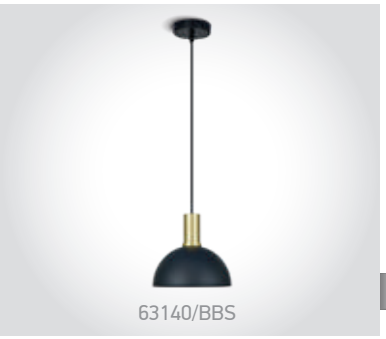
63140/BBS

63140 | 10W | E27 | Aluminium

IP20

5 YEAR

Suitable for E27 LED lamp.



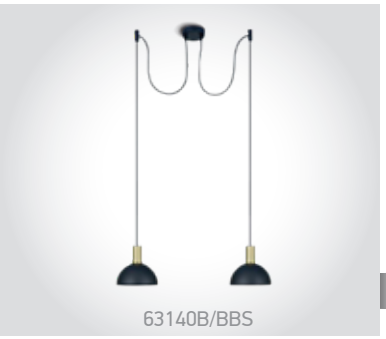
63140B/BBS

63140B | 2x10W | E27 | Aluminium

IP20

5 YEAR

63140B/B


Suitable for E27 LED lamp.



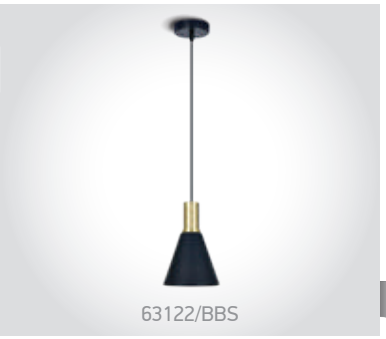
63122/BBS

63122 | 10W | E27 | Aluminium

IP20

5 YEAR

63122/CU



63122B/B

63122B | 3x10W | E27 | Aluminium

IP20

5 YEAR

63122B/BBS

63122B/CU



Order Code	Colour	Watts	Input	Class		Notes
63140/BBS	Brushed brass	10W	100-240V		1	-
63140B/B	Black	2x10W	100-240V		1	-
63140B/BBS	Brushed brass	2x10W	100-240V		1	-
63122/BBS	Brushed brass	10W	100-240V		1	-
63122/CU	Copper	10W	100-240V		1	-
63122B/B	Black	3x10W	100-240V		1	-
63122B/BBS	Brushed brass	3x10W	100-240V		1	-
63122B/CU	Copper	3x10W	100-240V		1	-

Round Pendant

63142A/W | White Pendant Shade

5 YEAR

1

IP20



Decorative E27

0990 | 20W | E27

IP20

Suitable for E27 LED lamp.



0990 | 20W | E27

IP20

Suitable for E27 LED lamp.



0992 | 20W | E27

IP20

Suitable for E27 LED lamp.



Order Code	Colour	Lampholder	Watts	Input	Class		Notes
0990/B	Black	E27	20W	100-240V		36	-
0990/BBS	Brushed brass	E27	20W	100-240V		36	-
0992/B	Black	E27	20W	100-240V		36	-

GU10 Pendants

63146A | 5x7W | MR16 | GU10 | Aluminium

IP20

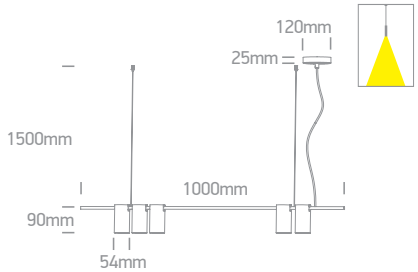

63146A | 5x7W | MR16 | GU10 | Aluminium

IP20

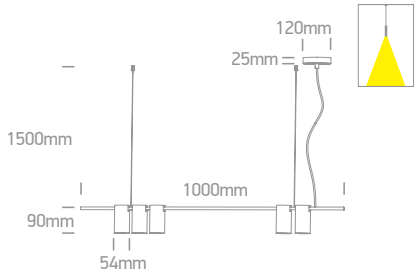

63146B | 7x7W | MR16 | GU10 | Aluminium

IP20

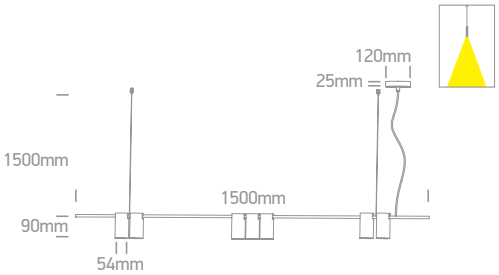

63146B | 7x7W | MR16 | GU10 | Aluminium

IP20

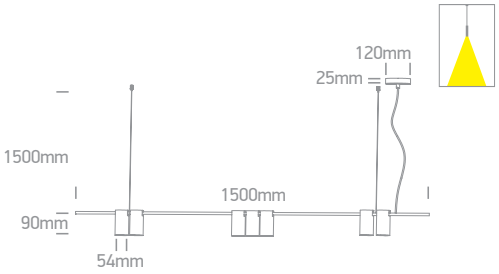

Order Code	Colour	Watts	Input	Class		Notes
63146A/B	Black	5x7W	100-240V		1	-
63146A/BBS	Brushed Brass	5x7W	100-240V		1	-
63146B/B	Black	7x7W	100-240V		1	-
63146B/BBS	Brushed Brass	7x7W	100-240V		1	-

63146C/B

one

63146B/BBS

GU10 Pendants

63146C/B

63146C | 10x7W | MR16 | GU10 | Aluminium

IP20

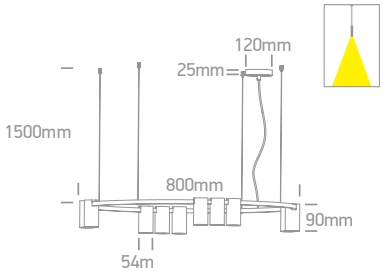

63146C/BBS

63146C | 10x7W | MR16 | GU10 | Aluminium

IP20

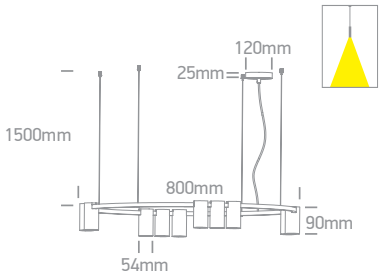

63146D/B

63146D | 15x7W | MR16 | GU10 | Aluminium

IP20

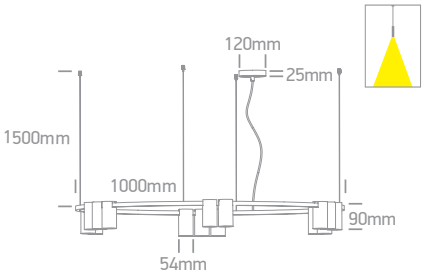

63146D/BBS

63146D | 15x7W | MR16 | GU10 | Aluminium

IP20

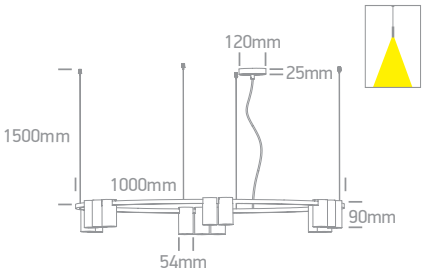

Order Code	Colour	Watts	Input	Class		Notes
63146C/B	Black	10x7W	100-240V		1	-
63146C/BBS	Brushed Brass	10x7W	100-240V		1	-
63146D/B	Black	15x7W	100-240V		1	-
63146D/BBS	Brushed Brass	15x7W	100-240V		1	-

Retro Pendants

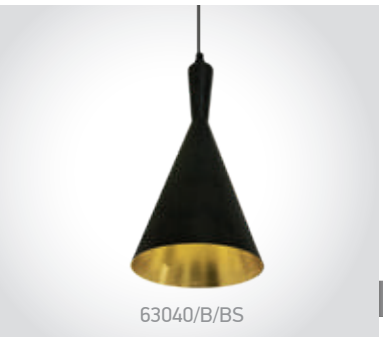

63040/B/BS

63040 | 12W | E27 | Aluminium

IP20



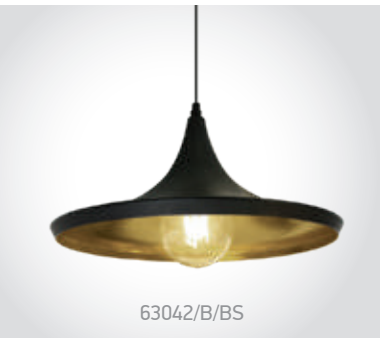

63042/B/BS

63042 | 12W | E27 | Aluminium

IP20





63044/B/BS

63044 | 12W | E27 | Aluminium

IP20





Order Code	Colour	Reflector	Watts	Input	Class		Notes
63040/B/BS	Black	Brass	12W	100-240V		1	-
63042/B/BS	Black	Brass	12W	100-240V		1	-
63044/B/BS	Black	Brass	12W	100-240V		1	-

Retro Pendant

63020 | 20W | E27 | Aluminium

IP20



Order Code	Colour	Reflector	Watts	Input	Class		Notes
63020/B/BS	Black	Brass	20W	100-240V		1	-

one

Bowl Shade Pendant Range

63016A/W/G

63016A/B/BS

63016A/W/G

63016A | 20W | E27 | Aluminium

IP20



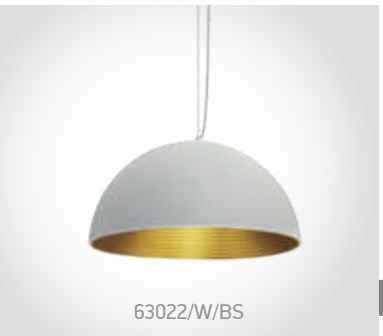

63022/W/BS

63022 | 20W | E27 | Aluminium

IP20



63022A/W/BS

63022A | 20W | E27 | Aluminium

IP20



63022B/W/BS

63022B | 25W | E27 | Aluminium

IP20



Order Code	Colour	Reflector	Watts	Input	Class		Notes
63016A/W/G	White	Grey	20W	100-240V		1	-
63022/W/BS	White	Brass	20W	100-240V		1	-
63022A/W/BS	White	Brass	20W	100-240V		1	-
63022B/W/BS	White	Brass	25W	100-240V		1	-

Bowl Shade Pendant Range

63016A/B/BS

63016A | 20W | E27 | Aluminium

IP20



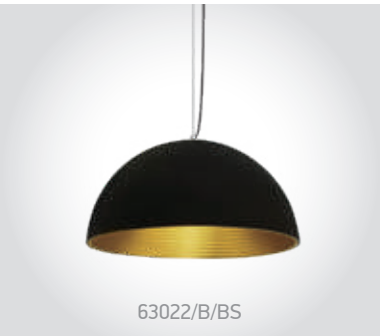

63022/B/BS

63022 | 20W | E27 | Aluminium

IP20



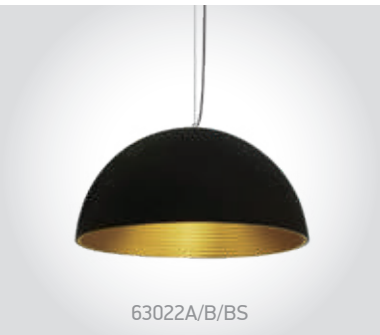

63022A/B/BS

63022A | 20W | E27 | Aluminium

IP20



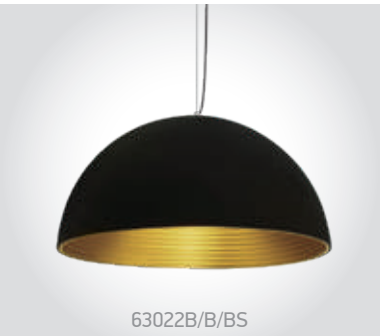

63022B/B/BS

63022B | 25W | E27 | Aluminium

IP20



Order Code	Colour	Reflector	Watts	Input	Class		Notes
63016A/B/BS	Black	Brass	20W	100-240V		1	-
63022/B/BS	Black	Brass	20W	100-240V		1	-
63022A/B/BS	Black	Brass	20W	100-240V		1	-
63022B/B/BS	Black	Brass	25W	100-240V		1	-

Decorative

Pages 515-554

15

The Oriental Range
Metal

61050A

61050A | 40W | E27 | Metal | Table lamp

IP20

Suitable for E27 LED lamp.



61050B

61050B | 40W | E27 | Metal | Floor lamp

IP20

Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
61050A	Antique oriental	40W	100-240V		1	-
61050B	Antique oriental	40W	100-240V		1	-

Portable Trendy Lights

61082A/W

61082A | 3,3W | SMD | Touch switch | Dimmable | Aluminium

Rechargeable USB socket.

LED BUILT IN
80 CRI
DIMMABLE
IK 06
CE
2 YEAR
IP65

Charging time: 6Hrs
Working time: 9Hrs



61082A/BR

61082A | 3,3W | SMD | Touch switch | Dimmable | Aluminium

Rechargeable USB socket.

LED BUILT IN
80 CRI
DIMMABLE
IK 06
CE
2 YEAR
IP65

Charging time: 6Hrs
Working time: 9Hrs



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61082A/W	White	Warm white	3000K	3,3W	200lm	III	6	2x2200mAh lithium batteries
61082A/BR	Brown	Warm white	3000K	3,3W	200lm	III	6	2x2200mAh lithium batteries

one

Portable Trendy Lights

61082B/W/W

61082B | 3,5W | SMD | Touch switch | Dimmable | Aluminium

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CE · 2 YEAR · IP54

Charging time: 3Hrs
Working time: 3-3.5Hrs



61082/W

61082 | 3.5W | SMD | Touch switch | Dimmable | Aluminium + steel

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CE · 2 YEAR · IP54

61082/B

Charging time: 3-5Hrs
Working time: 6-7 Hrs



61082/W/RGBW

61082 | 3.5W | SMD | Touch switch | Dimmable | Aluminium + steel

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CE · 2 YEAR · IP54

Charging time: 3-5Hrs
Working time: 6-7 Hrs



61082/B/RGBW

61082 | 3.5W | SMD | Touch switch | Dimmable | Aluminium + steel

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CE · 2 YEAR · IP54

Charging time: 3-5Hrs
Working time: 6-7 Hrs



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61082B/W/W	White	Warm white	3000K	3,5W	200lm	III	12	1800mAh lithium battery
61082/W	White	Warm white	3000K	3.5W	260lm	III	6	5200mAh lithium battery
61082/B	Black	Warm white	3000K	3.5W	260lm	III	6	5200mAh lithium battery
61082/W/RGBW	White	RGB + Warm white	RGB + 3000K	3.5W	260lm	III	6	5200mAh lithium battery
61082/B/RGBW	Black	RGB + Warm white	RGB + 3000K	3.5W	260lm	III	6	5200mAh lithium battery

Portable Table Lights

61100/W

61100 | 3W | SMD | Touch switch | Dimmable | Metal

Rechargeable USB socket.

LED BUILT IN
80 CRI
DIMMABLE
CE 2 YEAR
IP54

61100/B

Charging time: 2,5Hrs
Working time: 8Hrs



61102/AL

61102 | 3W | SMD | Touch | Dimmable | Metal

Rechargeable USB socket.

LED BUILT IN
80 CRI
3-STEP DIMMABLE
CE 2 YEAR
IP54


61102/BBS

61102/CU

Charging time: 2,5Hrs
Working time: 8Hrs



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61100/W	White	Warm white	3000K	3W	120lm	III	10	4000mAh lithium battery
61100/B	Black	Warm white	3000K	3W	120lm	III	10	4000mAh lithium battery
61102/AL	Aluminium	Warm white	3000K	3W	120lm	III	10	2000mAh lithium battery
61102/BBS	Brushed brass	Warm white	3000K	3W	120lm	III	10	2000mAh lithium battery
61102/CU	Copper	Warm white	3000K	3W	120lm	III	10	2000mAh lithium battery

Portable Table Lights

61090/W

61090 | 2,5W | SMD | Dimmable | Aluminium + PC diffuser

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CCT V · 2 YEAR · IP65

61090/B

Charging time: ≤6,5Hrs
Working time: ≥10Hrs
100% light intensity



61106/W/W

61106 | 2W | SMD | Touch switch | Dimmable | Aluminium

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · 2 YEAR · IP44

61106/B/W

Charging time: 4 Hrs
Working time: 5 Hrs



61094/W/UW

61094 | 1,8W | SMD | Dimmable | Aluminium

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · ADJUSTABLE · 2 YEAR · IP65

Charging time: ≤6,5Hrs
Working time: ≥10Hrs
100% light intensity



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61090/W	White	CCT V	2700K-3000K	2,5W	100lm	III	6	2x4400mAh lithium batteries
61090/B	Black	CCT V	2700K-3000K	2,5W	100lm	III	6	2x4400mAh lithium batteries
61106/W/W	White	Warm white	3000K	2W	200lm	III	12	2200mAh lithium battery
61106/B/W	Black	Warm white	3000K	2W	200lm	III	12	2200mAh lithium battery
61094/W/UW	White	Ultra warm white	2200K	1,8W	120lm	III	6	2x4400mAh lithium batteries

Portable Table Lights

61092/W

61092 | 2,5W | SMD | Dimmable | Aluminium

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CCT V · CE · 2 YEAR · IP65

Charging time: ≤6,5Hrs
Working time: ≥10Hrs
100% light intensity



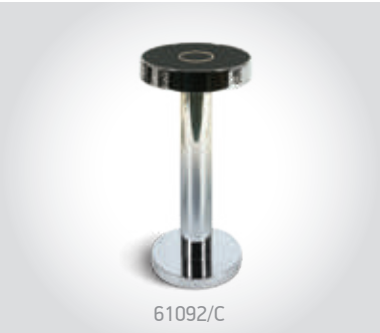

61092/C

61092 | 2,5W | SMD | Dimmable | Aluminium

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · CCT V · CE · 2 YEAR · IP65

Charging time: ≤6,5Hrs
Working time: ≥10Hrs
100% light intensity



61000

61000 | Charging station for 61090 & 61092 | 100-240V

Charge up to 6 table lamps.

CE · 2 YEAR · IP20

Charging USB adaptor.
Order code 61000A.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61092/W	White	CCT V	2700K-3000K	2,5W	120lm	III	6	4400mAh lithium battery
61092/C	Chrome	CCT V	2700K-3000K	2,5W	120lm	III	6	4400mAh lithium battery

Portable Table Lights

61084/B

61084 | 2W | SMD | Touch switch | 3-Step Dimming | Metal + PC

Rechargeable USB socket.

LED BUILT IN

3-STEP DIMMABLE

2 YEAR

IP44

Charging time: 4Hrs
Working time: 8Hrs



61088/W

61088 | 3W | SMD | 3-Step Dimming | ABS

Rechargeable USB socket.

LED BUILT IN

80 CRI

3-STEP DIMMABLE

2 YEAR

IP65

61088/B

Charging time: 3,5Hrs
Working time:
4Hrs / 8Hrs / 15Hrs
100% / 50% / 25%



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61084/B	Black	Warm white	3000K	2W	80lm	III	8	2200mAh lithium battery
61088/W	White	Warm white	3000K	3W	120lm	III	9	2200mAh lithium battery
61088/B	Black	Warm white	3000K	3W	120lm	III	9	2200mAh lithium battery

Crystal Effect Table Lights

61098/W

61098 | 1,2W | SMD | Touch | 3-Step Dimming | Plastic

Rechargeable USB socket.

LED BUILT IN

80 CRI

3-STEP DIMMABLE

2 YEAR

IP54

Charging time: 2,5Hrs
Working time: 8Hrs



61104/W

61104 | 1,2W | SMD | Touch | 3-Step Dimming | Plastic

Rechargeable USB socket.

LED BUILT IN

80 CRI

3-STEP DIMMABLE

2 YEAR

IP54

Charging time: 2,5Hrs
Working time: 8Hrs



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
61098/W	Clear	Warm white	3000K	1,2W	60lm	III	10	2000mAh lithium battery
61104/W	Clear	Warm white	3000K	1,2W	60lm	III	10	2000mAh lithium battery

The Wood Nostalgia

61118

61118 | 12W | E27 | Wood + beige fabric shade

EU Plug.

IP20



61118A

61118A | 12W | E27 | Wood + beige fabric shade

EU Plug.

IP20



Order Code	Colour	Watts	Input	Class		Notes
61118	Wood	12W	100-240V		4	With ON/OFF Switch
61118A	Wood	12W	100-240V		1	With ON/OFF Switch

Retro Lights

62120/BBS

62120 | 12W | E27 | Surface | Recessed | Aluminium

IP20





62120A/BBS

62120A | 12W | E27 | Aluminium

IP20



Order Code	Colour	Watts	Input	Class				Notes
62120/BBS	Brushed brass	12W	100-240V		150mm	50mm	4	-
62120A/BBS	Brushed brass	12W	100-240V		-	-	2	-

LED Circle Rings

62156C | 65W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



62156D | 100W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62156C/B/W	Black	Warm white	3000K	65W	4300lm	230V	⏚	1	Complete with 1600mA driver
62156C/BBS/W	Brushed brass	Warm white	3000K	65W	4300lm	230V	⏚	1	Complete with 1600mA driver
62156D/B/W	Black	Warm white	3000K	100W	6500lm	230V	⏚	1	Complete with 2x1200mA drivers

LED Circle Rings

63150 | 48W | SMD | Dimmable | Aluminium

IP20

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 3 YEAR



63150A | 65W | SMD | Dimmable | Aluminium

IP20

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 3 YEAR



63150B | 65W | SMD | Dimmable | Aluminium

IP20

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 3 YEAR

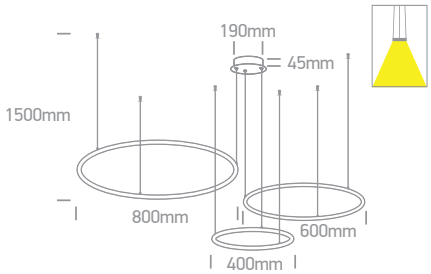

63150C | 100W | SMD | Dimmable | Aluminium

IP20

LED BUILT IN · 80 CRI · TRIAC DIMMABLE · CE · 3 YEAR

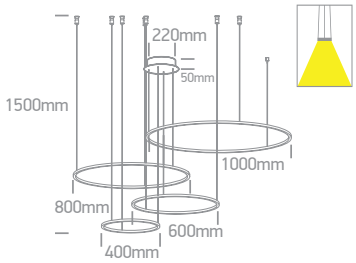

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63150/B/W	Black	Warm white	3000K	48W	3550lm	230V		1	Complete with 1200mA dimmable driver
63150A/B/W	Black	Warm white	3000K	65W	4800lm	230V		1	Complete with 2x700mA dimmable drivers
63150B/B/W	Black	Warm white	3000K	65W	4800lm	230V		1	Complete with 2x700mA dimmable drivers
63150C/B/W	Black	Warm white	3000K	100W	7400lm	230V		1	Complete with 2x1200mA dimmable drivers

LED Pendant Circles

63152A/B/W

63152A | 20W | SMD | Dimmable | Aluminium

LED BUILT IN
80 CRI
TRIAC DIMMABLE
CE
3 YEAR
IP20



63152B/B/W

63152B | 30W | SMD | Dimmable | Aluminium

LED BUILT IN
80 CRI
TRIAC DIMMABLE
CE
3 YEAR
IP20



63152C/B/W

63152C | 40W | SMD | Dimmable | Aluminium

LED BUILT IN
80 CRI
TRIAC DIMMABLE
CE
3 YEAR
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63152A/B/W	Black	Warm white	3000K	20W	1400lm	230V		1	Complete with 500mA dimmable driver
63152B/B/W	Black	Warm white	3000K	30W	2100lm	230V		1	Complete with 700mA dimmable driver
63152C/B/W	Black	Warm white	3000K	40W	2800lm	230V		1	Complete with 1050mA dimmable driver

The Dark Light Wall Lights

65148A | 12W | SMD | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
2 YEAR
IP20



65148A | 12W | SMD | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
2 YEAR
IP20



65148B | 15W | SMD | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
2 YEAR
IP20





65148B | 15W | SMD | Aluminium

LED BUILT IN
90 CRI
ADJUSTABLE
2 YEAR
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65148A/W/W	White	Warm white	3000K	12W	950lm	230V		12	Complete with 280mA driver
65148A/B/W	Black	Warm white	3000K	12W	950lm	230V		12	Complete with 280mA driver
65148B/W/W	White	Warm white	3000K	15W	1200lm	230V		12	Complete with 350mA driver
65148B/B/W	Black	Warm white	3000K	15W	1200lm	230V		12	Complete with 350mA driver

LED Pendant Rings

63046 | 25W | SMD | Steel + aluminium

Oval shape.

LED BUILT IN

80 CRI

CE

2 YEAR

IP20

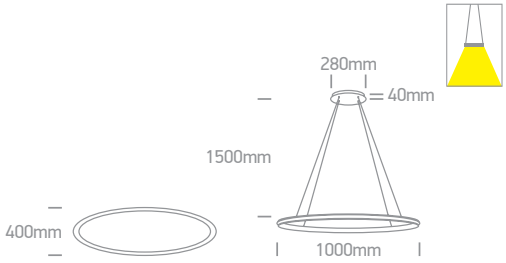

63046A | 45W | SMD | Steel + aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63046/W	White	Warm white	3000K	25W	1540lm	230V		1	Complete with 24V DC driver
63046A/W	White	Warm white	3000K	45W	2700lm	230V		1	Complete with 24V DC driver

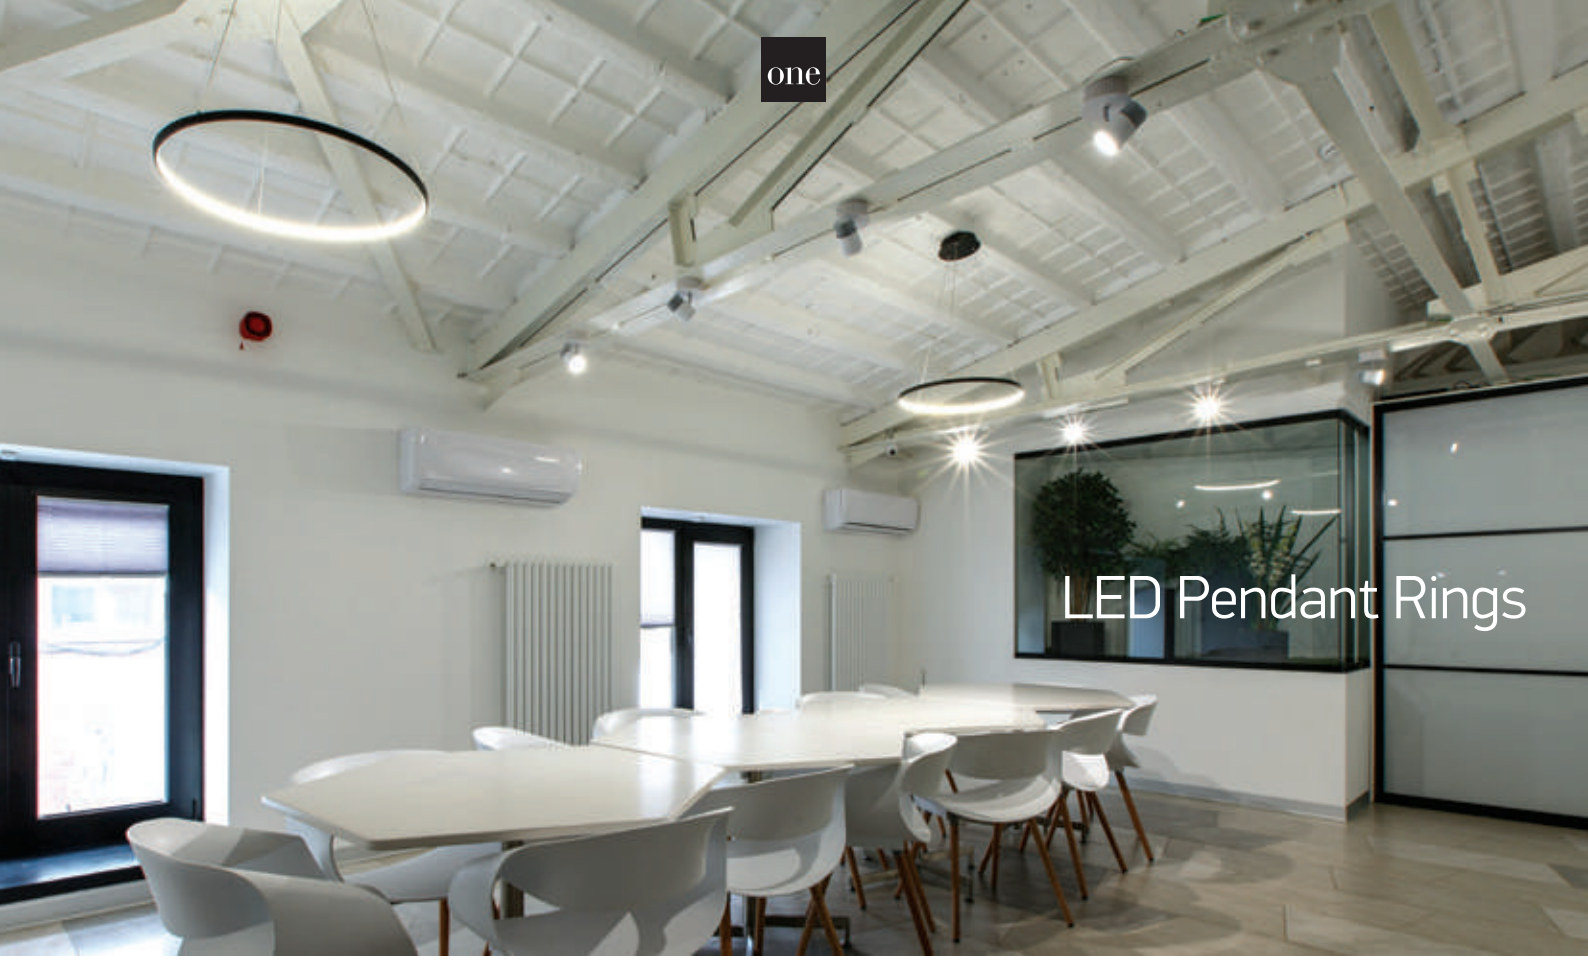

LED Pendant Rings

63048 | 19W | SMD | Steel + aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP20



63048 | 19W | SMD | Steel + aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP20



63050 | 40W | SMD | Steel + aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63048/B	Black	Warm white	3000K	19W	1000lm	230V		1	Complete with 24V DC driver
63048/C	Chrome	Warm white	3000K	19W	1000lm	230V		1	Complete with 24V DC driver
63050/W	White	Warm white	3000K	40W	2250lm	230V		1	Complete with 24V DC driver

LED Pendant Rings

63114/W/W

63114 | 40W | SMD | Metal + ABS

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



63114/B/W

63114 | 40W | SMD | Metal + ABS

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



63156/B/W

63156 | 50W | SMD | Aluminium

LED BUILT IN

90 CRI

CE

3 YEAR

new

DARK LIGHT

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63114/W/W	White	Warm white	3000K	40W	2400lm	230V		1	Complete with 1000mA driver
63114/B/W	Black	Warm white	3000K	40W	2400lm	230V		1	Complete with 1000mA driver
63156/B/W	Black	Warm white	3000K	50W	4000lm	230V		1	Complete with 1200mA driver

LED Pendant Rings

63144A/W/W

63144A | 40W | SMD | Steel + aluminium + acrylic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20

63144A/B/W



63144A/BS/W



63144B/W/W

63144B | 60W | SMD | Steel + aluminium + acrylic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20

63144B/B/W

63144B/BS/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63144A/W/W	White	Warm white	3000K	40W	4350lm	230V		1	Complete with 650mA driver
63144A/B/W	Black	Warm white	3000K	40W	4350lm	230V		1	Complete with 650mA driver
63144A/BS/W	Brass	Warm white	3000K	40W	4350lm	230V		1	Complete with 650mA driver
63144B/W/W	White	Warm white	3000K	60W	6800lm	230V		1	Complete with 1050mA driver
63144B/B/W	Black	Warm white	3000K	60W	6800lm	230V		1	Complete with 1050mA driver
63144B/BS/W	Brass	Warm white	3000K	60W	6800lm	230V		1	Complete with 1050mA driver

LED Pendant Rings

62144NB/W/W

62144NB | 50W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20

62144NB/B/W



62144NB/BBS/W

62144NB | 50W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62144NB/W/W	White	Warm white	3000K	50W	3000lm	230V		1	Complete with 1200mA driver
62144NB/B/W	Black	Warm white	3000K	50W	3000lm	230V		1	Complete with 1200mA driver
62144NB/BBS/W	Brushed brass	Warm white	3000K	50W	3000lm	230V		1	Complete with 1200mA driver

LED Pendant Rings
CCT V

62144NB/BGL/V

62144NB/W/V

62144NB | 50W | SMD | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20



62144NB/B/V

62144NB | 50W | SMD | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20



62144NB/BBS/V

62144NB | 50W | SMD | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20



62144NB/BGL/V

62144NB | 50W | SMD | Dimmable | Aluminium

LED BUILT IN · 90 CRI · TRIAC DIMMABLE · CCT V · CE · 3 YEAR · new · IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62144NB/W/V	White	CCT V	2700K-3000K-4000K	50W	4250lm	230V		1	Complete with 1050mA dimmable driver
62144NB/B/V	Black	CCT V	2700K-3000K-4000K	50W	4250lm	230V		1	Complete with 1200mA dimmable driver
62144NB/BBS/V	Brushed brass	CCT V	2700K-3000K-4000K	50W	4250lm	230V		1	Complete with 1200mA dimmable driver
62144NB/BGL/V	Brushed gold	CCT V	2700K-3000K-4000K	50W	4250lm	230V		1	Complete with 1200mA dimmable driver

Pendant Cones

63076A/B/W

63076A | 5W | COB | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20



63076C/B/W

63076C | 5x5W | COB | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20



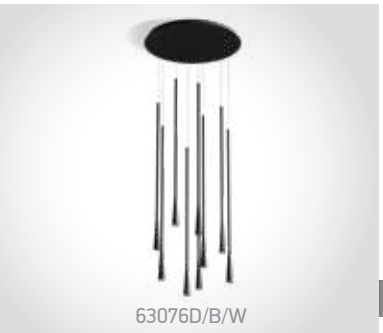

63076D/B/W

63076D | 9x5W | COB | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20



63076E/B/W

63076E | 5x5W | COB | Aluminium

LED BUILT IN · 90 CRI · CE · 3 YEAR · IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63076A/B/W	Black	Warm white	3000K	5W	300lm	230V		6	Complete with 500mA driver
63076C/B/W	Black	Warm white	3000K	5x5W	1500lm	230V		1	Complete with 2x500mA drivers
63076D/B/W	Black	Warm white	3000K	9x5W	2700lm	230V		1	Complete with 3x500mA drivers
63076E/B/W	Black	Warm white	3000K	5x5W	1500lm	230V		1	Complete with 5x500mA drivers

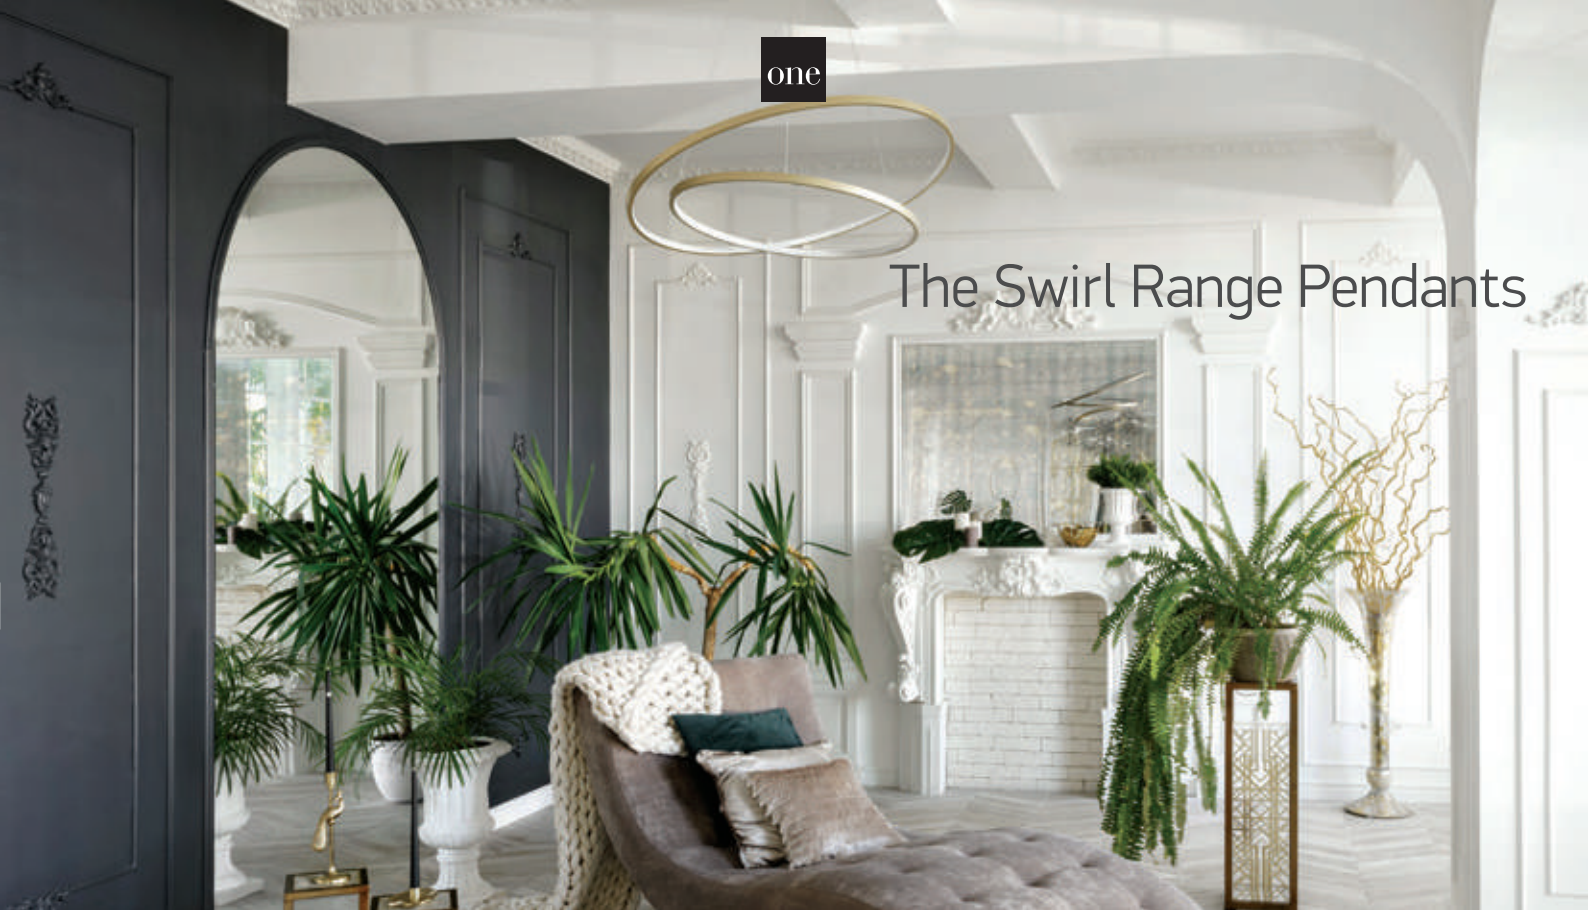

The Swirl Range Pendants

63062/BS

63062 | 36W | SMD | Steel + aluminium + acrylic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



63068A/BS

63068A | 40W | SMD | Steel + aluminium + acrylic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



63066A/W

63066A | 30W | SMD | Steel + aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20

63066A/B



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63062/BS	Brass	Warm white	3000K	36W	1800lm	230V		1	Complete with 24V DC driver
63068A/BS	Brass	Warm white	3000K	40W	2400lm	230V		1	Complete with 24V DC driver
63066A/W	White	Warm white	3000K	30W	1800lm	230V		1	Complete with 24V DC driver
63066A/B	Black	Warm white	3000K	30W	1800lm	230V		1	Complete with 24V DC driver

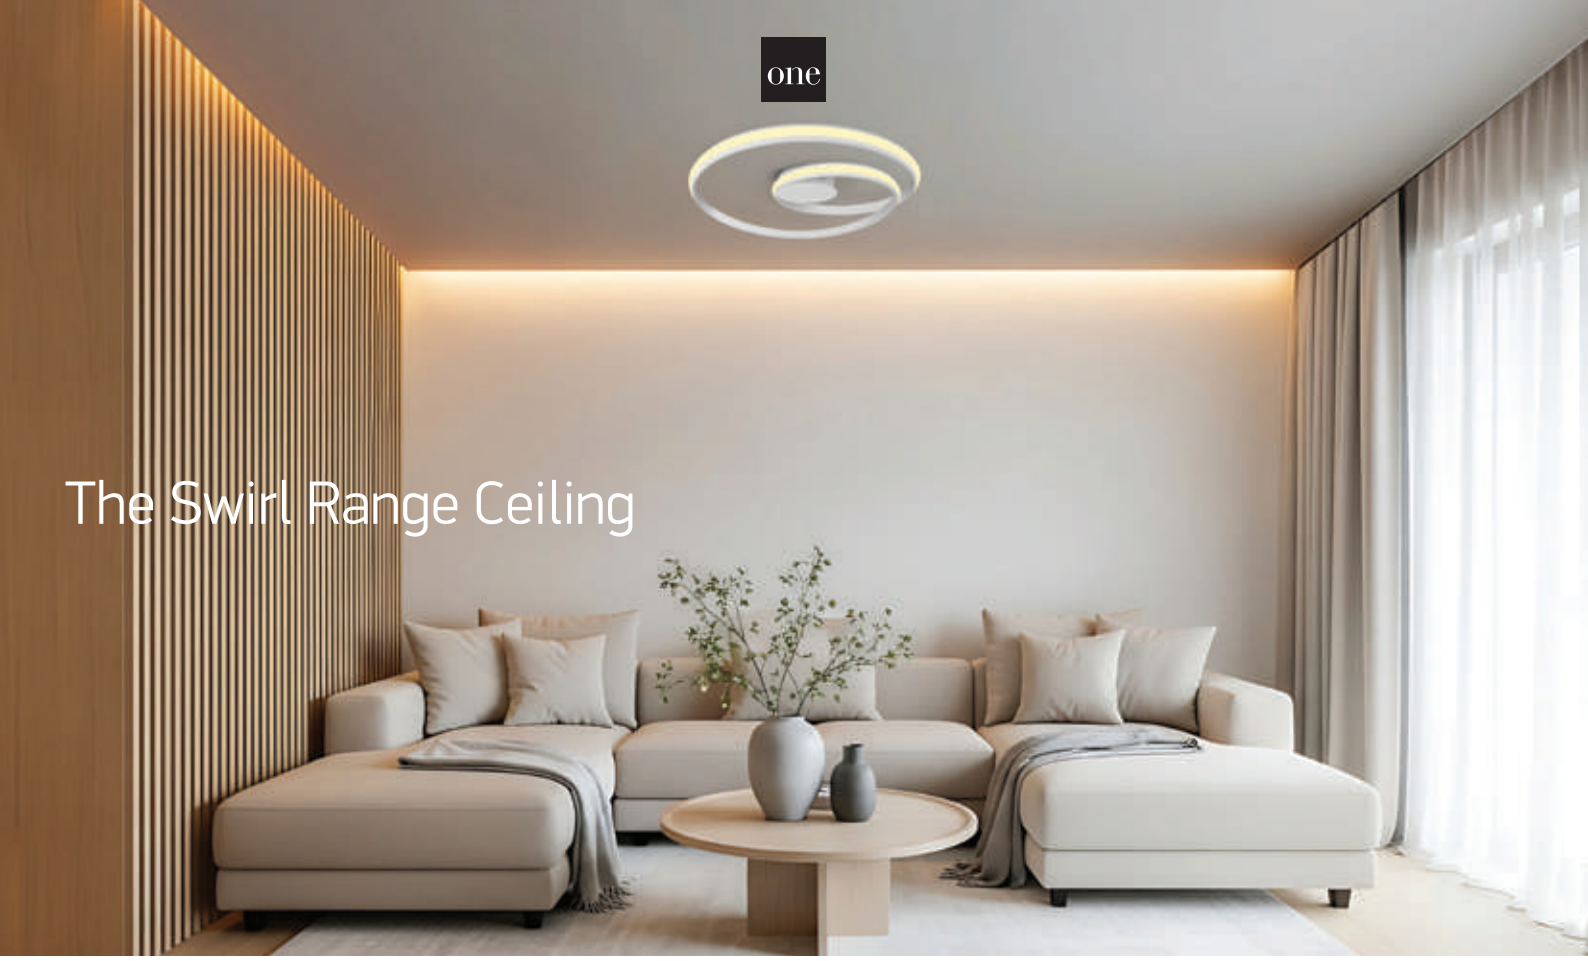

The Swirl Range Ceiling

63066 | 30W | SMD | Steel + aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



63066 | 30W | SMD | Steel + aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



63068 | 30W | SMD | Steel + aluminium + acrylic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63066/W	White	Warm white	3000K	30W	1500lm	230V		1	Complete with 24V DC driver
63066/B	Black	Warm white	3000K	30W	1500lm	230V		1	Complete with 24V DC driver
63068/BS	Brass	Warm white	3000K	30W	1500lm	230V		1	Complete with 24V DC driver

The Swirl Range Ceiling

63154A | 40W | SMD | Dimmable | Aluminium

IP20

LED BUILT IN | 80 CRI | TRIAC DIMMABLE | CE | 3 YEAR



63154B | 20W | SMD | Dimmable | Aluminium

IP20

LED BUILT IN | 80 CRI | TRIAC DIMMABLE | CE | 3 YEAR



63154C | 40W | SMD | Dimmable | Aluminium

IP20

LED BUILT IN | 80 CRI | TRIAC DIMMABLE | CE | 3 YEAR

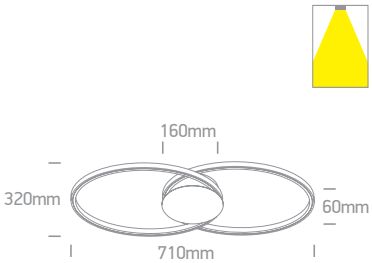

63154D | 60W | SMD | Dimmable | Aluminium

IP20

LED BUILT IN | 80 CRI | TRIAC DIMMABLE | CE | 3 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63154A/B/W	Black	Warm white	3000K	40W	2800lm	230V		1	Complete with 1050mA dimmable driver
63154A/CH/W	Champagne	Warm white	3000K	40W	2800lm	230V		1	Complete with 1050mA dimmable driver
63154B/B/W	Black	Warm white	3000K	20W	1400lm	230V		1	Complete with 500mA dimmable driver
63154B/CH/W	Champagne	Warm white	3000K	20W	1400lm	230V		1	Complete with 500mA dimmable driver
63154C/B/W	Black	Warm white	3000K	40W	2800lm	230V		1	Complete with 1050mA dimmable driver
63154C/CH/W	Champagne	Warm white	3000K	40W	2800lm	230V		1	Complete with 1050mA dimmable driver
63154D/B/W	Black	Warm white	3000K	60W	4200lm	230V		1	Complete with 2x700mA dimmable drivers
63154D/CH/W	Champagne	Warm white	3000K	60W	4200lm	230V		1	Complete with 2x700mA dimmable drivers

The Ribbon Table Lights

61086/W

61086 | 10W | SMD | Steel + aluminium + acrylic

With ON/OFF Switch / EU Plug.

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



61086/B

61086 | 10W | SMD | Steel + aluminium + acrylic

With ON/OFF Switch / EU Plug.

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



61086/BS

61086 | 10W | SMD | Steel + aluminium + acrylic

With ON/OFF Switch / EU Plug.

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61086/W	White	Warm white	3000K	10W	550lm	230V		5	Complete with 24V DC driver
61086/B	Black	Warm white	3000K	10W	550lm	230V		5	Complete with 24V DC driver
61086/BS	Brass	Warm white	3000K	10W	550lm	230V		5	Complete with 24V DC driver

The Ribbon Floor Lights

61086A/W

61086A | 29W | SMD | Steel + aluminium + acrylic

With ON/OFF Switch / EU Plug.

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



61086A/B

61086A | 29W | SMD | Steel + aluminium + acrylic

With ON/OFF Switch / EU Plug.

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



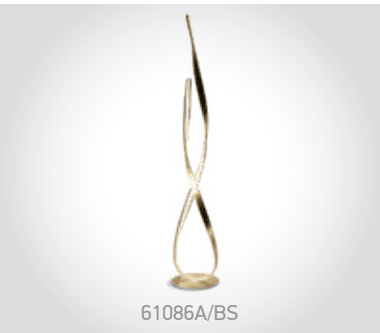

61086A/BS

61086A | 29W | SMD | Steel + aluminium + acrylic

With ON/OFF Switch / EU Plug.

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61086A/W	White	Warm white	3000K	29W	1740lm	230V		1	Complete with 24V DC driver
61086A/B	Black	Warm white	3000K	29W	1740lm	230V		1	Complete with 24V DC driver
61086A/BS	Brass	Warm white	3000K	29W	1740lm	230V		1	Complete with 24V DC driver

The Crystal Swirl Range

63054A/B

63054A | 20W | SMD | Steel + aluminium + acrylic crystal look

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



63054C/B

63054C | 150W | SMD | Steel + aluminium + acrylic crystal look

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63054A/B	Black	Warm white	3000K	20W	1000lm	230V		1	Complete with 24V DC driver
63054C/B	Black	Warm white	3000K	150W	8500lm	230V		1	Complete with 24V DC driver

The Light Bars

63056 | 65W | SMD | Steel + aluminium + acrylic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63056/BBS	Brushed brass	Warm white	3000K	65W	3900lm	230V	⏚	1	Complete with 24V DC driver

Mushroom Pendants

63058/BGL/W

63058 | 60W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



63058/BBR/W

63058 | 60W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63058/BGL/W	Brushed gold	Warm white	3000K	60W	4200lm	230V		1	Complete with 1400mA driver
63058/BBR/W	Brushed brown	Warm white	3000K	60W	4200lm	230V		1	Complete with 1400mA driver

LED Pendant Rings

62142NB/AN/V

62142NB | 42W | SMD | Aluminium

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

IP20

62142NB/W/V



62142NB/W/W

62142NB | 42W | SMD | Aluminium

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



62180NB/B/W

62180NB | 80W | SMD | Metal base + aluminium + PMMA

LED BUILT IN

80 CRI

CE

2 YEAR

IP20

62180NB/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62142NB/W/V	White	CCT V	2700K-3000K-4000K	42W	3570lm	230V		1	Complete with 1050mA driver
62142NB/AN/V	Anthracite	CCT V	2700K-3000K-4000K	42W	3570lm	230V		1	Complete with 1050mA driver
62142NB/W/W	White	Warm white	3000K	42W	3570lm	230V		1	Complete with 1050mA driver
62180NB/W/W	White	Warm white	3000K	80W	5600lm	230V		1	Complete with 2x1000mA drivers
62180NB/B/W	Black	Warm white	3000K	80W	5600lm	230V		1	Complete with 2x1000mA drivers

The Cloud Series

62148A/W

62148A | 23W | SMD | Metal base + PC

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



62148B/W

62148B | 40W | SMD | Metal base + PC

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62148A/W	White	Warm white	3000K	23W	1900lm	230V		1	Complete with 500mA driver
62148B/W	White	Warm white	3000K	40W	3200lm	230V		1	Complete with 1000mA driver

The Cloud Pendant Series

63110C | 80W | SMD | Metal base + PC

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



63112 | 60W | SMD | Metal + Plastic

LED BUILT IN

80 CRI

CE

2 YEAR

IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
63110C/W	White	Warm white	3000K	80W	6400lm	230V		1	Complete with 2x1000mA drivers
63112/W	White	Warm white	3000K	60W	4800lm	230V		1	Complete with 1300mA driver

one

The Nordic Decorative Range

63174C | 3x8W | E14 | Metal + glass

IP20

Suitable for E14 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
63174C/BS	Brass	3x8W	100-240V		1	-

Retro Ceiling Lights

62172B/BS

62172B | 3x12W | E27 | Metal

CE 3 YEAR

IP20

Suitable for E27 LED lamp.



62172C/BS

62172C | 6x12W | E27 | Metal

CE 3 YEAR

IP20

Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
62172B/BS	Brass	3x12W	100-240V		5	-
62172C/BS	Brass	6x12W	100-240V		5	-

Retro Classic Range

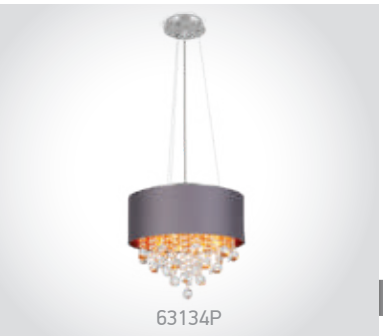

63134P

63134P | 4x8W | E14 | Fabric + glass

IP20

Suitable for E14 LED lamps.



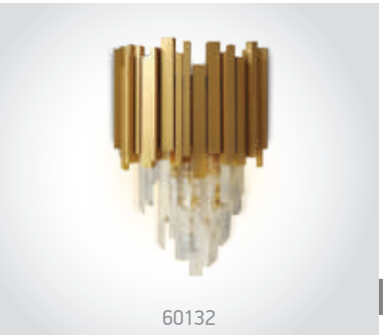

60132

60132 | 2x8W | E14 | Aluminium + glass

IP20

Suitable for E14 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
63134P	Dark grey	4x8W	100-240V		1	-
60132	Brass	2x8W	100-240V		8	-

63116A/BBS

63116A | 5x9W | G9 | Steel

IP20

Suitable for G9 LED lamp.



61116/BBS

61116 | 9W | G9 | Steel

EU Schuko Plug.

IP20

61116/B



Order Code	Colour	Watts	Input	Class			Notes
63116A/BBS	Brushed brass	5x9W	100-240V		-	2	-
61116/B	Black	9W	100-240V		150cm	4	With ON/OFF Switch
61116/BBS	Brushed brass	9W	100-240V		150cm	4	With ON/OFF Switch

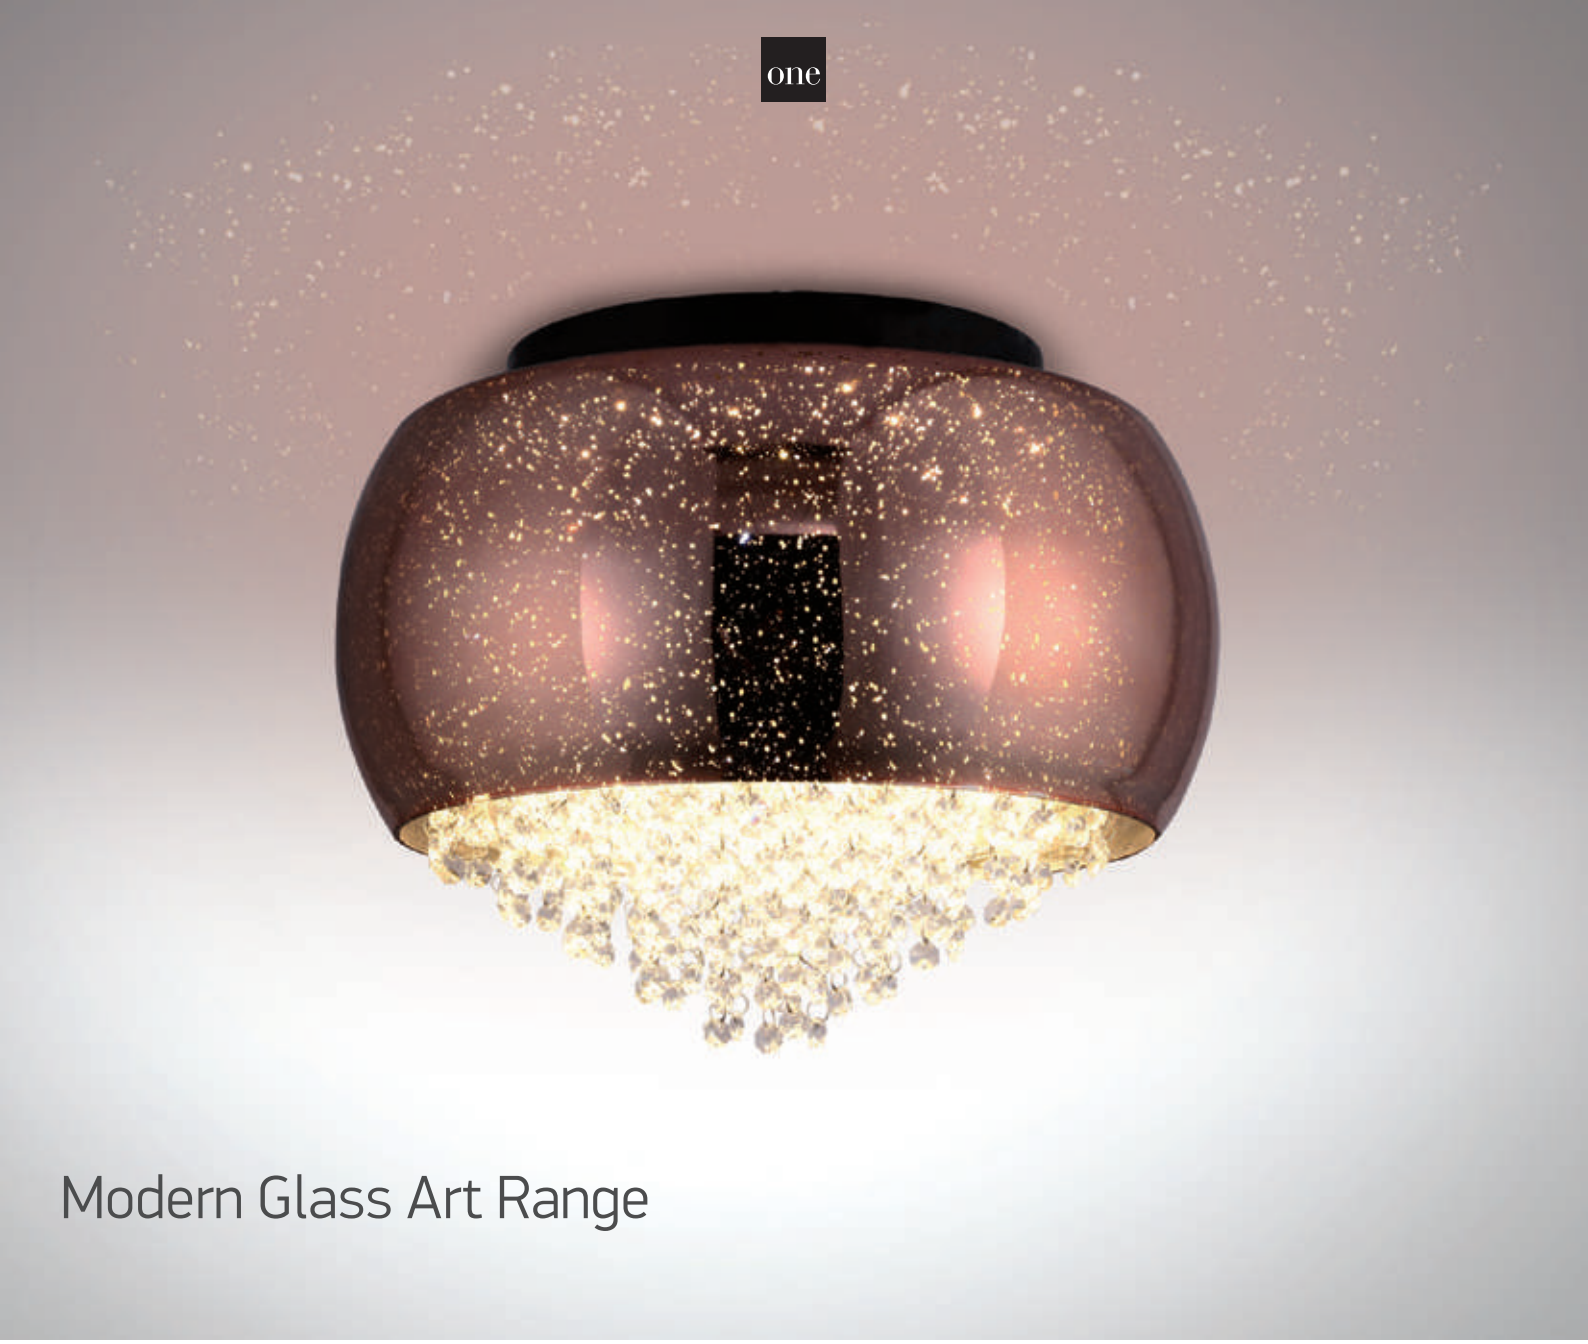

Modern Glass Art Range

62170A

62170A | 4x9W | G9 | Metal + glass

IP20

Suitable for G9 LED lamps.



62170B

62170B | 6x9W | G9 | Metal + glass

IP20

Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
62170A	Copper	4x9W	100-240V		1	-
62170B	Copper	6x9W	100-240V		1	-

The Classic Retro Range

60162 | 2x9W | G9 | Metal + Plastic beads + glass

IP20

3 YEAR

Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
60162	Chrome	2x9W	100-240V		8	-

The Classic Range

60178B/C

62184B/C/W

60178B/C

60178B | 4x9W | G9 | Metal + glass

IP20

Suitable for G9 LED lamps.



62166B

62166B | 5x9W | G9 | Metal + glass

IP20

Suitable for G9 LED lamps.



63166P

63166P | 5x9W | G9 | Metal + glass

IP20

Suitable for G9 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
60178B/C	Chrome	4x9W	100-240V		1	-
62166B	Chrome	5x9W	100-240V		2	-
63166P	Chrome	5x9W	100-240V		2	-

The Classic Range

62184B/C/W

62184B | 24W | SMD | Metal + glass

LED BUILT IN

80 CRI

CE

3 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62184B/C/W	Chrome	Warm white	3000K	24W	1300lm	230V	⏚	1	Complete with 300mA driver

Hotel & Bedroom

Pages 557-566

16

The Hotel Range
Metal

61046/MC

61046 | 12W | E27 | Metal + white fabric shade

ADJUSTABLE

2 YEAR

IP20

Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
61046/MC	Brushed chrome	12W	100-240V		8	With ON/OFF Switch

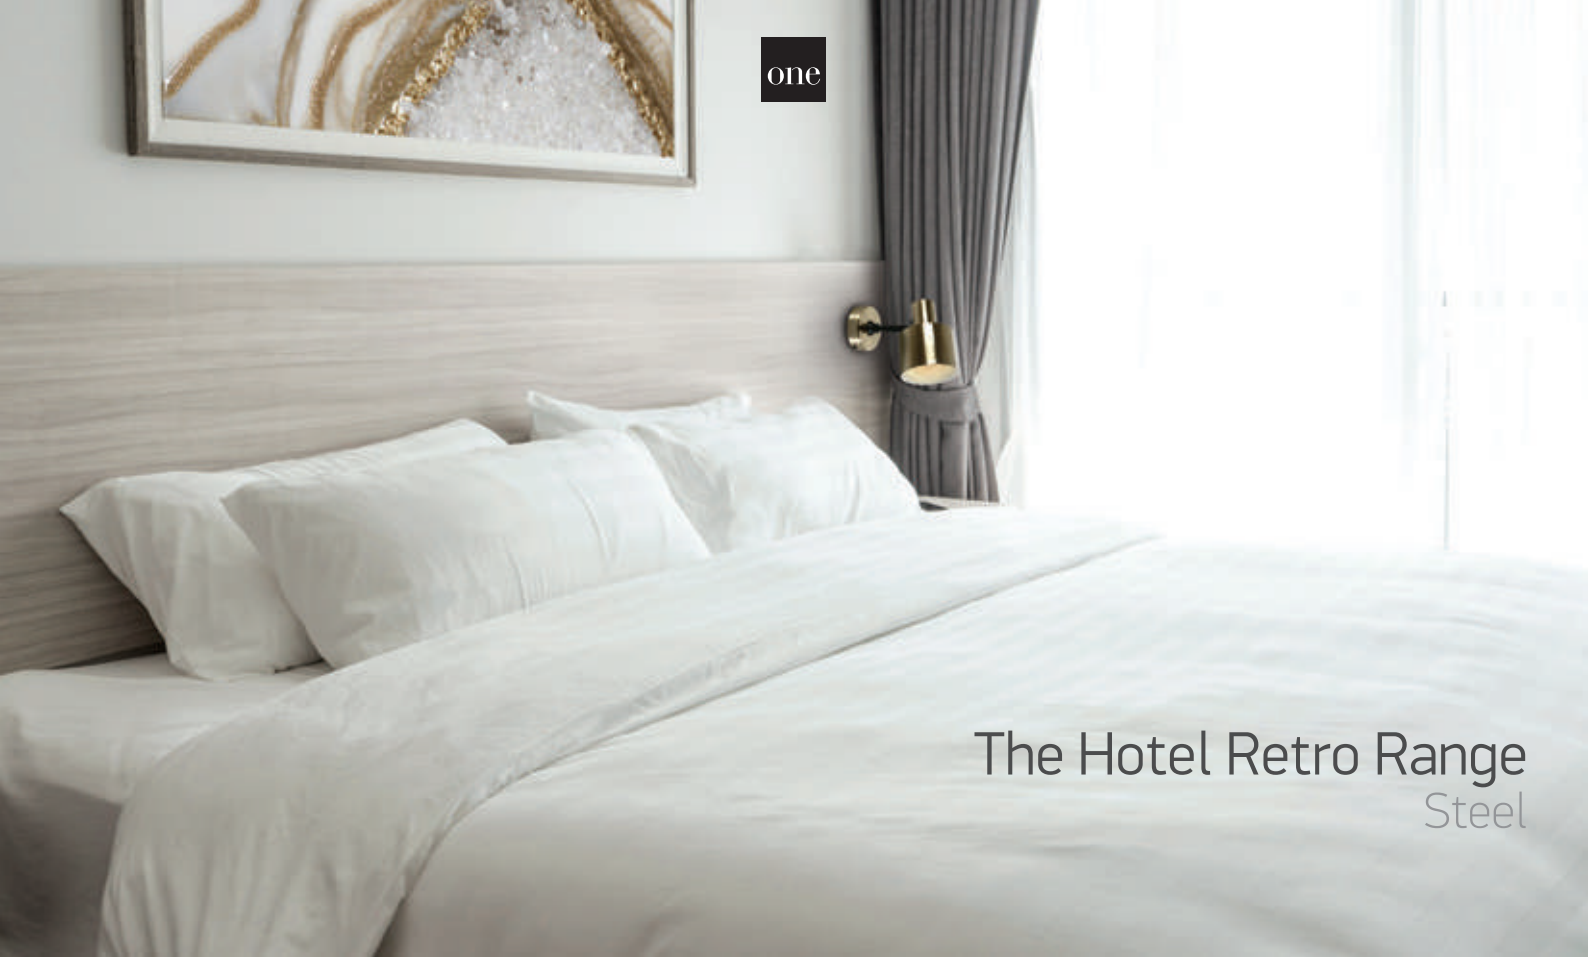

The Hotel Retro Range
Steel

60118/B

60118 | 10W | E27 | Steel

ADJUSTABLE 5 YEAR

IP20

Suitable for E27 LED lamp.



60118/BBS

60118 | 10W | E27 | Steel

ADJUSTABLE 5 YEAR

IP20

Suitable for E27 LED lamp.



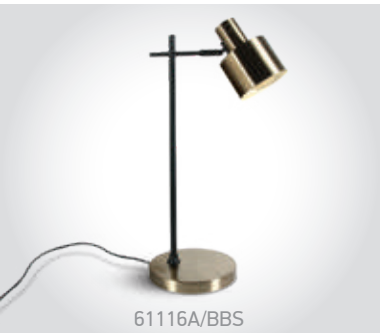

61116A/BBS

61116A | 10W | E27 | Steel

EU Schuko Plug.

ADJUSTABLE 5 YEAR

IP20

Suitable for E27 LED lamp.



Order Code	Colour	Watts	Input	Class			Notes
60118/B	Black	10W	100-240V		-	4	-
60118/BBS	Brushed brass	10W	100-240V		-	4	-
61116A/BBS	Brushed brass	10W	100-240V		150cm	4	With ON/OFF Switch

one

Reading Spots
Aluminium

65746/W/W

65746 | 3W | LED | Aluminium

With ON/OFF Switch.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20


65746/B/W

Complete with Black & Brass reflectors.



65746A/W/W

65746A | 3W | LED | USB | Aluminium

With switch, USB type A and USB type C.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20

65746A/B/W

Complete with Black & Brass reflectors.



65746R/W/W

65746R | 3W | LED | Wall recessed | Aluminium

With ON/OFF Switch.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · IP20

65746R/B/W

Complete with Black & Brass reflectors.



65746RA/B/W

65746RA | 3W | SMD | Wall recessed | Aluminium

With switch, USB type A and USB type C.

LED BUILT IN · 90 CRI · ADJUSTABLE · CE · 3 YEAR · new · IP20

Complete with Black & Brass reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
65746/W/W	White	Warm white	3000K	3W	150lm	36°	230V		-	-	24	Complete with 700mA driver
65746/B/W	Black	Warm white	3000K	3W	150lm	36°	230V		-	-	24	Complete with 700mA driver
65746A/W/W	White	Warm white	3000K	3W	150lm	36°	230V		-	-	24	Complete with 700mA driver
65746A/B/W	Black	Warm white	3000K	3W	150lm	36°	230V		-	-	24	Complete with 700mA driver
65746R/W/W	White	Warm white	3000K	3W	150lm	36°	230V		115x50mm	50mm	24	Complete with 700mA driver
65746R/B/W	Black	Warm white	3000K	3W	150lm	36°	230V		115x50mm	50mm	24	Complete with 700mA driver
65746RA/B/W	Black	Warm white	3000K	3W	150lm	36°	230V		170x65mm	50mm	24	Complete with 700mA driver

Reading Spots
Aluminium

65746B/W/W

65746B | 3W + 6W Backlight | LED | Aluminium

With 2 x ON/OFF Switches.

LED BUILT IN

90 CRI

ADJUSTABLE

CE

2 YEAR

IP20



Complete with Black, Brass & White reflectors.



65746B/B/W

65746B | 3W + 6W Backlight | LED | Aluminium

With 2 x ON/OFF Switches.

LED BUILT IN

90 CRI

ADJUSTABLE

CE

2 YEAR

IP20



Complete with Black, Brass & White reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65746B/W/W	White	Warm white	3000K	3W+6W	150lm+420lm	36°	230V		20	Complete with 700mA + 350mA drivers
65746B/B/W	Black	Warm white	3000K	3W+6W	150lm+420lm	36°	230V		20	Complete with 700mA + 350mA drivers

Reading Spots
Aluminium

65738/B/W

65738/W/W

65738/W/W

65738 | 3W | SMD | Aluminium

With ON/OFF Switch.

LED BUILT IN

90 CRI

ADJUSTABLE

2 YEAR

IP20

Complete with Black, Brass & White reflectors.



65738/B/W

65738 | 3W | SMD | Aluminium

With ON/OFF Switch.

LED BUILT IN

90 CRI

ADJUSTABLE

2 YEAR

IP20

Complete with Black, Brass & White reflectors.



Order Code	Colour	Reflector	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65738/W/W	White	Black	Warm white	3000K	3W	160lm	36°	230V		24	Complete with 700mA driver
65738/B/W	Black	Black	Warm white	3000K	3W	160lm	36°	230V		24	Complete with 700mA driver

Reading Spots
Aluminium

65738A/W/W

65738A | 3W | LED | Aluminium

With ON/OFF Switch.

LED BUILT IN

90 CRI

ADJUSTABLE

2 YEAR

IP20



65738A/B/W

65738A | 3W | LED | Aluminium

With ON/OFF Switch.

LED BUILT IN

90 CRI

ADJUSTABLE

2 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65738A/W/W	White	Warm white	3000K	3W	160lm	36°	230V		24	Complete with 700mA driver
65738A/B/W	Black	Warm white	3000K	3W	160lm	36°	230V		24	Complete with 700mA driver

Reading Spots

65146/W/W

65146 | 3W + 6W Sidelight | LED | Metal + aluminium

With 2 x ON/OFF Switches.

LED BUILT IN
90 CRI
ADJUSTABLE
CE
2 YEAR
IP20

65146/B/W


Complete with Black, Brass & White reflectors.



65146A/W/W

65146A | 3W + 6W Sidelight | LED | Metal + aluminium

With 2 x ON/OFF Switches.

LED BUILT IN
90 CRI
ADJUSTABLE
CE
2 YEAR
IP20

65146A/B/W


Complete with Black, Brass & White reflectors.



65147/W/W

65147 | 6W + 4W Uplight | SMD | Aluminium + acrylic

With 2X ON/OFF switches.

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR
IP20

65147/B/W



65147A/W/W

65147A | 6W + 4W Uplight | SMD | Aluminium + acrylic

With 2X ON/OFF switches.

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR
IP20

65147A/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65146/W/W	White	Warm white	3000K	3W+6W	150lm+420lm	230V		20	Complete with 700mA + 150mA drivers
65146/B/W	Black	Warm white	3000K	3W+6W	150lm+420lm	230V		20	Complete with 700mA + 150mA drivers
65146A/W/W	White	Warm white	3000K	3W+6W	150lm+420lm	230V		20	Complete with 700mA + 150mA drivers
65146A/B/W	Black	Warm white	3000K	3W+6W	150lm+420lm	230V		20	Complete with 700mA + 150mA drivers
65147/W/W	White	Warm white	3000K	6W+4W	500lm+340lm	230V		12	Complete with 2 x 300mA drivers
65147/B/W	Black	Warm white	3000K	6W+4W	500lm+340lm	230V		12	Complete with 2 x 300mA drivers
65147A/W/W	White	Warm white	3000K	6W+4W	500lm+340lm	230V		12	Complete with 2 x 300mA drivers
65147A/B/W	Black	Warm white	3000K	6W+4W	500lm+340lm	230V		12	Complete with 2 x 300mA drivers

Reading Spots

65144/W/W

65144 | 3W + 6W Backlight | SMD | Metal + aluminium

With 2 x ON/OFF Switches.

LED BUILT IN
90 CRI
ADJUSTABLE
CE
2 YEAR
IP20

65144/B/W


Complete with Black, Brass & White reflectors.



61132A/W/W

61132A | 3W + 6W Base light | SMD | Metal + aluminium

EU Plug / With 2 x ON/OFF Switches.

LED BUILT IN
90 CRI
ADJUSTABLE
CE
2 YEAR
IP20


61132A/B/W


Complete with Black, Brass & White reflectors.



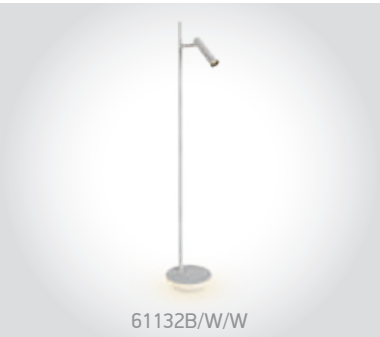
61132B/W/W

61132B | 3W + 8W Base light | SMD | Metal + aluminium

EU Plug / With 2 x ON/OFF Switches.

LED BUILT IN
90 CRI
ADJUSTABLE
CE
2 YEAR
IP20


61132B/B/W


Complete with Black, Brass & White reflectors.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65144/W/W	White	Warm white	3000K	3W+6W	150lm+420lm	230V		10	Complete with 700mA + 150mA drivers
65144/B/W	Black	Warm white	3000K	3W+6W	150lm+420lm	230V		10	Complete with 700mA + 150mA drivers
61132A/W/W	White	Warm white	3000K	3W+6W	150lm+420lm	230V		6	Complete with 700mA + 150mA drivers
61132A/B/W	Black	Warm white	3000K	3W+6W	150lm+420lm	230V		6	Complete with 700mA + 150mA drivers
61132B/W/W	White	Warm white	3000K	3W+8W	150lm+560lm	230V		1	Complete with 700mA + 350mA drivers
61132B/B/W	Black	Warm white	3000K	3W+8W	150lm+560lm	230V		1	Complete with 700mA + 350mA drivers

Hotel Reading Spots
Aluminium

65740A | 2x6W | SMD | Aluminium

LED BUILT IN

80 CRI

ADJUSTABLE

CE

2 YEAR

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
65740A/W/W	White	Warm white	3000K	2x6W	2x500lm	230V		12	Complete with 300mA driver

one

The Retro GU10 Spots
Aluminium

65105NA/W

65105NA/B

65105NA | 10W | MR16 | GU10 | Aluminium

With switch.

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

65105NA/W



65105NA/BBS

65105NA | 10W | MR16 | GU10 | Aluminium

With switch.

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

65105NA/MG



65105NBA/B

65105NBA | 10W | MR16 | GU10 | Aluminium

With switch.

ADJUSTABLE

5 YEAR

DARK LIGHT

IP20

65105NBA/W



Order Code	Colour	Reflector	Watts	Input	Class		Notes
65105NA/W	White	Black	10W	100-240V		12	-
65105NA/B	Black	Brass	10W	100-240V		12	-
65105NA/BBS	Brushed brass	Black	10W	100-240V		12	-
65105NA/MG	Metal grey	Black	10W	100-240V		12	-
65105NBA/W	White	Black	10W	100-240V		12	-
65105NBA/B	Black	Brass	10W	100-240V		12	-

Bathroom

Pages 569-578

17

Classic Mirror Light

38118N | 18W | SMD | Aluminium + glass

LED BUILT IN

80 CRI

CE

2 YEAR

IP44



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38118N/C/W	Chrome	Warm white	3000K	18W	1225lm	230V		6	Complete with 500mA driver

Classic Mirror Lights
CCT V

38118N/BBS/V

38118K/MC/V

38118K/B/V

38118K | 18W | SMD | Aluminium + glass

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

new

IP44

38118K/W/V



38118K/BBS/V

38118K | 18W | SMD | Aluminium + glass

LED BUILT IN

90 CRI

CCT V

CE

3 YEAR

new

IP44

38118K/MC/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38118K/W/V	White	CCT V	3000K-4000K-5000K	18W	1440lm	230V		6	Complete with 450mA driver
38118K/B/V	Black	CCT V	3000K-4000K-5000K	18W	1440lm	230V		6	Complete with 450mA driver
38118K/BBS/V	Brushed brass	CCT V	3000K-4000K-5000K	18W	1440lm	230V		6	Complete with 450mA driver
38118K/MC/C	Brushed chrome	Cool white	4000K	18W	1225lm	230V		6	Complete with 500mA driver
38118K/MC/V	Brushed chrome	CCT V	3000K-4000K-5000K	18W	1440lm	230V		6	Complete with 450mA driver

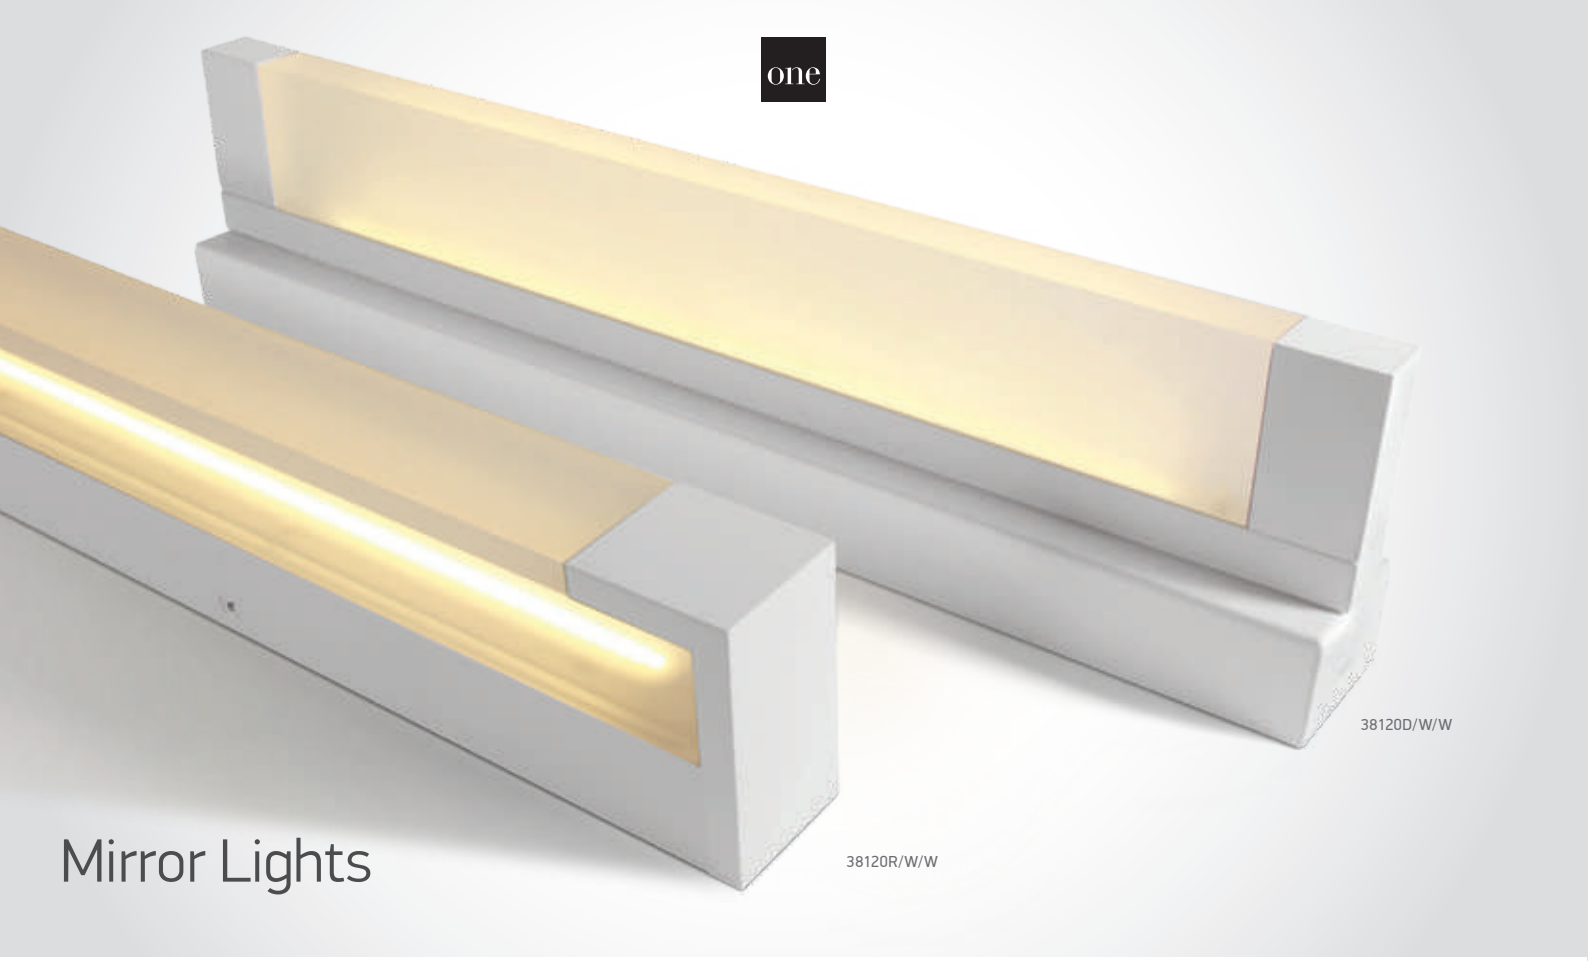

Mirror Lights

38114R/W/W

38114R | 14W | SMD | Aluminium + acrylic

LED BUILT IN
80 CRI
CE
2 YEAR
IP44





38120R/W/W

38120R | 20W | SMD | Aluminium + acrylic

LED BUILT IN
80 CRI
CE
2 YEAR
IP44



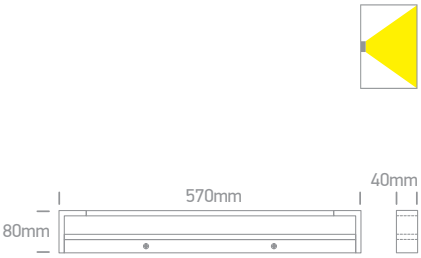

38120D/W/W

38120D | 20W | SMD | Aluminium + acrylic

LED BUILT IN
80 CRI
CE
2 YEAR
IP44



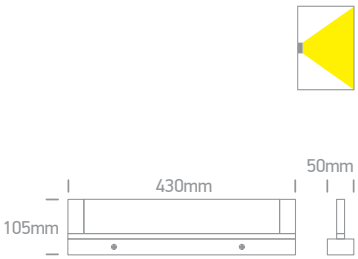

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38114R/W/W	White	Warm white	3000K	14W	1000lm	230V	⏚	10	Complete with 600mA driver
38120R/W/W	White	Warm white	3000K	20W	1400lm	230V	⏚	6	Complete with 600mA driver
38120D/W/W	White	Warm white	3000K	20W	1600lm	230V	⏚	6	Complete with 600mA driver

Mirror Lights
Adjustable

38112C | 12W | SMD | Aluminium + acrylic

38112C/W/W

LED BUILT IN
80 CRI
ADJUSTABLE
CE
2 YEAR
IP44

38112C/B/W



38112C | 12W | SMD | Aluminium + acrylic

38112C/W/V

LED BUILT IN
90 CRI
CCT V
ADJUSTABLE
new
CE
2 YEAR
IP44

new
38112C/B/V



38118C | 18W | SMD | Aluminium + acrylic

38118C/W/V

LED BUILT IN
90 CRI
CCT V
ADJUSTABLE
new
CE
2 YEAR
IP44

new
38118C/B/V

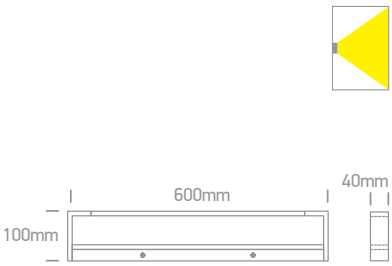

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38112C/W/W	White	Warm white	3000K	12W	1000lm	230V		10	Complete with 600mA driver
38112C/B/W	Black	Warm white	3000K	12W	1000lm	230V		10	Complete with 600mA driver
38112C/W/V	White	CCT V	3000K-3500K-4000K	12W	1000lm	230V		10	Complete with 300mA driver
38112C/B/V	Black	CCT V	3000K-3500K-4000K	12W	1000lm	230V		10	Complete with 300mA driver
38118C/W/V	White	CCT V	3000K-3500K-4000K	18W	1500lm	230V		6	Complete with 600mA driver
38118C/B/V	Black	CCT V	3000K-3500K-4000K	18W	1500lm	230V		6	Complete with 600mA driver

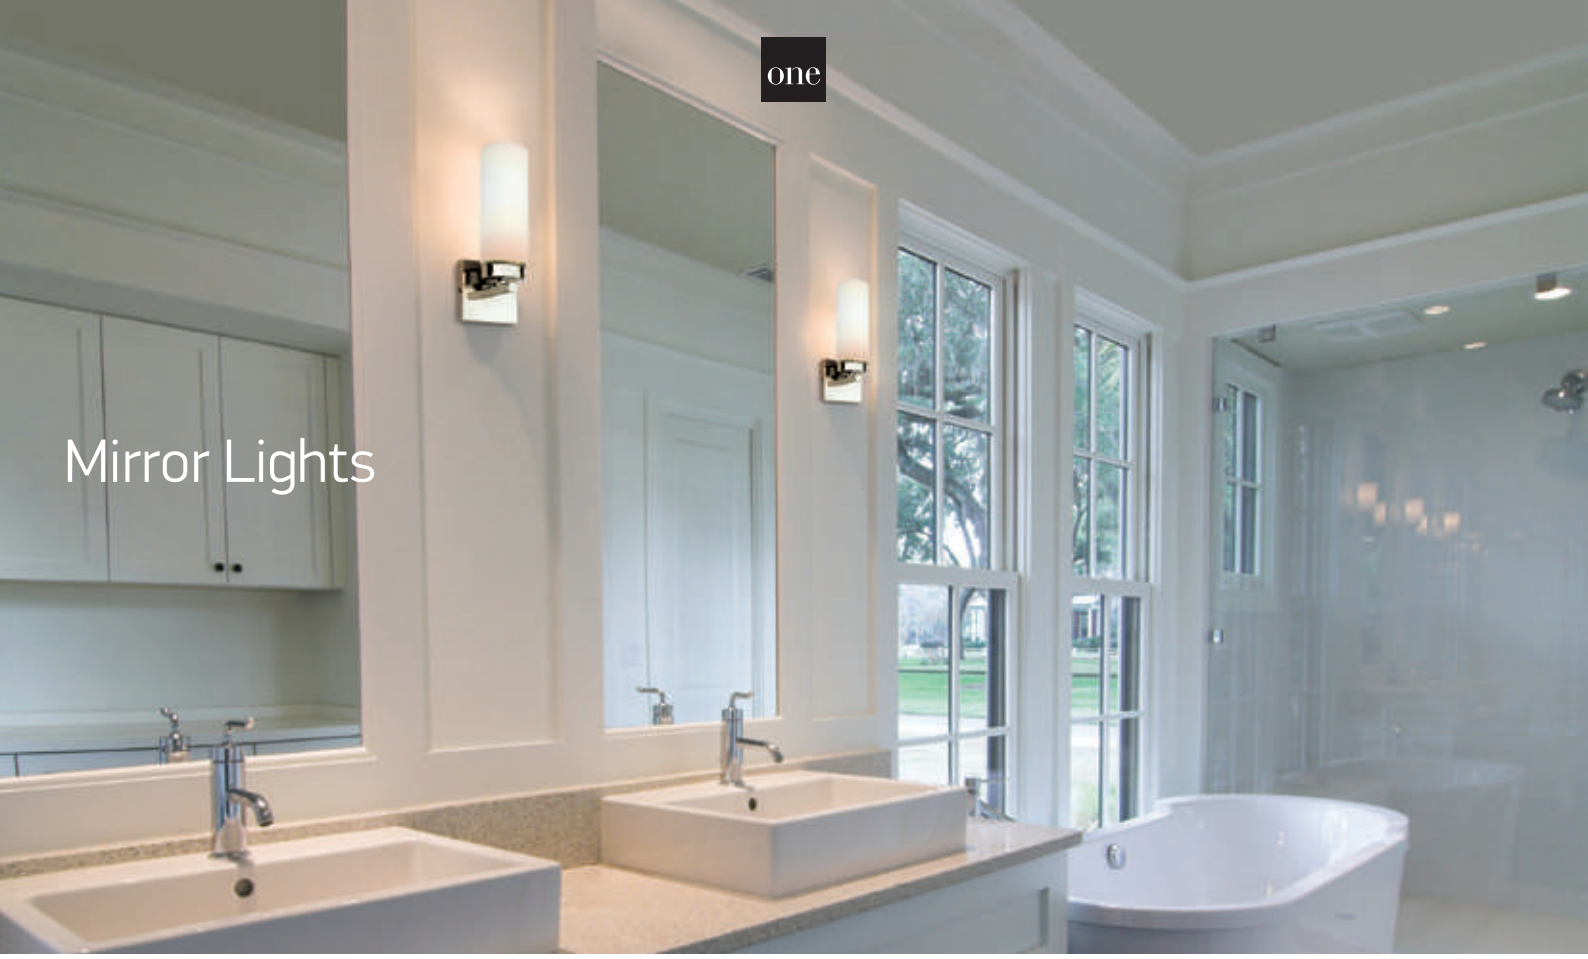

Mirror Lights

38110BD

38110BD | 10W | SMD | PC

LED BUILT IN
80 CRI
DIMMABLE
CCT V
IP20
offer
3 YEAR

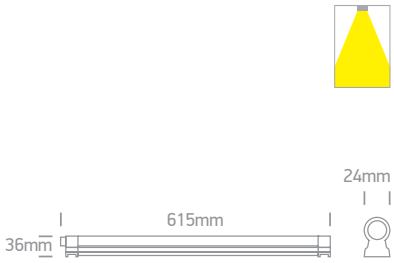

60106/C

60106 | 40W | E14 | Metal + glass

3 YEAR
IP44



60106A/C

60106A | 2x40W | E14 | Metal + glass

3 YEAR
IP44



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38110BD	White	CCT V	2700K - 6500K	10W	700lm	230V		150cm	20	Complete with dimmable driver
60106/C	Chrome	-	-	40W	-	100-240V		-	10	-
60106A/C	Chrome	-	-	2x40W	-	100-240V		-	10	-

The Mirror LED Range

38114M | 15W | SMD | Aluminium + PC

38114M/W

LED BUILT IN
80 CRI
2 YEAR
IP44



38114EL | 23W | SMD | Aluminium + acrylic

38114EL/V

new
IP44

LED BUILT IN
90 CRI
CCT V
3 YEAR



38115C | 15W | SMD | Aluminium + PC

38115C/V

new
IP44

LED BUILT IN
90 CRI
CCT V
3 YEAR

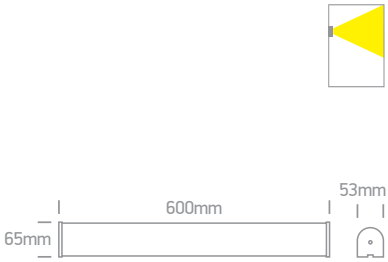

38116P | 16W | SMD | Aluminium + PC

38116P/W

LED BUILT IN
80 CRI
2 YEAR
IP44



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38114M/C	Chrome	Cool white	4000K	15W	1200lm	230V		12	Complete with 130mA driver
38114M/W	Chrome	Warm white	3000K	15W	1200lm	230V		12	Complete with 130mA driver
38114M/EW	Chrome	Extra warm white	2700K	15W	1200lm	230V		12	Complete with 130mA driver
38114EL/V	Chrome	CCT V	3000K-4000K-5000K	23W	1650lm	230V		8	Complete with 700mA driver
38115C/V	Chrome	CCT V	3000K-4000K	15W	1300lm	230V		10	Complete with 350mA driver
38116P/W	Chrome	Warm white	3000K	16W	1280lm	230V		12	Complete with 120mA driver

Slim Mirror Lights

38108N | 8W | SMD | Aluminium + PC

38108N/B/V

new
IP44

LED BUILT IN
90 CRI
CCT V
CE
2 YEAR

new
38108N/W/V



38114N | 14W | SMD | Aluminium + PC

38114N/B/V

new
IP44

LED BUILT IN
90 CRI
CCT V
CE
2 YEAR

new
38114N/W/V

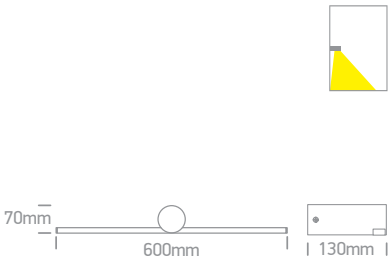

38114T | 14W | SMD | Aluminium + acrylic

38114T/B/V

new
IP44

LED BUILT IN
90 CRI
CCT V
CE
2 YEAR

new
38114T/W/V

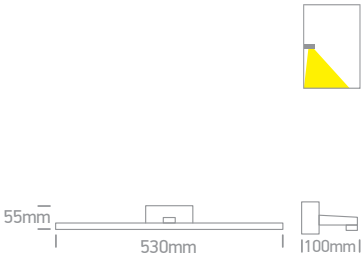

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38108N/W/V	White	CCT V	3000K-3500K-4000K	8W	700lm	230V		12	Complete with 180mA driver
38108N/B/V	Black	CCT V	3000K-3500K-4000K	8W	700lm	230V		12	Complete with 180mA driver
38114N/W/V	White	CCT V	3000K-3500K-4000K	14W	1200lm	230V		6	Complete with 350mA driver
38114N/B/V	Black	CCT V	3000K-3500K-4000K	14W	1200lm	230V		6	Complete with 350mA driver
38114T/W/V	White	CCT V	3000K-3500K-4000K	14W	1200lm	230V		6	Complete with 300mA driver
38114T/B/V	Black	CCT V	3000K-3500K-4000K	14W	1200lm	230V		6	Complete with 300mA driver

The Mirrors
CCT V

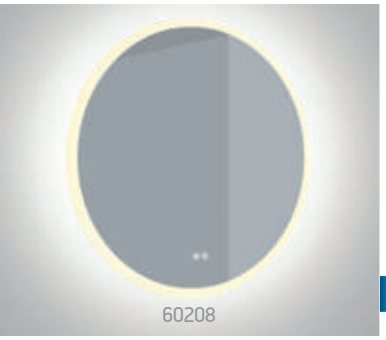

60208 | 20W LED / 16W DEFOG | Dimmable | Glass + aluminium frame

LED BUILT IN
80 CRI
DIMMABLE
CCT V
CE
3 YEAR
IP44

ON/OFF Dimming
CCT Variable Defog

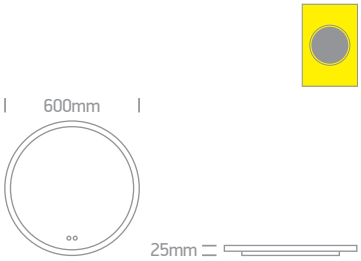

60208A | 20W LED / 16W DEFOG | Dimmable | Glass + aluminium frame

LED BUILT IN
80 CRI
DIMMABLE
CCT V
CE
3 YEAR
IP44

ON/OFF Dimming
CCT Variable Defog

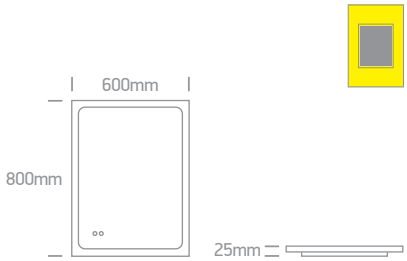

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
60208	CCT V	3000K - 6500K	20W LED / 16W DEFOG	1600lm	230V		1	Complete with dimmable driver
60208A	CCT V	3000K - 6500K	20W LED / 16W DEFOG	1600lm	230V		1	Complete with dimmable driver

The Mirrors
Black CCT V

60208C/B/V

60208C | 20W LED / 16W DEFOG | Dimmable | Glass + aluminium frame

LED BUILT IN
80 CRI
DIMMABLE
CCT V
new
IP44
CE 3 YEAR

ON/OFF Dimming
CCT Variable Defog

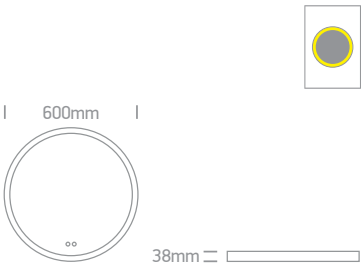

60208D/B/V

60208D | 20W LED / 16W DEFOG | Dimmable | Glass + aluminium frame

LED BUILT IN
80 CRI
DIMMABLE
CCT V
new
IP44
CE 3 YEAR

ON/OFF Dimming
CCT Variable Defog

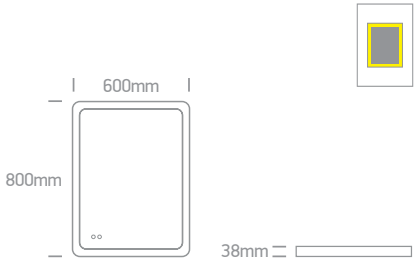

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
60208C/B/V	Black	CCT V	3000K-6500K	20W LED/16W DEFOG	1600lm	230V		1	Complete with dimmable driver
60208D/B/V	Black	CCT V	3000K-6500K	20W LED/16W DEFOG	1600lm	230V		1	Complete with dimmable driver

The Mirrors
White CCT V

60208C/W/V

60208C | 20W LED / 16W DEFOG | Dimmable | Glass + aluminium frame

LED BUILT IN
80 CRI
DIMMABLE
CCT V
new
IP44
CE 3 YEAR

ON/OFF Dimming
CCT Variable Defog

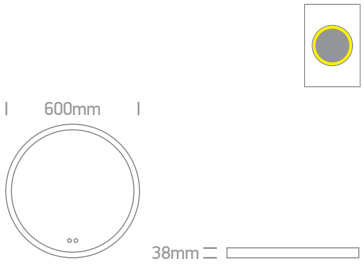

60208D/W/V

60208D | 20W LED / 16W DEFOG | Dimmable | Glass + aluminium frame

LED BUILT IN
80 CRI
DIMMABLE
CCT V
new
IP44
CE 3 YEAR

ON/OFF Dimming
CCT Variable Defog

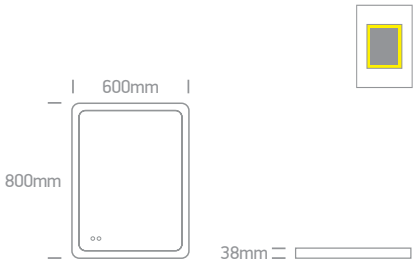

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
60208C/W/V	White	CCT V	3000K-6500K	20W LED/16W DEFOG	1600lm	230V		1	Complete with dimmable driver
60208D/W/V	White	CCT V	3000K-6500K	20W LED/16W DEFOG	1600lm	230V		1	Complete with dimmable driver

Wall Recessed & Inground

Pages 581-608

18

68006N/W + 050176/G

68007/W/W

Indoor Square Wall Recessed

68007/W/W

68007 | 1,5W | LED | Plastic

Supplied with box for concrete installation.

LED BUILT IN

CE 2 YEAR

DARK LIGHT

IP20



68007/B/W

68007 | 1,5W | LED | Plastic

Supplied with box for concrete installation.

LED BUILT IN

CE 2 YEAR

DARK LIGHT

IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
68007/W/W	White	Warm white	3000K	1,5W	100lm	100-240V		86x86mm	40mm	50	Complete with driver
68007/B/W	Black	Warm white	3000K	1,5W	70lm	100-240V		86x86mm	40mm	50	Complete with driver

Dark Light Wall Recessed

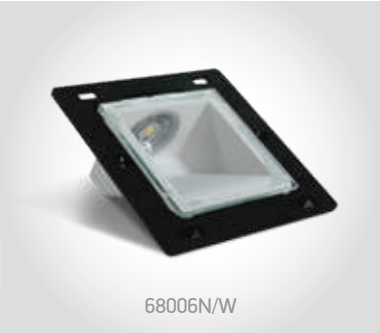

68006N/W

68006N | 1W | SMD | Aluminium

Cover plate must be ordered separately.

LED BUILT IN

90 CRI

CE

3 YEAR

DARK LIGHT

IP44



050176/W White

050176/B Black

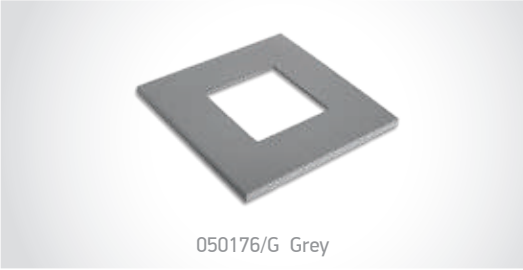

050176/G Grey

68006N/BOX | Suitable for 68006N & 68000B | Plastic

Gypsum installation.

CE

5

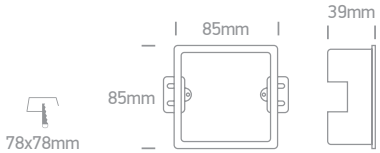

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
68006N/W	White	Warm white	3000K	1W	80lm	230V		12cm	70x70mm	40mm	20	Complete with 350mA driver

Dark Light Step Series
Aluminium

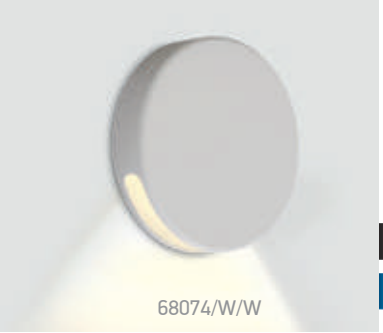
68074/W/W

68074 | 2W | COB | Aluminium

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP65
IK08
CE
2 YEAR

68074/B/W



68074A/W/W

68074A | 2W | COB | Aluminium

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP65
IK08
CE
2 YEAR

68074A/B/W



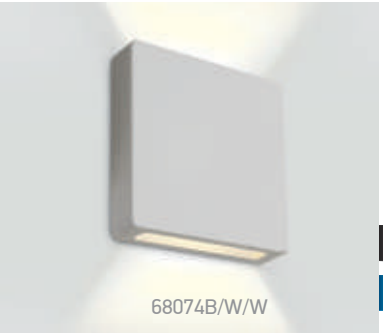
68074B/W/W

68074B | 2W | COB | Aluminium

LED BUILT IN
90 CRI
DIMMABLE
QUICK FIX
DARK LIGHT
IP65
IK08
CE
2 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
68074/W/W	White	Warm white	3000K	2W	100lm	700mA	III	200cm	35mm	55mm	100	Requires 700mA driver
68074/B/W	Black	Warm white	3000K	2W	100lm	700mA	III	200cm	35mm	55mm	100	Requires 700mA driver
68074A/W/W	White	Warm white	3000K	2W	100lm	700mA	III	200cm	35mm	55mm	100	Requires 700mA driver
68074A/B/W	Black	Warm white	3000K	2W	100lm	700mA	III	200cm	35mm	55mm	100	Requires 700mA driver
68074B/W/W	White	Warm white	3000K	2W	110lm	700mA	III	200cm	35mm	55mm	100	Requires 700mA driver

one

Indoor/Outdoor Decorative Wall Recessed

Aluminium

68070/W/W

68070 | 1W | COB | Aluminium

Driver can not pass through the cutout hole. / Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · IK08 · CE · 2 YEAR · IP65


68070/B/W


68070/AL/W



68004/W/W

68004 | 3W | COB | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 2 YEAR · DARK LIGHT · IP54



68004A/W/W

68004A | 1W | COB | Aluminium

Driver can not pass through the cutout hole. / Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · QUICK FIX · CE · 2 YEAR · DARK LIGHT · IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Concrete installation		Gypsum installation			Notes
68070/W/W	White	Warm white	3000K	1W	50lm	36°	350mA	III	200cm	35mm	60mm	30mm	60mm	100	Requires 350mA driver
68070/B/W	Black	Warm white	3000K	1W	50lm	36°	350mA	III	200cm	35mm	60mm	30mm	60mm	100	Requires 350mA driver
68070/AL/W	Aluminium	Warm white	3000K	1W	50lm	36°	350mA	III	200cm	35mm	60mm	30mm	60mm	100	Requires 350mA driver
68004/W/W	White	Warm white	3000K	3W	120lm	24°	350mA	III	200cm	52mm	110mm	49mm	70mm	36	Requires 350mA driver
68004A/W/W	White	Warm white	3000K	1W	40lm	60°	350mA	III	200cm	35mm	50mm	33mm	30mm	60	Requires 350mA driver

Indoor/Outdoor Dark Light Wall Recessed

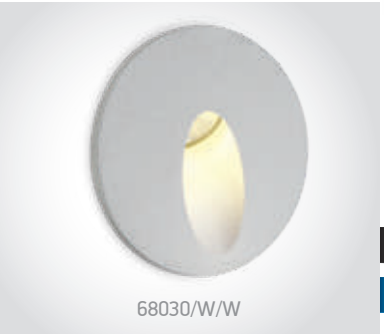
68030/W/W

68030 | 3W | LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN

CE 2 YEAR

DARK LIGHT

IP54


68030/B/W


68030/AL/W



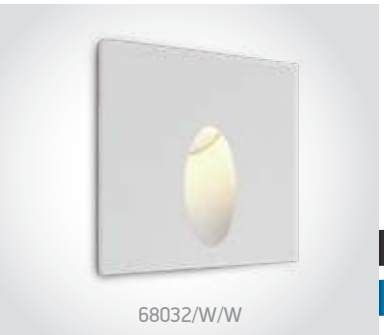
68032/W/W

68032 | 3W | LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN

CE 2 YEAR

DARK LIGHT

IP54


68032/B/W


68032/G/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Concrete installation	Gypsum installation		Notes
68030/W/W	White	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68030/B/W	Black	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68030/AL/W	Aluminium	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68032/W/W	White	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68032/B/W	Black	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68032/G/W	Grey	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver

Indoor/Outdoor Dark Light Wall Recessed

68000B | 3W | SMD | British standard box | Aluminium

Cover plate must be ordered separately.

68000B/W/V

new
DARK LIGHT
IP65
80 CRI
2 YEAR
LED BUILT IN
CCT V
CE

68000B/B/V

68000B/W/V + 050000B3/B



050000B1/W White
050000B1/B Black

050000B2/W White
050000B2/B Black

050000B3/W White
050000B3/B Black

050000B4/W White
050000B4/B Black

050000B5/W White
050000B5/B Black

68000E | 3W | SMD | European round box | Aluminium

Cover plate must be ordered separately.

68000E/W/V

new
DARK LIGHT
IP65
80 CRI
2 YEAR
LED BUILT IN
CCT V
CE

68000E/B/V

68000E/W/V + 050000E2/B



050000E1/W White
050000E1/B Black

050000E2/W White
050000E2/B Black

050000E3/W White
050000E3/B Black

050000E4/W White
050000E4/B Black

050000E5/W White
050000E5/B Black

050000E6/W White
050000E6/B Black

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
68000B/W/V	White	CCT V	2500K-2800K-3000K-3500K-4000K	3W	180lm	230V		20cm	20	Complete with 230mA driver
68000B/B/V	Black	CCT V	2500K-2800K-3000K-3500K-4000K	3W	180lm	230V		20cm	20	Complete with 230mA driver
68000E/W/V	White	CCT V	2500K-2800K-3000K-3500K-4000K	3W	180lm	230V		20cm	20	Complete with 230mA driver
68000E/B/V	Black	CCT V	2500K-2800K-3000K-3500K-4000K	3W	180lm	230V		20cm	20	Complete with 230mA driver

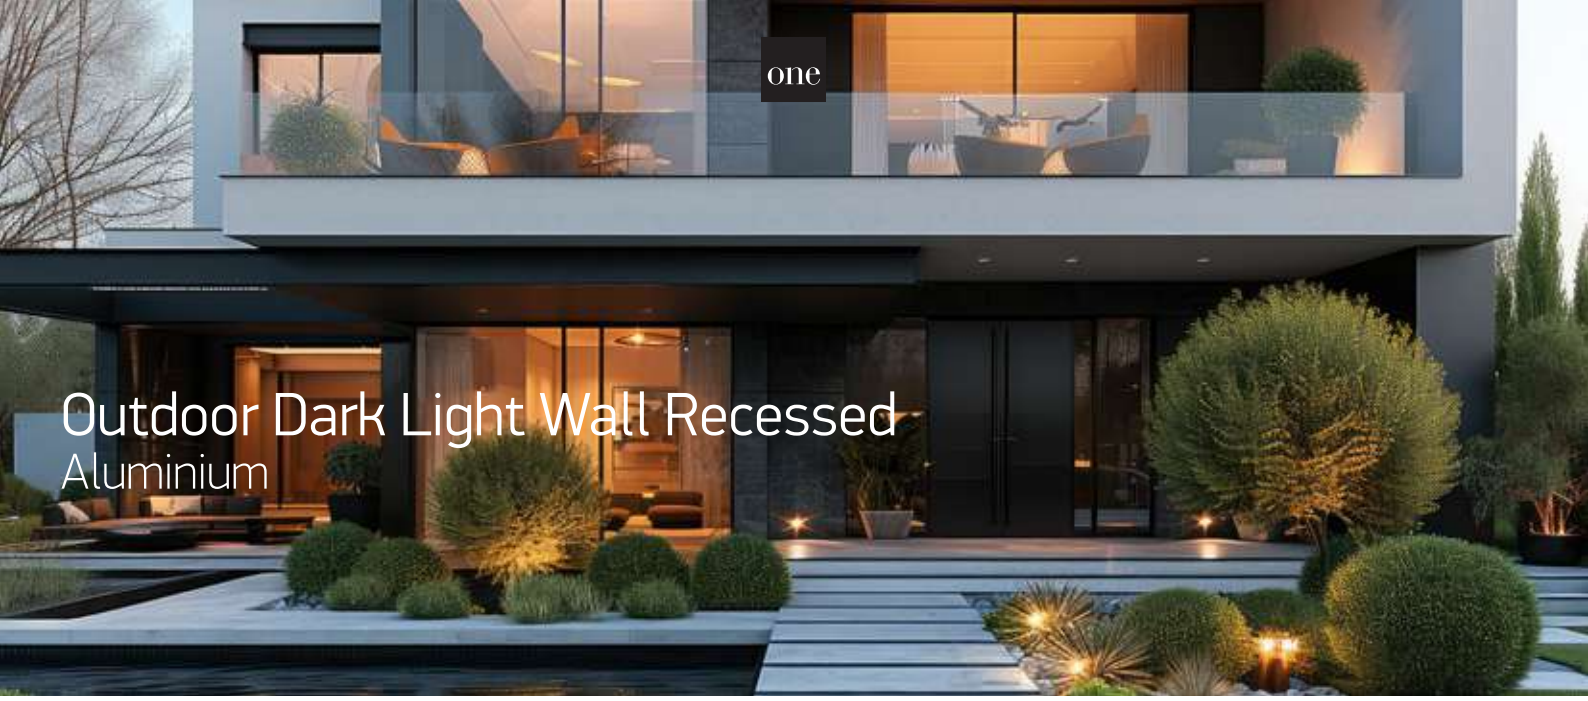

Outdoor Dark Light Wall Recessed
Aluminium

68068/AN/W

68068 | 3W | SMD | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP65

68068/W/W

68068/G/W



68068A/B/W

68068A | 4W | SMD | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP65

68068A/W/W

68068A/G/W



68068C/AN/W

68068C | 7W | SMD | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · CE · 2 YEAR · DARK LIGHT · IP65

68068C/W/W

68068C/G/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation			Notes
68068/W/W	White	Warm white	3000K	3W	300lm	100-240V		110mm	100mm	60mm	24	Complete with 350mA driver
68068/AN/W	Anthracite	Warm white	3000K	3W	300lm	100-240V		110mm	100mm	60mm	24	Complete with 350mA driver
68068/G/W	Grey	Warm white	3000K	3W	300lm	100-240V		110mm	100mm	60mm	24	Complete with 350mA driver
68068A/W/W	White	Warm white	3000K	4W	300lm	100-240V		110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068A/B/W	Black	Warm white	3000K	4W	300lm	100-240V		110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068A/G/W	Grey	Warm white	3000K	4W	300lm	100-240V		110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068C/W/W	White	Warm white	3000K	7W	550lm	100-240V		220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/AN/W	Anthracite	Warm white	3000K	7W	550lm	100-240V		220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/G/W	Grey	Warm white	3000K	7W	550lm	100-240V		220x70mm	210x60mm	80mm	12	Complete with 350mA driver

one

Outdoor Dark Light Wall Recessed

CCT V

68068/AN/V

68068 | 3W | SMD | Aluminium

Supplied with box for concrete installation.

new | DARK LIGHT | IP65 | 80 CRI | CCT V | 2 YEAR | LED BUILT IN | CE



68068/W/V



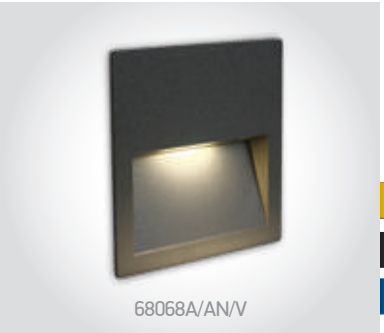
68068A/AN/V

68068A | 3W | SMD | Aluminium

Supplied with box for concrete installation.

new | DARK LIGHT | IP65 | 80 CRI | CCT V | 2 YEAR | LED BUILT IN | CE

68068A/W/V



68068A/B/V



68068B/AN/V

68068B | 6W | SMD | Aluminium

Supplied with box for concrete installation.

new | DARK LIGHT | IP65 | 80 CRI | CCT V | 2 YEAR | LED BUILT IN | CE



68068B/W/V



68068B/B/V



68068B/G/V



68068C/AN/V

68068C | 6W | SMD | Aluminium

Supplied with box for concrete installation.

new | DARK LIGHT | IP65 | 80 CRI | CCT V | 2 YEAR | LED BUILT IN | CE



68068C/B/V



68068C/G/V



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation			Notes
68068/W/V	White	CCT V	2200K-2700K-3000K-4000K	3W	300lm	230V		110mm	100mm	60mm	24	Complete with 350mA driver
68068/AN/V	Anthracite	CCT V	2200K-2700K-3000K-4000K	3W	300lm	230V		110mm	100mm	60mm	24	Complete with 350mA driver
68068A/W/V	White	CCT V	2200K-2700K-3000K-4000K	3W	300lm	230V		110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068A/AN/V	Anthracite	CCT V	2200K-2700K-3000K-4000K	3W	300lm	230V		110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068A/B/V	Black	CCT V	2200K-2700K-3000K-4000K	3W	300lm	230V		110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068B/W/V	White	CCT V	2200K-2700K-3000K-4000K	6W	400lm	230V		145x70mm	130x60mm	80mm	12	Complete with 300mA driver
68068B/AN/V	Anthracite	CCT V	2200K-2700K-3000K-4000K	6W	400lm	230V		145x70mm	130x60mm	80mm	12	Complete with 300mA driver
68068B/B/V	Black	CCT V	2200K-2700K-3000K-4000K	6W	400lm	230V		145x70mm	130x60mm	80mm	12	Complete with 300mA driver
68068B/G/V	Grey	CCT V	2200K-2700K-3000K-4000K	6W	400lm	230V		145x70mm	130x60mm	80mm	12	Complete with 300mA driver
68068C/AN/V	Anthracite	CCT V	2200K-2700K-3000K-4000K	6W	550lm	230V		220x70mm	210x60mm	80mm	12	Complete with 300mA driver
68068C/B/V	Black	CCT V	2200K-2700K-3000K-4000K	6W	550lm	230V		220x70mm	210x60mm	80mm	12	Complete with 300mA driver
68068C/G/V	Grey	CCT V	2200K-2700K-3000K-4000K	6W	550lm	230V		220x70mm	210x60mm	80mm	12	Complete with 300mA driver

one

Wall Recessed Decorative

68072A | 5W | SMD | Stainless steel 316 + tempered glass

68072A/W

LED BUILT IN
80 CRI
IK 08
CE
2 YEAR
IP65

Supplied with box for concrete installation.

68072C | 10W | SMD | Stainless steel 316 + tempered glass

68072C/W

LED BUILT IN
80 CRI
IK 08
CE
2 YEAR
IP65

Supplied with box for concrete installation.

68076 | 3W | SMD | Glass + metal

Supplied with box for concrete installation.

68076/W/W

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP65

68076/B/W

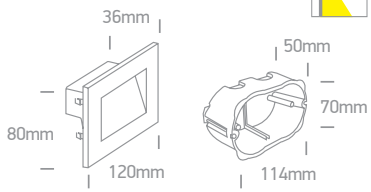

68076A | 4W | SMD | Glass + metal

Supplied with box for concrete installation.

68076A/W/W

LED BUILT IN
80 CRI
CE
2 YEAR
DARK LIGHT
IP65

68076A/B/W

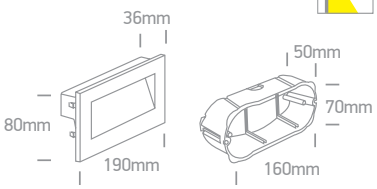

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation			Notes
68072A/W	Stainless steel	Warm white	3000K	5W	100lm	230V		112x42mm	98x35mm	75mm	24	Complete with 350mA driver
68072C/W	Stainless steel	Warm white	3000K	10W	200lm	230V		253x55mm	240x45mm	75mm	12	Complete with 350mA driver
68076/W/W	White	Warm white	3000K	3W	200lm	230V		115x70mm	2x68mm	55mm	12	AC LED
68076/B/W	Black	Warm white	3000K	3W	200lm	230V		115x70mm	2x68mm	55mm	12	AC LED
68076A/W/W	White	Warm white	3000K	4W	270lm	230V		160x70mm	3x68mm	55mm	12	AC LED
68076A/B/W	Black	Warm white	3000K	4W	270lm	230V		160x70mm	3x68mm	55mm	12	AC LED

Outdoor Dark Light Wall Recessed
Aluminium

68062/W/W

68062 | 3,6W | LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN

80 CRI

CE 2 YEAR

DARK LIGHT

IP65

68062/AN/W



68064/W/W

68064 | 3,6W | LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN

80 CRI

CE 2 YEAR

DARK LIGHT

IP65

68064/AN/W

68064/G/W



68066/W/W

68066 | 8,5W | SMD | Aluminium

Supplied with box for concrete installation.

LED BUILT IN

80 CRI

CE 2 YEAR

DARK LIGHT

IP65

68066/AN/W

68066/G/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Concrete installation	Gypsum installation			Notes
68062/W/W	White	Warm white	3000K	3,6W	100lm	53°	100-240V		62x97mm	60x95mm	65mm	24	Complete with 350mA driver
68062/AN/W	Anthracite	Warm white	3000K	3,6W	100lm	53°	100-240V		62x97mm	60x95mm	65mm	24	Complete with 350mA driver
68064/W/W	White	Warm white	3000K	3,6W	85lm	44°	100-240V		97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68064/AN/W	Anthracite	Warm white	3000K	3,6W	85lm	44°	100-240V		97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68064/G/W	Grey	Warm white	3000K	3,6W	85lm	44°	100-240V		97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68066/W/W	White	Warm white	3000K	8,5W	160lm	44°	100-240V		238x74mm	238x74mm	80mm	12	Complete with 500mA driver
68066/AN/W	Anthracite	Warm white	3000K	8,5W	160lm	44°	100-240V		238x74mm	238x74mm	80mm	12	Complete with 500mA driver
68066/G/W	Grey	Warm white	3000K	8,5W	160lm	44°	100-240V		238x74mm	238x74mm	80mm	12	Complete with 500mA driver

one

69042B/AL/W

69044/AL/W

The Inground Mini Series

Natural aluminium

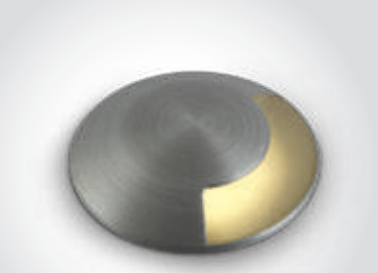

69042A/AL/W

69042A | 1W | SMD | Natural aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · IK08 · WALK OVER · CE · 2 YEAR · IP67

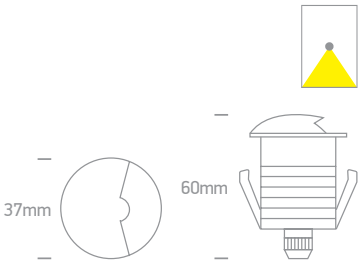

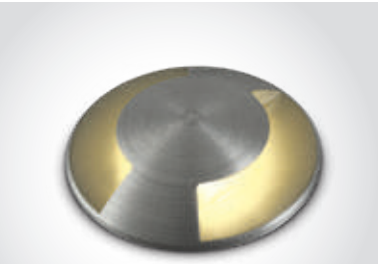

69042B/AL/W

69042B | 1W | SMD | Natural aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · IK08 · WALK OVER · CE · 2 YEAR · IP67

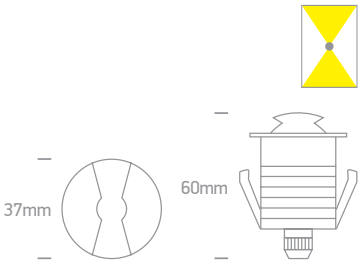

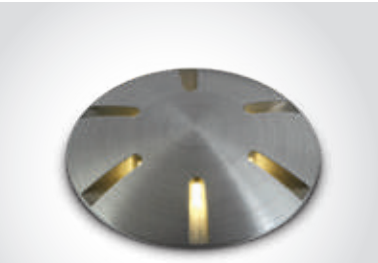

69044/AL/W

69044 | 1W | LED | Natural aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · IK08 · WALK OVER · CE · 2 YEAR · IP67

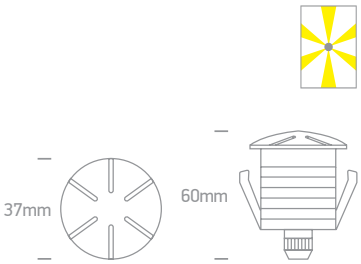

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Decking	Concrete	Decking	Concrete		Notes
69042A/AL/W	Aluminium	Warm white	3000K	1W	30lm	350mA		200cm	30mm	35mm	80mm	95+300mm drainage	50	Requires 350mA driver
69042B/AL/W	Aluminium	Warm white	3000K	1W	50lm	350mA		200cm	30mm	35mm	80mm	95+300mm drainage	50	Requires 350mA driver
69044/AL/W	Aluminium	Warm white	3000K	1W	30lm	350mA		200cm	30mm	35mm	80mm	95+300mm drainage	50	Requires 350mA driver

The Inground Midi Series
Natural aluminium

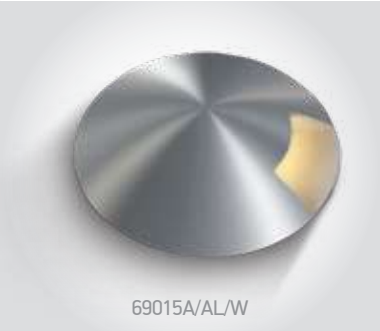

69015A | 3W | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · IK08 · WALK OVER · CE · 2 YEAR · IP67



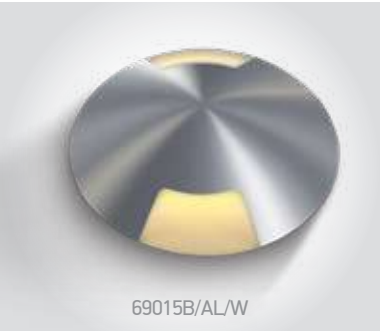

69015B | 3W | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · IK08 · WALK OVER · CE · 2 YEAR · IP67



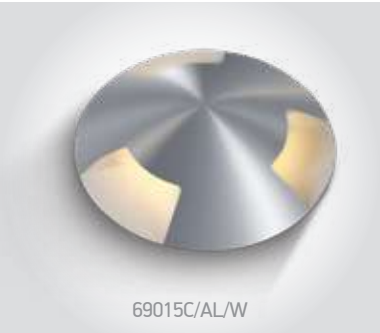

69015C | 3W | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · IK08 · WALK OVER · CE · 2 YEAR · IP67



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69015A/AL/W	Aluminium	Warm white	3000K	3W	30lm	24V DC	III	200cm	52mm	90+300mm drainage	32	Requires 24V DC driver
69015B/AL/W	Aluminium	Warm white	3000K	3W	60lm	24V DC	III	200cm	52mm	90+300mm drainage	32	Requires 24V DC driver
69015C/AL/W	Aluminium	Warm white	3000K	3W	80lm	24V DC	III	200cm	52mm	90+300mm drainage	32	Requires 24V DC driver

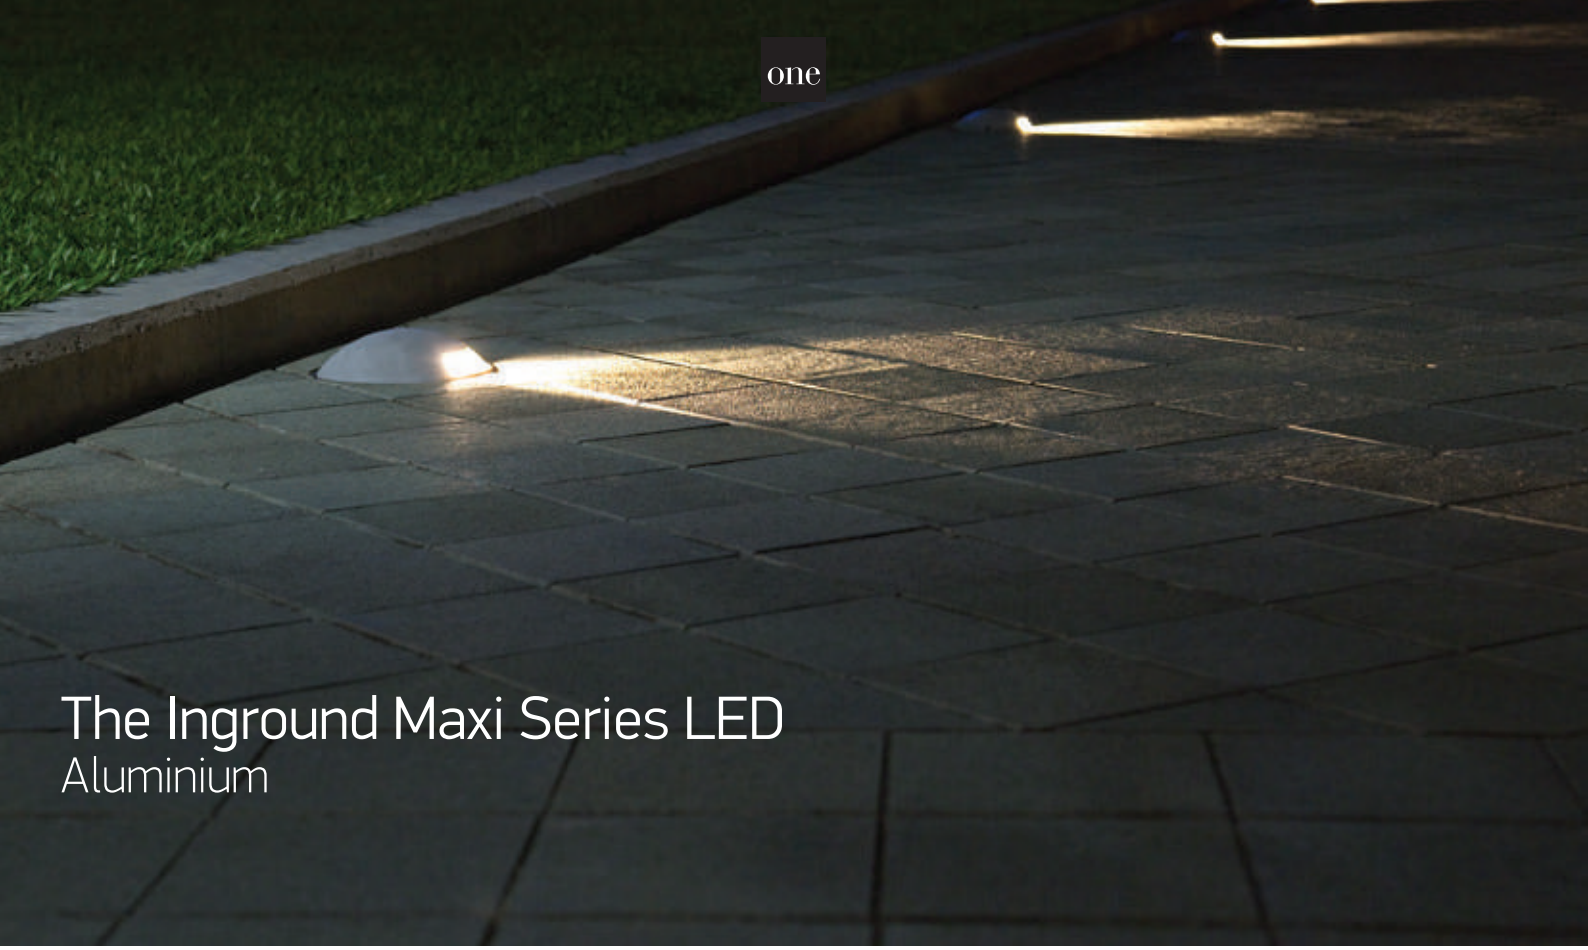

The Inground Maxi Series LED
Aluminium

69016/W

69016 | 3W | LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · IK 08 · WALK OVER · CE · 2 YEAR · IP67



69016A/W

69016A | 3W | LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · IK 08 · WALK OVER · CE · 2 YEAR · IP67



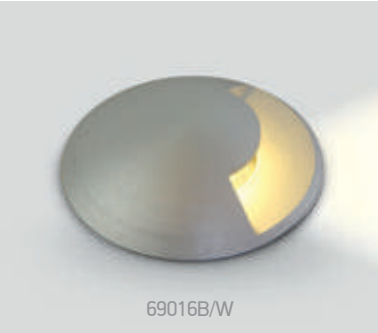
69016B/W

69016B | 3W | LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · IK 08 · WALK OVER · CE · 2 YEAR · IP67



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69016/W	Aluminium	Warm white	3000K	3W	120lm	100-240V		200cm	77mm	130+300mm drainage	18	Complete with 350mA driver
69016A/W	Aluminium	Warm white	3000K	3W	150lm	100-240V		200cm	77mm	130+300mm drainage	18	Complete with 350mA driver
69016B/W	Aluminium	Warm white	3000K	3W	100lm	100-240V		200cm	77mm	130+300mm drainage	18	Complete with 350mA driver

one

The Inground Maxi Series GU10
Aluminium

69016G | 10W | MR16 | GU10 | Aluminium

Supplied with box for concrete installation.

IK10 · WALK OVER · CE · 2 YEAR · IP67



69016AG | 10W | MR16 | GU10 | Aluminium

Supplied with box for concrete installation.

IK10 · WALK OVER · CE · 2 YEAR · IP67



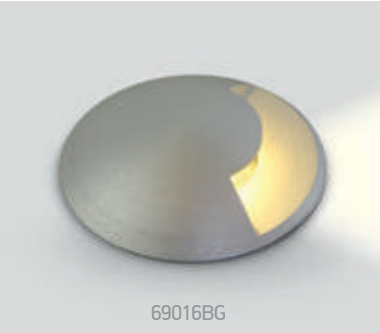

69016BG | 10W | MR16 | GU10 | Aluminium

Supplied with box for concrete installation.

IK10 · WALK OVER · CE · 2 YEAR · IP67



Order Code	Colour	Watts	Input	Class					Notes
69016G	Aluminium	10W	100-240V		200cm	80mm	130+300mm drainage	18	1 gland
69016AG	Aluminium	10W	100-240V		200cm	80mm	130+300mm drainage	18	1 gland
69016BG	Aluminium	10W	100-240V		200cm	80mm	130+300mm drainage	18	1 gland

The Inground Mini Series

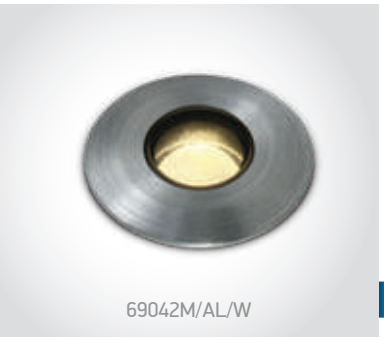

69042M/AL/W

69042M | 2W | LED | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · IK08 · WALK OVER · CE · IP67 · 2 YEAR



69042/AL/W

69042 | 2W | SMD | Natural Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · IK08 · WALK OVER · CE · IP67 · 2 YEAR



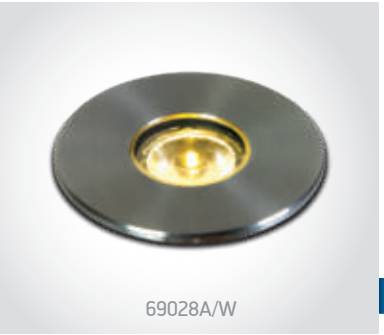

69028A/W

69028A | 2W | LED | Stainless Steel 316

LED BUILT IN · 80 CRI · IK08 · WALK OVER · CE · IP67 · 2 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Gypsum/Decking	Concrete	Decking	Concrete		Notes
69042M/AL/W	Aluminium	Warm white	3000K	2W	150lm	24°	700mA	III	200cm	22mm	26mm	60mm	95+300mm drainage	50	Requires 700mA driver
69042/AL/W	Aluminium	Warm white	3000K	2W	150lm	36°	700mA	III	200cm	30mm	35mm	80mm	95+300mm drainage	50	Requires 700mA driver
69028A/W	Stainless steel	Warm white	3000K	2W	90lm	30°	230V		200cm	-	100mm	-	130+300mm drainage	12	AC LED

one

The COB Honeycomb Range

69052 | 3W | COB | Stainless steel 316 + tempered glass

Supplied with box for concrete installation.

LED BUILT IN
90 CRI
DIMMABLE
IK 08
WALK OVER
CE
2 YEAR
IP67

1 gland + Removable honeycomb.



69052A | 13W | COB | Aluminium

Supplied with box for concrete installation.

LED BUILT IN
80 CRI
DIMMABLE
IK 08
WALK OVER
CE
2 YEAR
IP67

1 gland + Removable honeycomb.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69052/W	Stainless steel	Warm white	3000K	3W	240lm	36°	24V DC	III	200cm	52mm	100+300mm drainage	50	Requires 24V DC driver
69052A/W	Aluminium	Warm white	3000K	13W	1000lm	36°	350mA	III	200cm	75mm	140+300mm drainage	24	Requires 350mA driver

The Dark Light Inground Range
24V DC

69056A/W

69056A | 3W | COB | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · IK08 · WALK OVER · CE · 3 YEAR · DARK LIGHT · IP67



69056B/W

69056B | 7W | COB | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · IK08 · WALK OVER · CE · 3 YEAR · DARK LIGHT · IP67



69056C/W

69056C | 9W | COB | Aluminium

Supplied with box for concrete installation.

LED BUILT IN · 90 CRI · DIMMABLE · IK08 · WALK OVER · CE · 3 YEAR · DARK LIGHT · IP67



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69056A/W	Aluminium	Warm white	3000K	3W	240lm	38°	24V DC	III	200cm	50mm	100+300mm drainage	50	Requires 24V DC driver
69056B/W	Aluminium	Warm white	3000K	7W	560lm	38°	24V DC	III	200cm	60mm	100+300mm drainage	36	Requires 24V DC driver
69056C/W	Aluminium	Warm white	3000K	9W	720lm	38°	24V DC	III	200cm	70mm	135+300mm drainage	24	Requires 24V DC driver

one

The Dark Light Inground Range
230V

69070A/W

69070A | 3,5W | COB | Stainless steel 316L + Aluminium body

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · IK 10 · CAR OVER · CE · 2 YEAR · DARK LIGHT · IP67



69070B/W

69070B | 10W | COB | Stainless steel 316L + Aluminium body

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · IK 10 · CAR OVER · CE · 2 YEAR · DARK LIGHT · IP67



69070C/W

69070C | 15W | COB | Stainless steel 316L + Aluminium body

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · IK 10 · CAR OVER · CE · 2 YEAR · DARK LIGHT · IP67



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69070A/W	Stainless steel	Warm white	3000K	3,5W	300lm	20°	230V		200cm	100mm	120+300mm drainage	18	Complete with driver
69070B/W	Stainless steel	Warm white	3000K	10W	800lm	20°	230V		200cm	137mm	140+300mm drainage	8	Complete with driver
69070C/W	Stainless steel	Warm white	3000K	15W	1200lm	20°	230V		200cm	165mm	155+300mm drainage	6	Complete with driver

one

69068A/W

69068B/W

The Dark Light Inground
Constant current

69068A/W

69068A | 2W | SMD | Stainless steel 316 + Aluminium body

new | DARK LIGHT | IP67

LED BUILT IN | 90 CRI | IK 10 | WALK OVER | CE | 2 YEAR

Supplied with box for concrete installation.

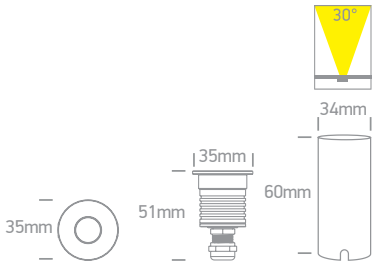

69068B/W

69068B | 4,5W | COB | Stainless steel 316 + Aluminium body

new | DARK LIGHT | IP67

LED BUILT IN | 90 CRI | IK 10 | WALK OVER | CE | 2 YEAR

Supplied with box for concrete installation.

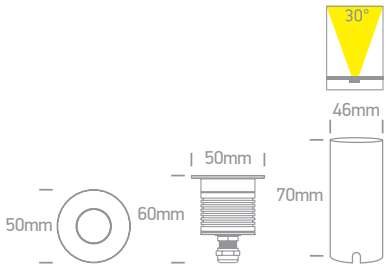

69068C/W

69068C | 6,5W | COB | Stainless steel 316 + Aluminium body

new | DARK LIGHT | IP67

LED BUILT IN | 90 CRI | IK 10 | WALK OVER | CE | 2 YEAR

Supplied with box for concrete installation.

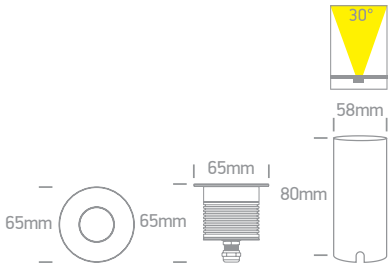

69068CH/W

69068CH | 6,5W | COB | Stainless steel 316 + Aluminium body

Complete with honeycomb.

new | DARK LIGHT | IP67

LED BUILT IN | 90 CRI | IK 10 | WALK OVER | CE | 2 YEAR

Supplied with box for concrete installation.

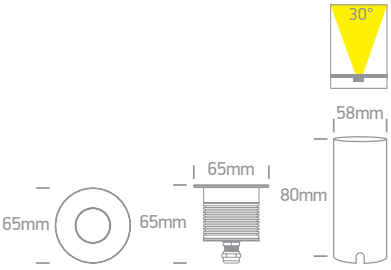

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69068A/W	Stainless steel	Warm white	3000K	2W	160lm	30°	700mA	III	200cm	35mm	80+300mm drainage	50	Requires 700mA driver
69068B/W	Stainless steel	Warm white	3000K	4,5W	360lm	30°	500mA	III	200cm	47mm	90+300mm drainage	36	Requires 500mA driver
69068C/W	Stainless steel	Warm white	3000K	6,5W	520lm	30°	700mA	III	200cm	59mm	100+300mm drainage	24	Requires 700mA driver
69068CH/W	Stainless steel	Warm white	3000K	6,5W	400lm	30°	700mA	III	200cm	59mm	100+300mm drainage	24	Requires 700mA driver

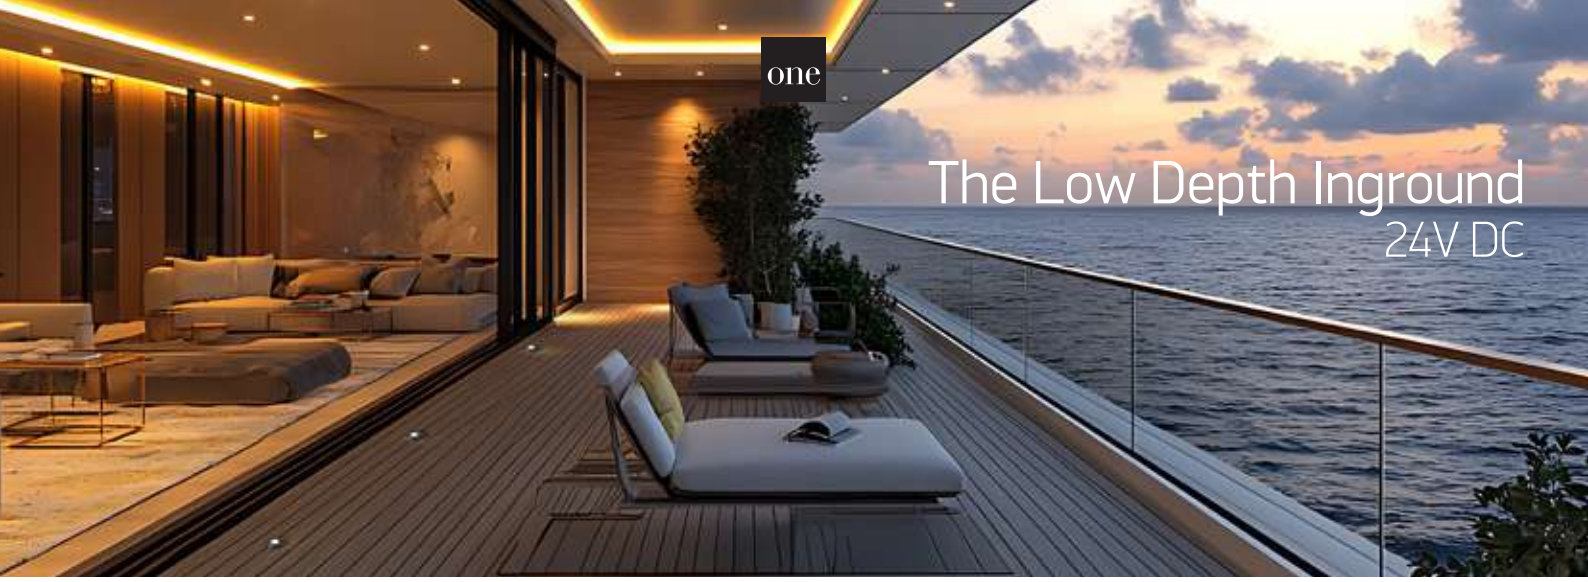

The Low Depth Inground
24V DC

69076A/W

69076A | 3x1W | Stainless steel 316L + Aluminium body

Low depth application.

new
IP67

LED BUILT IN · 90 CRI · DIMMABLE · IK 10 · CAR OVER · CE · 2 YEAR

Supplied with box for concrete installation.



69076B/W

69076B | 6x1W | Stainless steel 316L + Aluminium body

Low depth application.

new
IP67

LED BUILT IN · 90 CRI · DIMMABLE · IK 10 · CAR OVER · CE · 2 YEAR

Supplied with box for concrete installation.



69076C/W

69076C | 9x1W | Stainless steel 316L + Aluminium body

Low depth application.

new
IP67

LED BUILT IN · 90 CRI · DIMMABLE · IK 10 · CAR OVER · CE · 2 YEAR

Supplied with box for concrete installation.



69076DW

69076D | 18x1W | Stainless steel 316L + Aluminium body

Low depth application.

new
IP67

LED BUILT IN · 90 CRI · DIMMABLE · IK 10 · CAR OVER · CE · 2 YEAR

Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69076A/W	Stainless steel	Warm white	3000K	3x1W	300lm	45°	24V DC	III	200cm	90mm	50+300mm drainage	24	Requires 24V DC driver
69076B/W	Stainless steel	Warm white	3000K	6x1W	600lm	45°	24V DC	III	200cm	122mm	50+300mm drainage	18	Requires 24V DC driver
69076C/W	Stainless steel	Warm white	3000K	9x1W	900lm	45°	24V DC	III	200cm	150mm	50+300mm drainage	12	Requires 24V DC driver
69076D/W	Stainless steel	Warm white	3000K	18x1W	1800lm	45°	24V DC	III	200cm	196mm	50+300mm drainage	6	Requires 24V DC driver

The COB Inground Range
Stainless steel

69040/W

69040 | 10W | COB | Stainless steel 316

LED BUILT IN
80 CRI
IK 10
WALK OVER
CE
2 YEAR
IP67



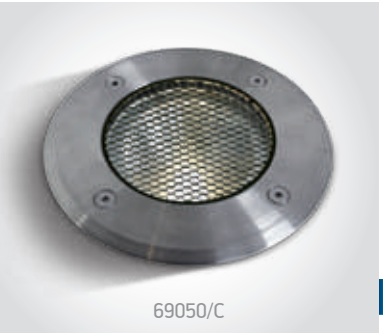

69050/C

69050 | 20W | COB | Dimmable | Stainless steel 316 + tempered glass

LED BUILT IN
80 CRI
TRIAC DIMMABLE
IK 08
WALK OVER
CE
2 YEAR
IP67

1 gland + Removable honeycomb.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69040/W	Stainless steel	Warm white	3000K	10W	700lm	40°	230V		200cm	106mm	185+300mm drainage	6	Complete with 500mA driver
69050/C	Stainless steel	Cool white	4000K	20W	1800lm	25°	230V		200cm	132mm	200+300mm drainage	6	AC LED
69050/W	Stainless steel	Warm white	3000K	20W	1800lm	25°	230V		200cm	132mm	200+300mm drainage	6	AC LED

The Trimless Inground Range

69060/B/W

69060 | 6W | LED | Trimless | Aluminium + Glass

Supplied with box for concrete installation.

LED BUILT IN

80 CRI

IK 08

WALK OVER

CE

2 YEAR

IP67

Complete with honeycomb.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69060/B/W	Black	Warm white	3000K	6W	460lm	25°	100-240V		200cm	136mm	150+300mm drainage	6	Complete with 500mA driver

The COB Inground Adjustable Range
Stainless steel

69054/W

69054 | 15W | COB | Dimmable | Stainless steel 316 + tempered glass

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · ±15° ADJUSTABLE · TRIAC DIMMABLE · IK 10 · CAR OVER · CE · IP67 · 2 YEAR

1 gland + connection box.



69054A/W

69054A | 30W | COB | Dimmable | Stainless steel 316 + tempered glass

Supplied with box for concrete installation.

LED BUILT IN · 80 CRI · ±15° ADJUSTABLE · TRIAC DIMMABLE · IK 10 · CAR OVER · CE · IP67 · 2 YEAR

1 gland + connection box.

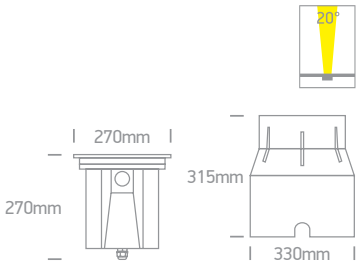

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69054/W	Stainless steel	Warm white	3000K	15W	840lm	20°	230V		200cm	230mm	270+300mm drainage	2	AC LED
69054A/W	Stainless steel	Warm white	3000K	30W	2000lm	20°	230V		200cm	330mm	330+300mm drainage	1	AC LED

one

The Inground Tiltable Range

69072/W

69072 | 3W | COB | Stainless steel 316L + Aluminium body | Tiltable beam

LED BUILT IN · 80 CRI · IK 10 · ADJUSTABLE · CAR OVER · CE · 2 YEAR · IP67

Supplied with box for concrete installation.

Tiltable beam +-20°



69074A/W

69074A | 3x1,5W | COB | Stainless steel 316L + Aluminium body | Tiltable beam

LED BUILT IN · 80 CRI · IK 10 · ADJUSTABLE · CAR OVER · CE · 2 YEAR · DARK LIGHT · IP67

Supplied with box for concrete installation.

Tiltable beam +-20°



69074B/W

69074B | 9x1,5W | COB | Stainless steel 316L + Aluminium body | Tiltable beam

LED BUILT IN · 80 CRI · IK 10 · ADJUSTABLE · CAR OVER · CE · 2 YEAR · DARK LIGHT · IP67

Supplied with box for concrete installation.

Tiltable beam +-20°



69074C/W

69074C | 12x1,5W | COB | Stainless steel 316L + Aluminium body | Tiltable beam

LED BUILT IN · 80 CRI · IK 10 · ADJUSTABLE · CAR OVER · CE · 2 YEAR · DARK LIGHT · IP67

Supplied with box for concrete installation.

Tiltable beam +-20°



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69072/W	Stainless steel	Warm white	3000K	3W	210lm	5°	230V	⏚	200cm	90mm	135+300mm drainage	18	Complete with driver
69074A/W	Stainless steel	Warm white	3000K	3x1,5W	320lm	36°	230V	⏚	200cm	140mm	185+300mm drainage	8	Complete with driver
69074B/W	Stainless steel	Warm white	3000K	9x1,5W	1000lm	36°	230V	⏚	200cm	170mm	210+300mm drainage	4	Complete with driver
69074C/W	Stainless steel	Warm white	3000K	12x1,5W	1250lm	36°	230V	⏚	200cm	200mm	270+300mm drainage	2	Complete with driver

The Asymmetric Inground
Stainless steel

69062 | 8W | SMD | Asymmetrical | Stainless steel 316 + Aluminium

69062/W

IP67

LED BUILT IN

80 CRI

IK 08

WALK OVER

2 YEAR

Supplied with box
for concrete installation.

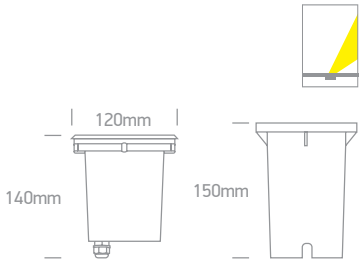

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69062/W	Stainless steel	Warm white	3000K	8W	680lm	230V		200cm	115mm	170+300mm drainage	12	Complete with 350mA driver

one

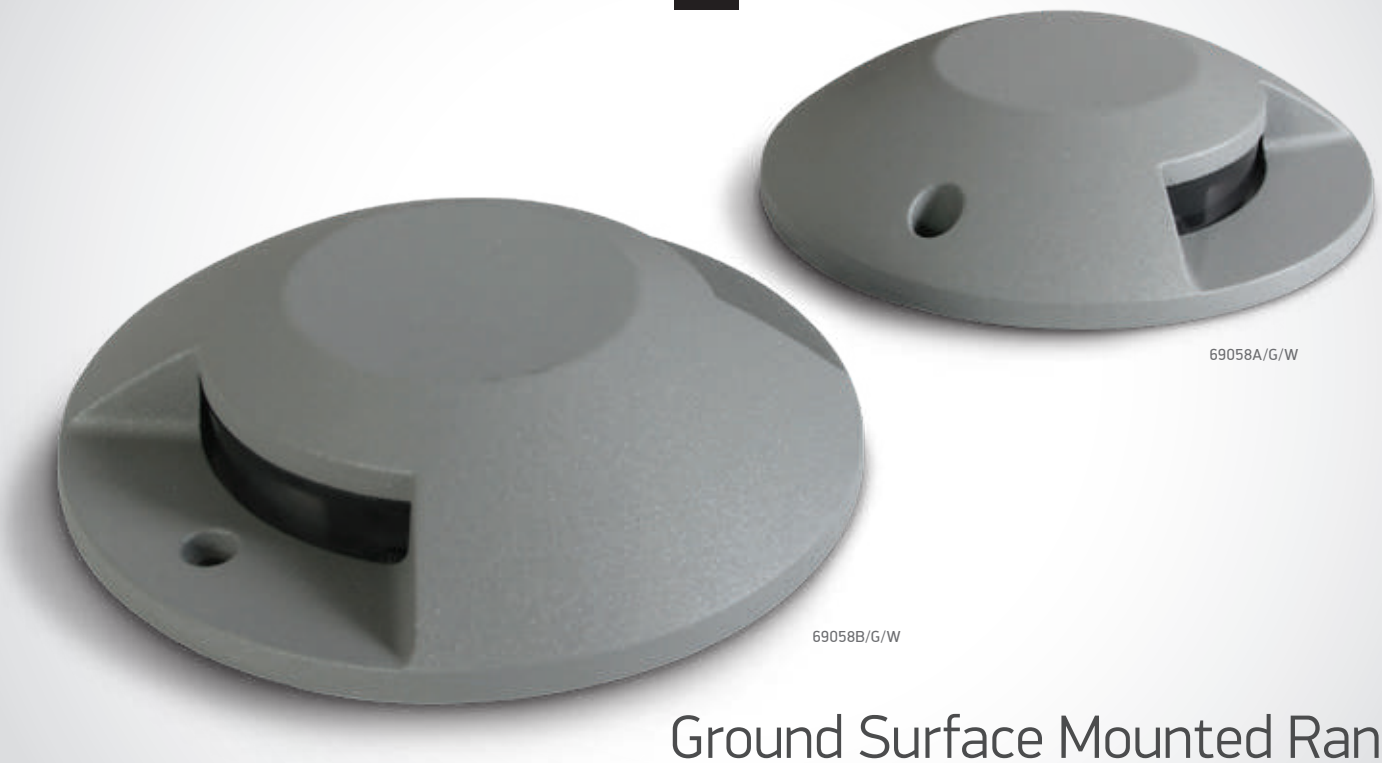

69058A/G/W

69058B/G/W

Ground Surface Mounted Range
Aluminium

69058A/G/W

69058A | 6W | COB | Aluminium

Surface mounted - No hole required.

LED BUILT IN · 80 CRI · IK 10 · WALK OVER · CE · 2 YEAR · IP67



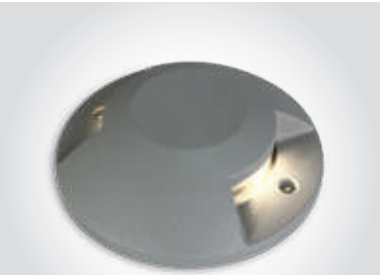

69058B/G/W

69058B | 2x6W | COB | Aluminium

Surface mounted - No hole required.

LED BUILT IN · 80 CRI · IK 10 · WALK OVER · CE · 2 YEAR · IP67





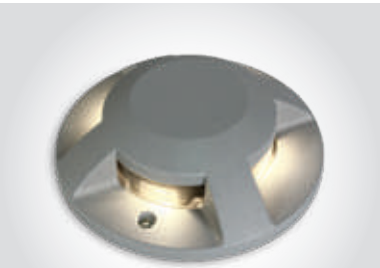

69058C/G/W

69058C | 4x3W | COB | Aluminium

Surface mounted - No hole required.

LED BUILT IN · 80 CRI · IK 10 · WALK OVER · CE · 2 YEAR · IP67



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
69058A/G/W	Grey	Warm white	3000K	6W	300lm	230V		12	Complete with 500mA driver
69058B/G/W	Grey	Warm white	3000K	2x6W	600lm	230V		12	Complete with 500mA driver
69058C/G/W	Grey	Warm white	3000K	4x3W	600lm	230V		12	Complete with 300mA driver

The GU10 Inground Range
Stainless steel 316

69006G

69006G | 10W | MR16 | GU10 | Stainless steel 316

Supplied with box for concrete installation.

IP67

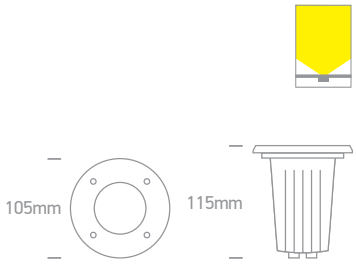

69046G

69046G | 10W | MR16 | GU10 | Stainless steel 316

Supplied with box for concrete installation.

IP67

Removable light guide.

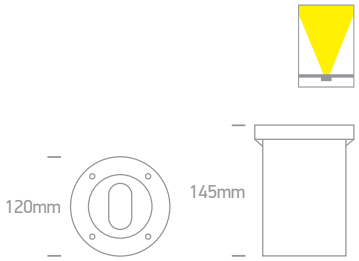

Order Code	Colour	Watts	Input	Class					Notes
69006G	Stainless steel	10W	100-240V		-	101mm	160+300mm drainage	20	2 glands
69046G	Stainless steel	10W	100-240V		200cm	115mm	160+300mm drainage	12	2 glands

The GX53 Inground Range
Stainless steel

69006 | 9W | GX53 | Stainless steel

Supplied with box for concrete installation.

WALK OVER

IK 08

2 YEAR

IP67

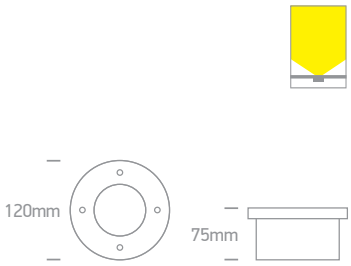

Order Code	Colour	Watts	Input	Class				Notes
69006	Stainless steel	9W	100-240V		110mm	90+300mm drainage	20	-

one

Garden & Underwater

Pages 611-644

19

LED Garden Spots

7070/W

7070 | 5W | SMD | Plastic

Supplied with spike & base.

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP65

7070/C



7068/B/W

7068 | 6W | COB | Aluminium

Supplied with spike.

LED BUILT IN · 80 CRI · ADJUSTABLE · IK 07 · CE · 2 YEAR · IP65



7010P

7010P | Plastic spike for garden spots

200 · CE · 2 YEAR



7012/B

7012 | Tree mounting strap for spots | Max. 2KG load

CE · 2 YEAR · 50

new



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7070/C	Black	Cool white	4000K	5W	400lm	38°	100-240V		200cm	40	Complete with driver
7070/W	Black	Warm white	3000K	5W	400lm	38°	100-240V		200cm	40	Complete with driver
7068/B/W	Black	Warm white	3000K	6W	380lm	40°	230V		200cm	30	Complete with driver

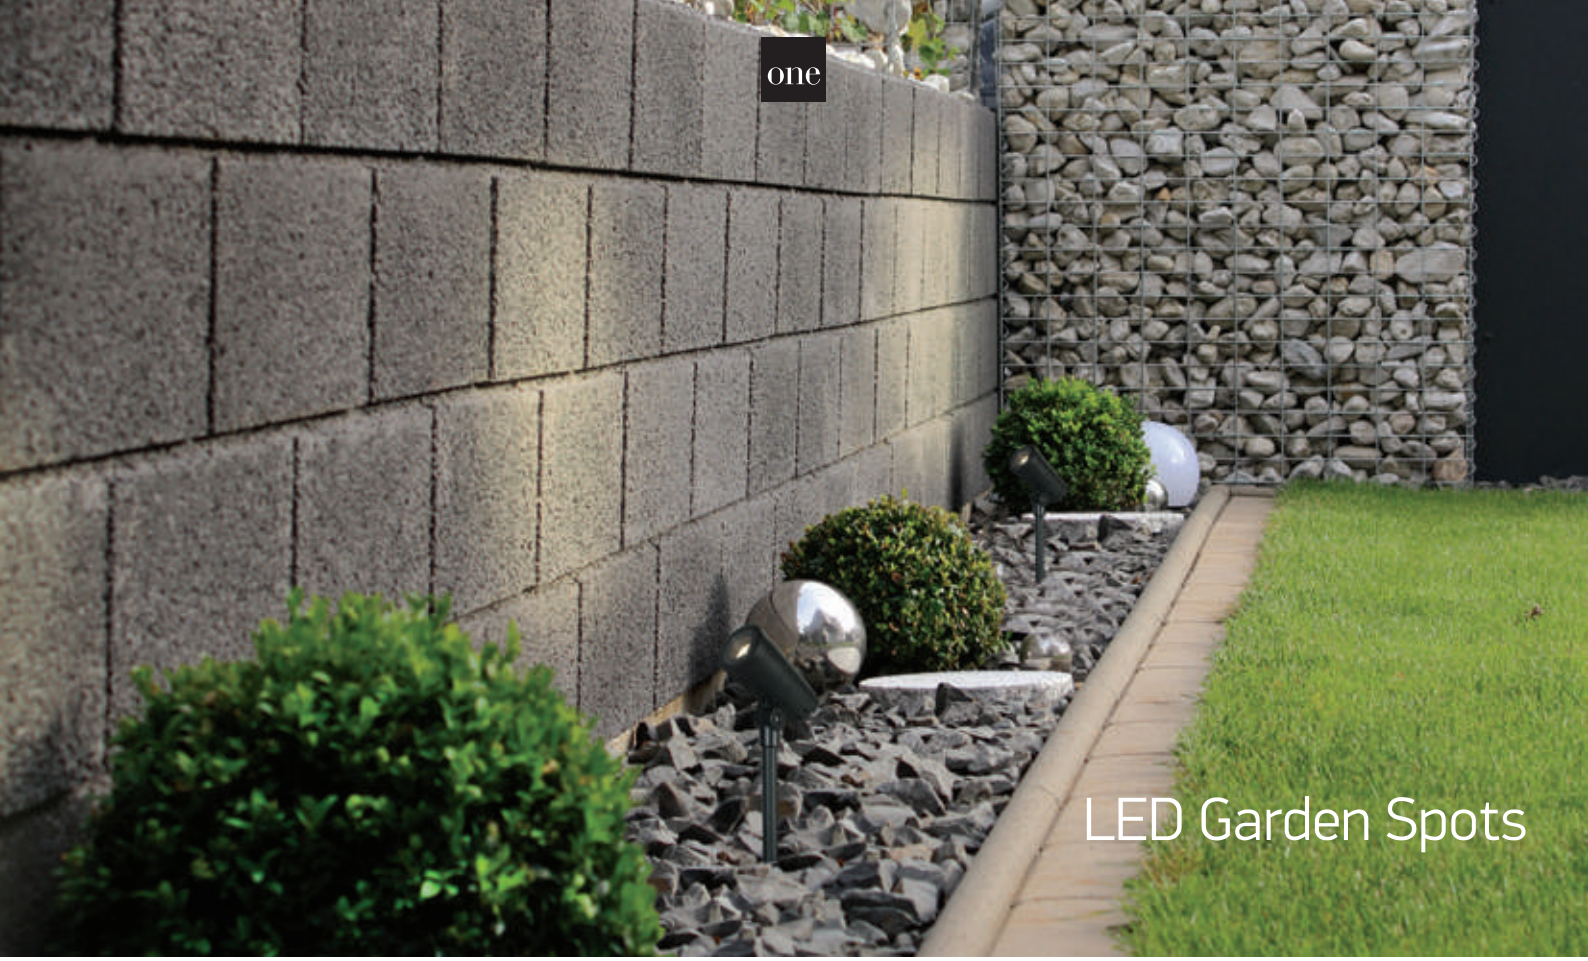

LED Garden Spots

67456/B/W

67456 | 3W | COB | Aluminium

Supplied with spike.

LED BUILT IN · 90 CRI · DIMMABLE · ADJUSTABLE · CE · 3 YEAR · IP67



67458/B/W

67458 | 8W | SMD | Aluminium

Supplied with spike.

LED BUILT IN · 80 CRI · DIMMABLE · ADJUSTABLE · CE · 2 YEAR · IP65



67482/AN/W

67482 | 11W | COB | Adjustable beam 20°-60° | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IK 06 · CE · 2 YEAR · IP65

Zoomable lens

Supplied with spike.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
67456/B/W	Black	Warm white	3000K	3W	170lm	36°	350mA		200cm	36	Requires 350mA driver
67458/B/W	Black	Warm white	3000K	8W	520lm	38°	24V DC		200cm	50	Requires 24V DC driver
67482/AN/W	Anthracite	Warm white	3000K	11W	500lm	20°-60°	100-240V		150cm	6	Complete with 500mA driver

GU10 Garden Spots
Aluminium

one

67198G/W

67198G | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE CE 2 YEAR

IP65


Supplied with spike.



67198G/AN

67198G | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE CE 2 YEAR

IP65


Supplied with spike.



67198G/B

67198G | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE CE 2 YEAR

IP65

67198G/BR


Supplied with spike.



67198AG/AN

67198AG | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE CE 2 YEAR

IP65

Supplied with spike
& 400mm pole stand.



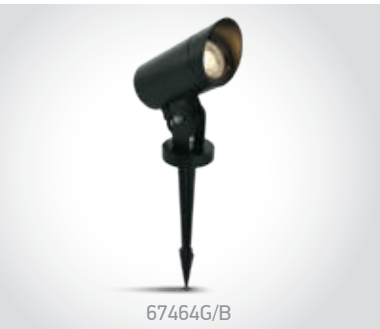
67464G/B

67464G | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE CE 2 YEAR

IP65


Supplied with spike.

Order Code	Colour	Watts	Input	Class			Notes
67198G/W	White	10W	100-240V		150cm	12	-
67198G/AN	Anthracite	10W	100-240V		150cm	12	-
67198G/B	Black	10W	100-240V		150cm	12	-
67198G/BR	Brown	10W	100-240V		150cm	12	-
67198AG/AN	Anthracite	10W	100-240V		150cm	6	-
67464G/B	Black	10W	100-240V		200cm	12	-

one

GU10 Garden Spots
Plastic

67200G/W

67200G | 6W | MR16 | GU10 | ABS + PC

ADJUSTABLE · IK 06 · CE · 3 YEAR · IP65

Supplied with spike.



67200G/AN

67200G | 6W | MR16 | GU10 | ABS + PC

ADJUSTABLE · IK 06 · CE · 3 YEAR · IP65

Supplied with spike.



67202G/B

67202G | 6W | MR16 | GU10 | ABS + PC

ADJUSTABLE · IK 06 · CE · 3 YEAR · IP65

Supplied with spike.



Order Code	Colour	Watts	Input	Class			Notes
67200G/W	White	6W	100-240V		200cm	20	-
67200G/AN	Anthracite	6W	100-240V		200cm	20	-
67202G/B	Black	6W	100-240V		200cm	20	-

The GU10 Garden Round Spots
Aluminium

67196BG | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE CE 2 YEAR

IP65

Supplied with spike.



67196BG | 10W | MR16 | GU10 | Aluminium

ADJUSTABLE CE 2 YEAR

IP65

Supplied with spike.



Order Code	Colour	Watts	Input	Class			Notes
67196BG/W	White	10W	100-240V		150cm	6	-
67196BG/AN	Anthracite	10W	100-240V		150cm	6	-

The COB Garden Round Spots
Aluminium

67196A/AN/W

67196A | 3W | COB | Aluminium

LED BUILT IN | 85 CRI | ADJUSTABLE | IK06 | CE | 2 YEAR | IP65

Supplied with spike.



67196B/AN/W

67196B | 6W | COB | Aluminium

LED BUILT IN | 85 CRI | ADJUSTABLE | IK06 | CE | 2 YEAR | IP65

Supplied with spike.



67196C/AN/W

67196C | 9W | COB | Aluminium

LED BUILT IN | 85 CRI | ADJUSTABLE | IK06 | CE | 2 YEAR | IP65

Supplied with spike.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
67196A/AN/W	Anthracite	Warm white	3000K	3W	240lm	35°	100-240V		150cm	12	Complete with 350mA driver
67196B/AN/W	Anthracite	Warm white	3000K	6W	450lm	35°	230V		150cm	6	Complete with 500mA driver
67196C/AN/W	Anthracite	Warm white	3000K	9W	700lm	35°	230V		150cm	6	Complete with 500mA driver

The COB Garden Spots
Aluminium

7046/AN/W

7046 | 10W | COB | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IK06 · CE · 2 YEAR · IP65

Supplied with spike.



7047/W/W

7047 | 20W | COB | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP65

Supplied with spike.



7047/AN/W

7047 | 20W | COB | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP65

Supplied with spike.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7046/AN/W	Anthracite	Warm white	3000K	10W	850lm	50°	230V		150cm	12	Complete with 500mA driver
7047/W/W	White	Warm white	3000K	20W	1800lm	50°	230V		150cm	8	Complete with 500mA driver
7047/AN/W	Anthracite	Warm white	3000K	20W	1800lm	50°	230V		150cm	8	Complete with 500mA driver

The Garden Square Spots

7052B/AN/W

7052B | 1W | COB | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP65

Optional spike.
Order code 7010P.



67514/AN/W

67514 | 6W | SMD | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IK07 · CE · 2 YEAR · IP65

Supplied with spike.



7052/AN/W

7052 | 7W | COB | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR · IP65

Supplied with spike.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7052B/AN/W	Anthracite	Warm white	3000K	1W	80lm	40°	24V DC		100cm	36	Requires 24V DC driver
67514/AN/W	Anthracite	Warm white	3000K	6W	550lm	30°	230V		200cm	12	Complete with 700mA driver
7052/AN/W	Anthracite	Warm white	3000K	7W	550lm	47°	100-240V		100cm	12	Complete with 700mA driver

The Garden Round Spots

67488C/AN/W

67488B/AN/W

67488A/AN/W

67488A | 5W | COB | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IK06 · CE · 2 YEAR · IP65

Supplied with spike.



67488B/AN/W

67488B | 11W | COB | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IK06 · CE · 2 YEAR · IP65

Supplied with spike.



67488C/AN/W

67488C | 14W | COB | Aluminium

LED BUILT IN · 80 CRI · ADJUSTABLE · IK06 · CE · 2 YEAR · IP65

Supplied with spike.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
67488A/AN/W	Anthracite	Warm white	3000K	5W	200lm	30°	100-240V		150cm	12	Complete with 350mA driver
67488B/AN/W	Anthracite	Warm white	3000K	11W	680lm	20°	230V		150cm	8	Complete with 500mA driver
67488C/AN/W	Anthracite	Warm white	3000K	14W	800lm	20°	230V		150cm	4	Complete with 300mA driver

The Garden Cylinder Spots
Constant current

67538A/B/W

67538A | 2W | SMD | Aluminium

new
DARK LIGHT
IP65
LED BUILT IN
90 CRI
DIMMABLE
ADJUSTABLE
CE
2 YEAR

Supplied with spike.



67538B/B/W

67538B | 6,5W | COB | Aluminium

new
DARK LIGHT
IP65
LED BUILT IN
90 CRI
DIMMABLE
ADJUSTABLE
CE
2 YEAR

Supplied with spike.



67538C/B/W

67538C | 12W | COB | Aluminium

new
DARK LIGHT
IP65
LED BUILT IN
90 CRI
DIMMABLE
ADJUSTABLE
CE
2 YEAR

Supplied with spike.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
67538A/B/W	Black	Warm white	3000K	2W	160lm	36°	700mA	III	150cm	40	Requires 700mA driver
67538B/B/W	Black	Warm white	3000K	6,5W	520lm	36°	700mA	III	150cm	24	Requires 700mA driver
67538C/B/W	Black	Warm white	3000K	12W	960lm	36°	700mA	III	150cm	12	Requires 700mA driver

Garden Spots
GU10 + PAR30

67204E/B

67204G/B

67204G/B

67204G | 10W | MR16 | GU10 | ABS + PC

ADJUSTABLE

IK 06

CE

3 YEAR

IP65

Supplied with spike.



67204E/B

67204E | 10W | PAR30 | E27 | ABS + PC

ADJUSTABLE

IK 06

CE

3 YEAR

IP65

Supplied with spike.



Order Code	Colour	Watts	Input	Class	Cable		Notes
67204G/B	Black	10W	100-240V		200cm	16	-
67204E/B	Black	10W	100-240V		200cm	16	-

Solar Wall Light

67496/B/EW

67496 | 2W | Solar powered | Sensor | Aluminium

3 Modes operation.

LED BUILT IN

80 CRI

Solar

IP65

2 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)		Notes
67496/B/EW	Black	Extra warm white	2700K	2W	120lm	4	2200mAh lithium battery

Retro Wall Light

67408/B

67408 | 12W | E27 | Metal + glass

2 YEAR

IP44

Suitable for E27 LED lamp.



Order Code	Colour	Watts		Class		Notes
67408/B	Black	12W	100-240V		4	-

one

The E27 Tube Lights
Aluminium

67094/AN

67094 | 20W | E27 | Aluminium

IP54

67094/B

67094/G

67094/BR



67098/AN

67098 | 2x20W | E27 | Aluminium

IP54

67098/G



Order Code	Colour	Watts	Input	Class		Notes
67094/AN	Anthracite	20W	100-240V		12	-
67094/B	Black	20W	100-240V		12	-
67094/G	Grey	20W	100-240V		12	-
67094/BR	Rust brown	20W	100-240V		12	-
67098/AN	Anthracite	2x20W	100-240V		12	-
67098/G	Grey	2x20W	100-240V		12	-

one

67102/B

67102/G

67100/B

67100/G

The E27 Tube Lights
Aluminium

67100/B

67100 | 20W | E27 | Aluminium

IP54

67100/AN

67100/G

67100/BR



67102/B

67102 | 20W | E27 | Aluminium

IP54

67102/AN

67102/G

67102/BR



Order Code	Colour	Watts	Input	Class		Notes
67100/AN	Anthracite	20W	100-240V		4	-
67100/B	Black	20W	100-240V		4	-
67100/G	Grey	20W	100-240V		4	-
67100/BR	Rust brown	20W	100-240V		4	-
67102/AN	Anthracite	20W	100-240V		4	-
67102/B	Black	20W	100-240V		4	-
67102/G	Grey	20W	100-240V		4	-
67102/BR	Rust brown	20W	100-240V		4	-

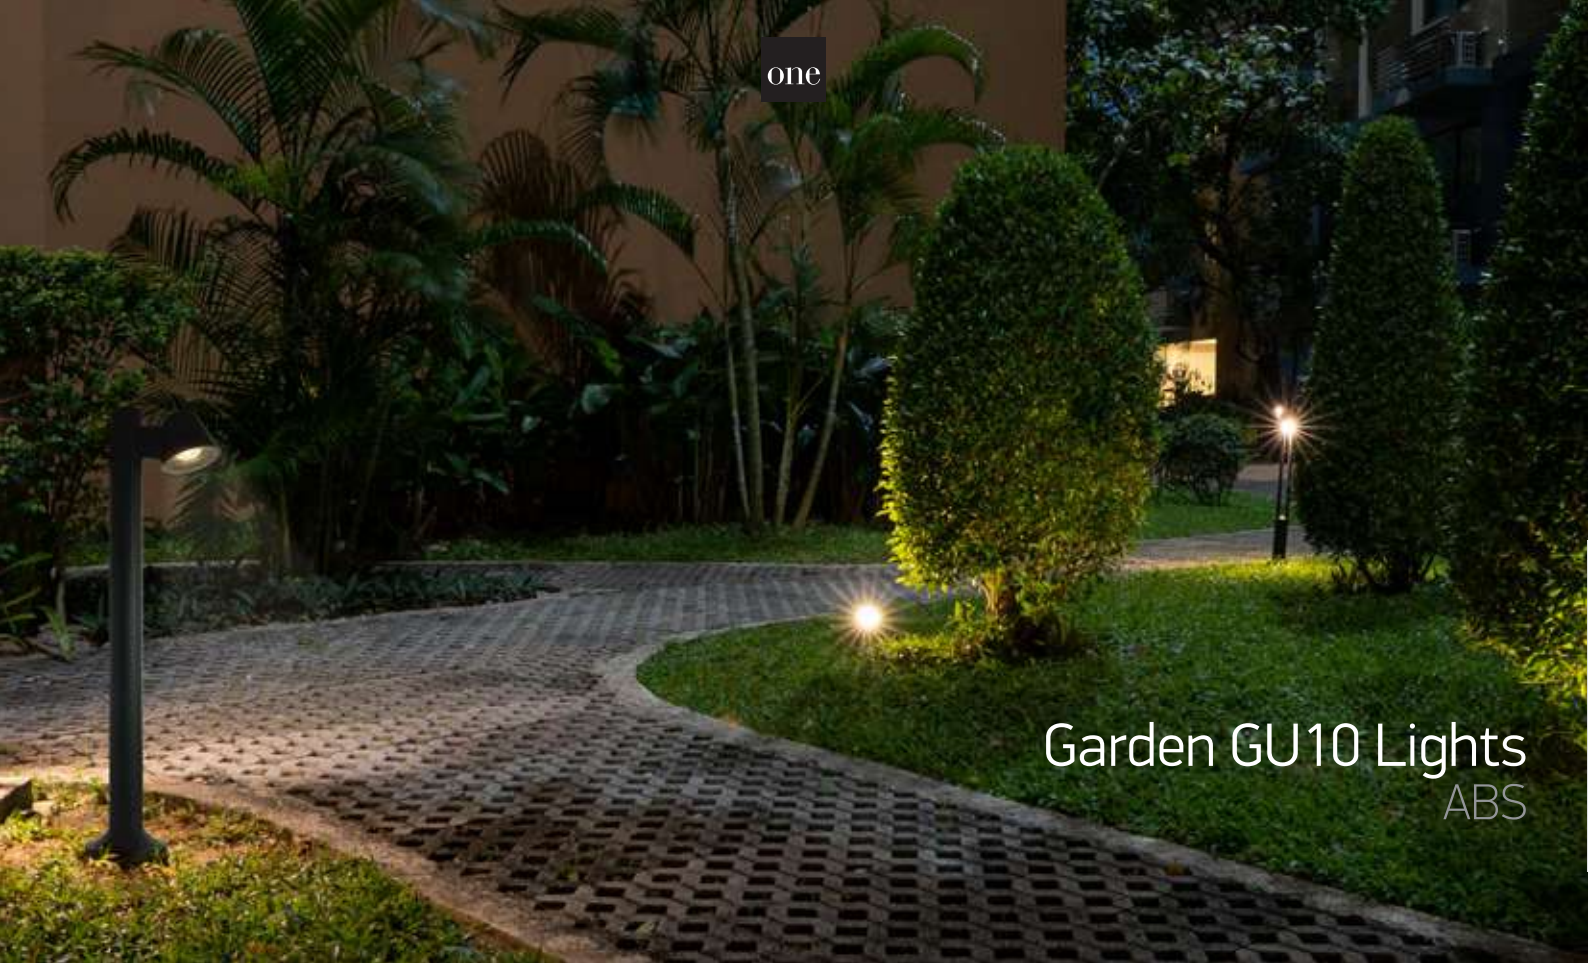

Garden GU10 Lights
ABS

67534A/AN

67534A | 6W | MR16 | GU10 | ABS + PC

ADJUSTABLE

IK 06 CE 3 YEAR

IP65



67534B/AN

67534B | 6W | MR16 | GU10 | ABS + PC

ADJUSTABLE

CE 3 YEAR

IP65



67534C/AN

67534C | 2x6W | MR16 | GU10 | ABS + PC

ADJUSTABLE

CE 3 YEAR

IP65



Order Code	Colour	Watts	Input	Class		Notes
67534A/AN	Anthracite	6W	100-240V		20	-
67534B/AN	Anthracite	6W	100-240V		6	-
67534C/AN	Anthracite	2x6W	100-240V		4	-

Corridor Bollards

67508A/AN/W

67508A | 8W | SMD | Aluminium

LED BUILT IN
80 CRI
IK 06
CE
2 YEAR
IP65



67508B/AN/C

67508B | 8W | SMD | LED Bollard with 2xSchuko Sockets 1000W each | Aluminium

LED BUILT IN
80 CRI
IK 06
CE
2 YEAR
IP65

67508B/AN/W



67494/AN

67494 | Bollard with 2xSchuko Sockets 1000W each | Aluminium

CE
2 YEAR
IP44



67494A/AN/W

67494A | 3W | SMD | LED Bollard with 2xSchuko Sockets 1000W each | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP44



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67508A/AN/W	Anthracite	Warm white	3000K	8W	600lm	230V		2	Complete with 500mA driver
67508B/AN/C	Anthracite	Cool white	4000K	8W	600lm	230V		2	Complete with 500mA driver
67508B/AN/W	Anthracite	Warm white	3000K	8W	600lm	230V		2	Complete with 500mA driver
67494/AN	Anthracite	-	-	-	-	230V		4	-
67494A/AN/W	Anthracite	Warm white	3000K	3W	240lm	230V		4	Complete with 350mA driver

LED Garden Path Lights
CCT V

67470 | 10W | COB | Aluminium

LED BUILT IN · 80 CRI · CCT V · IK 10 · CE · 2 YEAR · new · IP65



67470A | 10W | COB | Aluminium

LED BUILT IN · 80 CRI · CCT V · IK 10 · CE · 2 YEAR · new · IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67470/B/V	Black	CCT V	3000K-3500K-4000K	10W	500lm	230V		6	Complete with 240mA driver
67470A/B/V	Black	CCT V	3000K-3500K-4000K	10W	500lm	230V		6	Complete with 240mA driver

one

LED Garden Path Lights
Aluminium

67460A | 8W | LED | Aluminium

1-side light.

LED BUILT IN
80 CRI
IK 10
CE
2 YEAR
IP54



67460B | 2x6W | LED | Aluminium

2-side light.

LED BUILT IN
80 CRI
IK 10
CE
2 YEAR
IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67460A/AN/W	Anthracite	Warm white	3000K	8W	640lm	100-240V		4	Complete with 350mA driver
67460B/AN/W	Anthracite	Warm white	3000K	2x6W	2x500lm	100-240V		4	Complete with 300mA driver

one

LED Mushroom Bollards

ABS + PC

67490A/B/W

67490/B/W

67490/B/W

67490 | 6,5W | SMD | ABS + PC

LED BUILT IN

80 CRI

IK 06

CE

2 YEAR

IP54



67490A/B/W

67490A | 6,5W | SMD | ABS + PC

LED BUILT IN

80 CRI

IK 06

CE

2 YEAR

IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67490/B/W	Black	Warm white	3000K	6,5W	600lm	230V		6	Complete with 300mA driver
67490A/B/W	Black	Warm white	3000K	6,5W	600lm	230V		6	Complete with 300mA driver

LED Bollard Lights
Aluminium

67358/AN/W

67358 | 7W | COB | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP65





67034/AN/W

67034 | 15W | COB | Aluminium

LED BUILT IN

80 CRI

CE

2 YEAR

IP54



Order Code	Colour	Light Colour	CCT (K)	Watts	Beam Angle	Lumen (lm)	Input	Class		Notes
67358/AN/W	Anthracite	Warm white	3000K	7W	-	262lm	100-240V		8	Complete with 700mA driver
67034/AN/W	Anthracite	Warm white	3000K	15W	50°	450lm	100-240V		4	Complete with driver

The Cage Light Bollards
Aluminium

67506/AN/C

67506 | 22W | SMD | Aluminium

LED BUILT IN
80 CRI
IK 10
CE
2 YEAR
IP65

67506/AN/W



67506A/AN/C

67506A | 22W | SMD | Aluminium

LED BUILT IN
80 CRI
IK 10
CE
2 YEAR
IP65

67506A/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67506/AN/C	Anthracite	Cool white	4000K	22W	1900lm	230V		1	Complete with 500mA driver
67506/AN/W	Anthracite	Warm white	3000K	22W	1900lm	230V		1	Complete with 500mA driver
67506A/AN/C	Anthracite	Cool white	4000K	22W	1900lm	230V		1	Complete with 500mA driver
67506A/AN/W	Anthracite	Warm white	3000K	22W	1900lm	230V		1	Complete with 500mA driver

The Cage Light Bollards
Aluminium

67504/AN/C

67504 | 22W | SMD | Aluminium

LED BUILT IN
80 CRI
IK 10
CE
2 YEAR
IP65

67504/AN/W



67504A/AN/C

67504A | 22W | SMD | Aluminium

LED BUILT IN
80 CRI
IK 10
CE
2 YEAR
IP65

67504A/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67504/AN/C	Anthracite	Cool white	4000K	22W	1900lm	230V		1	Complete with 500mA driver
67504/AN/W	Anthracite	Warm white	3000K	22W	1900lm	230V		1	Complete with 500mA driver
67504A/AN/C	Anthracite	Cool white	4000K	22W	1900lm	230V		1	Complete with 500mA driver
67504A/AN/W	Anthracite	Warm white	3000K	22W	1900lm	230V		1	Complete with 500mA driver

The Project Bollards Range
Aluminium

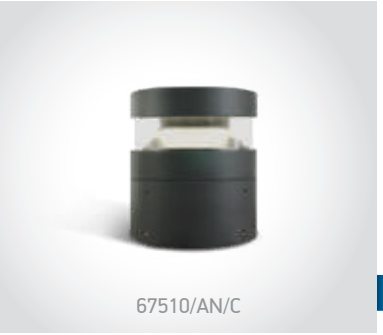

67510/AN/C

67510 | 20W | SMD | Aluminium

LED BUILT IN
80 CRI
IK 10
CE
2 YEAR
IP65

Light stop accessory.
Order code 050210/AN.



67510A/AN/C

67510A | 20W | SMD | Aluminium

LED BUILT IN
80 CRI
IK 10
CE
2 YEAR
IP65

Light stop accessory.
Order code 050210/AN.



67510B/AN/C

67510B | 20W | SMD | Aluminium

LED BUILT IN
80 CRI
IK 10
CE
2 YEAR
IP65

Light stop accessory.
Order code 050210/AN.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67510/AN/C	Anthracite	Cool white	4000K	20W	2000lm	230V		4	Complete with 500mA driver
67510/AN/W	Anthracite	Warm white	3000K	20W	2000lm	230V		4	Complete with 500mA driver
67510A/AN/C	Anthracite	Cool white	4000K	20W	2000lm	230V		2	Complete with 500mA driver
67510A/AN/W	Anthracite	Warm white	3000K	20W	2000lm	230V		2	Complete with 500mA driver
67510B/AN/C	Anthracite	Cool white	4000K	20W	2000lm	230V		1	Complete with 500mA driver
67510B/AN/W	Anthracite	Warm white	3000K	20W	2000lm	230V		1	Complete with 500mA driver

The LED Bollards Range

Cone reflector

67410/AN/W

67410 | 12W | SMD | Aluminium

LED BUILT IN

80 CRI

IK08

CE

2 YEAR

IP65

67410A/AN/W

67410A | 20W | SMD | Aluminium

LED BUILT IN

80 CRI

IK08

CE

2 YEAR

IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67410/AN/C	Anthracite	Cool white	4000K	12W	1000lm	230V		2	Complete with 500mA driver
67410/AN/W	Anthracite	Warm white	3000K	12W	1000lm	230V		2	Complete with 500mA driver
67410A/AN/C	Anthracite	Cool white	4000K	20W	1600lm	230V		2	Complete with 500mA driver
67410A/AN/W	Anthracite	Warm white	3000K	20W	1600lm	230V		2	Complete with 500mA driver

The Romantic Outdoor Range

67406/B

67406 | 12W | E27 | Stainless steel 201 + tempered glass

IP43

Suitable for E27 LED lamps.



67406A/B

67406A | 12W | E27 | Stainless steel 201 + tempered glass

IP43

Suitable for E27 LED lamp.



67406B/B

67406B | 2x12W | E27 | Stainless steel 201 + tempered glass

IP43

Suitable for E27 LED lamps.



67406C/B

67406C | 12W | E27 | Stainless steel 201 + tempered glass

IP43

Suitable for E27 LED lamps.



67406D/B

67406D | 2x12W | E27 | Stainless steel 201 + tempered glass

IP43

Suitable for E27 LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
67406/B	Black	12W	100-240V		4	-
67406A/B	Black	12W	100-240V		4	-
67406B/B	Black	2x12W	100-240V		4	-
67406C/B	Black	12W	100-240V		4	-
67406D/B	Black	2x12W	100-240V		2	-

Outdoor String Lights

0994 | 12W | E27 | 15xT-lampholders

50cm spacing.

IP44

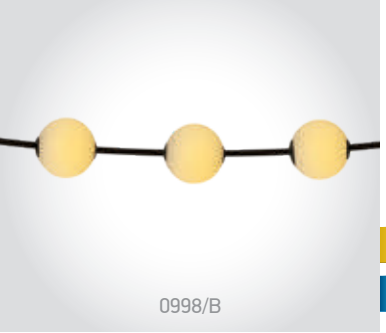

0998 | 6X1W | Plastic

46cm spacing.

new

IP65

Complete with Schuko driver.

0996 | 1W | 12xLEDs | Solar powered

50cm spacing.

Solar

IP55



Supplied with spike.



Supplied with mounting accessory.

Order Code	Colour	Watts	Light colour	CCT (K)	Input	Class			Notes
0994/B	Black	12W	-	-	100-240V		850cm	8	-
0998/B	Black	6x1W	Extra warm white	2500K	230V / 24V		300cm	8	Total length 650cm
0996/B	Black	1W	Extra warm white	2700K	-		850cm	8	2000mAh lithium battery

Rechargeable Path Lights

67530B/W

67530B | 2,2W | SMD | Touch switch | Dimmable | Aluminium

Rechargeable USB socket.

LED BUILT IN · 80 CRI · DIMMABLE · IK 06 · CCT V · CE · 2 YEAR · IP65

Charging time: 6Hrs
Working time: 9Hrs
(at 100% intensity)



67462/B/W

67462 | 3W | Rechargeable | Aluminium

EU charger included.

LED BUILT IN · 80 CRI · CE · 2 YEAR · IP54

Charging time: 5-7Hrs
Working time: 9Hrs



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
67530B/W	White	CCT V	2700K-3000K	2,2W	130lm	III	2	4400mAh lithium battery
67462/B/W	Black	Warm white	3000K	3W	190lm	III	4	2x2200mAh lithium batteries

67530B/W

67520A/B/W

Solar Path Lights

67520/B/W

67520 | 2,2W | SMD | Solar powered | Night sensor | Aluminium

Hybrid charging (USB & Solar).

LED BUILT IN | 80 CRI | DIMMABLE | Solar | IP65 | IK 06 | CE | 2 YEAR

Night Sensor (ON/OFF)
Dimmer switch: 5-100%
Solar charging time: 20Hrs
USB charging time: 6Hrs

Working time:
9Hrs in 100% Light intensity
20Hrs in 50% Light intensity



67520A/B/W

67520A | 2,2W | SMD | Solar powered | Night sensor | Aluminium

Hybrid charging (USB & Solar).

LED BUILT IN | 80 CRI | DIMMABLE | Solar | IP65 | IK 06 | CE | 2 YEAR

Night Sensor (ON/OFF)
Dimmer switch: 5-100%
Solar charging time: 20Hrs
USB charging time: 6Hrs

Working time:
9Hrs in 100% Light intensity
20Hrs in 50% Light intensity



050250/B

050250/B | Wall bracket for 67520 & 67520A | Aluminium

CE | 24



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Class		Notes
67520/B/W	Black	Warm white	3000K	2,2W	150lm	III	4	2x2200mAh lithium batteries
67520A/B/W	Black	Warm white	3000K	2,2W	150lm	III	2	2x2200mAh lithium batteries

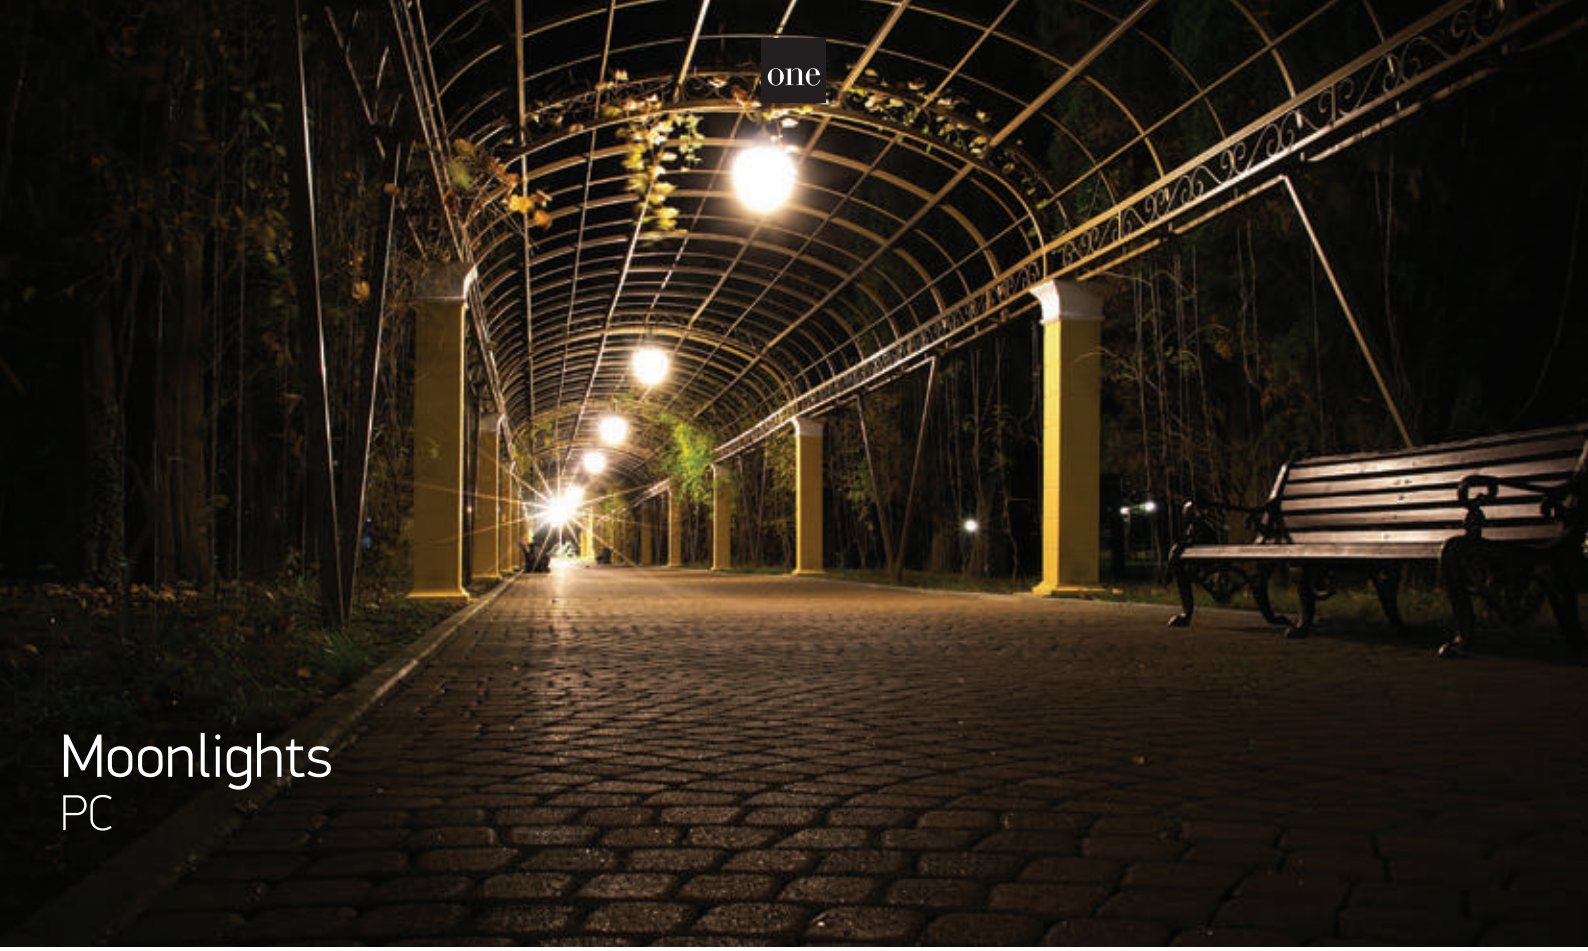

Moonlights
PC

63028

63028 | 15W | E27 | PC

IP54

l380mml

63028A

63028A | 20W | E27 | PC

IP54

l450mml

63028B

63028B | 30W | E27 | PC

IP54

l560mml

Order Code	Colour	Watts	Input	Class		Notes
63028	White	15W	100-240V		1	Pendant / Ground / Spike
63028A	White	20W	100-240V		1	Pendant / Ground / Spike
63028B	White	30W	100-240V		1	Pendant / Ground / Spike

Stone Moonlights

7072

7072 | 20W | E27 | Plastic

Complete with SCHUKO plug.

CE 3 YEAR

IP65



7072A

7072A | 20W | E27 | Plastic

Complete with SCHUKO plug.

CE 3 YEAR

IP65



Order Code	Colour	Lampholder	Watts	Input	Class			Notes
7072	Stone	E27	20W	100-240V	☐	200cm	4	-
7072A	Stone	E27	20W	100-240V	☐	200cm	1	-

The LED Underwater Range
Stainless steel

69064A/W

69064B/W

69064C/W

one

The LED Underwater Range

Stainless steel

69064A/C

69064A | 3x1W | LED | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · DIMMABLE · ADJUSTABLE · IK08 · CE · IP68 · 2 YEAR



69064B/C

69064B | 6x1W | LED | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · DIMMABLE · ADJUSTABLE · IK08 · CE · IP68 · 2 YEAR



69064C/C

69064C | 9x1W | LED | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · DIMMABLE · ADJUSTABLE · IK08 · CE · IP68 · 2 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
69064A/C	Stainless steel	Cool white	4000K	3x1W	200lm	24V DC	III	500cm	18	Requires 24V DC driver
69064A/W	Stainless steel	Warm white	3000K	3x1W	200lm	24V DC	III	500cm	18	Requires 24V DC driver
69064B/C	Stainless steel	Cool white	4000K	6x1W	400lm	24V DC	III	500cm	10	Requires 24V DC driver
69064B/W	Stainless steel	Warm white	3000K	6x1W	400lm	24V DC	III	500cm	10	Requires 24V DC driver
69064C/C	Stainless steel	Cool white	4000K	9x1W	600lm	24V DC	III	500cm	8	Requires 24V DC driver
69064C/W	Stainless steel	Warm white	3000K	9x1W	600lm	24V DC	III	500cm	8	Requires 24V DC driver

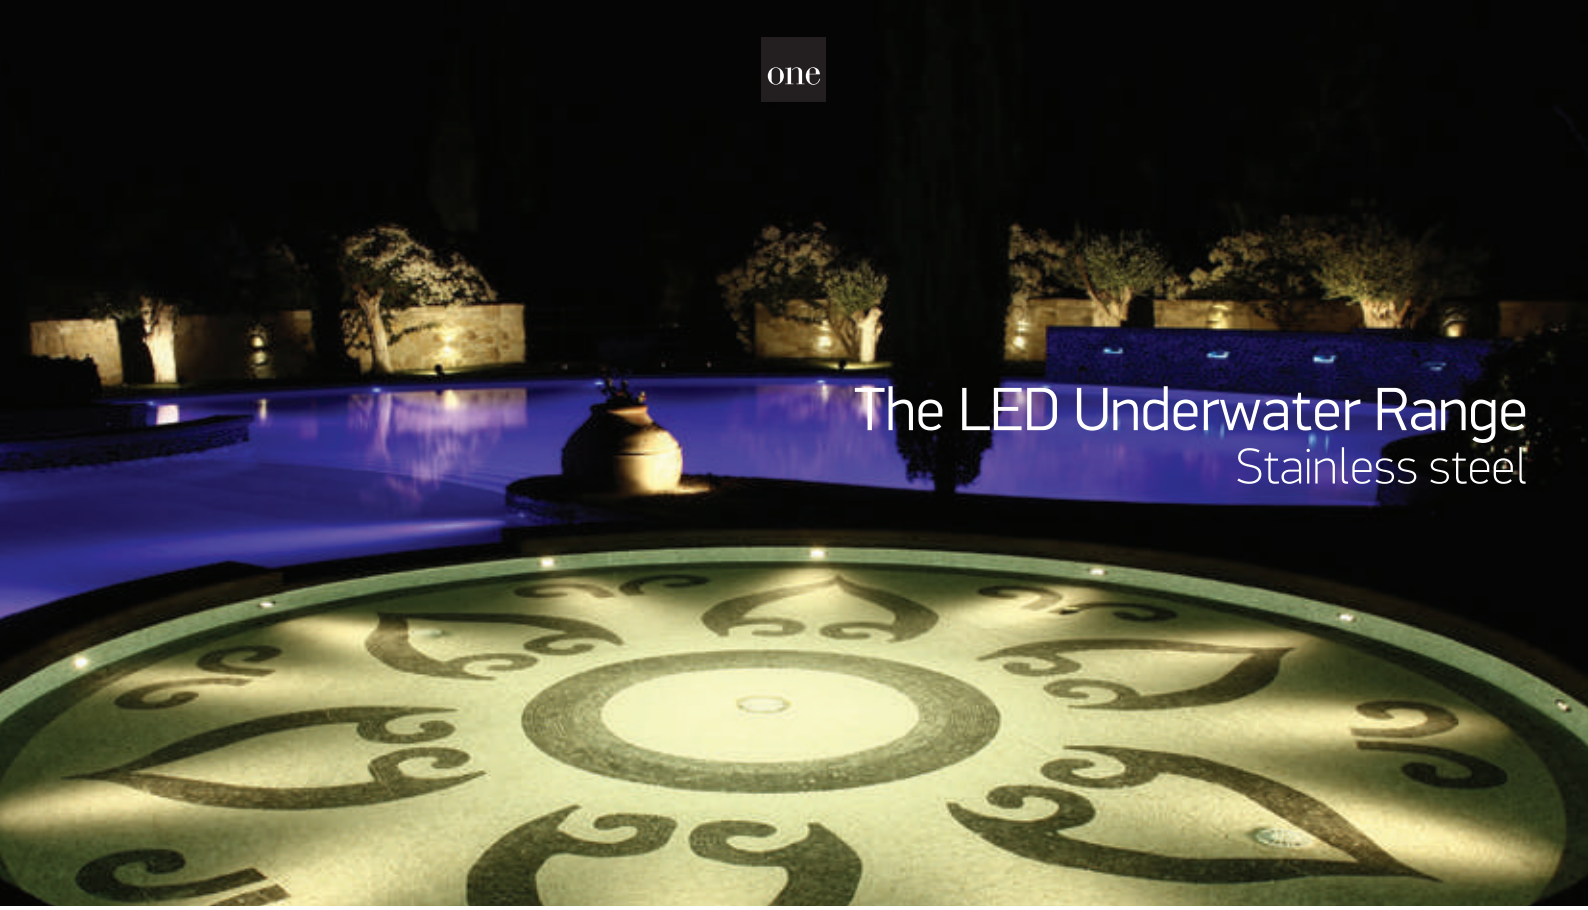

The LED Underwater Range
Stainless steel

69066M/W

69066M | 0,3W | SMD | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · DIMMABLE · IK08 · CE · 2 YEAR · IP68

Supplied with box.



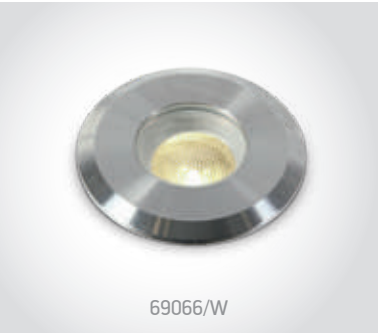

69066/W

69066 | 1W | SMD | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · DIMMABLE · IK10 · CE · 2 YEAR · IP68

Supplied with box.



69066A/W

69066A | 3x1W | SMD | Stainless steel 316

Underwater only / 2m max depth.

2m max · LED BUILT IN · 80 CRI · DIMMABLE · IK10 · CE · 2 YEAR · IP68

Supplied with box.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69066M/W	Stainless steel	Warm white	3000K	0,3W	30lm	24V DC	III	500cm	22mm	45mm	50	Requires 24V DC driver
69066/W	Stainless steel	Warm white	3000K	1W	70lm	24V DC	III	500cm	46mm	90mm	20	Requires 24V DC driver
69066A/C	Stainless steel	Cool white	4000K	3x1W	210lm	24V DC	III	500cm	88mm	85mm	20	Requires 24V DC driver
69066A/W	Stainless steel	Warm white	3000K	3x1W	210lm	24V DC	III	500cm	88mm	85mm	20	Requires 24V DC driver

The LED Underwater Range
Stainless steel

69066B/C

69066B | 6x1W | SMD | Stainless steel 316

Underwater only / 2m max depth.

2m max

LED BUILT IN | 80 CRI | DIMMABLE

IK10 | CE | 2 YEAR

IP68

69066B/W

69066B | 6x1W | SMD | Stainless steel 316

Underwater only / 2m max depth.

2m max

LED BUILT IN | 80 CRI | DIMMABLE

IK10 | CE | 2 YEAR

IP68



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69066B/C	Stainless steel	Cool white	4000K	6x1W	420lm	24V DC	III	500cm	140mm	110mm	8	Requires 24V DC driver
69066B/W	Stainless steel	Warm white	3000K	6x1W	420lm	24V DC	III	500cm	140mm	110mm	8	Requires 24V DC driver

Industrial & Floodlights

Pages 647-674

20

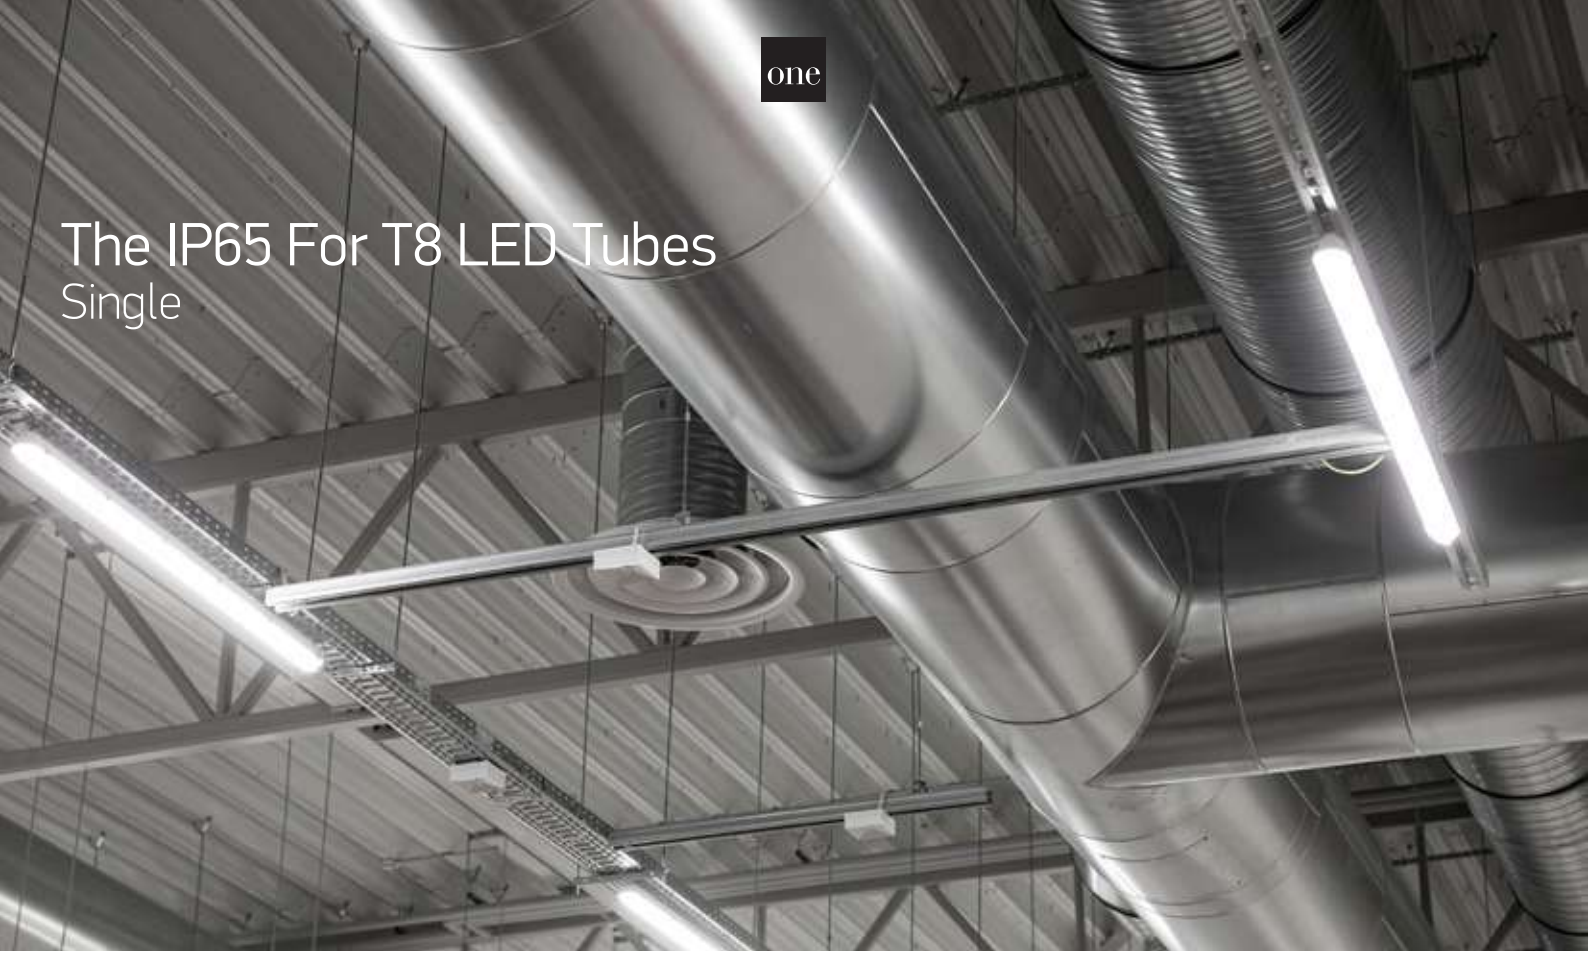

The IP65 For T8 LED Tubes
Single

38120P

38120P | T8 LED 60cm | PC + PC

new

IP65

IK08

CE 3 YEAR



38140P

38140P | T8 LED 120cm | PC + PC

new

IP65

IK08

CE 3 YEAR

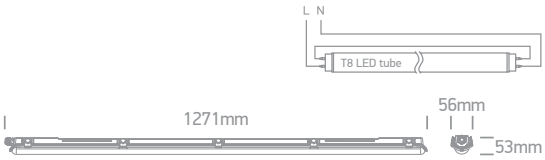

38150P

38150P | T8 LED 150cm | PC + PC

new

IP65

IK08

CE 3 YEAR

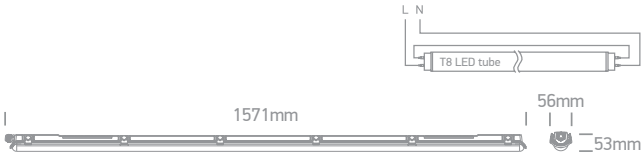

Order Code	Colour	Input	Class		Notes
38120P	Grey	100-240V		9	Only suitable for T8 LED tubes
38140P	Grey	100-240V		9	Only suitable for T8 LED tubes
38150P	Grey	100-240V		9	Only suitable for T8 LED tubes

The IP65 For T8 LED Tubes
Double

38220P | 2xT8 LED 60cm | PC + PC

new

IP65



38240P | 2xT8 LED 120cm | PC + PC

new

IP65

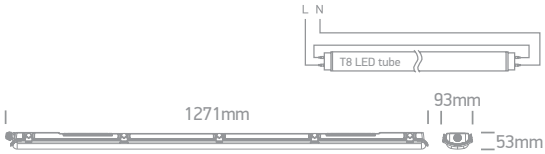

38250P | 2xT8 LED 150cm | PC + PC

new

IP65

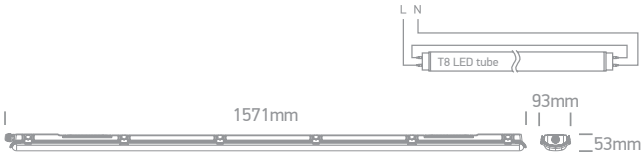

Order Code	Colour	Input	Class		Notes
38220P	Grey	100-240V		6	Only suitable for T8 LED tubes
38240P	Grey	100-240V		6	Only suitable for T8 LED tubes
38250P	Grey	100-240V		6	Only suitable for T8 LED tubes

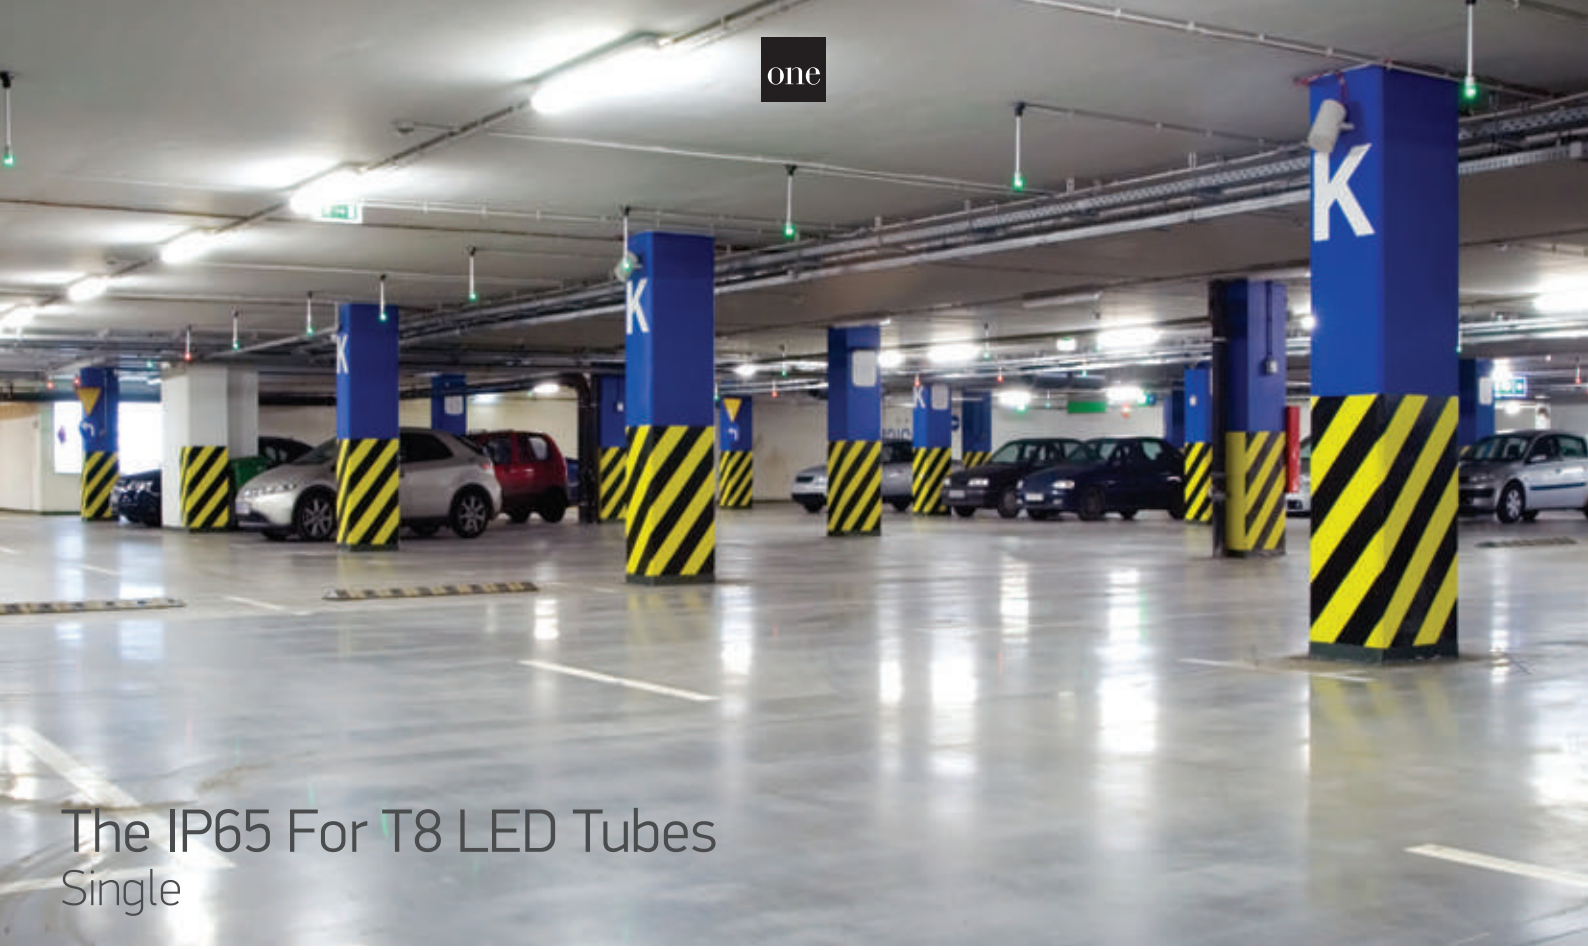

The IP65 For T8 LED Tubes
Single

38118E | T8 LED 60cm | PC + PC

IK08

CE 5 YEAR

IP65

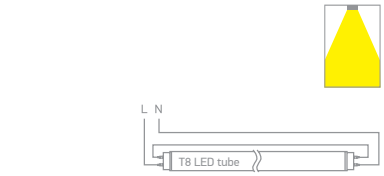



38136E | T8 LED 120cm | PC + PC

IK08

CE 5 YEAR

IP65

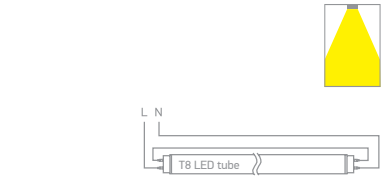



38158E | T8 LED 150cm | PC + PC

IK08

CE 5 YEAR

IP65

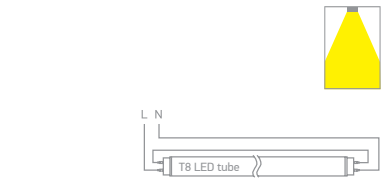



Order Code	Colour	Input	Class		Notes
38118E	Grey	100-240V		15	Only suitable for T8 LED tubes
38136E	Grey	100-240V		9	Only suitable for T8 LED tubes
38158E	Grey	100-240V		9	Only suitable for T8 LED tubes

The IP65 For T8 LED Tubes
Double

38218E

38218E | 2xT8 LED 60cm | PC + PC

IK08

CE 5 YEAR

IP65

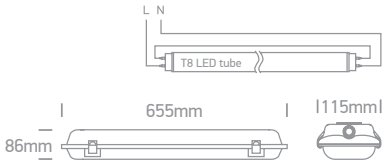

38236E

38236E | 2xT8 LED 120cm | PC + PC

IK08

CE 5 YEAR

IP65

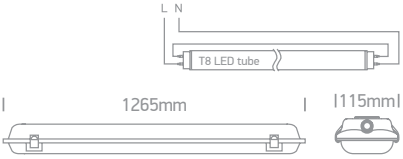

38258E

38258E | 2xT8 LED 150cm | PC + PC

IK08

CE 5 YEAR

IP65

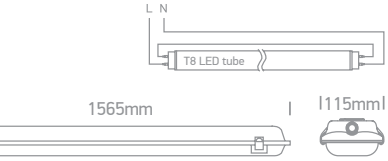

Order Code	Colour	Input	Class		Notes
38218E	Grey	100-240V		9	Only suitable for T8 LED tubes
38236E	Grey	100-240V		6	Only suitable for T8 LED tubes
38258E	Grey	100-240V		6	Only suitable for T8 LED tubes

The High Power IP65 LED Range

38118M/C

38118M | 15W | SMD | PC + opal PC diffuser

LED BUILT IN
80 CRI
IK 08
CE
3 YEAR
IP65

Stainless steel clips.



38158M/C

38158M | 40W | SMD | PC + opal PC diffuser

LED BUILT IN
80 CRI
IK 08
CE
3 YEAR
IP65

Stainless steel clips.

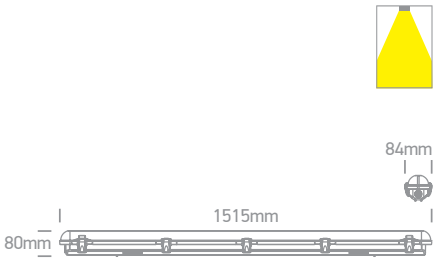

38236M/C

38236M | 60W | SMD | PC + opal PC diffuser

LED BUILT IN
80 CRI
IK 08
CE
3 YEAR
IP65

Stainless steel clips.

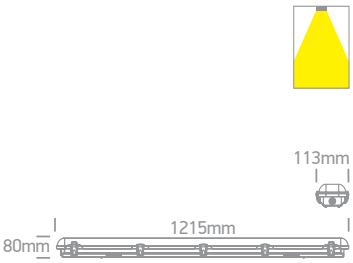

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38118M/C	Grey	Cool white	4000K	15W	1500lm	230V		12	Complete with 350mA driver
38158M/C	Grey	Cool white	4000K	40W	4000lm	230V		9	Complete with 700mA driver
38236M/C	Grey	Cool white	4000K	60W	6000lm	230V		6	Complete with 1050mA driver

The IP65 CCT V & PV Range

38120M | 25W PV | SMD | PC + PC

new IP65

LED BUILT IN · 80 CRI · CCT V · PV · IK08 · CE · 3 YEAR

Stainless steel clips.



38140M | 50W PV | SMD | PC + PC

new IP65

LED BUILT IN · 80 CRI · CCT V · PV · IK08 · CE · 3 YEAR

Stainless steel clips.



38140ME | 50W PV | SMD | Emergency 3Hrs Maintained | PC + PC

new IP65

LED BUILT IN · 80 CRI · CCT V · PV · IK08 · CE · 3 YEAR

Stainless steel clips.



38150M | 70W PV | SMD | PC + PC

new IP65

LED BUILT IN · 80 CRI · CCT V · PV · IK08 · CE · 3 YEAR

Stainless steel clips.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Battery Duration		Notes
38120M/V	Grey	CCT V	3000K-4000K-6500K	14W-18W-22W-25W	2500lm@25W	230V		-	15	Complete with PV driver
38140M/V	Grey	CCT V	3000K-4000K-6500K	28W-36W-42W-50W	5000lm@50W	230V		-	12	Complete with PV driver
38140ME/V	Grey	CCT V	3000K-4000K-6500K	28W-36W-42W-50W	5000lm@50W	230V		3Hrs	12	Supplied with battery
38150M/V	Grey	CCT V	3000K-4000K-6500K	48W-55W-62W-70W	7000lm@70W	230V		-	9	Complete with PV driver

The IP65 CCT V & PV Range
Enclosed

38120N/V

38120N | 18W PV | SMD | PC + PC

new IP65

LED BUILT IN · 80 CRI · CCT V · PV · IK08 · CE · 3 YEAR

Stainless steel clips.



38140N/V

38140N | 36W PV | SMD | PC + PC

new IP65

LED BUILT IN · 80 CRI · CCT V · PV · IK08 · CE · 3 YEAR

Stainless steel clips.

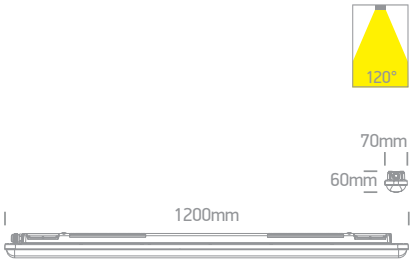

38150N/V

38150N | 48W PV | SMD | PC + PC

new IP65

LED BUILT IN · 80 CRI · CCT V · PV · IK08 · CE · 3 YEAR

Stainless steel clips.

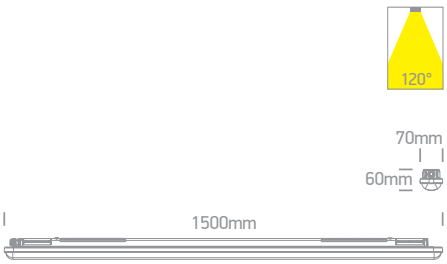

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
38120N/V	Grey	CCT V	3000K-4000K-6500K	10W-13W-15W-18W	2160lm@18W	120°	230V		16	Complete with PV driver
38140N/V	Grey	CCT V	3000K-4000K-6500K	20W-25W-30W-36W	4320lm@36W	120°	230V		16	Complete with PV driver
38150N/V	Grey	CCT V	3000K-4000K-6500K	27W-35W-40W-48W	5760lm@48W	120°	230V		12	Complete with PV driver

The IP65 LED Slim Range
PC

38118LA/C

38118LA | 18W | SMD | PC

LED BUILT IN
80 CRI
IK 08
CE
2 YEAR
IP65

Optional suspension kit. Order code 050084.

Complete with 2pcs fixing clips.



38136LA/C

38136LA | 36W | SMD | PC

LED BUILT IN
80 CRI
IK 08
CE
2 YEAR
IP65

Optional suspension kit. Order code 050084.

Complete with 3pcs fixing clips.

38145LA/C

38145LA | 45W | SMD | PC

LED BUILT IN
80 CRI
IK 08
CE
2 YEAR
IP65

Optional suspension kit. Order code 050084.

Complete with 4pcs fixing clips.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38118LA/D	White	Daylight	6000K	18W	1600lm	100-240V		50cm	20	Complete with driver
38118LA/C	White	Cool white	4000K	18W	1600lm	100-240V		50cm	20	Complete with driver
38136LA/D	White	Daylight	6000K	36W	3200lm	100-240V		50cm	20	Complete with driver
38136LA/C	White	Cool white	4000K	36W	3200lm	100-240V		50cm	20	Complete with driver
38145LA/D	White	Daylight	6000K	45W	4100lm	100-240V		50cm	20	Complete with driver
38145LA/C	White	Cool white	4000K	45W	4100lm	100-240V		50cm	20	Complete with driver

The IP65 LED Connectable Range
Single

38118LC/C

38118LC | 18W | SMD | Connectable | PC

Supermarket linear range.

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
IP65

Optional suspension kit. Order code 050084.

Connect 20 fittings maximum.

38136LC/C

38136LC | 36W | SMD | Connectable | PC

Supermarket linear range.

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
IP65

Optional suspension kit. Order code 050084.

Connect 10 fittings maximum.

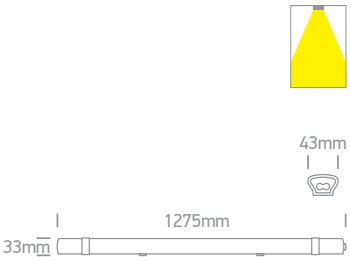

38145LC/C

38145LC | 45W | SMD | Connectable | PC

Supermarket linear range.

LED BUILT IN
80 CRI
IK08
CE
2 YEAR
IP65

Optional suspension kit. Order code 050084.

Connect 10 fittings maximum.

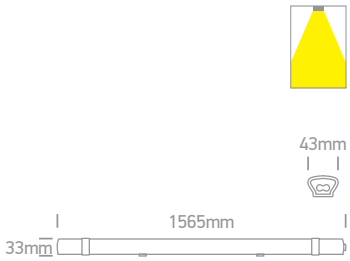

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38118LC/C	White	Cool white	4000K	18W	1550lm	100-240V		50cm	20	Complete with driver
38118LC/W	White	Warm white	3000K	18W	1500lm	100-240V		50cm	20	Complete with driver
38136LC/C	White	Cool white	4000K	36W	3100lm	100-240V		50cm	20	Complete with driver
38136LC/W	White	Warm white	3000K	36W	3000lm	100-240V		50cm	20	Complete with driver
38145LC/C	White	Cool white	4000K	45W	4000lm	100-240V		50cm	20	Complete with driver

The IP65 LED Connectable Range
Double

38236LC/C

38236LC | 36W | SMD | Connectable | PC

Supermarket linear range.

LED BUILT IN

80 CRI

IK08

CE

2 YEAR

IP65

Optional suspension kit. Order code 050084.

Connect 10 fittings maximum.

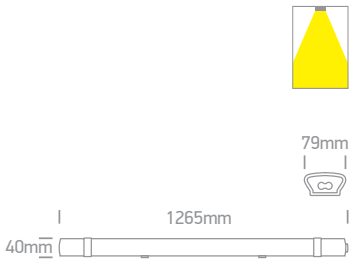

38245LC/C

38245LC | 45W | SMD | Connectable | PC

Supermarket linear range.

LED BUILT IN

80 CRI

IK08

CE

2 YEAR

IP65

Optional suspension kit. Order code 050084.

Connect 10 fittings maximum.

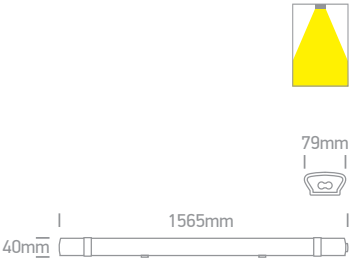

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38236LC/D	White	Daylight	6000K	36W	3100lm	100-240V		50cm	10	Complete with driver
38236LC/C	White	Cool white	4000K	36W	3100lm	100-240V		50cm	10	Complete with driver
38245LC/D	White	Daylight	6000K	45W	4000lm	100-240V		50cm	10	Complete with driver
38245LC/C	White	Cool white	4000K	45W	4000lm	100-240V		50cm	10	Complete with driver

The Supermarket Linear System

CCT V & PV

38100A/W/V

38100A | 20W PV | SMD | Linear system | Aluminium

Maximum 600W can be connected together.

new

IP20

LED BUILT IN | 90 CRI | CCT V | PV | CE | 3 YEAR

Complete with 2 pcs fixing clips & plastic connector.

Optional 2m suspension kit. Order code 050012.



38100B/W/V

38100B | 40W PV | SMD | Linear system | Aluminium

Maximum 600W can be connected together.

new

IP20

LED BUILT IN | 90 CRI | CCT V | PV | CE | 3 YEAR

Complete with 2 pcs fixing clips & plastic connector.

Optional 2m suspension kit. Order code 050012.



38100C/W/V

38100C | 60W PV | SMD | Linear system | Aluminium

Maximum 600W can be connected together.

new

IP20

LED BUILT IN | 90 CRI | CCT V | PV | CE | 3 YEAR

Complete with 2 pcs fixing clips & plastic connector.

Optional 2m suspension kit. Order code 050012.

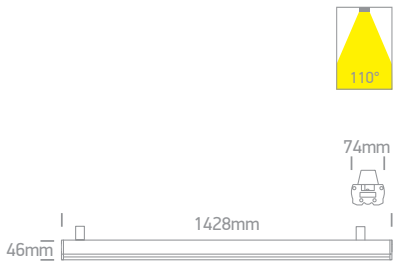

050012A

050012A | Connector for 38100A, 38100B, 38100C

CE | 5 YEAR | 100

new

050012 | Suspension 2m for 38100A, 38100B, 38100C

new

050012

CE | 5 YEAR | 100

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38100A/W/V	White	CCT V	3000K-4000K-5000K	12W-14W-17W-20W	2600lm@20W	110°	230V		80cm	10	Complete with PV driver
38100B/W/V	White	CCT V	3000K-4000K-5000K	23W-28W-34W-40W	5200lm@40W	110°	230V		140cm	10	Complete with PV driver
38100C/W/V	White	CCT V	3000K-4000K-5000K	34W-40W-50W-60W	7800lm@60W	110°	230V		170cm	10	Complete with PV driver

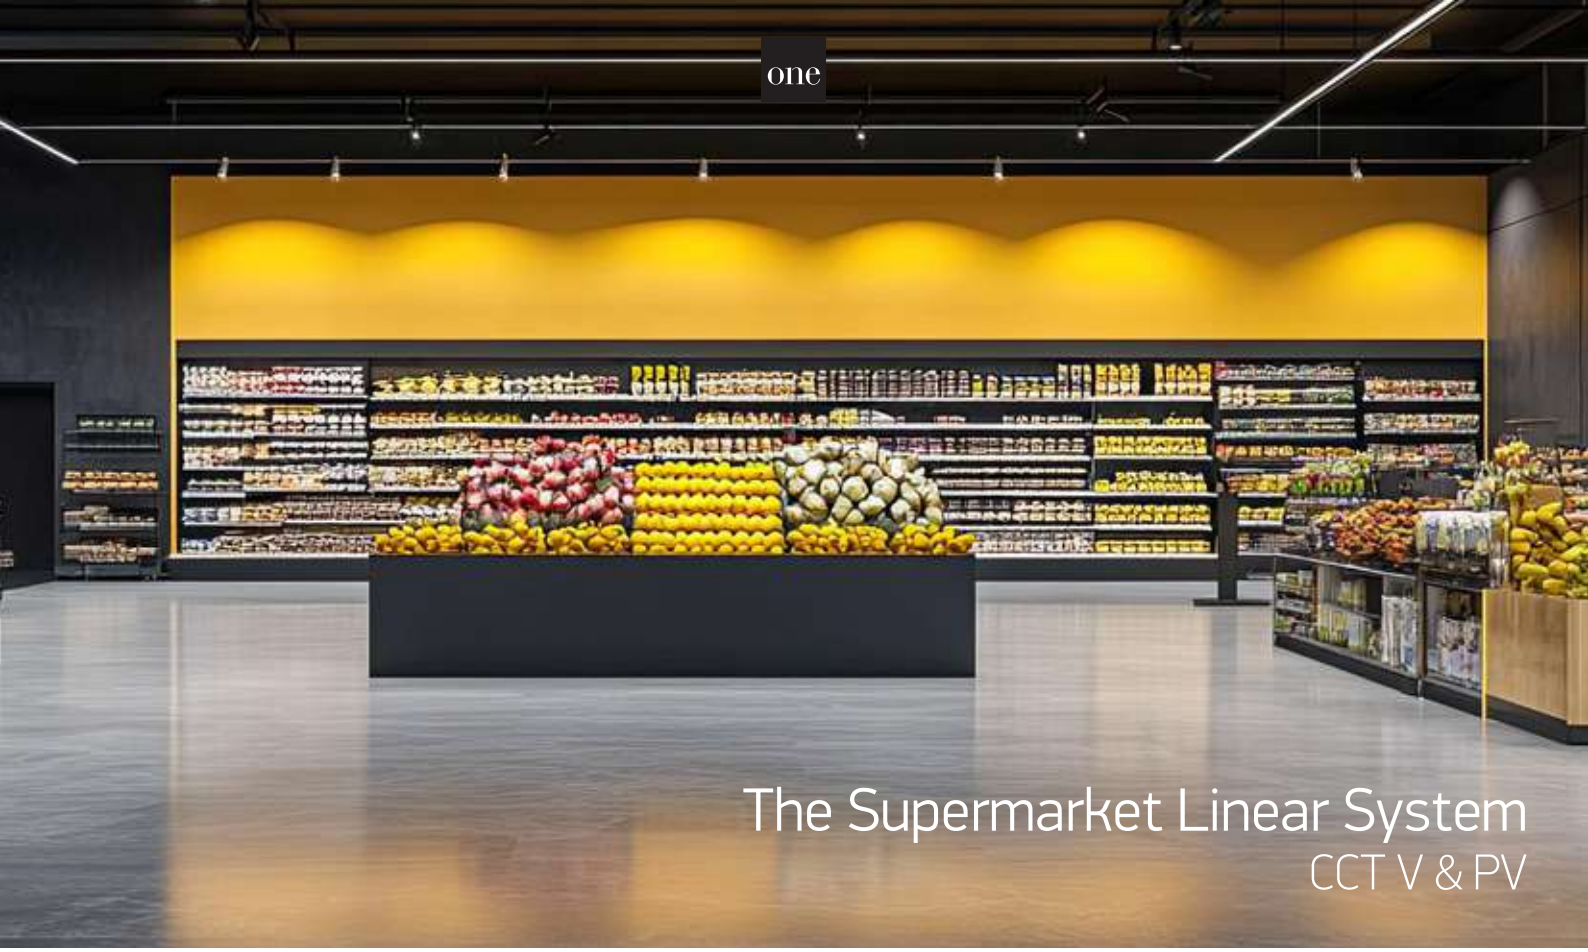

The Supermarket Linear System
CCT V & PV

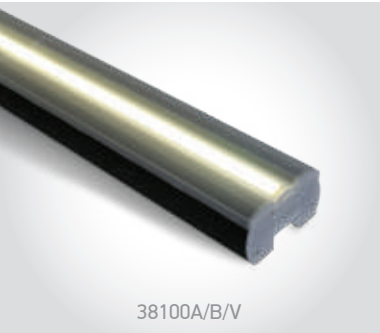

38100A/B/V

38100A | 20W PV | SMD | Linear system | Aluminium

Maximum 600W can be connected together.

new

IP20

LED BUILT IN

90 CRI

CCT V

PV

CE 3 YEAR

Complete with 2 pcs fixing clips & plastic connector.

Optional 2m suspension kit. Order code 050012.



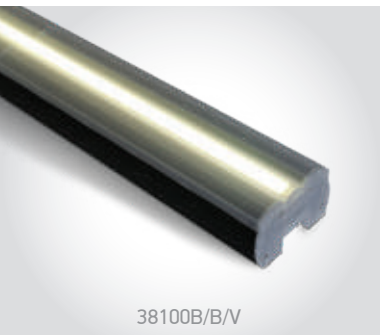

38100B/B/V

38100B | 40W PV | SMD | Linear system | Aluminium

Maximum 600W can be connected together.

new

IP20

LED BUILT IN

90 CRI

CCT V

PV

CE 3 YEAR

Complete with 2 pcs fixing clips & plastic connector.

Optional 2m suspension kit. Order code 050012.



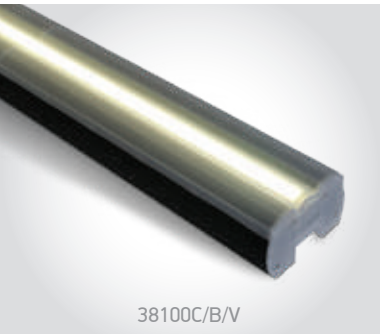

38100C/B/V

38100C | 60W PV | SMD | Linear system | Aluminium

Maximum 600W can be connected together.

new

IP20

LED BUILT IN

90 CRI

CCT V

PV

CE 3 YEAR

Complete with 2 pcs fixing clips & plastic connector.

Optional 2m suspension kit. Order code 050012.

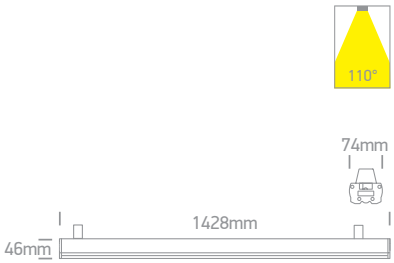

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38100A/B/V	Black	CCT V	3000K-4000K-5000K	12W-14W-17W-20W	2600lm@20W	110°	230V		80cm	10	Complete with PV driver
38100B/B/V	Black	CCT V	3000K-4000K-5000K	23W-28W-34W-40W	5200lm@40W	110°	230V		140cm	10	Complete with PV driver
38100C/B/V	Black	CCT V	3000K-4000K-5000K	34W-40W-50W-60W	7800lm@60W	110°	230V		170cm	10	Complete with PV driver

The Supermarket LED Linear Range
Aluminium

38280/W/C

38280 | 80W | SMD | Aluminium

Can be connected in line.

LED BUILT IN

90 CRI

ADJUSTABLE

3 YEAR

IP20

Complete with 2 Fixing clips & 2 connectors.

Complete with 3m suspension kit.

Adjustable sides



50mm

1200mm

140mm

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38280/W/C	White	Cool white	4000K	80W	7400lm	230V	⏚	4	Complete with 600mA & 1500mA drivers

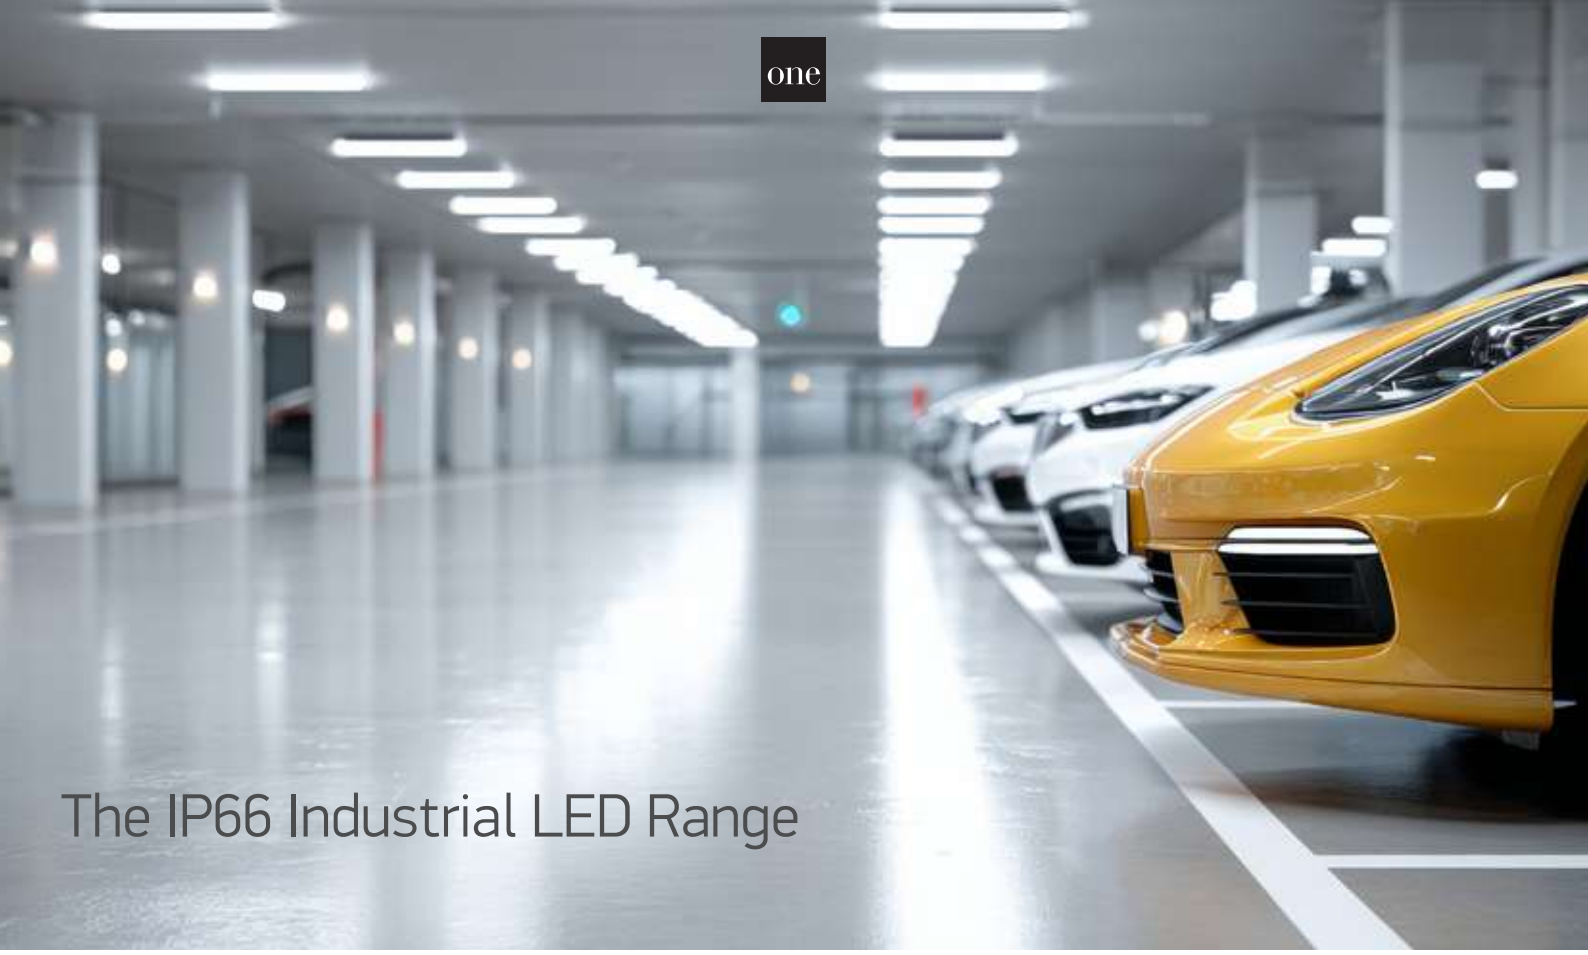

The IP66 Industrial LED Range

38115LB/C

38115LB | 15W | SMD | PC

LED BUILT IN · 80 CRI · IK08 · CE · 2 YEAR · IP66

Complete with 2pcs fixing clips.



38130LB/V

38130LB | 30W | SMD | PC

LED BUILT IN · 80 CRI · CCT V · IK08 · CE · 2 YEAR · IP66

Complete with 3pcs fixing clips.



38150LB/V

38150LB | 50W | SMD | PC

LED BUILT IN · 80 CRI · CCT V · IK08 · CE · 2 YEAR · IP66

Complete with 3pcs fixing clips.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38115LB/C	White	Cool white	4000K	15W	1725lm	230V		15	Complete with 140mA driver
38130LB/V	White	CCT V	3000K-4000K-6000K	30W	3450lm	230V		12	Complete with 230mA driver
38150LB/V	White	CCT V	3000K-4000K-6000K	50W	5750lm	230V		9	Complete with 300mA driver

The Industrial IP65 AC LED UFO
Aluminium

63100NA | 100W | SMD | AC LED | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP65



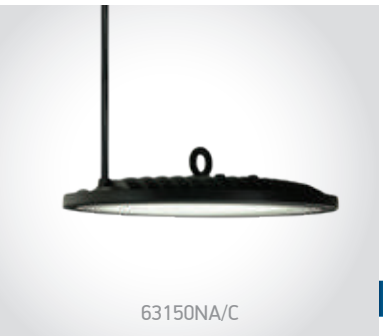

63150NA | 150W | SMD | AC LED | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP65



63200NA | 200W | SMD | AC LED | Aluminium

LED BUILT IN
80 CRI
CE
2 YEAR
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63100NA/C	Black	Cool white	4000K	100W	10000lm	90°	230V		150cm	10	AC LED
63150NA/C	Black	Cool white	4000K	150W	15000lm	90°	230V		150cm	10	AC LED
63200NA/C	Black	Cool white	4000K	200W	20000lm	90°	230V		150cm	10	AC LED

The Industrial IP65 UFO Range
CCT V & PV & BV

63100NB | 100W PV | SMD | Aluminium + PC

new
IP65

LED BUILT IN
80 CRI
CCT V
PV
IK 09
CE
5 YEAR



63150NB | 150W PV | SMD | Aluminium + PC

new
IP65

LED BUILT IN
80 CRI
CCT V
PV
IK 09
CE
5 YEAR



63200NB | 200W PV | SMD | Aluminium + PC

new
IP65

LED BUILT IN
80 CRI
CCT V
PV
IK 09
CE
5 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63100NB/V	Black	CCT V	3000K-4000K-5000K	60W-80W-100W	15000lm@100W	70°-90°-110°	230V		50cm	1	Complete with PV driver
63150NB/V	Black	CCT V	3000K-4000K-5000K	80W-120W-150W	22500lm@150W	70°-90°-110°	230V		50cm	1	Complete with PV driver
63200NB/V	Black	CCT V	3000K-4000K-5000K	100W-150W-200W	30000lm@200W	70°-90°-110°	230V		50cm	1	Complete with PV driver

The Industrial IP65 UFO Range
DALI

63150NL | 150W | SMD | DALI | Aluminium + PC

LED BUILT IN
80 CRI
DALI DIMMABLE
CE
5 YEAR
IP65



63240NL | 240W | SMD | DALI | Aluminium + PC

LED BUILT IN
80 CRI
DALI DIMMABLE
CE
5 YEAR
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63150NL/C	Black	Cool white	4000K	150W	22500lm	90°	230V		150cm	1	Complete with DALI 2 driver
63240NL/C	Black	Cool white	4000K	240W	36000lm	90°	230V		150cm	1	Complete with DALI 2 driver

one

63200N/V

63100N/V

The Industrial IP65 UFO Range

CCT V & PV

63100N/V

63100N | 100W PV | SMD | Aluminium + PC

LED BUILT IN

80 CRI

CCT V

PV

CE 5 YEAR

IP65



63150N/V

63150N | 150W PV | SMD | Aluminium + PC

LED BUILT IN

80 CRI

CCT V

PV

CE 5 YEAR

IP65



63200N/V

63200N | 200W PV | SMD | Aluminium + PC

LED BUILT IN

80 CRI

CCT V

PV

CE 5 YEAR

IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63100N/V	Black	CCT V	4000K-4700K-5700K	60W-80W-100W	15000lm@100W	90°	230V		150cm	1	Complete with PV driver
63150N/V	Black	CCT V	4000K-4700K-5700K	90W-120W-150W	22500lm@150W	90°	230V		150cm	1	Complete with PV driver
63200N/V	Black	CCT V	4000K-4700K-5700K	120W-160W-200W	30000lm@200W	90°	230V		150cm	1	Complete with PV driver

The Industrial IP65 Linear Range
Adjustable

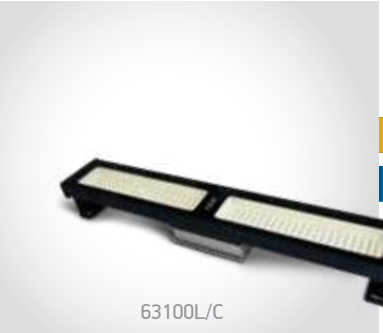
63100L/C

63100L/C | SMD | 100W | Linear high bay | Aluminium

new
IP65
LED BUILT IN
80 CRI
ADJUSTABLE
IK 06
CE 3 YEAR



63150L/C

63150L/C | SMD | 150W | Linear high bay | Aluminium

new
IP65
LED BUILT IN
80 CRI
ADJUSTABLE
IK 06
CE 3 YEAR

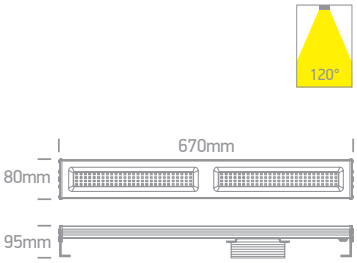

63200L/C

63200L/C | SMD | 200W | Linear high bay | Aluminium

new
IP65
LED BUILT IN
80 CRI
ADJUSTABLE
IK 06
CE 3 YEAR

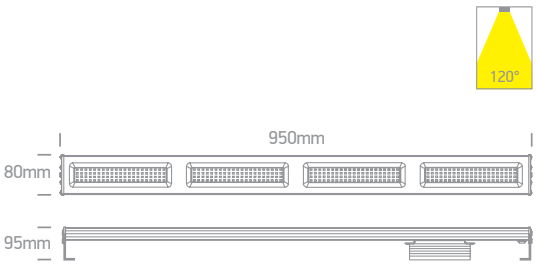

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63100L/C	Black	Cool white	4000K	100W	10000lm	120°	120-240V		100cm	6	Complete with driver
63150L/C	Black	Cool white	4000K	150W	15000lm	120°	120-240V		100cm	4	Complete with driver
63200L/C	Black	Cool white	4000K	200W	20000lm	120°	120-240V		100cm	4	Complete with driver

The AC Street Lights
CCT V

70118A/AN/V

70118A | SMD | DOB | 50W | Aluminium + PC

Mounting bracket must be ordered separately.

LED BUILT IN · 80 CRI · CCT V · ADJUSTABLE · IK 08 · CE · 3 YEAR · new · IP65

Wall mounting bracket.
Order code 050400A/AN.

Pole mounting bracket.
Order code 050400B/AN.



70118B/AN/V

70118B | SMD | DOB | 100W | Aluminium + PC

Mounting bracket must be ordered separately.

LED BUILT IN · 80 CRI · CCT V · ADJUSTABLE · IK 08 · CE · 3 YEAR · new · IP65

Wall mounting bracket.
Order code 050400A/AN.

Pole mounting bracket.
Order code 050400B/AN.



70118C/AN/V

70118C | SMD | DOB | 150W | Aluminium + PC

Mounting bracket must be ordered separately.

LED BUILT IN · 80 CRI · CCT V · ADJUSTABLE · IK 08 · CE · 3 YEAR · new · IP65

Wall mounting bracket.
Order code 050400A/AN.

Pole mounting bracket.
Order code 050400B/AN.



70118D/AN/V

70118D | SMD | DOB | 200W | Aluminium + PC

Mounting bracket must be ordered separately.

LED BUILT IN · 80 CRI · CCT V · ADJUSTABLE · IK 08 · CE · 3 YEAR · new · IP65

Wall mounting bracket.
Order code 050400A/AN.

Pole mounting bracket.
Order code 050400B/AN.

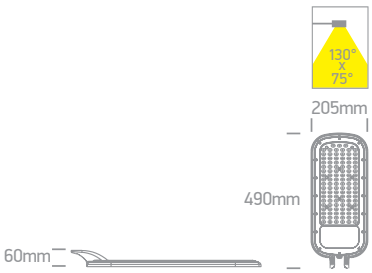

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
70118A/AN/V	Anthracite	CCT V	3000K-4000K-5000K	50W	5000lm	130°x75°	230V		100cm	6	-
70118B/AN/V	Anthracite	CCT V	3000K-4000K-5000K	100W	10000lm	130°x75°	230V		100cm	5	-
70118C/AN/V	Anthracite	CCT V	3000K-4000K-5000K	150W	15000lm	130°x75°	230V		100cm	5	-
70118D/AN/V	Anthracite	CCT V	3000K-4000K-5000K	200W	20000lm	130°x75°	230V		100cm	5	-

one

AC LED Floodlights

CCT V 30-150W

7028CB/B/V

7028CB | 30W | SMD | Aluminium + tempered glass

new
IP65
LED BUILT IN
80 CRI
CCT V
ADJUSTABLE
IK 06
CE
2 YEAR

CCT V button.



7028CC/B/V

7028CC | 50W | SMD | Aluminium + tempered glass

new
IP65
LED BUILT IN
80 CRI
CCT V
ADJUSTABLE
IK 06
CE
2 YEAR

CCT V button.



7028CD/B/V

7028CD | 100W | SMD | Aluminium + tempered glass

new
IP65
LED BUILT IN
80 CRI
CCT V
ADJUSTABLE
IK 06
CE
2 YEAR

CCT V button.



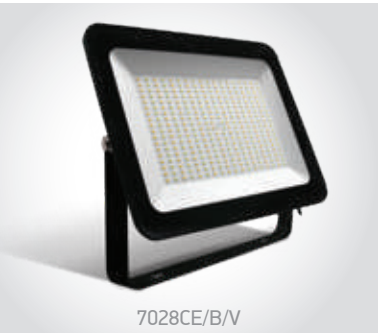
7028CE/B/V

7028CE | 150W | SMD | Aluminium + tempered glass

new
IP65
LED BUILT IN
80 CRI
CCT V
ADJUSTABLE
IK 06
CE
2 YEAR

CCT V button.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028CB/B/V	Black	CCT V	3000K-4000K-6500K	30W	3000lm	110°	230V		50cm	20	AC LED
7028CC/B/V	Black	CCT V	3000K-4000K-6500K	50W	5000lm	110°	230V		50cm	10	AC LED
7028CD/B/V	Black	CCT V	3000K-4000K-6500K	100W	10000lm	110°	230V		50cm	5	AC LED
7028CE/B/V	Black	CCT V	3000K-4000K-6500K	150W	15000lm	110°	230V		50cm	4	AC LED

AC LED Floodlights
CCT V 200-300W

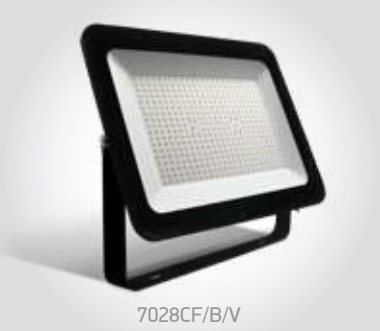

7028CF/B/V

7028CF | 200W | SMD | Aluminium + tempered glass

new

IP65

LED BUILT IN · 80 CRI · CCT V · ADJUSTABLE · IK 06 · CE · 2 YEAR

CCT V button.



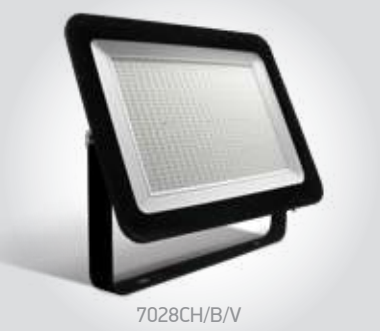

7028CH/B/V

7028CH | 300W | SMD | Aluminium + tempered glass

new

IP65

LED BUILT IN · 80 CRI · CCT V · ADJUSTABLE · IK 06 · CE · 2 YEAR

CCT V button.



7028CF/B/D

7028CF | 250W | SMD | Aluminium + tempered glass

IP65

LED BUILT IN · 80 CRI · ADJUSTABLE · CE · 2 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028CF/B/V	Black	CCT V	3000K-4000K-6500K	200W	20000lm	110°	230V		50cm	4	AC LED
7028CH/B/V	Black	CCT V	3000K-4000K-6500K	300W	30000lm	110°	230V		50cm	2	AC LED
7028CF/B/D	Black	Daylight	6000K	250W	22500lm	110°	230V		30cm	4	AC LED

The LED Wall Washers

RGB & RGBW

7055B/RGB

7055B/RGB | 24x1,5W | LED | RGB | Aluminium

Connect maximum 5pcs.

LED BUILT IN · DIMMABLE · ADJUSTABLE · CE · 5 YEAR · IP66

89100LP
DALI LED Controller 4 channel.

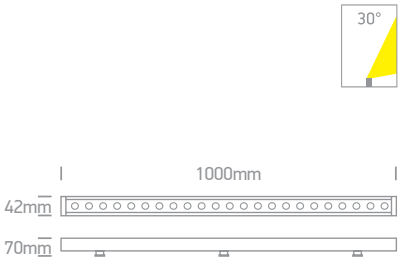

7055A/RGBW

7055A/RGBW | 12W | LED | RGB + W | Aluminium

Connect maximum 10pcs.

LED BUILT IN · 80 CRI · DIMMABLE · ADJUSTABLE · IK08 · CE · 5 YEAR · new · IP66

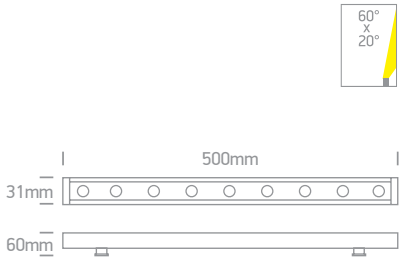

7055B/RGBW

7055B/RGBW | 24W | LED | RGB + W | Aluminium

Connect maximum 5pcs.

LED BUILT IN · 80 CRI · DIMMABLE · ADJUSTABLE · IK08 · CE · 5 YEAR · new · IP66

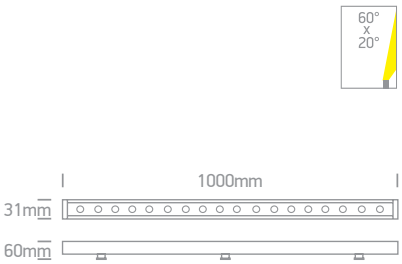

Order Code	Colour	Light Colour	CCT (K)	Watts	Beam Angle	Input	Class			Notes
7055B/RGB	Grey	RGB	-	24x1,5W	30°	24V DC	III	100cm	12	Requires 24V DC driver
7055A/RGBW	Grey	RGB + Warm white	RGB + 3000K	12W	60°x20°	24V DC	III	100cm	12	Requires 24V DC driver
7055B/RGBW	Grey	RGB + Warm white	RGB + 3000K	24W	60°x20°	24V DC	III	100cm	12	Requires 24V DC driver

The LED Wall Washers
Single Colour

7055A | 12x1W | LED | Aluminium

Connect maximum 10pcs.

LED BUILT IN · 80 CRI · DIMMABLE · ADJUSTABLE · CE · 5 YEAR · IP66

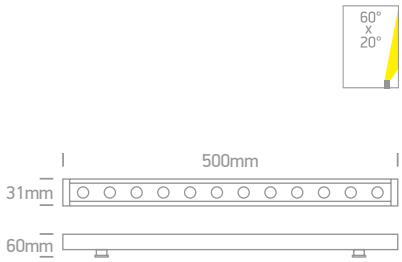

7055B | 24x1W | LED | Aluminium

Connect maximum 5pcs.

LED BUILT IN · 80 CRI · DIMMABLE · ADJUSTABLE · CE · 5 YEAR · IP66

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7055A/C	Grey	Cool white	4000K	12x1W	850lm	60°x20°	24V DC	III	100cm	12	Requires 24V DC driver
7055A/W	Grey	Warm white	3000K	12x1W	850lm	60°x20°	24V DC	III	100cm	12	Requires 24V DC driver
7055B/C	Grey	Cool white	4000K	24x1W	1700lm	60°x20°	24V DC	III	100cm	12	Requires 24V DC driver
7055B/W	Grey	Warm white	3000K	24x1W	1700lm	60°x20°	24V DC	III	100cm	12	Requires 24V DC driver

The LED High Power Box
Aluminium

7058A/W/V

7058A | 120W PV | SMD | Surface mounted | Aluminium

LED BUILT IN
80 CRI
CCT V
PV
IK 08
CE
5 YEAR
IP65

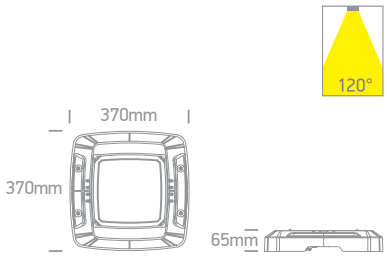

7058R/W/C

7058R | 120W | SMD | Recessed mounted | Aluminium

Ideal for petrol stations, showrooms & warehouses.

LED BUILT IN
70 CRI
CE
5 YEAR
IP65

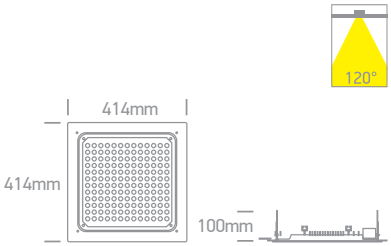

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
7058A/W/V	White	CCT V	3000K-4000K-5000K	36W-60W-90W-120W	18000lm@120W	120°	230V		-	-	1	Complete with PV driver
7058R/W/C	White	Cool white	4000K	120W	10200lm	120°	100-240V		380x380mm	130mm	1	Complete with driver

The Industrial LED Lights
Aluminium

7056A | 50W | SMD | Aluminium

LED BUILT IN
80 CRI
CE
3 YEAR
IP65



7056A | 50W | SMD | Aluminium

LED BUILT IN
80 CRI
CCT V
CE
3 YEAR
new
IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7056A/C	Black	Cool white	4000K	50W	4250lm	230V		6	Complete with driver
7056A/V	Black	CCT V	3000K-4000K-5000K	50W	4250lm	230V		6	Complete with 1200mA driver

The LED Park Light
CCT V

70112 | 75W PV | LED | Aluminium

LED BUILT IN

80 CRI

CCT V

PV

IK08

CE

5 YEAR

IP66





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
70112/B/V	Black	CCT V	2700K-3300K-4000K	25W-40W-60W-75W	8250lm@75W	120-240V		150cm	1	Complete with PV driver

The LED Park Lantern
Aluminium

70110 | 60W | LED | Aluminium

LED BUILT IN

70 CRI

CE

5 YEAR

IP66



70105 | 50W | COB | Aluminium

LED BUILT IN

70 CRI

CE

5 YEAR

IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
70110/AN/C	Anthracite	Cool white	4000K	60W	4500lm	Assymetric	100-240V		100cm	1	Complete with driver
70105/AN/C	Anthracite	Cool white	4000K	50W	4000lm	60°	100-240V		500cm	1	Complete with driver

Exit

one

Emergency Lights

Pages 677-686

21

Ceiling Emergency Point

89412 | 3W | LED | Emergency 3Hrs Non-Maintained | Plastic

Self-test.

LED BUILT IN

2 YEAR

IP20

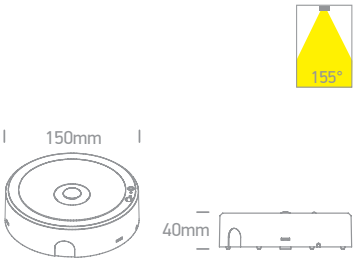

Order Code	Colour	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
89412/W	White	3W	300lm	155°	230V		20	Supplied with battery

Emergency LED Recessed Spot

89002B

89002B | 1,5W | LED | Emergency 3Hrs Non-Maintained | Plastic

Self-test.

LED BUILT IN

CE 2 YEAR

IP20



89002C

89002C | 3W | LED | Emergency 3Hrs Non-Maintained | Plastic

Self-test.

LED BUILT IN

CE 2 YEAR

IP20



89002

89002 | 3W | LED | Emergency 3Hrs Maintained & Non-Maintained | Recessed | Plastic + aluminium

LED BUILT IN

CE 2 YEAR

IP20

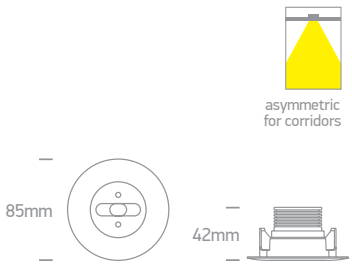

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Battery Type	Battery Duration				Notes
89002B	White	Cool light	4000K	1,5W	150lm	125°	230V		-	3Hrs	35mm	120mm	20	Supplied with battery
89002C	White	Cool light	4000K	3W	300lm	155°	230V		-	3Hrs	45mm	130mm	20	Supplied with battery
89002	White	Daylight	6000K	3W	170lm	Asymmetric	230V		Li-FePO4 3,2V 1,5Ah	3Hrs	72mm	120mm	12	Supplied with battery

Emergency LED Plafo

67218E/W/V

67218E | 15W | SMD | Emergency 3Hrs Maintained | Plastic

LED BUILT IN · 80 CRI · CCT V · IK 10 · CE · 3 YEAR · IP65

Optional ring.
Order code 67218R/B Black.



67366E/W/V

67366E | 12W | SMD | Emergency 3Hrs Maintained | PC

new · IP54

LED BUILT IN · 80 CRI · CCT V · IK 08 · CE · 2 YEAR



67280ANE/G/W

67280ANE | 15W | SMD | Emergency 3Hrs Maintained | Plastic

LED BUILT IN · 80 CRI · IK 08 · CE · 2 YEAR · IP65

Optional ring. Order code
050410/AN Anthracite.



67282ANE/G/W

67282ANE | 16W | SMD | Emergency 3Hrs Maintained | Plastic

LED BUILT IN · 80 CRI · IK 08 · CE · 2 YEAR · IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Battery Duration		Notes
67218E/W/V	White	CCT V	3000K-4000K-6500K	15W	1600lm	230V		3Hrs	6	Supplied with battery
67366E/W/V	White	CCT V	3000K-4000K-5000K	12W	1000lm	230V		3Hrs	20	Supplied with battery
67280ANE/G/W	Grey	Warm white	3000K	15W	1000lm	230V		3Hrs	10	Supplied with battery
67282ANE/G/W	Grey	Warm white	3000K	16W	1280lm	230V		3Hrs	10	Supplied with battery

Emergency LED Wall & Ceiling

89404

89404 | 5W | LED | Emergency 3Hrs Maintained | PC

LED BUILT IN
18m VIEW
2 YEAR
IP65



Supplied with 3 stickers.



89404A

89404A | 4W | LED | Emergency 3Hrs Maintained | PC

Auto self-test & test button.

new
LED BUILT IN
18m VIEW
2 YEAR
IP65



Supplied with 3 stickers.



89408/W

89408 | 3W | LED | Emergency 3Hrs Maintained | Auto monthly test | PC

Wall mounted.

LED BUILT IN
24m VIEW
2 YEAR
IP20



Supplied with 2 stickers.

89414/W

89414 | 1W | LED | Emergency 3Hrs Maintained & Non-Maintained modes | PC

Ceiling/Wall mounted | Self-test.

new
LED BUILT IN
30m VIEW
2 YEAR
IP20



Supplied with 4 stickers.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Battery Type	Battery Duration		Notes
89404	White	Daylight	6000K	5W	400lm	230V		Li-FePO4 3,2V 1,5Ah	3Hrs	12	Supplied with battery
89404A	White	Daylight	6000K	4W	400lm	230V		Li-FePO4 3,2V 1,5Ah	3Hrs	12	Supplied with battery
89408/W	White	Daylight	6000K	3W	55lm	230V		Li-fePO4 3,2V 1,5Ah	3Hrs	10	Supplied with battery
89414/W	White	Daylight	5700K	1W	-	230V		Li-FePO4 3,2V 1,6Ah	3Hrs	10	Supplied with battery

Emergency LED Ceiling/Wall/Recessed

Recessed mounted.

89416 | 3W | LED | Emergency 3Hrs Maintained | PC

Ceiling/Wall/Recessed mounted | Self-test.

new

IP20

LED BUILT IN

24m VIEW

2 YEAR

Surface mounted.



Supplied with 4 stickers & recessed mounting accesory.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Battery Type	Battery Duration				Notes
89416	White	Daylight	6500K	3W	200lm	230V		Li-FePO4 3,2V 2,0Ah	3Hrs	380x70mm	90mm	4	Supplied with battery

Compact Universal LED Emergency Kit

89001/EME | 1-30W | Built-in Emergency kit for LED fittings | Emergency 3Hrs Maintained Use inside fittings/Self-test.

IP20

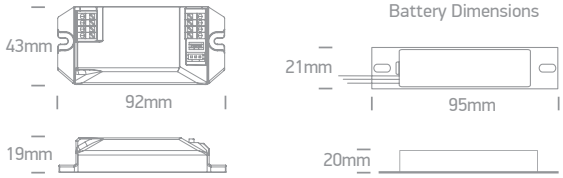

WIRING DIAGRAM

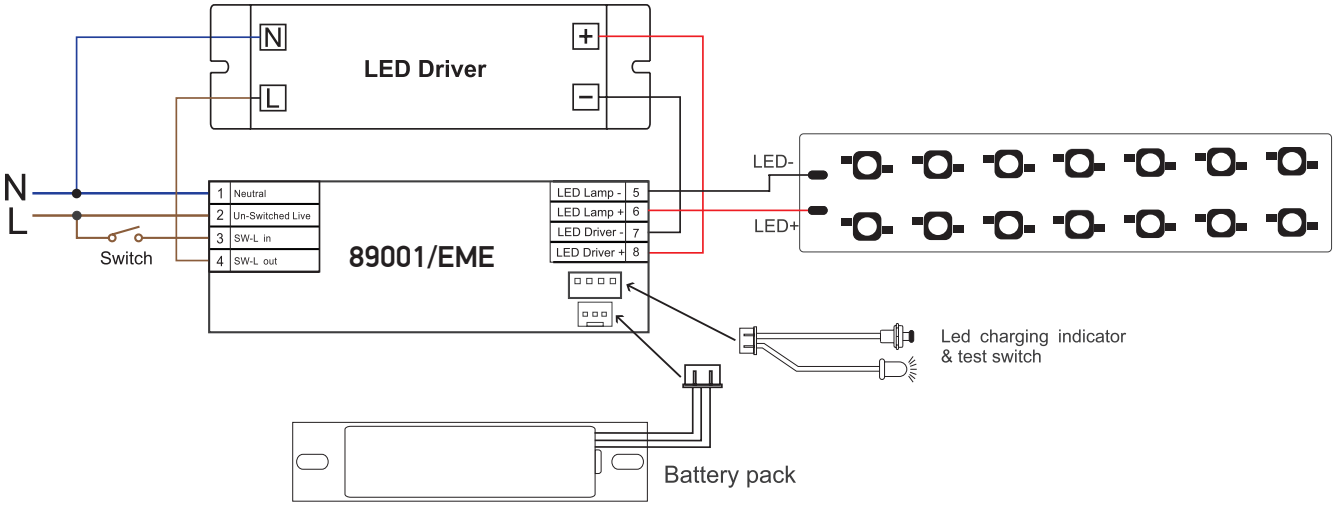

This kit will only operate with LED Fittings/Strips 1-30W suitable for 9-45V DC power supply.
The driver automatically adjusts the output LED current to provide the optimum match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

Emergency mode light output compared with normal operation:

Luminaire Power	5W	10W	15W	20W	25W	30W
	20%	10%	7%	5%	4%	3%

Order Code	Input	Watts	Output	Class	Battery Type	Charge Period	Battery Duration		Notes
89001/EME	230V	1-30W	9-45V DC		Li-FePO4 3,2V 1,6Ah	24Hrs	3Hrs	50	Supplied with battery

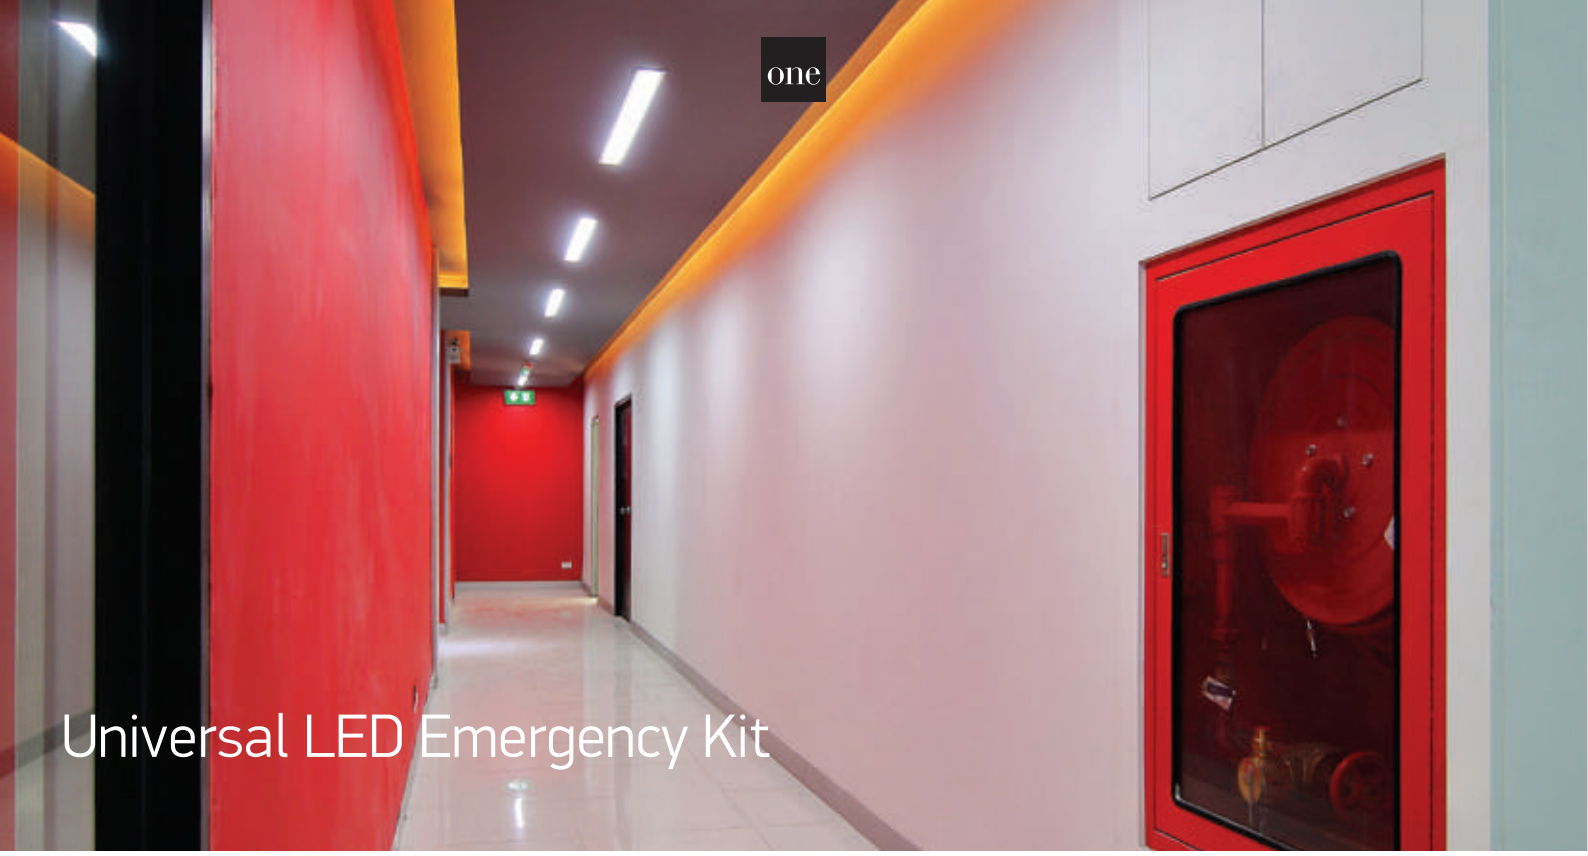

Universal LED Emergency Kit

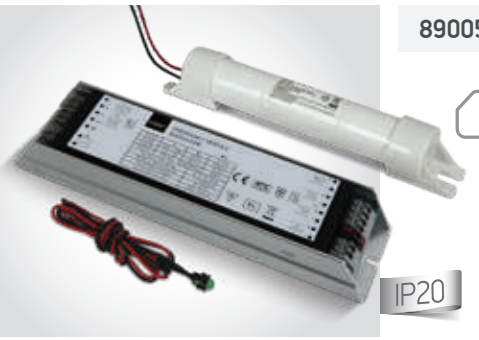

89005A/EME | 5-50W | Built-in Emergency kit for LED fittings | Emergency 3Hrs Maintained

Use inside fittings.

2 YEAR



WIRING DIAGRAM

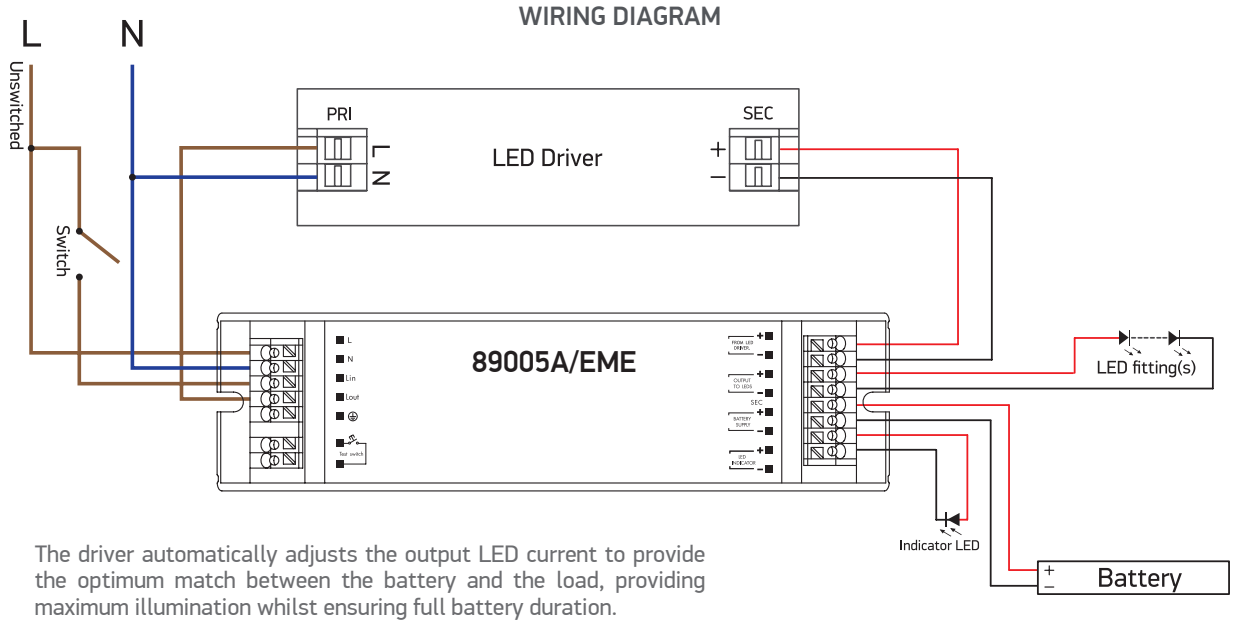

The driver automatically adjusts the output LED current to provide the optimum match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

Emergency mode light output compared with normal operation:

Luminaire Power	5W	7W	10W	12W	15W	20W	25W	30W	35W	40W	45W	50W
	60%	43%	30%	25%	20%	15%	12%	10%	9%	8%	7%	6%

Order Code	Input	Watts	Output	Class	Battery Type	Charge Period	Battery Duration		Notes
89005A/EME	230V	5-50W	9-60V DC		Ni-Cd 3,6V 4,0Ah	24Hrs	3Hrs	12	Supplied with battery

Universal Integrated Battery Emergency Kit

89005B/EME | 5-50W | Emergency kit for LED Downlights and LED strips | Emergency 3Hrs Maintained Self-test.



WIRING DIAGRAM

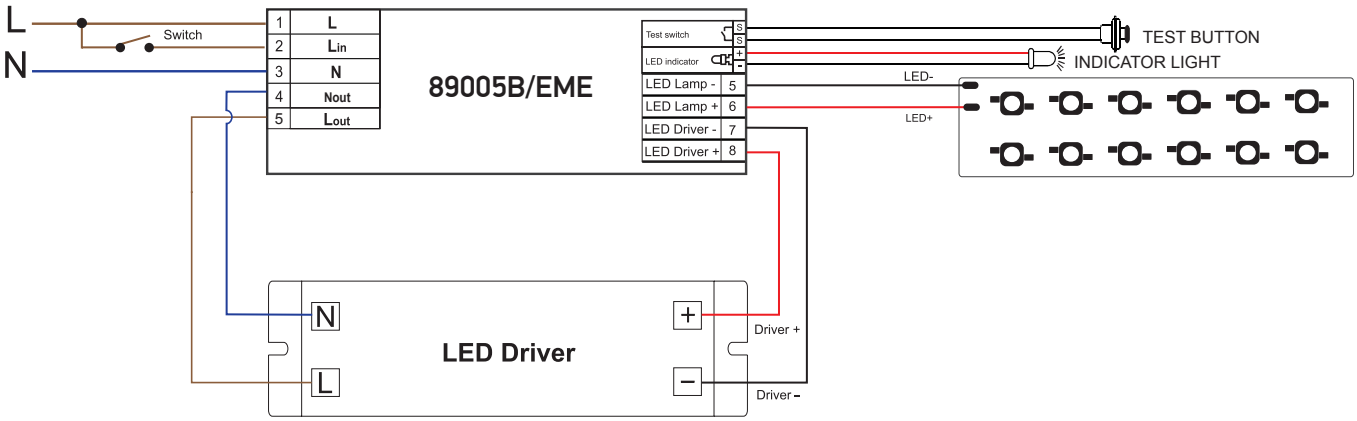

This kit will only operate with LED Fittings/Strips 5-50W suitable for 8-60V DC power supply.
The driver automatically adjusts the output LED current to provide the optimum match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

Emergency mode light output compared with normal operation:

Luminaire Power	5W	7W	10W	12W	15W	20W	25W	30W	35W	40W	45W	50W
	50%	35%	25%	20%	17%	12%	10%	8%	7%	6%	6%	5%

Order Code	Input	Watts	Output	Class	Battery Type	Charge Period	Battery Duration		Notes
89005B/EME	230V	5-50W	8-60V DC		Li-FePO4 3,2V 3,2Ah	24Hrs	3Hrs	25	Supplied with battery

GU10/E27 LED Emergency Kit

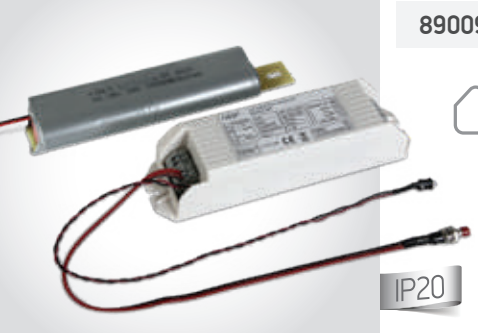

89009/EME | 3-7W | Emergency kit for GU10/E27 LED | Emergency 3Hrs Maintained

Suitable for 7306CG lamp.

2 YEAR

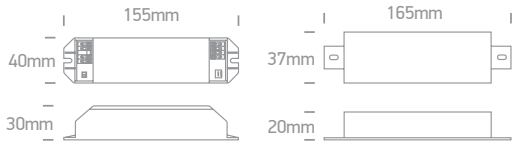

WIRING DIAGRAM

Maintained mode (Controlled by a switch)

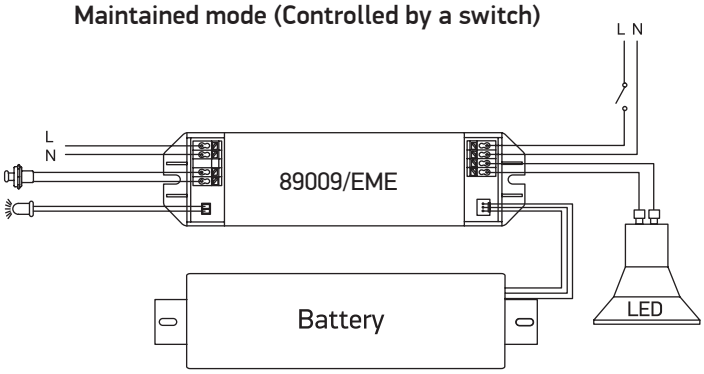

Non-maintained mode (Emergency only)

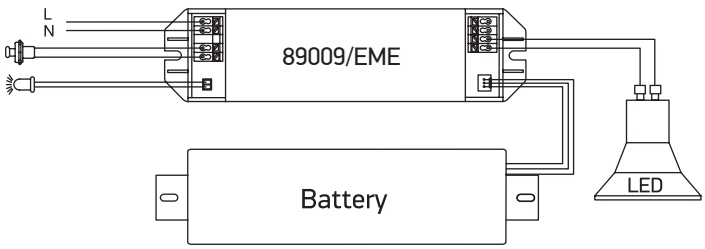

* This kit will only operate with GU10, E27 LED & T8 CCT V lamps suitable for 230V AC high frequency power supply. Most of the lamps in the market today are compatible however we recommend to test suitability before purchasing the lamps. Suitable for 7306CG lamp.

Order Code	Input	Watts	Class	Battery Type	Charge Period	Battery Duration		Notes
89009/EME	230V	3-7W		Li-FePO4 3,2Ah	Max. 24Hrs	3Hrs	24	Supplied with battery

MR16 LED Emergency Kit

89002A | 3W | Emergency kit with MR16 LED module | Emergency 3Hrs Maintained

2 YEAR

Compatible with all MR16 fittings



MAINTAINED MODE

* Driver 89004 must be ordered separately

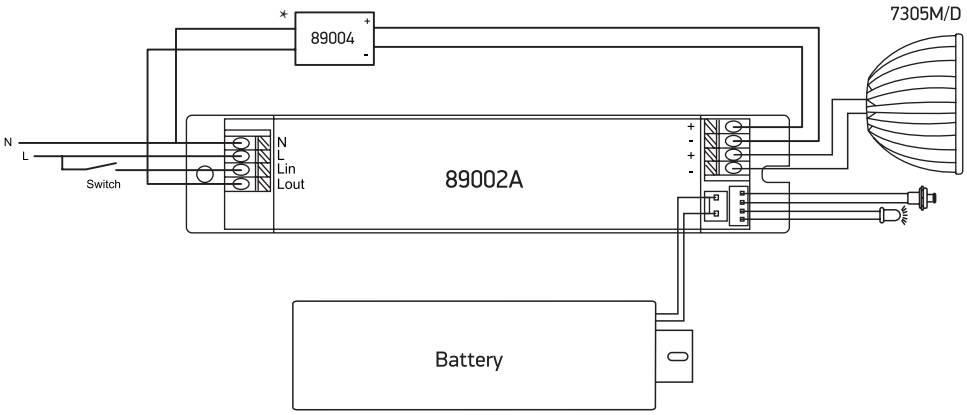

NON-MAINTAINED MODE

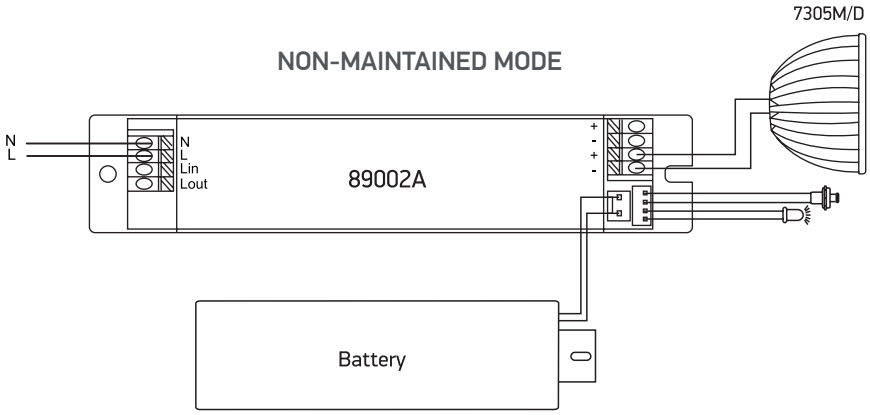

Order Code	Light Colour	CCT (K)	Watts	Input	Battery Type	Charge Period	Battery Duration		Notes
89002A	Daylight	6000K	3W	230V	Ni-Cd 4,8V 2,0Ah	24Hrs	3Hrs	24	Supplied with battery & MR16 LED module 7305M/D

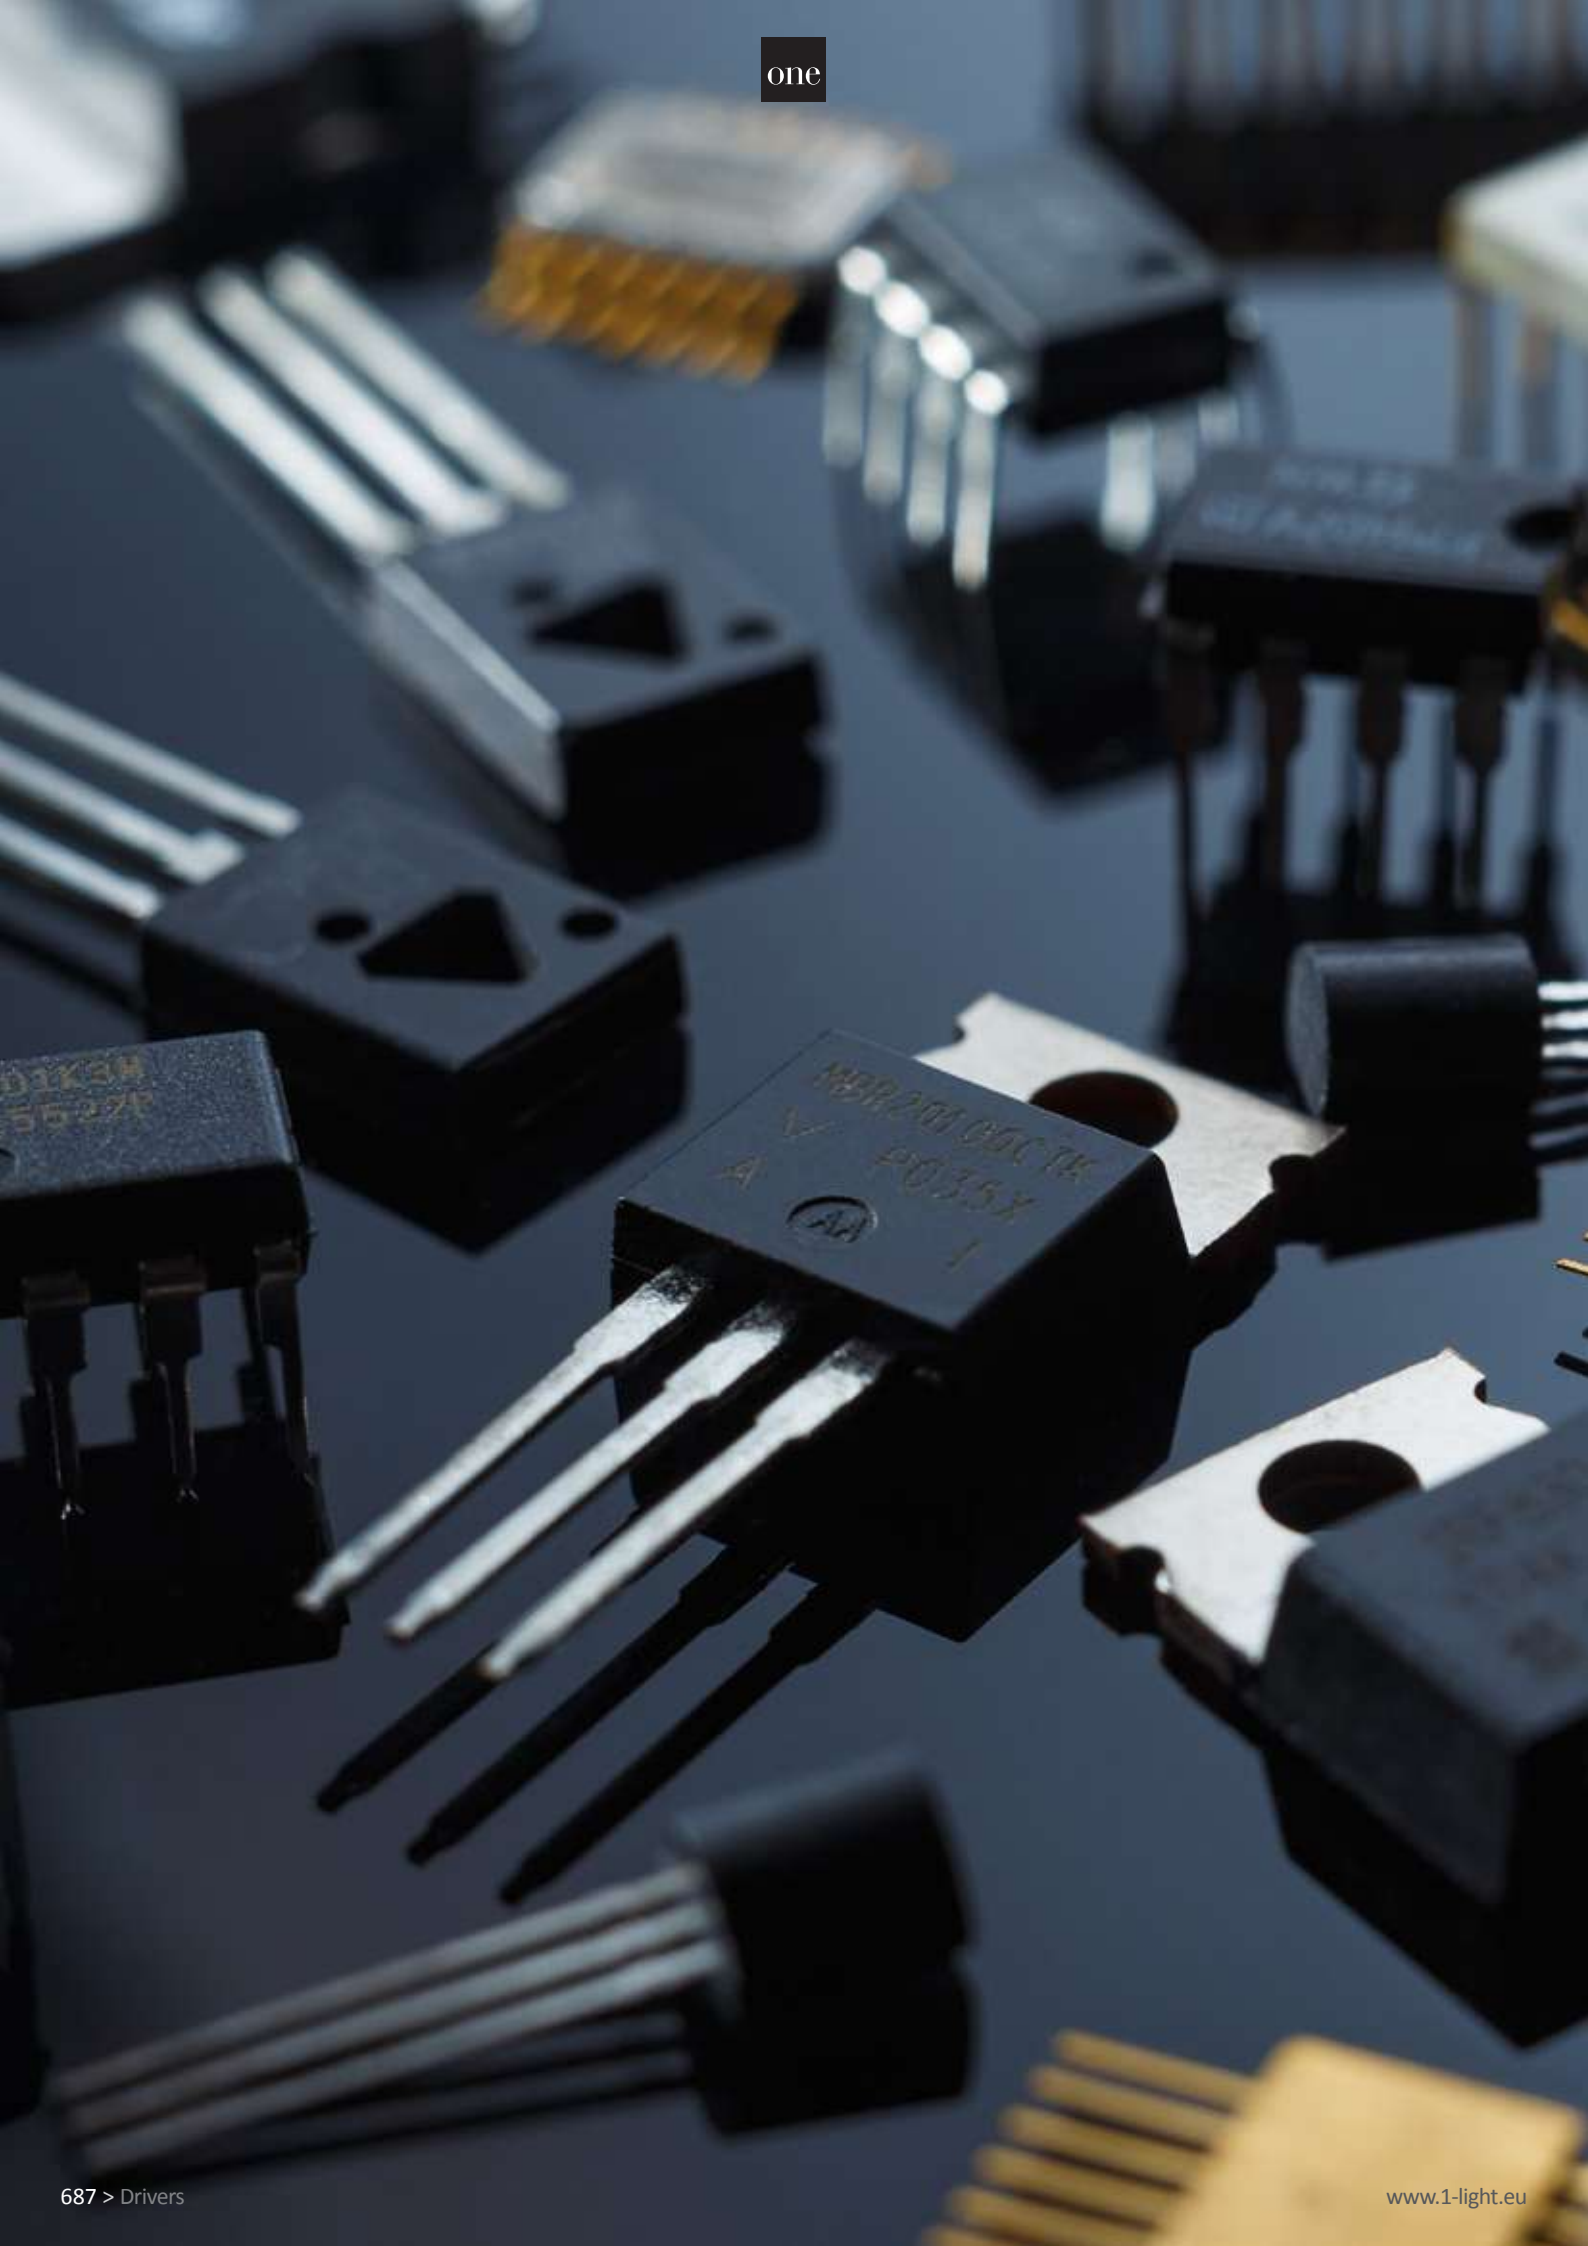

Drivers

Pages 689-716

22

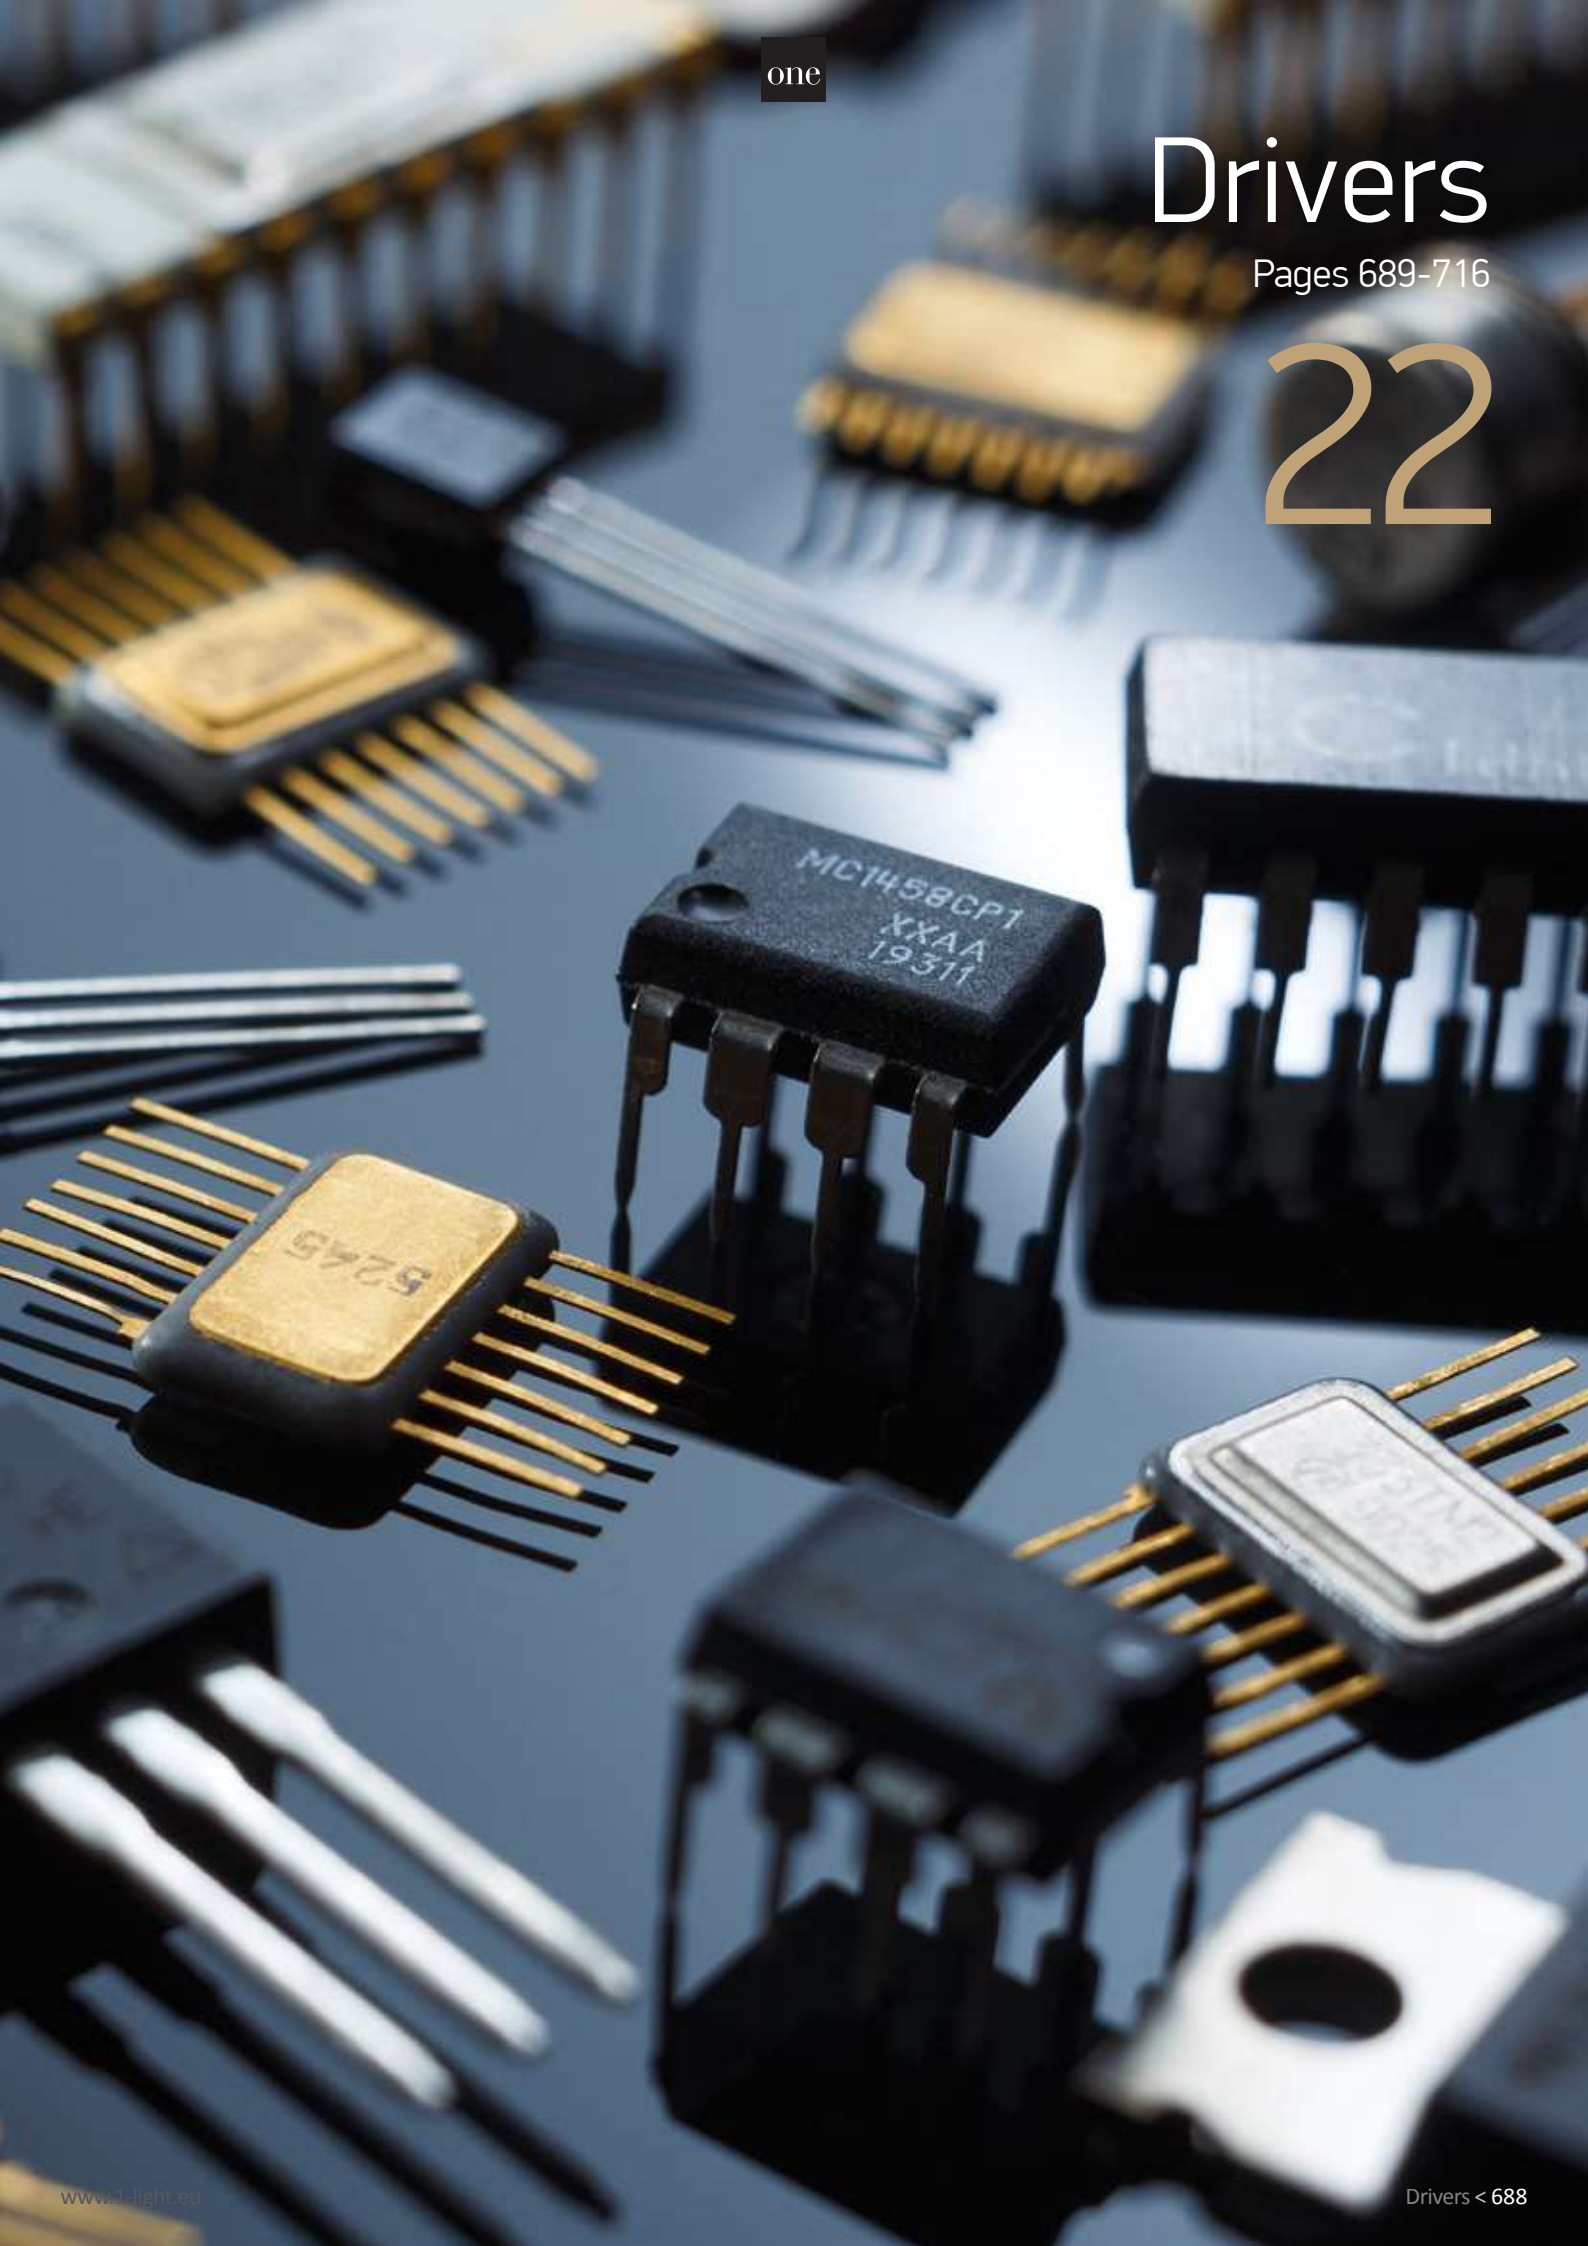

Mini Series
Constant current

one

89004 | 1-4W | 350mA

QUICK FIX CE 5 YEAR

89006P | 2-6W | 350mA

QUICK FIX CE 5 YEAR

89006PC | 1,5-6W | 500mA

QUICK FIX CE 5 YEAR

89004A | 2-4W | 700mA

QUICK FIX CE 5 YEAR

89006PA | 2-6W | 700mA

QUICK FIX CE 5 YEAR

Order Code	Input	Power	Output	Class	Dimmable		Notes
89004	230V	1-4W	350mA		NO	200	-
89006P	230V	2-6W	350mA		NO	100	-
89006PC	230V	1,5-6W	500mA		NO	100	-
89004A	230V	2-4W	700mA		NO	200	-
89006PA	230V	2-6W	700mA		NO	100	-

TRIAC Dimmable Mini Series

Constant current

89004T | 2-4W | 350mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP66

55mm · 30mm · 24mm

89007T | 3,5-7W | 350mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP66

55mm · 30mm · 24mm

89004AT | 2-4W | 700mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP66

55mm · 30mm · 24mm

89010AT | 5-10W | 700mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20

58mm · 36mm · 20mm

Order Code	Input	Power	Output	Class	Dimmable		Notes
89004T	230V	2-4W	350mA		YES	200	Use TRIAC dimmer
89007T	230V	3,5-7W	350mA		YES	100	Use TRIAC dimmer
89004AT	230V	2-4W	700mA		YES	200	Use TRIAC dimmer
89010AT	230V	5-10W	700mA		YES	100	Use TRIAC dimmer

The 350mA Range

Constant current

89015

89008

89008

89008 | 4-8W | 350mA

QUICK FIX · CE · 5 YEAR

IP20

89015

89015 | 7-15W | 350mA

QUICK FIX · CE · 5 YEAR

IP20



89020

89020 | 10-20W | 350mA

QUICK FIX · CE · 5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89008	230V	4-8W	350mA	⧈	NO	100	-
89015	230V	7-15W	350mA	⧈	NO	100	-
89020	230V	10-20W	350mA	⧈	NO	100	-

The 500mA Range
Constant current

89015C

89020C

89015C

89015C | 7,5-15W | 500mA

QUICK FIX CE 5 YEAR

IP20

89020C

89020C | 10-20W | 500mA

QUICK FIX CE 5 YEAR

IP20

89030C

89030C | 20-30W | 500mA

QUICK FIX CE 5 YEAR

IP20

Order Code	Input	Power	Output	Class	Dimmable		Notes
89015C	230V	7,5-15W	500mA		NO	100	-
89020C	230V	10-20W	500mA		NO	100	-
89030C	230V	20-30W	500mA		NO	100	-

The 700mA Range

Constant current

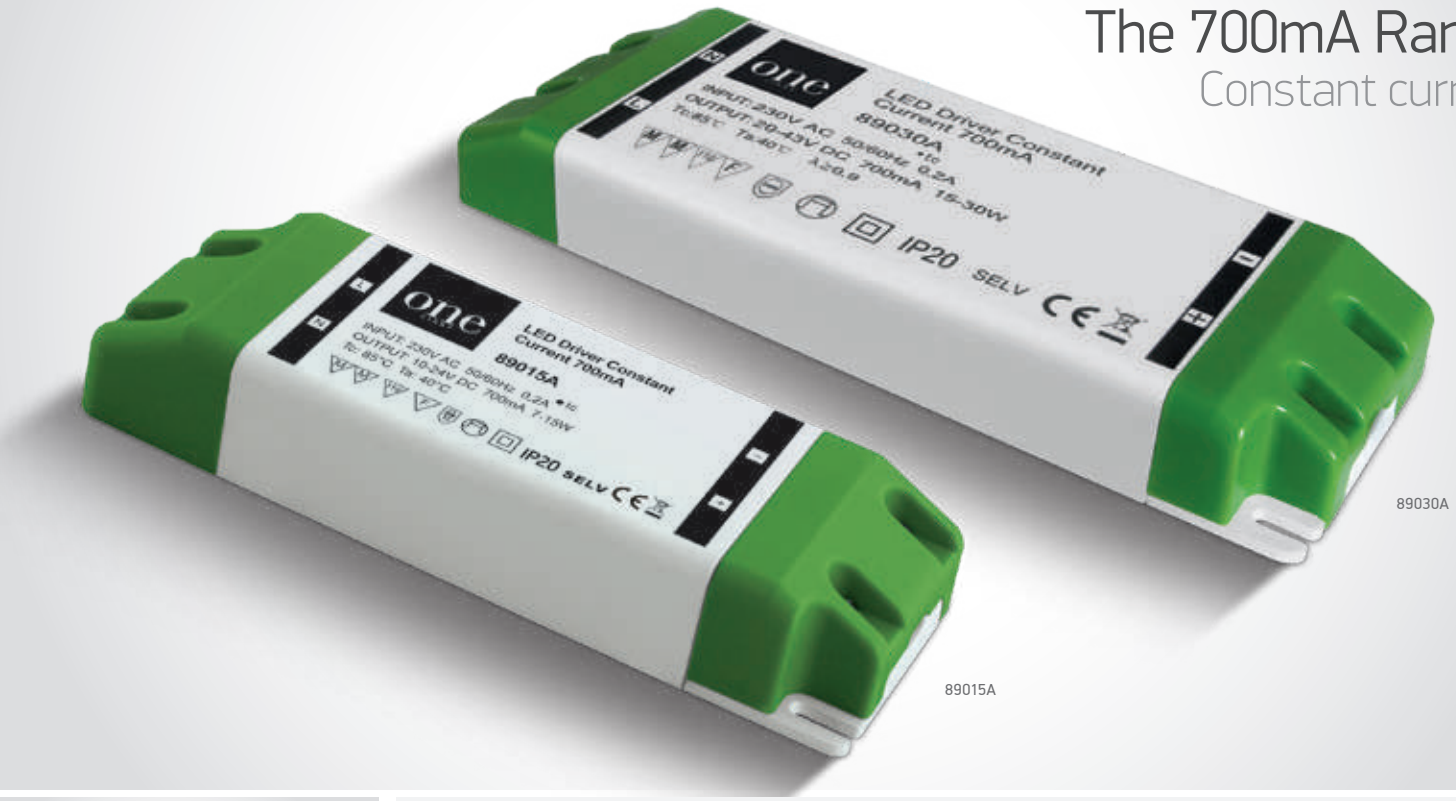

89030A

89015A

89008A | 4-8W | 700mA

89008A

QUICK FIX CE 5 YEAR

IP20



89015A | 7-15W | 700mA

89015A

QUICK FIX CE 5 YEAR

IP20



89030A | 15-30W | 700mA

89030A

QUICK FIX CE 5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89008A	230V	4-8W	700mA		NO	100	-
89015A	230V	7-15W	700mA		NO	100	-
89030A	230V	15-30W	700mA		NO	100	-

High Power
Constant current

89048

89048 | 5-50W | 650-1400mA

Adjustable outputs using DIP switches.

new

IP20

89060

89060 | 33-55W | 1300mA

IP20

89048T

89048T | 32-50W | 1200mA | TRIAC Dimmable

IP20

Order Code	Input	Power	Output	Class	Dimmable		Notes
89048	230V	5-50W	650-1400mA		NO	50	-
89060	230V	33-55W	1300mA		NO	1	-
89048T	230V	32-50W	1200mA		YES	1	Use TRIAC dimmer

one

89016UT

The TRIAC Dimmable Range

Adjustable constant current

89009UT

89009UT | TRIAC Dimmable

Adjustable output using DIP switch.

TRIAC DIMMABLE · CE · 3 YEAR · IP20

Output Current	100mA	150mA	200mA	250mA	300mA	350mA
Output Power	0,9-4,2W	1,35-6,3W	1,8-8,4W	2,25-8,25W	2,7-8,1W	3,15-8,4W

89016UT

89016UT | TRIAC Dimmable

Adjustable output using DIP switches.

TRIAC DIMMABLE · CE · 3 YEAR · IP20



Output Current	200mA	250mA	300mA	350mA
Output Power	5,2-8,4W	6,5-10,5W	7,8-12,6W	9,1-14,7W

89024UT

89024UT | TRIAC Dimmable

Adjustable output using DIP switches.

TRIAC DIMMABLE · CE · 3 YEAR · IP20

Output Current	400mA	450mA	500mA	550mA
Output Power	10-16W	11,25-18W	12,5-20W	13,75-22W

89030UT

89030UT | TRIAC Dimmable

Adjustable output using DIP switches.

TRIAC DIMMABLE · CE · 3 YEAR · IP20



Output Current	500mA	550mA	600mA	700mA
Output Power	13-21W	14,3-23,1W	15,6-25,2W	18,2-29,4W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89009UT	230V	Refer to table	Adjustable	☐	YES	126	Use TRIAC dimmer
89016UT	230V	Refer to table	Adjustable	☐	YES	90	Use TRIAC dimmer
89024UT	230V	Refer to table	Adjustable	☐	YES	72	Use TRIAC dimmer
89030UT	230V	Refer to table	Adjustable	☐	YES	72	Use TRIAC dimmer

89015T | 7-15W | 350mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20

89015CT | 7,5-15W | 500mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20



89006AT | 3,5-6W | 700mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20

89008AT | 6-8W | 700mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20



89015AT | 7-15W | 700mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20



89040AT | 21-40W | 700mA | TRIAC Dimmable

TRIAC DIMMABLE · QUICK FIX · CE · 5 YEAR

IP20

Order Code	Input	Power	Output	Class	Dimmable		Notes
89015T	230V	7-15W	350mA		YES	100	Use TRIAC dimmer
89015CT	230V	7,5-15W	500mA		YES	100	Use TRIAC dimmer
89006AT	230V	3,5-6W	700mA		YES	100	Use TRIAC dimmer
89008AT	230V	6-8W	700mA		YES	100	Use TRIAC dimmer
89015AT	230V	7-15W	700mA		YES	100	Use TRIAC dimmer
89040AT	230V	21-40W	700mA		YES	50	Use TRIAC dimmer

Adjustable Constant Current DALI Dimmable

DALI & Push to DIM

89007AL | DALI & Push to DIM Dimmable

Adjustable output using DIP switches.

IP20

PUSH TO DIM · DALI DIMMABLE · QUICK FIX · CE · 5 YEAR

LED Current Selection

	1	2	3
350mA	○	○	○
400mA	●	○	○
450mA	○	●	○
500mA	●	●	○
550mA	○	○	●
600mA	●	○	●
650mA	○	●	●
700mA	●	●	●

Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
Output Power	1,75-7W	2-8W	2,25-7,65W	2,5-8W	2,75-7,7W	3-7,8W	3,25-7,8W	3,5-7,7W

89015L | DALI & Push to DIM Dimmable

Adjustable output using DIP switches.

IP20

PUSH TO DIM · DALI DIMMABLE · QUICK FIX · CE · 5 YEAR

LED Current Selection

	1	2	3
120mA	○	○	○
150mA	●	○	○
180mA	○	●	○
210mA	●	●	○
250mA	○	○	●
280mA	●	○	●
320mA	○	●	●
350mA	●	●	●

Output Current	120mA	150mA	180mA	210mA	250mA	280mA	320mA	350mA
Output Power	1,08-5,76W	1,35-7,20W	1,62-8,64W	1,89-10W	2,25-12W	2,52-13,44W	2,88-15W	3,15-14,7W

89015AL | DALI & Push to DIM Dimmable

Adjustable output using DIP switches.

IP20

PUSH TO DIM · DALI DIMMABLE · QUICK FIX · CE · 5 YEAR

LED Current Selection

	1	2	3
350mA	○	○	○
400mA	●	○	○
450mA	○	●	○
500mA	●	●	○
550mA	○	○	●
600mA	●	○	●
650mA	○	●	●
700mA	●	●	●

Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
Output Power	3,15-14,7W	3,6-14,8W	4,05-14,85W	4,5-15W	4,95-14,85W	5,4-15W	5,85-14,95W	6,3-14,7W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89007AL	230V	Refer to table	Adjustable	⧈	YES	50	DALI & Push to DIM
89015L	230V	Refer to table	Adjustable	⧈	YES	50	DALI & Push to DIM
89015AL	230V	Refer to table	Adjustable	⧈	YES	50	DALI & Push to DIM

Adjustable Constant Current DALI Dimmable

DALI & Push to DIM

89026AL | DALI & Push to DIM Dimmable

Adjustable output using DIP switches.





Output Current	160mA	200mA	250mA	300mA	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA
Output Power	4,80-8W	6-10W	5-12,50W	6-15W	7-17,50W	8-20W	9-22,50W	10-25W	11-25,85W	12-25,80W	13-26W	14-26W

89044L | DALI & Push to DIM Dimmable

Adjustable output using DIP switches.





Output Current	700mA	750mA	800mA	850mA	900mA	950mA	1000mA	1050mA
Output Power	14-35W	15-37,50W	16-40W	17-42,50W	18-43W	19-43,70W	20-40W	21-40W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89026AL	230V	Refer to table	Adjustable		YES	50	DALI & Push to DIM
89044L	230V	Refer to table	Adjustable		YES	50	DALI & Push to DIM

Marine Drivers for Yachts

Constant current

89028M

89028M | 9-36V DC | LED Marine driver | 350mA | PWM Dimmable

DIMMABLE 3 YEAR

IP20



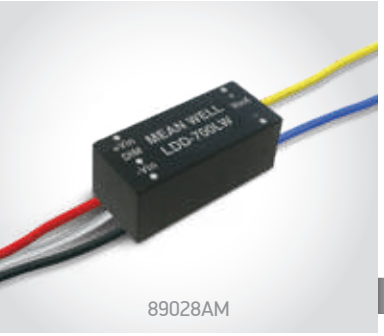

89028AM

89028AM | 9-36V DC | LED Marine driver | 700mA | PWM Dimmable

DIMMABLE 3 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89028M	9-36V DC	4,2W@12V / 8,4W@24V / 11,2W@36V	350mA	III	YES	240	-
89028AM	9-36V DC	8,4W@12V / 16,8W@24V / 22,4W@36V	700mA	III	YES	240	-

one

89075W

89030W

The 12V DC Range

Constant voltage

89015W

IP20

89015W | 15W | 12V DC

CE 5 YEAR



89030W

IP20

89030W | 30W | 12V DC

CE 5 YEAR

89075W

IP20

89075W | 75W | 12V DC

CE 5 YEAR



Order Code	Input	Power	Output	Class	Dimmable		Notes
89015W	230V	15W	12V DC	⧈	NO	100	-
89030W	230V	30W	12V DC	⧈	NO	50	-
89075W	230V	75W	12V DC	⧈	NO	25	-

The 24V DC Range

Constant voltage

89030V

89015V

89015V

IP20

89015V | 15W | 24V DC

CE 5 YEAR

89030V

IP20

89030V | 30W | 24V DC

CE 5 YEAR



89075V

IP20

89075V | 75W | 24V DC

CE 5 YEAR

Order Code	Input	Power	Output	Class	Dimmable		Notes
89015V	230V	15W	24V DC	⧈	NO	100	-
89030V	230V	30W	24V DC	⧈	NO	50	-
89075V	230V	75W	24V DC	⧈	NO	25	-

The 24V DC Range High Power

Constant voltage

89100V | 100W | 24V DC

5 YEAR

89150V | 150W | 24V DC

5 YEAR

89200V | 200W | 24V DC

5 YEAR

89320V | 320W | 24V DC

5 YEAR

Order Code	Input	Power	Output	Class	Dimmable		Notes
89100V	230V	100W	24V DC		NO	20	-
89150V	230V	150W	24V DC		NO	25	-
89200V	230V	200W	24V DC		NO	20	-
89320V	230V	320W	24V DC		NO	20	-

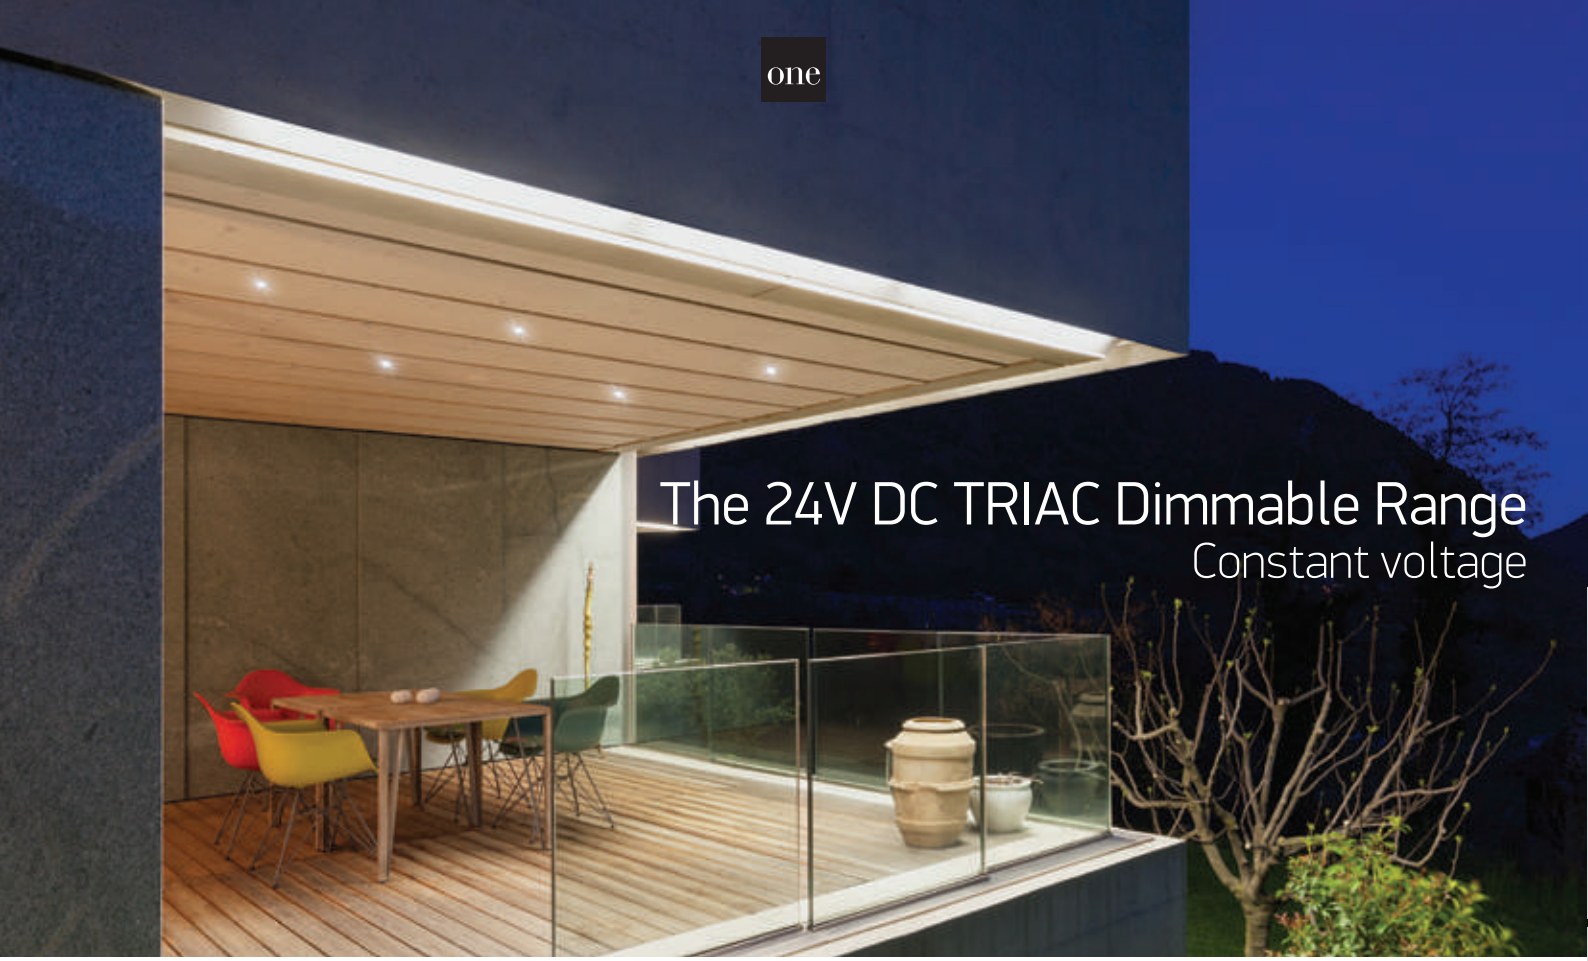

The 24V DC TRIAC Dimmable Range

Constant voltage

89040VT

89040VT | 40W | 24V DC | TRIAC Dimmable

TRIAC DIMMABLE · CE · 5 YEAR

IP20

89050VT

89050VT | 12-50W | 24V DC | TRIAC Dimmable

TRIAC DIMMABLE · CE · 5 YEAR

IP20

89075VT

89075VT | 10-75W | 24V DC | TRIAC Dimmable

TRIAC DIMMABLE · CE · 5 YEAR

IP20

Order Code	Input	Power	Output	Class	Dimmable		Notes
89040VT	230V	40W	24V DC		YES	50	Use TRIAC dimmer
89050VT	230V	12-50W	24V DC		YES	20	Use TRIAC dimmer
89075VT	230V	10-75W	24V DC		YES	20	Use TRIAC dimmer

The 24V DC TRIAC Dimmable Range

Constant voltage

89100VT | 20-100W | 24V DC | TRIAC Dimmable

TRIAC DIMMABLE · CE · 5 YEAR

89150VT | 20-150W | 24V DC | TRIAC Dimmable

TRIAC DIMMABLE · CE · 5 YEAR

89200VT | 75-200W | 24V DC | TRIAC Dimmable

TRIAC DIMMABLE · CE · 5 YEAR



89300VT | 100-300W | 24V DC | TRIAC Dimmable

TRIAC DIMMABLE · CE · 5 YEAR

Order Code	Input	Power	Output	Class	Dimmable		Notes
89100VT	230V	20-100W	24V DC	☐	YES	20	Use TRIAC dimmer
89150VT	230V	20-150W	24V DC	☐	YES	15	Use TRIAC dimmer
89200VT	230V	75-200W	24V DC	☐	YES	15	Use TRIAC dimmer
89300VT	230V	100-300W	24V DC	☐	YES	15	Use TRIAC dimmer

The 24V DC Open Range
Constant voltage

one

89060VN

89060VN | 60W | 24V DC

CE 3 YEAR

IP20



89100VN

89100VN | 100W | 24V DC

CE 3 YEAR

IP20



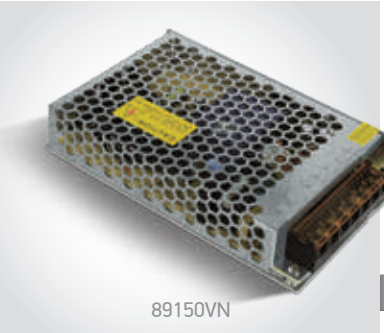
89150VN

89150VN | 150W | 24V DC

CE 3 YEAR

IP20



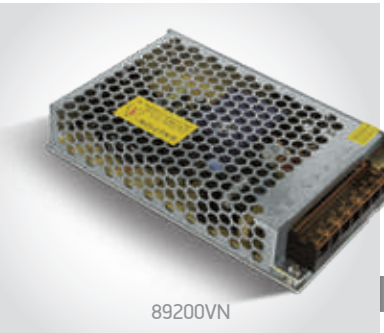
89200VN

89200VN | 200W | 24V DC

CE 3 YEAR

IP20



89350VN

89350VN | 350W | 24V DC

Cooling fan.

CE 3 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89060VN	100-240V	60W	24V DC		NO	66	-
89100VN	100-240V	100W	24V DC		NO	42	-
89150VN	100-240V	150W	24V DC		NO	40	-
89200VN	230V	200W	24V DC		NO	40	-
89350VN	100-240V	350W	24V DC		NO	27	Cooling fan

The 24V DC Open Range Dimmable
Constant voltage

89100VND | 100W | 24V DC | TRIAC & 1-10V Dimmable

TRIAC DIMMABLE · 1-10V DIMMABLE · CE · 3 YEAR

IP20

89200VND | 200W | 24V DC | TRIAC & 1-10V Dimmable

TRIAC DIMMABLE · 1-10V DIMMABLE · CE · 3 YEAR

IP20

Order Code	Input	Power	Output	Class	Dimmable		Notes
89100VND	230V	100W	24V DC	⏚	YES	60	TRIAC & 1-10V
89200VND	230V	200W	24V DC	⏚	YES	40	TRIAC & 1-10V

The 24V DC Slim Range
Constant voltage

one

89030VL | 30W | 24V DC

Suitable for LED profiles on page 210, 211, 212.

IP20

89060VL | 60W | 24V DC

Suitable for LED profiles on page 210, 211, 212.

IP20

89075VL | 75W | 24V DC

Suitable for LED profiles on page 210, 211, 212.

IP20

89100VL | 100W | 24V DC

Suitable for LED profiles on page 210, 211, 212.

IP20

89150VL | 150W | 24V DC

Suitable for LED profiles on page 210, 211, 212.

IP20

Order Code	Input	Power	Output	Class	Dimmable		Notes
89030VL	230V	30W	24V DC		NO	100	-
89060VL	230V	60W	24V DC		NO	50	-
89075VL	230V	75W	24V DC		NO	50	-
89100VL	230V	100W	24V DC		NO	50	-
89150VL	230V	150W	24V DC		NO	25	-

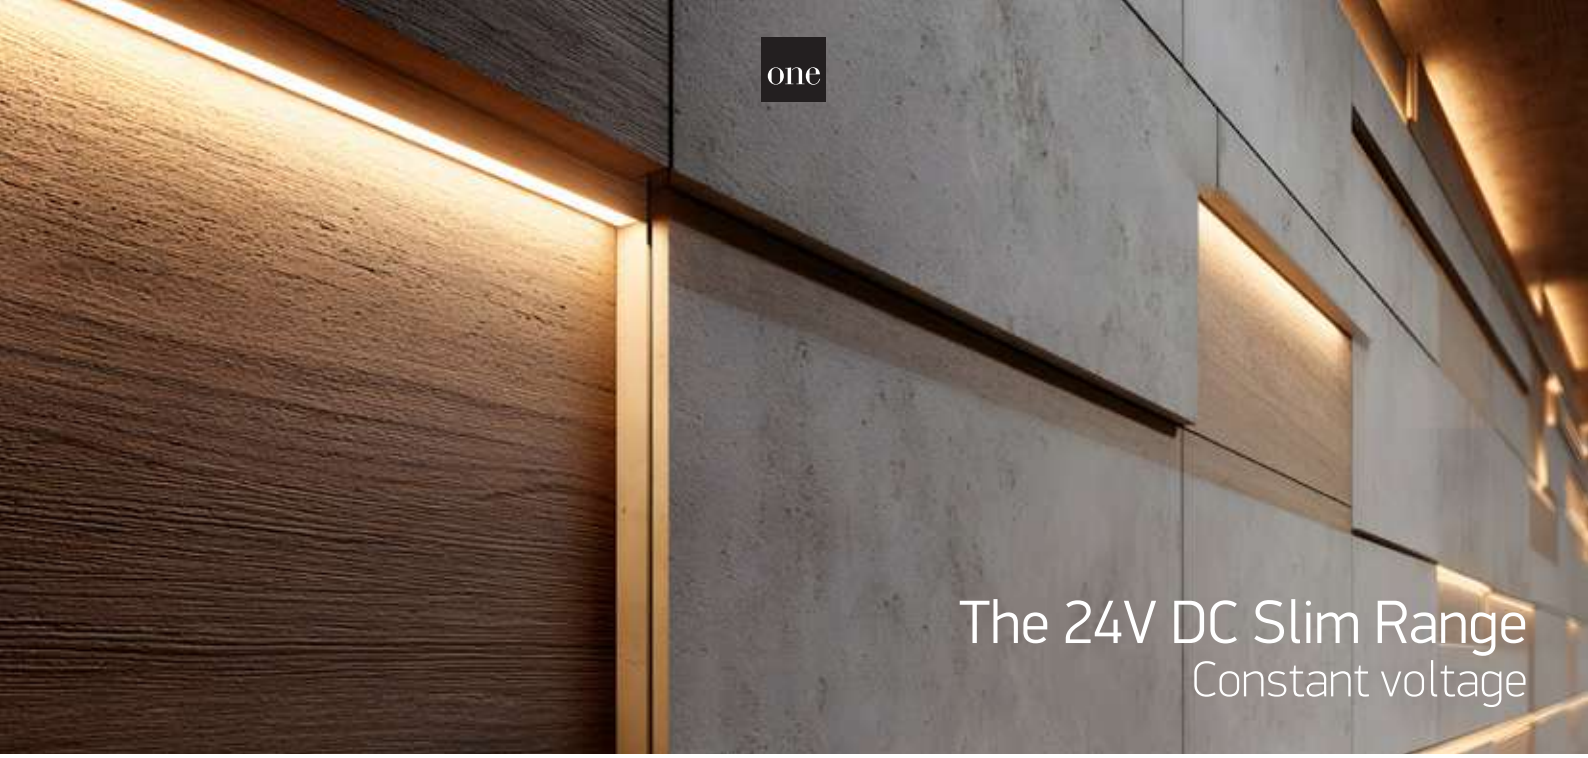

The 24V DC Slim Range
Constant voltage

89240VL | 240W | 24V DC

Suitable for LED profiles on page 210, 211, 212.

CE 5 YEAR

Order Code	Input	Power	Output	Class	Dimmable		Notes
89240VL	230V	240W	24V DC		NO	50	-

The 24V DC Slim Range
TRIAC Dimmable

89100VLT | 20-100W | 24V DC | TRIAC Dimmable

Suitable for LED profiles on page 210, 211, 212.

TRIAC DIMMABLE CE 5 YEAR

89150VLT | 30-150W | 24V DC | TRIAC Dimmable

Suitable for LED profiles on page 210, 211, 212.

TRIAC DIMMABLE CE 5 YEAR

Order Code	Input	Power	Output	Class	Dimmable		Notes
89100VLT	230V	20-100W	24V DC		YES	20	Use TRIAC dimmer
89150VLT	230V	30-150W	24V DC		YES	20	Use TRIAC dimmer

The 24V DC Slim DALI Dimmable

Constant voltage

89100VLL | 30-100W | 24V DC | DALI & Push to DIM Dimmable

Suitable for LED profiles on page 210, 211, 212.

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR

IP20

89150VLL | 45-150W | 24V DC | DALI & Push to DIM Dimmable

Suitable for LED profiles on page 210, 211, 212.

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR

IP20

89240VLL | 75-250W | 24V DC | DALI & Push to DIM Dimmable

Suitable for LED profiles on page 212.

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR

IP20

Order Code	Input	Power	Output	Class	Dimmable		Notes
89100VLL	230V	30-100W	24V DC		YES	20	DALI & Push to DIM
89150VLL	230V	45-150W	24V DC		YES	20	DALI & Push to DIM
89240VLL	230V	75-250W	24V DC		YES	20	DALI & Push to DIM

The 24DC DALI & Push to DIM
Constant voltage

89090VL | 10-90W | 24V DC | DALI & Push to DIM Dimmable

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR

new

IP20



89200VL | 20-200W | 24V DC | DALI & Push to DIM Dimmable

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR

new

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89090VL	230V	10-90W	24V DC		YES	20	DALI & Push to DIM
89200VL	230V	20-200W	24V DC		YES	20	DALI & Push to DIM

The 24V DC Waterproof IP67 Range

Constant voltage

89100VP | 100W | 24V DC

CE 3 YEAR

89150VP | 150W | 24V DC

CE 3 YEAR

89200VP | 200W | 24V DC

CE 3 YEAR



89300VP | 300W | 24V DC

CE 3 YEAR



Order Code	Input	Power	Output	Class		Dimmable		Notes
89100VP	230V	100W	24V DC		100cm	NO	36	-
89150VP	230V	150W	24V DC		100cm	NO	15	-
89200VP	230V	200W	24V DC		100cm	NO	10	-
89300VP	230V	300W	24V DC		100cm	NO	20	-

The 24V DC Waterproof IP67 Range

DALI & Push to DIM

89150VPL | 15-150W | 24V DC | DALI & Push to DIM Dimmable

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR



89240VPL | 24-240W | 24V DC | DALI & Push to DIM Dimmable

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR



Order Code	Input	Power	Output	Class		Dimmable		Notes
89150VPL	230V	15-150W	24V DC		100cm	YES	10	-
89240VPL	230V	24-240W	24V DC		100cm	YES	10	-

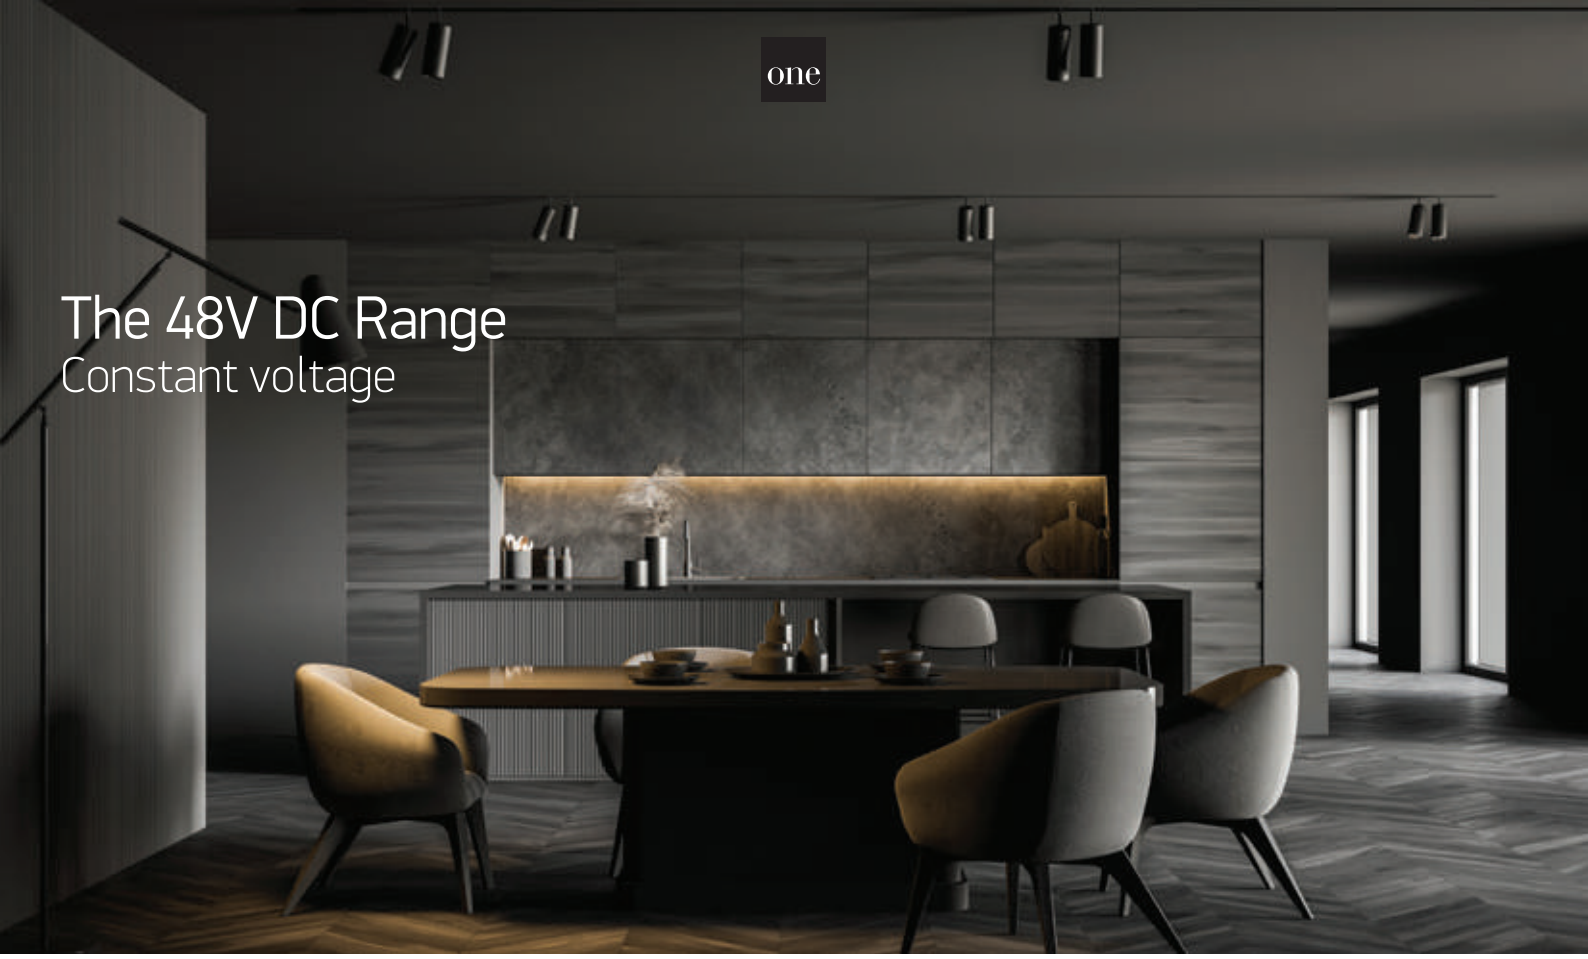

The 48V DC Range
Constant voltage

89200X | 200W | 48V DC

5 YEAR

89320X | 320W | 48V DC

5 YEAR

89240XL | 240W | 48V DC

5 YEAR

Order Code	Input	Power	Output	Class	Dimmable		Notes
89200X	230V	200W	48V DC		NO	25	-
89320X	230V	320W	48V DC		NO	20	-
89240XL	230V	240W	48V DC		NO	50	-

The 48V DC Open Range

Constant voltage

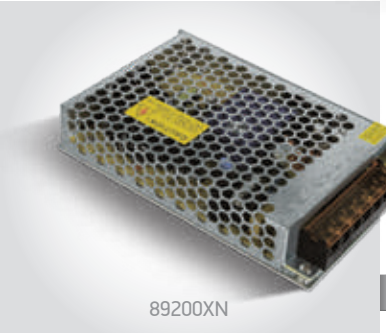

89200XN | 200W | 48V DC

CE 3 YEAR

IP20



89350XN | 350W | 48V DC

Cooling fan.

CE 3 YEAR

IP20



89240XR | 240W | DIN RAIL driver 48V DC

CE 5 YEAR

IP20



Order Code	Input	Power	Output	Class	Dimmable		Notes
89200XN	100-240V	200W	48V DC		NO	40	-
89350XN	100-240V	350W	48V DC		NO	27	Cooling fan
89240XR	100-240V	240W	48V DC		NO	10	-

Adjustable Constant Current DALI Dimmable Range
DALI & Push to DIM

89009L | DALI & Push to DIM Dimmable

Adjustable output using DIP switches.

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR · IP20

LED Current Selection

	1	2
350mA	●	●
450mA	○	●
600mA	●	○
700mA	○	○

Output Current	350mA	450mA	600mA	700mA
Output Power	2,1-8,75W	2,7-9W	3,6-9W	4,2-9,1W

89050LL | DALI & Push to DIM Dimmable

Adjustable outpout using DIP switches.

PUSH TO DIM · DALI DIMMABLE · CE · 5 YEAR · IP20

LED Current Selection

	1	2	3	4
550mA	●	●	●	●
600mA	○	●	●	●
650mA	●	○	●	●
700mA	○	○	●	●
750mA	●	●	○	●
800mA	○	●	○	●
850mA	●	○	○	●
900mA	○	○	○	●

	1	2	3	4
950mA	●	●	●	○
1000mA	○	●	●	○
1050mA	●	○	●	○
1100mA	○	○	●	○
1150mA	●	●	○	○
1200mA	○	●	○	○
1250mA	●	○	○	○
1300mA	○	○	○	○



Output Current	550mA	600mA	650mA	700mA	750mA	800mA	850mA	900mA
Output Power	3,3-23,1W	3,6-25,2W	3,9-27,3W	4,2-29,4W	4,5-31,5W	4,8-33,6W	5,1-35,7W	5,4-37,8W
Output Current	950mA	1000mA	1050mA	1100mA	1150mA	1200mA	1250mA	1300mA
Output Power	5,7-39,9W	6-42W	6,3-44,1W	6,6-46,2W	6,9-48,3W	7,2-50,4W	7,5-50W	7,8-49,4W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89009L	230V	Refer to table	Adjustable		YES	100	DALI & Push to DIM
89050LL	230V	Refer to table	Adjustable		YES	20	DALI & Push to DIM

one

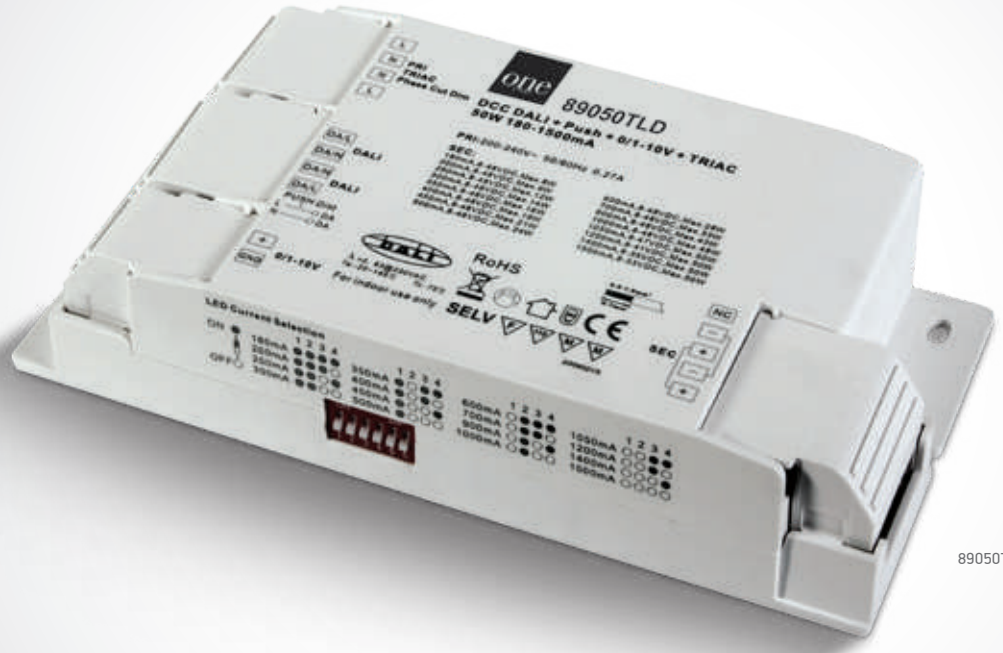

89050TLD

Adjustable Constant Current DALI Dimmable Range

DALI, Push to DIM, 1-10V & TRIAC

89040L

IP20

89040L | DALI & Push to DIM Dimmable

Adjustable output using DIP switches.

PUSH TO DIM

DALI DIMMABLE

5 YEAR

LED Current Selection





Output Current	300mA	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	750mA	800mA	850mA	900mA	950mA	1000mA	1050mA
Output Power	2,7-14W	3,2-17W	3,6-19W	4-22W	4,5-24W	5-26W	5,4-29W	5,8-31W	6,3-34W	6,8-36W	7,2-36W	7,6-38W	8,1-40W	8,6-40W	9-42W	9,5-44W

89050TLD

IP20

89050TLD | DALI, Push to DIM, 1-10V, TRIAC Dimmable

Adjustable output using DIP switches.

PUSH TO DIM

DALI DIMMABLE

1-10V DIMMABLE

TRIAC DIMMABLE

3 YEAR

LED Current Selection



Operation Current Selection



Output Current	180mA	200mA	250mA	300mA	350mA	400mA	450mA	500mA
Output Power	1,44-8,64W	1,6-9,6W	2-12W	2,4-14,4W	2,8-16,8W	3,2-19,2W	3,6-21,6W	4-24W
Output Current	600mA	700mA	900mA	1000mA	1050mA	1200mA	1400mA	1500mA
Output Power	4,8-28,8W	5,6-33,6W	7,2-43,2W	8-48W	8,4-49,35W	9,6-49,2W	11,2-49W	12-49,5W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89040L	230V	Refer to table	Adjustable	☐	YES	50	DALI & Push to DIM
89050TLD	230V	Refer to table	Adjustable	☐	YES	36	DALI, Push to DIM, 1-10V, TRIAC Dimmer

Control & Dimming

Pages 719-724

23

Ceiling-Mounted Motion Sensors

22004 | 300W (LED) / 800W (Incandescent) | Surface infrared motion sensor

IP20

Detection Angle: 360°
Detection Distance: Max. Ø 6m (<24°C)
Time Delay: 10sec ± 3sec to 15min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation Height: 2,2-4m



22014 | 1000W (LED) / 2000W (Incandescent) | Surface infrared presence sensor

ON when detecting presence.

IP20

Detection Angle: 360°
Detection Distance: Max. Ø 20m (<24°C)
Time Delay: 10sec ± 3sec to 30min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation Height: 2,2-6m



22004M | 250W (LED) / 500W (Incandescent) | Surface microwave motion sensor

new
IP20

Detection Angle: 360°
Detection Distance: Max. Ø 16m (adjustable) (<24°C)
Time Delay: 10sec ± 3sec to 12min ± 1 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation Height: 2-6m



22004P | 800W (LED) / 1600W (Incandescent) | Surface infrared motion & presence sensor

ON when detecting presence.

new
IP20

Detection Angle: 360°
Detection Distance: Max. Ø 6m (adjustable) (<24°C)
Time Delay: 10sec ± 3sec to 15min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation Height: 2,2-4m



Order Code	Colour	Power	Input	Class		Notes
22004	White	300W (LED) / 800W (Incandescent)	230V		50	-
22014	White	1000W (LED) / 2000W (Incandescent)	230V		50	-
22004M	White	250W (LED) / 500W (Incandescent)	230V		50	Cable entry is from the back
22004P	White	800W (LED) / 1600W (Incandescent)	230V		50	Cable entry is from the back

22008A

one

Recessed Motion Sensors

22008

22008 | 200W (LED) / 800W (Incandescent) | Recessed infrared motion sensor

IP20

Detection Angle: 360°
Detection Distance:
Max. Ø 6m (<24°C)
Time Delay: 10sec ± 3sec to 15min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation Height: 2,2-4m



22008A

22008A | 300W (LED) / 800W (Incandescent) | Recessed infrared motion & presence sensor

ON when detecting presence.

new

IP20

Detection Angle: 360°
Detection Distance:
Max. Motion Ø 20m,
Presence Ø 6m (<24°C)
Time Delay: 10sec ± 3sec to 30min ± 2min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation Height: 2,2-4m



22008AB

22008AB | 500W (LED) / 1000W (Incandescent) | Recessed infrared motion sensor

new

IP20

Detection Angle: 360°
Detection Distance:
Max. Ø 8m (<24°C)
Time Delay: 10sec ± 3sec to 30min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation Height: 1,8-4m



22008MP

22008MP | 800W (LED) / 1600W (Incandescent) | Recessed microwave motion & presence sensor

ON when detecting presence.

new

IP20

Detection Angle: 360°
Detection Distance:
Max. Ø 6m (adjustable) (<24°C)
Time Delay: 10sec ± 3sec to 12min ± 1 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation Height: 2-4m



22008P

22008P | 800W (LED) / 1600W (Incandescent) | Recessed infrared motion & presence sensor

ON when detecting presence.

new

IP20

Detection Angle: 360°
Detection Distance:
Max. Ø 6m (adjustable) (<24°C)
Time Delay: 10sec ± 3sec to 15min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation Height: 2,2-4m



Order Code	Colour	Power	Input	Class				Notes
22008	White	200W (LED) / 800W (Incandescent)	230V	☐	40mm	60mm	100	-
22008A	White	300W (LED) / 800W (Incandescent)	230V	☐	45mm	80mm	50	-
22008AB	White	500W (LED) / 1000W (Incandescent)	230V	☐	64mm	60mm	50	-
22008MP	White	800W (LED) / 1600W (Incandescent)	230V	☐	64mm	90mm	50	-
22008P	White	800W (LED) / 1600W (Incandescent)	230V	☐	64mm	90mm	50	-

Motion Sensors

22006

22006 | 400W (LED) / 800W (Incandescent) | Infrared motion sensor

180° CE 2 YEAR

IP44

Detection Angle: 180°
Detection Distance: Max. 12m (<24°C)
Time Delay: 10sec ± 3sec to 15min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation Height: 1,8-2,5m



22006A

22006A | 800W (LED) / 1500W (Incandescent) | Infrared motion sensor

240° CE 2 YEAR

new

IP65

Detection Angle: 240°
Detection Distance: Max. 12m (<24°C)
Time Delay: 10sec ± 3sec to 15min ± 2 min (adjustable)
Ambient Light: <3-2000lux (adjustable)
Installation Height: 1,8-2,5m



22022

22022 | 400W (LED) / 800W (Incandescent) | Infrared motion sensor

Sensor head IP65 / Sensor controller IP20.

120°/360° CE 3 YEAR

IP20

IP65

Detection Angle: 120° / 360°
Detection Distance: 3m / 6m (selectable) (<24°C)
Ambient Light: <10lux or 2000lux (selectable)
Time Delay: 5s, 30s, 1min, 3min, 5min, 8min (selectable)
Detection Moving Speed: 0,6-1,5m/s
Installation Height: 1,8-2,5m (wall mount)
Installation Height: 2,2-4m (ceiling mount)



22000

22000 | 300W | Microwave motion sensor

Can be installed inside fittings.

CE 2 YEAR

IP20

Can be installed inside fittings
Selectable sensitivity 20%, 50%, 75%, 100%
Time Delay: 5s, 30s, 1min, 5min, 10min,
20min, 30min (selectable)
Daylight sensor 2, 5, 20, 50lux, disable (selectable)



Order Code	Colour	Input	Power	Output	Class		Notes
22006	White	230V	400W (LED) / 800W (Incandescent)	230V		50	-
22006A	White	230V	800W (LED) / 1500W (Incandescent)	230V		50	-
22022	White	230V	400W (LED) / 800W (Incandescent)	230V		50	-
22000	White	230V	300W	230V		100	-

LED Controllers

89102L | RF Bluetooth to DALI / 1-10V

Select DALI address using DIP switches. / Compatible with Amazon Alexa & Google Home.

5 YEAR

IP20

Application Easy Things or HomeeLife.

Bluetooth | amazon alexa | Google Home

89302 | 12-36V DC | Constant voltage RGB+W data repeater | 4 channels x 5A | PWM dimming only

DIMMABLE

2 YEAR

IP20

Repeats the signal when dimming constant voltage fittings e.g. LED strips.

89100LP | 12-36V DC | DALI & Push to DIM Dimmer | 4x60W@12V / 4x120W@24V / 4x180W@36V | 4 channels x 5A

PUSH TO DIM | DALI DIMMABLE

3 YEAR

IP67

* Push to DIM mode dims all channels together.



89100L | 12-24V DC | DALI & Push to DIM Dimmer | 75W@12V AC / 150W@24V AC | PWM dimming only

PUSH TO DIM | DALI DIMMABLE

2 YEAR

IP20

DALI to PWM
- Built-in push dimming
- Dimming range 0,1-100%

PUSH TO DIM
- No status changing < 0,05sec
- Push ON/OFF 0,1-1sec
- Dimming up or down 1,5-10sec
- Set 100% brightness > 11sec

DALI
- DALI agreement includes 16 groups & 64 addresses
- DALI agreement can be divided into 16 scenarios



89104LT | DALI & Push to DIM to TRIAC Dimmer | 100W@110V AC / 200W@240V AC

PUSH TO DIM | DALI DIMMABLE

3 YEAR

IP20

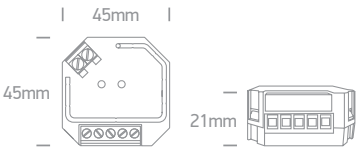

Order Code	Input	Power	Output	Class	Dimmable		Notes
89102L	100-240V	-	-		YES	1	DALI DT6 / DT8
89302	12-36V DC	60W@12V DC / 120W@24V DC	12-36V DC		YES	100	RGB+W Repeater
89100LP	12-36V DC	4x60W@12V DC / 4x120W@24V DC / 4x180W@36V DC	12-36V DC		YES	18	DALI & Push to DIM
89100L	12-24V DC	75W@12V / 150W@24V	12-24V		YES	200	DALI & Push to DIM
89104LT	100-240V	100W@110V AC / 200W@240V AC	100-240V AC	-	YES	50	DALI & Push to DIM to TRIAC

Remote Controllers

20030

20030 | 12-24V DC | Constant voltage wireless controller & dimmer | 3 channels x 3A

DIMMABLE

2 YEAR

IP20

Remote controller for dimming any constant voltage 12-24V LED fitting including LED strips, LED lamps, LED modules.
50 meters range, 2 memory settings, dimming by touch.

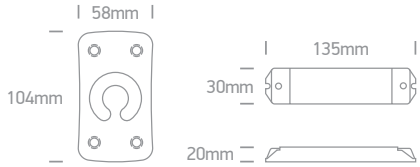

20032

20032 | 12-24V DC | Variable colour temperature controller & dimmer | 2 channels x 3A

DIMMABLE

2 YEAR

IP20

Remote controller for changing colour temperature from daylight to extra warm white.
Suitable for use with LED strips 7835/DEW & 7846/DEW.
50 meters range, 2 memory settings, dimming by touch.

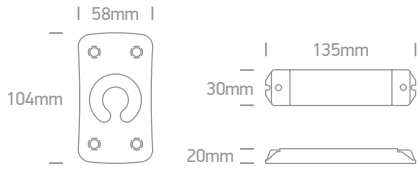

Order Code	Colour	Input	Power	Output	Class	Dimmable		Notes
20030	White	12-24V DC	36W/ch@12V 72W/ch@24V	12-24V DC	III	YES	50	-
20032	White	12-24V DC	36W/ch@12V 72W/ch@24V	12-24V DC	III	YES	50	-

Remote Controllers
RGB & RGB+W

20034 | 12-24V DC | RGB wireless controller & dimmer | 3 channels x 3A

DIMMABLE

2 YEAR

IP20

Remote controller for changing colours (RGB). Suitable for use with LED strips 7830/RGB, 7830W/RGB & 7846/RGB.
50 meters range, 2 memory settings, dimming by touch.

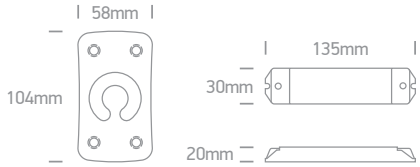

20036 | 12-24V DC | RGB+W wireless controller & dimmer | 4 channels x 3A

DIMMABLE

2 YEAR

IP20

Remote controller for changing colours (RGB+W). Suitable for use with LED strips 7830/RGBW, 7830W/RGBW & 7846/RGBW.
50 meters range, 2 memory settings, dimming by touch.

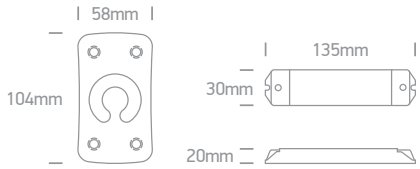

Order Code	Colour	Input	Power	Output	Class	Dimmable		Notes
20034	White	12-24V DC	36W/ch@12V 72W/ch@24V	12-24V DC	III	YES	50	-
20036	White	12-24V DC	36W/ch@12V 72W/ch@24V	12-24V DC	III	YES	50	-

save
energy
now!
ecolamp
10,5w
LED
one
LIGHT
give me
light!
ecolamp
5,5w
LED
one
shrink
the
energy
bills!
one
LIGHT

Lamps

Pages 727-748

24

G9 Lamps

7103ALG/C

7106ALG/W

7107ALG/C

7103ALG/C

7103ALG | 4W | SMD LED | G9

LED 80 CRI

CE 2 YEAR



7106ALG/C

7106ALG | 6W | SMD LED | G9

LED 80 CRI

CE 2 YEAR

7107ALG/C

7107ALG | 7W | SMD 2835 | G9

LED 80 CRI

CE 2 YEAR



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7103ALG/C	G9	Cool white	4000K	4W	400lm	230V	NO	100
7103ALG/W	G9	Warm white	3000K	4W	400lm	230V	NO	100
7106ALG/C	G9	Cool white	4000K	6W	600lm	230V	NO	100
7106ALG/W	G9	Warm white	3000K	6W	600lm	230V	NO	100
7107ALG/C	G9	Cool white	4000K	7W	700lm	230V	NO	100
7107ALG/W	G9	Warm white	3000K	7W	700lm	230V	NO	100

G9 Dimmable

7106ALGD/W

7103ALGD/W

7103ALGD/W

7103ALGD | 3,5W | SMD LED | G9 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR



7106ALGD/W

7106ALGD | 5W | SMD LED | G9 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7103ALGD/W	G9	Warm white	3000K	3,5W	300lm	230V	YES	100
7106ALGD/W	G9	Warm white	3000K	5W	450lm	230V	YES	100

7201G/W

7201G | 3W | SMD LED | MR11 | GU10 — GU10 MR11 SMD

LED 90 CRI
CE 2 YEAR

new



7307BG/W

7307BG | 7W | SMD LED | MR16 | GU10 — GU10 MR16 SMD

LED 80 CRI
CE 2 YEAR



7306CG/BL

7306CG/BL | 5W | COB LED | MR16 | GU10 — Blue GU10 MR16 COB LED

LED CE
2 YEAR



7304GE/W
Emergency 3 hours

7304GE | 4W | SMD 2835 | MR16 | GU10 | Dimmable — GU10 MR16 Emergency

LED 90 CRI DIMMABLE
CE 2 YEAR

Emergency 3Hrs Maintained

Leading & Trailing edge.

To switch OFF,
turn OFF-ON-OFF
within 2 seconds.



7101AL/W

7101AL | 2W | COB LED | G4 | Silicone — COB LED G4

LED 80 CRI
CE 2 YEAR



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable		Notes
7201G/W	GU10	Warm white	3000K	3W	240lm	36°	230V	NO	100	-
7307BG/C	GU10	Cool white	4000K	7W	600lm	90°	230V	NO	100	-
7307BG/W	GU10	Warm white	3000K	7W	600lm	90°	230V	NO	100	-
7306CG/BL	GU10	Blue	-	5W	-	60°	230V	NO	100	-
7304GE/W	GU10	Warm white	3000K	4W	300lm	60°	230V	YES	10	Supplied with battery
7101AL/W	G4	Warm white	3000K	2W	200lm	-	12V AC/DC	NO	100	-

GU10 MR16 CCT V

7306G/V

7306G | 6W PV | MR16 | GU10

LED 90 CRI CCT V PV CE 2 YEAR

new



7306GD/V

7306GD | 6W PV | MR16 | GU10 | Dimmable

LED 90 CRI TRIAC DIMMABLE CCT V PV CE 2 YEAR

new



7307G/V

7307G | 7W | MR16 | GU10

LED 80 CRI CCT V CE 2 YEAR

new



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306G/V	GU10	CCT V	3000K-3500K-4000K	3,5W-4,5W-6W	600lm	60°	230V	NO	100
7306GD/V	GU10	CCT V	3000K-3500K-4000K	3,5W-4,5W-6W	600lm	60°	230V	YES	100
7307G/V	GU10	CCT V	2700K-3000K-4000K	7W	560lm	60°	230V	NO	100

GU10 MR16 for enclosed fittings

7305EGD/W

7305EG/W

7305EG/W

7305EG | 5W | COB LED | MR16 | GU10

Suitable for high ambient temperature enclosed fittings.

LED 80 CRI

CE 3 YEAR

IP44



7305EGD/W

7305EGD | 5W | COB LED | MR16 | GU10 | Dimmable

Suitable for high ambient temperature enclosed fittings.

LED 80 CRI TRIAC DIMMABLE

CE 3 YEAR

IP44



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7305EG/W	GU10	Warm white	3000K	5W	500lm	38°	230V	NO	100
7305EGD/W	GU10	Warm white	3000K	5W	500lm	38°	230V	YES	100

GU10 MR16 COB LED

7301CG/W

7301CG | 1W | COB LED | MR16 | GU10

LED 85 CRI
CE 3 YEAR



7303CG/W

7303CG | 3W | COB LED | MR16 | GU10

LED 85 CRI
CE 3 YEAR



7306CG/W

7306CG | 6W | COB LED | MR16 | GU10

LED 85 CRI
CE 3 YEAR

7306CBG/W



Dimmable GU10 MR16 COB LED

7306CGD/W

7306CGD | 6W | COB LED | MR16 | GU10 | Dimmable

LED 85 CRI TRIAC DIMMABLE
CE 3 YEAR



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7301CG/W	GU10	Warm white	3000K	1W	100lm	60°	230V	NO	100
7303CG/W	GU10	Warm white	3000K	3W	300lm	60°	230V	NO	100
7306CG/C	GU10	Cool white	4000K	6W	600lm	60°	230V	NO	100
7306CG/W	GU10	Warm white	3000K	6W	600lm	60°	230V	NO	100
7306CG/EW	GU10	Extra warm white	2700K	6W	600lm	60°	230V	NO	100
7306CG/W/24	GU10	Warm white	3000K	6W	600lm	24°	230V	NO	100
7306CBG/W	GU10	Warm white	3000K	6W	600lm	60°	230V	NO	100
7306CGD/C	GU10	Cool white	4000K	6W	600lm	60°	230V	YES	100
7306CGD/W	GU10	Warm white	3000K	6W	600lm	60°	230V	YES	100
7306CGD/EW	GU10	Extra warm white	2700K	6W	600lm	60°	230V	YES	100

Special Versions GU10 MR16

7306GZ/W
Zoomable 24°- 60°

7306GZ | 7W | COB LED | MR16 | GU10 | Zoomable | Dimmable

Full spectrum CRI98.

LED 98 CRI TRIAC DIMMABLE CE 2 YEAR



7307G/W/10

7307G | 7W | COB LED | MR16 | GU10 | Dimmable

Full spectrum CRI97.

LED 97 CRI TRIAC DIMMABLE CE 2 YEAR

new



7306CHG/W

7306CHG | 6W | COB LED | MR16 | GU10 | Honeycomb

LED 85 CRI CE 3 YEAR

DARK LIGHT

new

7306CHG/W/W



7306CGA/W

7306CGA | 6W | COB LED | MR16 | GU10 | 24V DC

Low voltage.

LED 85 CRI CE 2 YEAR

new



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306GZ/W	GU10	Warm white	3000K	7W	510lm	24°- 60°	230V	YES	25
7307G/W/10	GU10	Warm white	3000K	7W	440lm	10°	230V	YES	100
7306CHG/W	GU10	Warm white	3000K	6W	420lm	60°	230V	NO	100
7306CHG/W/W	GU10	Warm white	3000K	6W	420lm	60°	230V	NO	100
7306CGA/W	GU10	Warm white	3000K	6W	600lm	60°	24V DC	NO	100

7306GCD/EW

Full Spectrum CRI97

7306GC/W

7306GC | 7W | COB LED | MR16 | GU10

Full spectrum CRI97.

LED 97 CRI

CE 2 YEAR



7306GCD/EW

7306GCD | 7W | COB LED | MR16 | GU10 | Dimmable

LED 97 CRI TRIAC DIMMABLE

CE 2 YEAR



7306DG/W

7306DG | 6W | COB LED | MR16 | GU10

Full spectrum CRI97.

LED 97 CRI

CE 3 YEAR

new

new

7306DG/EW



7306DGD/W

7306DGD | 6W | COB LED | MR16 | GU10 | Dimmable

Full spectrum CRI97.

LED 97 CRI TRIAC DIMMABLE

CE 3 YEAR

new

new

7306DGD/EW



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306GC/W	GU10	Warm white	3000K	7W	500lm	36°	230V	NO	100
7306GCD/EW	GU10	Extra warm white	2700K	7W	510lm	36°	230V	YES	100
7306DG/W	GU10	Warm white	3000K	6W	500lm	60°	230V	NO	100
7306DG/EW	GU10	Extra warm white	2700K	6W	500lm	60°	230V	NO	100
7306DGD/W	GU10	Warm white	3000K	6W	500lm	60°	230V	YES	100
7306DGD/EW	GU10	Extra warm white	2700K	6W	500lm	60°	230V	YES	100

MR16 LED Modules

7307MA/B/V

7307MA | 7W | COB LED | Aluminium

LED module suitable for MR16 fittings.

LED 90 CRI CCT V

CE 3 YEAR

new

IP20



7307MA/W/V

7307MA | 7W | COB LED | Aluminium

LED module suitable for MR16 fittings.

LED 90 CRI CCT V

CE 3 YEAR

new

IP20



7307M/W

7307M | 7W | COB LED | 700mA | Dimmable

LED module suitable for MR16 fittings.

LED 90 CRI DIMMABLE

QUICK FIX CE 5 YEAR

IP65

7313M/W

7313M | 13W | COB LED | 700mA | Dimmable

LED module suitable for MR16 fittings.

LED 90 CRI DIMMABLE

QUICK FIX CE 5 YEAR

IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Dimmable		Notes
7307MA/W/V	White	CCT V	3000K-4000K-5000K	7W	600lm	36°	230V		-	NO	50	Complete with 160mA driver
7307MA/B/V	Black	CCT V	3000K-4000K-5000K	7W	600lm	36°	230V		-	NO	50	Complete with 160mA driver
7307M/W	-	Warm white	3000K	7W	700lm	36°	700mA	III	30cm	YES	50	Requires 700mA driver
7313M/W	-	Warm white	3000K	13W	1300lm	36°	700mA	III	30cm	YES	50	Requires 700mA driver

Dim To Warm GU10
Dimmable

2800K

2200K

7306GDV/EWW

7306GDV | 5,5W | SMD 2835 | MR16 | GU10 | Dim to warm

Leading & Trailing edge.

LED 90 CRI DIMMABLE

CE 2 YEAR



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306GDV/EWW	GU10	Extra warm white	2800K-2200K	5,5W	350lm	38°	230V	YES	100

PAR30 COB LED

7310H/C | 10W | COB LED | PAR30 | E27

LED 90 CRI

CE 2 YEAR



7310H/W | 10W | COB LED | PAR30 | E27

LED 90 CRI

CE 2 YEAR



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7310H/C	E27	Cool white	4000K	10W	750lm	40°	230V	NO	20
7310H/W	E27	Warm white	3000K	10W	750lm	40°	230V	NO	20

7315GB/W/45

R111 GU10 LED

7315G/W/45

7315G | 13W | SMD LED | R111 | GU10

LED 80 CRI

CE 2 YEAR

7315GB/W/45

7315GB | 13W | SMD LED | R111 | GU10

Black body.

LED 80 CRI

CE 2 YEAR

Dimmable R111 GU10 LED

7315GD/W/45

7315GD | 15W | SMD LED | R111 | GU10 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE 2 YEAR

Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7315G/C/45	GU10	Cool white	4000K	13W	1250lm	45°	230V	NO	20
7315G/W/45	GU10	Warm white	3000K	13W	1250lm	45°	230V	NO	20
7315GB/C/45	GU10	Cool white	4000K	13W	1250lm	45°	230V	NO	20
7315GB/W/45	GU10	Warm white	3000K	13W	1250lm	45°	230V	NO	20
7315GD/W/45	GU10	Warm white	3000K	15W	1200lm	45°	230V	YES	20

Classic A60 Special Functions

9G09/RGBW

9G09/RGBW | 9W | SMD LED | E27 | RGBW + Remote

LED 80 CRI DIMMABLE

CE 2 YEAR


Supplied with remote control.



9G09T

9G09T | 9W | SMD 2835 | E27 | Wi-Fi | RGB + CCT V | Dimmable

LED 80 CRI DIMMABLE

CCT V CE 2 YEAR

RGB 2700K-6500K

tuya Smart Life

amazon alexa | Google Home



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9G09/RGBW	E27	RGB + Warm white	RGB + 3000K	9W	720lm (3000K)	100-240V	YES	100
9G09T	E27	RGB + CCT V	RGB + 2700K-6500K	9W	780lm	230V	YES	120

Classic Lamps LED

9G10B/W/E

9G10B | 10W | SMD LED | E27

LED 80 CRI

CE 2 YEAR

new



9G09/V/E

9G09 | 9W | SMD LED | E27

LED 80 CRI CCT V

CE 2 YEAR

new



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9G10B/C/E	E27	Cool white	4000K	10W	900lm	230V	NO	100
9G10B/W/E	E27	Warm white	3000K	10W	900lm	230V	NO	100
9G10B/EW/E	E27	Extra warm white	2700K	10W	900lm	230V	NO	100
9G09/V/E	E27	CCT V	2700K-3000K-4000K	9W	800lm	230V	NO	100

GX53

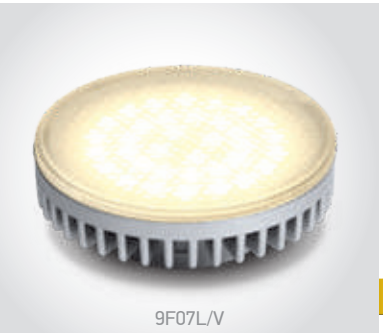

9F07L | 7W | SMD LED | GX53

LED 80 CRI CCT V

CE 2 YEAR

new



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9F07L/V	GX53	CCT V	3000K-4000K-5000K	7W	700lm	230V	NO	100

9G80N/C/LE

High Power LED E40

9G80N/C/LE

9G80N | 80W | SMD 2835 | E40

LED 80 CRI

CE 2 YEAR



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9G80N/C/LE	E40	Cool white	4000K	80W	8800lm	120°	230V	NO	4

T8 Tubes Glass

9009L | 9W | SMD | T8 | Glass

LED 80 CRI

CE 2 YEAR



9018L | 18W | SMD | T8 | Glass

LED 80 CRI

CE 2 YEAR



9022L | 24W | SMD | T8 | Glass

LED 80 CRI

CE 2 YEAR



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9009L/D	G13	Daylight	6000K	9W	1000lm	320°	230V	NO	25
9009L/C	G13	Cool white	4000K	9W	1000lm	320°	230V	NO	25
9018L/D	G13	Daylight	6000K	18W	2000lm	320°	230V	NO	25
9018L/C	G13	Cool white	4000K	18W	2000lm	320°	230V	NO	25
9022L/D	G13	Daylight	6000K	24W	2500lm	320°	230V	NO	25
9022L/C	G13	Cool white	4000K	24W	2500lm	320°	230V	NO	25
9022L/W	G13	Warm white	3000K	24W	2650lm	320°	230V	NO	25

T8 Tubes Glass
CCT V

9009L | 9W | SMD | T8 | Glass

LED 80 CRI CCT V

CE 2 YEAR



9018L | 18W | SMD | T8 | Glass

LED 80 CRI CCT V

CE 2 YEAR



9022L | 24W | SMD | T8 | Glass

LED 80 CRI CCT V

CE 2 YEAR



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9009L/V	G13	CCT V	3000K-4000K-6500K	9W	1000lm	240°	230V	NO	25
9018L/V	G13	CCT V	3000K-4000K-6500K	18W	2000lm	240°	230V	NO	12
9022L/V	G13	CCT V	3000K-4000K-6500K	24W	2650lm	240°	230V	NO	12

T5 Tubes Glass

9007LA/C

9007LA | 7W | SMD 2835 | T5 | Glass

LED 90 CRI

CE 2 YEAR



9016LA/C

9016LA | 16W | SMD 2835 | T5 | Glass

LED 90 CRI

CE 2 YEAR



9018LA/C

9018LA | 18W | SMD 2835 | T5 | Glass

LED 90 CRI

CE 2 YEAR



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9007LA/C	G5	Cool white	4000K	7W	1000lm	320°	230V	NO	10
9016LA/C	G5	Cool white	4000K	16W	2400lm	320°	230V	NO	10
9018LA/C	G5	Cool white	4000K	18W	2800lm	320°	230V	NO	10

Decorative Lamps

9G08E/A

9G08E | 8W | LED | E27

Decorative lamps.

LED CE

2 YEAR



9G08E/DC

9G08E | 8W | LED | E27

Decorative lamps.

LED CE

2 YEAR



Order Code	Lampholder	Glass Colour	Watts	Input	Dimmable	
9G08E/A	E27	Amber	8W	230V	NO	8
9G08E/DC	E27	Dark chrome	8W	230V	NO	8

Retro Amber Lamps LED
Dimmable

9G03RAD/A/E

9G03RAD | 6,5W | LED | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE 2 YEAR



9T05RD/A/E

9T05RD | 5W | LED | T28 | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE 2 YEAR

9G04RAD/A/E

9G04RAD | 7W | LED | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE 2 YEAR



9G06RD/A/E

9G06RD | 7W | LED | G125 | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE 2 YEAR



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9G03RAD/A/E	E27	Amber	2200K	6,5W	800lm	230V	YES	100
9T05RD/A/E	E27	Amber	2200K	5W	500lm	230V	YES	100
9G04RAD/A/E	E27	Amber	2200K	7W	800lm	230V	YES	50
9G06RD/A/E	E27	Amber	2200K	7W	800lm	230V	YES	20

Retro Lamp LED

9G03R/EW/E

9G03R | 4W | LED | E27

LED 80 CRI

CE 2 YEAR



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9G03R/EW/E	E27	Extra warm white	2700K	4W	470lm	230V	NO	100

Accessories & Gadgets

Pages 751- 756

25

Fast Connectors

0903F | 3-PIN Female connector

QUICK FIX

2 YEAR

200



0903M | 3-PIN Male connector

QUICK FIX

2 YEAR

200



0904F | 4-PIN Female connector

QUICK FIX

2 YEAR

500



0904M | 4-PIN Male connector

QUICK FIX

2 YEAR

200



0950GA | 100-240V | GU10 Lampholder | Double insulated

18cm

5 YEAR

50

0950G | 100-240V | GU10 Lampholder with bracket | Double insulated

5 YEAR

100



0950GB | 100-240V | GU10 Lampholder with bracket | Double insulated

Loop connector IN/OUT.

5 YEAR

40





0802 | Connection box 3-Way IN/OUT fast connector

Loop connector IN/OUT.

5 YEAR

10

IP20



050180C | Fast cable connector | 32A | 5-Port | Max. 4mm^2 csa wires

5 YEAR

100

IP20



050180E | Fast cable connector | 32A | 2x3-Port | Max. 4mm^2 csa wires

5 YEAR

100

IP20



Waterproof Connection Boxes

0800BA | Waterproof connection box 2 WAY | 16A | 450V | Cable diameter 4-11mm

2 YEAR | 250

IP67



0800B | Waterproof connection box 2 WAY | Cable diameter 4-11mm

2 YEAR | 100

IP67



0800A | Waterproof connection box 3 WAY | Cable diameter 4-14mm

2 YEAR | 74

IP67



0800C | Waterproof connection box 4 WAY | 24A | 450V | Cable diameter 4-14mm

2 YEAR | 74

IP67



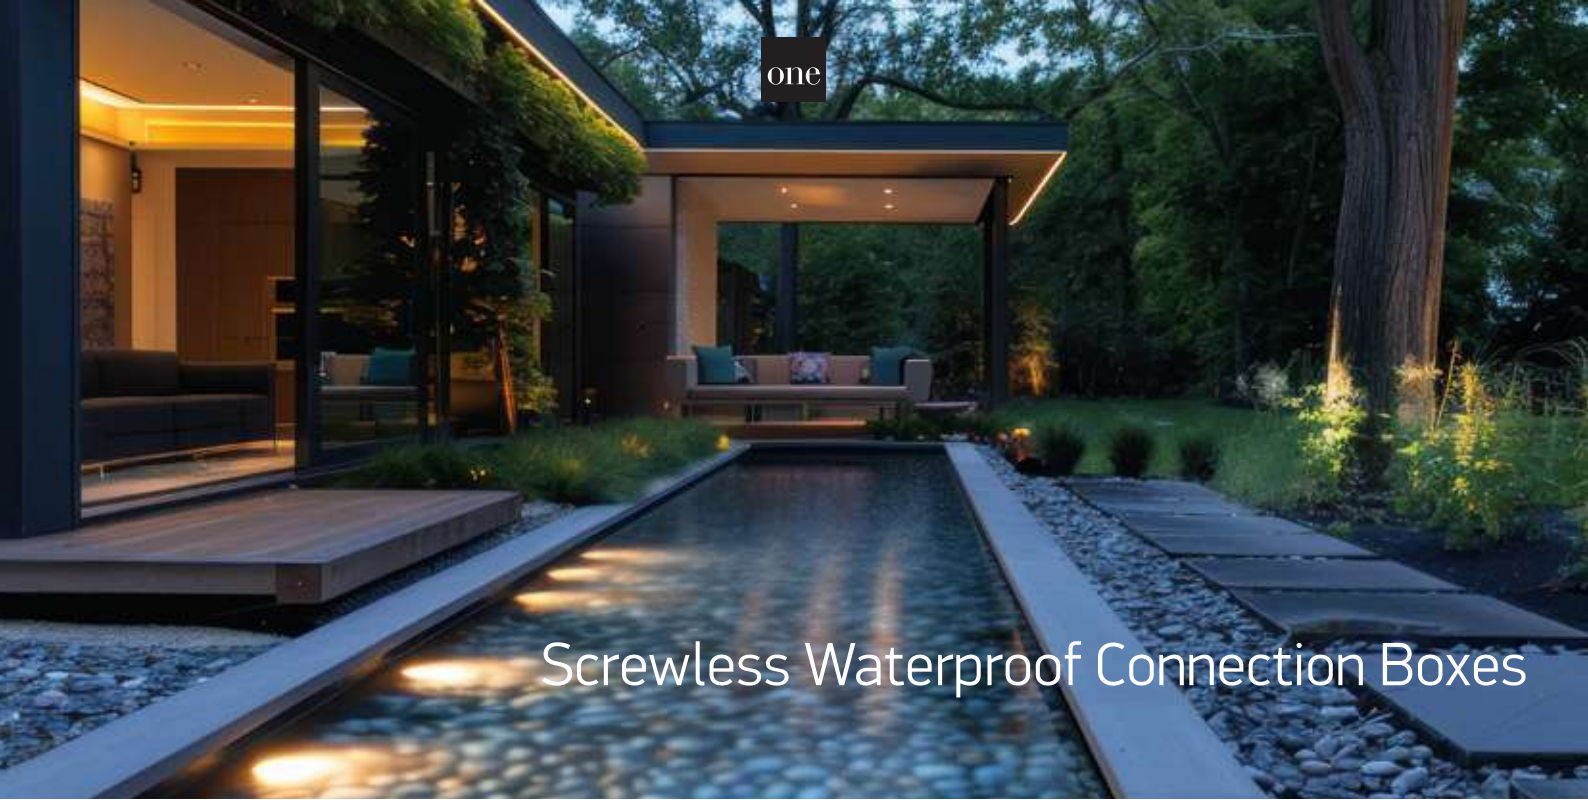

Screwless Waterproof Connection Boxes

0802BA | Waterproof screwless connection box 2 WAY | 16A | 450V | Cable diameter 4-11mm

2 YEAR

200

new

IP67

0802A | Waterproof screwless connection box 3 WAY | 16A | 450V | Cable diameter 4-11mm

2 YEAR

100

new

IP67



0802C | Waterproof screwless connection box 4 WAY | 16A | 450V | Cable diameter 4-11mm

2 YEAR

100

new

IP67



0802D | Waterproof connection box 4 WAY | 24A | 450V | Cable diameter 4-14mm

2 YEAR

20

new

IP67

Suitable for driver protection.



70038

Battery Lights

70038 | COB | Wardrobe / Magnet portable light

3xAAA Batteries included.

LED BUILT IN

2 YEAR

12

offer



70044 | 0,5W | LED | Sensor

3xAAA Batteries included.

LED BUILT IN

2 YEAR

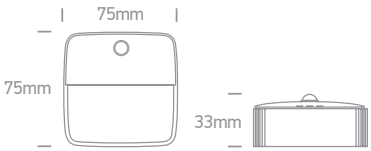

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	
70044	White	Warm white	3000K	0,5W	35lm	50

61136

61138

Gadgets

61138 | Wireless charger 3 in 1 for Smart Devices | ABS + PC

Includes USB cable and 230V adaptor.

2 YEAR

48

IP20



61136 | 8W | LED | Star projector / Speaker | Plastic

USB cable and 230V adaptor.

LED BUILT IN

2 YEAR

IP20

4Hrs automatic shutdown function



Order Code	Colour	Watts	Input	Class		Notes
61136	Black	8W	5V / 230V	III	1	Bluetooth / USB connectable

Ceiling Fans

Pages 759-770

26

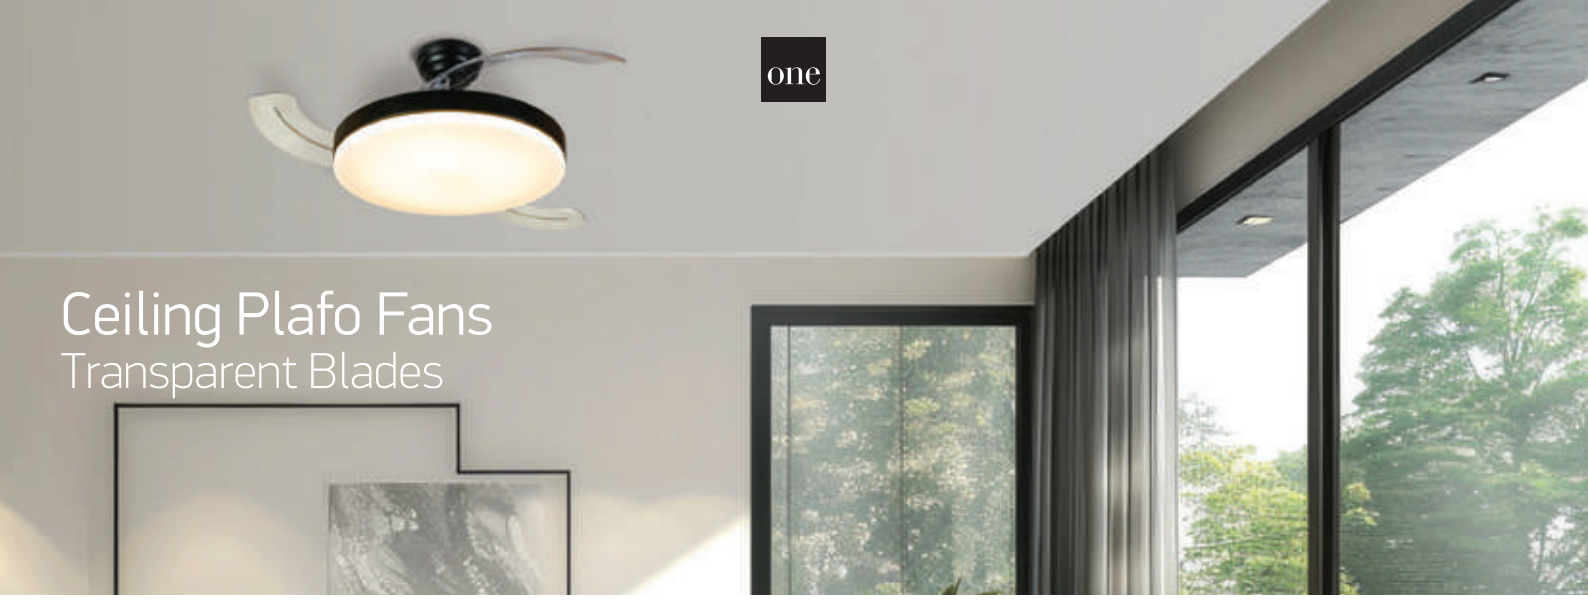

Ceiling Plafo Fans
Transparent Blades

6300/W/V

6300 | Metal body | Transparent PC blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR · IP20

Extra Remote control 030152B.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/W.

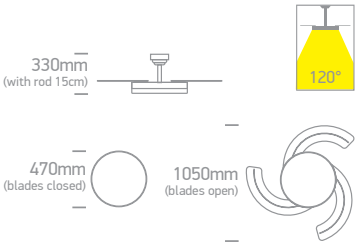

6300/B/V

6300 | Metal body | Transparent PC blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR · IP20

Extra Remote control 030152B.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/B.

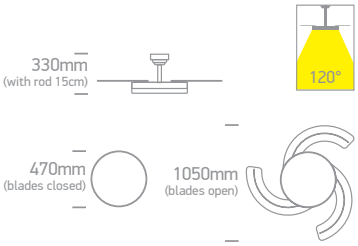

6300/BR/V

6300 | Metal body | Tinted brown PC blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR · IP20

Extra Remote control 030152B.

Complete with 15cm & 30cm rod.

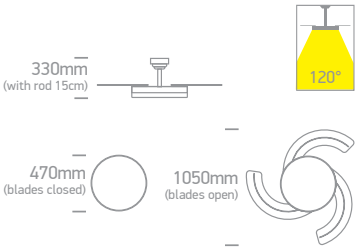

24002/W

24002 | 30W LED | 35W FAN | 6 Speed | Plastic + PC

LED BUILT IN · 80 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 2 YEAR · IP20



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6300/W/V	White	CCT V	3000K-4000K-5500K	32W	3500lm	120°	25W	230V		1	Complete with remote control
6300/B/V	Black	CCT V	3000K-4000K-5500K	32W	3500lm	120°	25W	230V		1	Complete with remote control
6300/BR/V	Brown	CCT V	3000K-4000K-5500K	32W	3500lm	120°	25W	230V		1	Complete with remote control
24002/W	White	CCT V	3000K-4000K-6000K	30W	2600lm	-	35W	230V		1	Complete with remote control

Ceiling Compact Fans

6300A/W/V

new

IP20

6300A | Metal body | White ABS blades | Ceiling mounted | 6 Speed | Winter reverse mode

LED BUILT IN

85 CRI

DIMMABLE

CCT V

DC MOTOR

CE

3 YEAR

Extra Remote control 030152A.



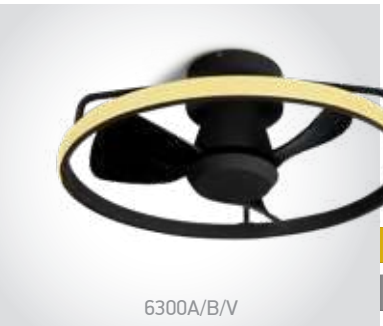

6300A/B/V

new

IP20

6300A | Metal body | Black ABS blades | Ceiling mounted | 6 Speed | Winter reverse mode

LED BUILT IN

85 CRI

DIMMABLE

CCT V

DC MOTOR

CE

3 YEAR

Extra Remote control 030152A.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	FAN Watts	Input	Class		Notes
6300A/W/V	White	CCT V	3000K-4000K-5500K	28W	2000lm	20W	230V		1	Complete with remote control
6300A/B/V	Black	CCT V	3000K-4000K-5500K	28W	2000lm	20W	230V		1	Complete with remote control

The Classic Fan Range
ABS Blades

6316/W

6316 | Metal body | White ABS blades | Rod mounted | 6 Speed | Winter reverse mode

DC MOTOR

CE 3 YEAR

IP20

Extra Remote control 030152C.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/W.



6316/B

6316 | Metal body | Black ABS blades | Rod mounted | 6 Speed | Winter reverse mode

DC MOTOR

CE 3 YEAR

IP20

Extra Remote control 030152C.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/B.



Order Code	Colour	FAN Watts	Input	Class		Notes
6316/W	White	30W	230V		1	Complete with remote control
6316/B	Black	30W	230V		1	Complete with remote control

The Slim Line Fan Range

6322C/W/V

6322C | Metal body | White ABS blades | Ceiling mounted | 6 Speed | Winter reverse mode

new

IP20

LED BUILT IN

85 CRI

DIMMABLE

CCT V

DC MOTOR

CE

3 YEAR

Extra Remote control 030152A.



6322C/B/V

6322C | Metal body | Black ABS blades | Ceiling mounted | 6 Speed | Winter reverse mode

new

IP20

LED BUILT IN

85 CRI

DIMMABLE

CCT V

DC MOTOR

CE

3 YEAR

Extra Remote control 030152A.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6322C/W/V	White	CCT V	3000K-4000K-5500K	15W	1400lm	120°	29W	230V		1	Complete with remote control
6322C/B/V	Black	CCT V	3000K-4000K-5500K	15W	1400lm	120°	29W	230V		1	Complete with remote control

one

White Body Ceiling Fans

White ABS Blades

6302C/W/V

6302C | Metal body | White ABS blades | Ceiling mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR · IP20

Extra Remote control 030152A.



6302/W/V

6302 | Metal body | White ABS blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR · IP20

Extra Remote control 030152A.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/W.



6304/W/V

6304 | Metal body | White ABS blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR · IP20

Extra Remote control 030152A.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/W.



6306/W/V

6306 | Metal body | White ABS blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR · IP20

Extra Remote control 030152A.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/W.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6302C/W/V	White	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control
6302/W/V	White	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control
6304/W/V	White	CCT V	3000K-4000K-5500K	22W	2000lm	120°	45W	230V	⏚	1	Complete with remote control
6306/W/V	White	CCT V	3000K-4000K-5500K	22W	2000lm	120°	40W	230V	⏚	1	Complete with remote control

one

Black Body Ceiling Fans

Black ABS Blades

6302C/B/V

6302C | Metal body | Black ABS blades | Ceiling mounted | 6 Speed | Winter reverse mode

LED BUILT IN
85 CRI
DIMMABLE
CCT V
DC MOTOR
CE
3 YEAR
IP20

Extra Remote control 030152A.



6302/B/V

6302 | Metal body | Black ABS blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN
85 CRI
DIMMABLE
CCT V
DC MOTOR
CE
3 YEAR
IP20

Extra Remote control 030152A.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/B.



6304/B/V

6304 | Metal body | Black ABS blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN
85 CRI
DIMMABLE
CCT V
DC MOTOR
CE
3 YEAR
IP20

Extra Remote control 030152A.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/B.



6306/B/V

6306 | Metal body | Black ABS blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN
85 CRI
DIMMABLE
CCT V
DC MOTOR
CE
3 YEAR
IP20

Extra Remote control 030152A.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/B.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6302C/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control
6302/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control
6304/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	45W	230V	⏚	1	Complete with remote control
6306/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	40W	230V	⏚	1	Complete with remote control

White Body Ceiling Fans
White Wood Blades

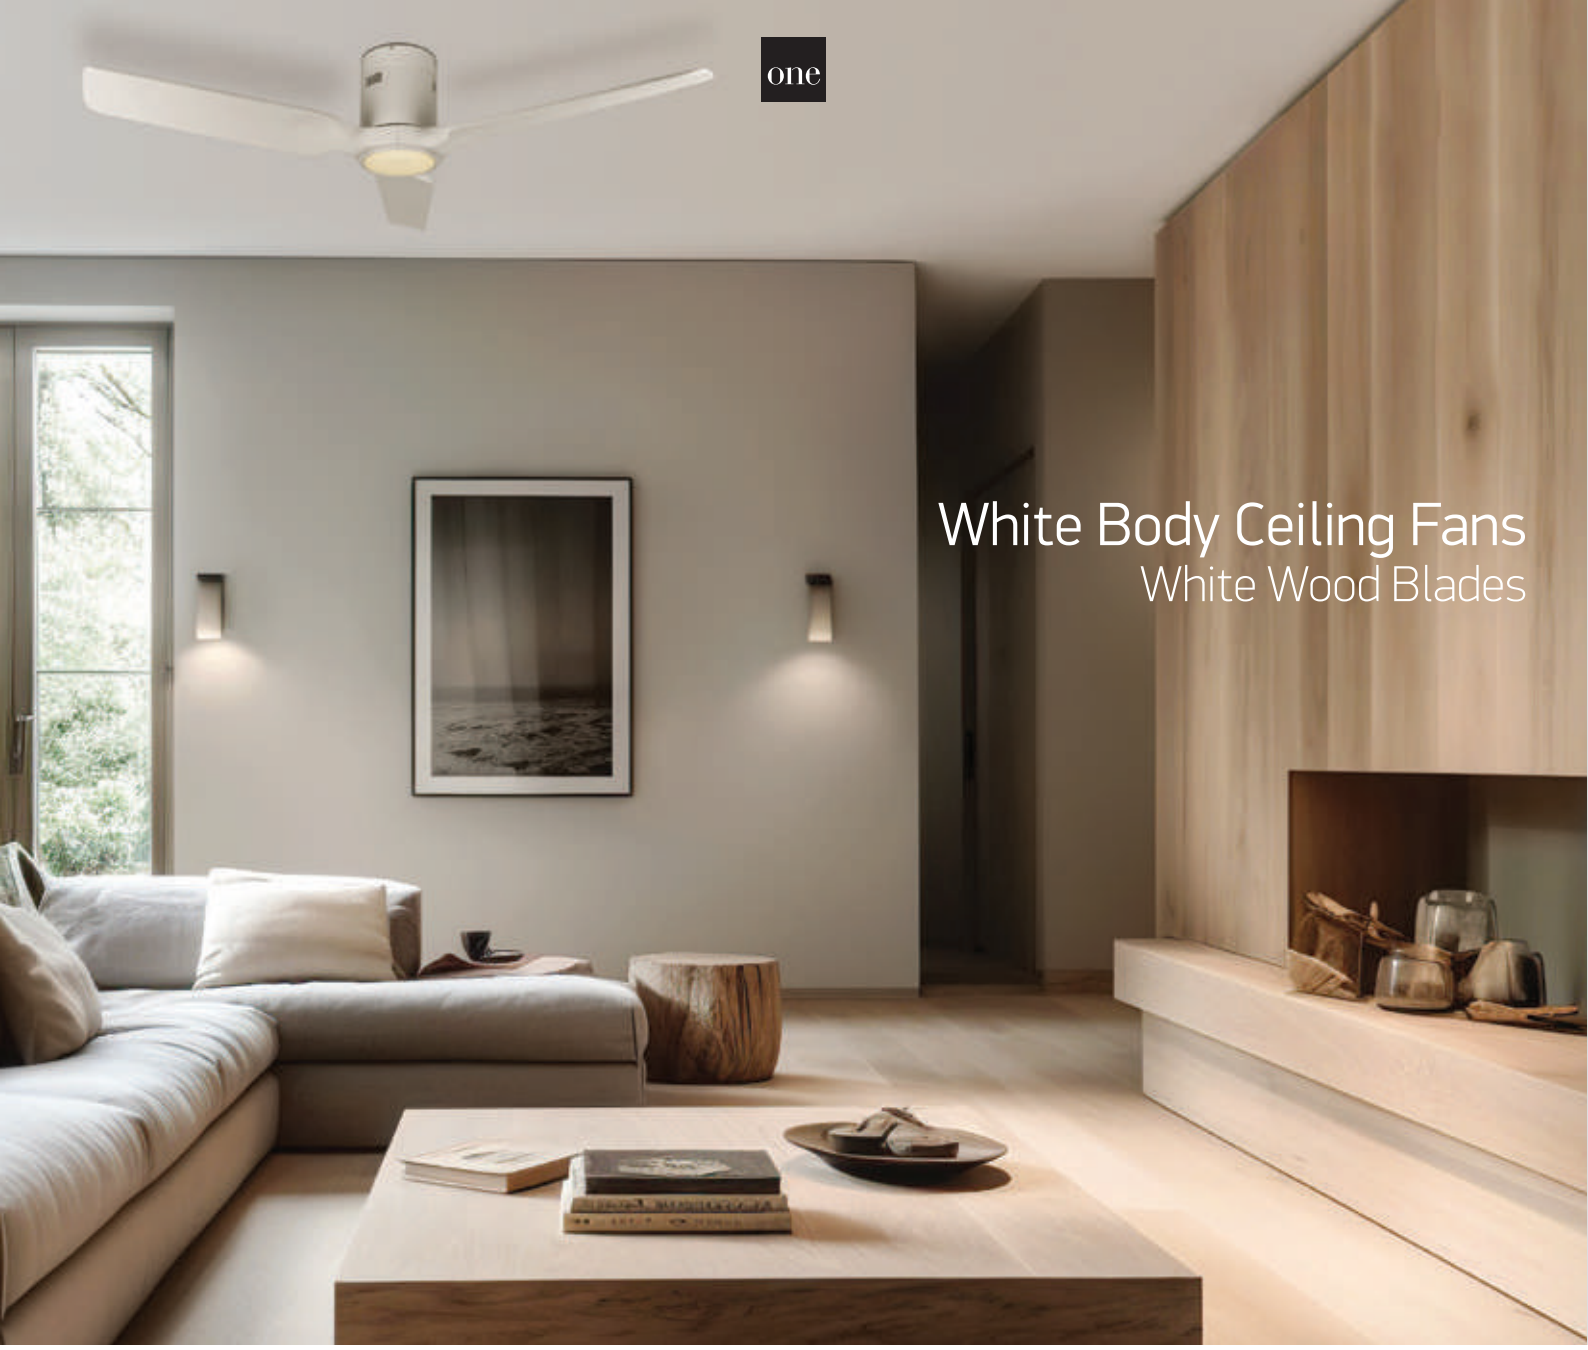

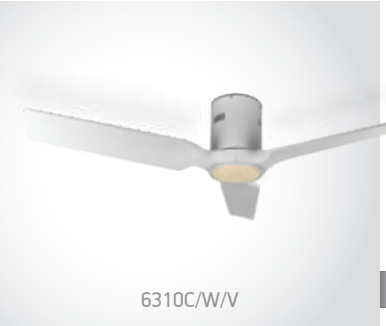

6310C | Metal body | White wood blades | Ceiling mounted | 6 Speed | Winter reverse mode

LED BUILT IN
85 CRI
DIMMABLE
CCT V
DC MOTOR
CE
3 YEAR
IP20

Extra Remote control 030152A.



6310 | Metal body | White wood blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN
85 CRI
DIMMABLE
CCT V
DC MOTOR
CE
3 YEAR
IP20

Extra Remote control 030152A.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/W.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6310C/W/V	White	CCT V	3000K-4000K- 5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control
6310/W/V	White	CCT V	3000K-4000K- 5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control

Black Body Ceiling Fans
Black Wood Blades

6310C/B/V

6310C | Metal body | Black wood blades | Ceiling mounted | 6 Speed | Winter reverse mode

LED BUILT IN
85 CRI
DIMMABLE
CCT V
DC MOTOR
CE
3 YEAR
IP20

Extra Remote control 030152A.



6310/B/V

6310 | Metal body | Black wood blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN
85 CRI
DIMMABLE
CCT V
DC MOTOR
CE
3 YEAR
IP20

Extra Remote control 030152A.



Complete with 15cm & 30cm rod.



Optional 1m rod 030156/B.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6310C/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control
6310/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control

White Body Ceiling Fans
Light Wood Blades

6312LC | Metal body | Light wood blades | Ceiling mounted | 6 Speed | Winter reverse mode

6312LC/W/V

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR · IP20

Extra Remote control 030152A.



6308L | Metal body | Light wood blades | Rod mounted | 6 Speed | Winter reverse mode

6308L/W/V

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR · IP20

Extra Remote control 030152A.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/W.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6312LC/W/V	White	CCT V	3000K-4000K-5500K	22W	2000lm	120°	25W	230V	⏚	1	Complete with remote control
6308L/W/V	White	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control

Black Body Ceiling Fans
Light Wood Blades

6312LC | Metal body | Light wood blades | Ceiling mounted | 6 Speed | Winter reverse mode

6312LC/B/V

LED BUILT IN | 85 CRI | DIMMABLE | CCT V | DC MOTOR | CE | 3 YEAR | IP20

Extra Remote control 030152A.



6314LC | Metal body | Light wood blades | Ceiling mounted | 6 Speed | Winter reverse mode

6314LC/B/V

LED BUILT IN | 85 CRI | DIMMABLE | CCT V | DC MOTOR | CE | 3 YEAR | IP20

Extra Remote control 030152A.



6308L | Metal body | Light wood blades | Rod mounted | 6 Speed | Winter reverse mode

6308L/B/V

LED BUILT IN | 85 CRI | DIMMABLE | CCT V | DC MOTOR | CE | 3 YEAR | IP20

Extra Remote control 030152A.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/B.



6312L | Metal body | Light wood blades | Rod mounted | 6 Speed | Winter reverse mode

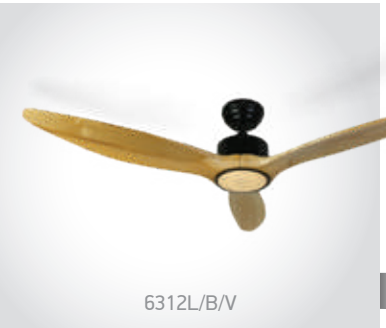

6312L/B/V

LED BUILT IN | 85 CRI | DIMMABLE | CCT V | DC MOTOR | CE | 3 YEAR | IP20

Extra Remote control 030152A.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/B.



6314L | Metal body | Light wood blades | Rod mounted | 6 Speed | Winter reverse mode

6314L/B/V

LED BUILT IN | 85 CRI | DIMMABLE | CCT V | DC MOTOR | CE | 3 YEAR | IP20

Extra Remote control 030152A.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/B.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6312LC/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	25W	230V		1	Complete with remote control
6314LC/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	40W	230V		1	Complete with remote control
6308L/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V		1	Complete with remote control
6312L/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	25W	230V		1	Complete with remote control
6314L/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	40W	230V		1	Complete with remote control

Black Body Ceiling Fans

Dark Wood Blades

6312DC/B/V

6312DC | Metal body | Dark wood blades | Ceiling mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR · IP20

Extra Remote control 030152A.



6314DC/B/V

6314DC | Metal body | Dark wood blades | Ceiling mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR · IP20

Extra Remote control 030152A.



6308D/B/V

6308D | Metal body | Dark wood blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR · IP20

Extra Remote control 030152A.

Complete with 15cm & 30cm rod.



Optional 1m rod 030156/B.



6312D/B/V

6312D | Metal body | Dark wood blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR · IP20

Extra Remote control 030152A.



Complete with 15cm & 30cm rod.



Optional 1m rod 030156/B.



6314D/B/V

6314D | Metal body | Dark wood blades | Rod mounted | 6 Speed | Winter reverse mode

LED BUILT IN · 85 CRI · DIMMABLE · CCT V · DC MOTOR · CE · 3 YEAR · IP20

Extra Remote control 030152A.



Complete with 15cm & 30cm rod.



Optional 1m rod 030156/B.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6312DC/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	25W	230V	⏚	1	Complete with remote control
6314DC/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	40W	230V	⏚	1	Complete with remote control
6308D/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	35W	230V	⏚	1	Complete with remote control
6312D/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	25W	230V	⏚	1	Complete with remote control
6314D/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	40W	230V	⏚	1	Complete with remote control

Ceiling Fans IP54

6320/W/V

6320 | Metal body | White ABS blades | Rod mounted | 6 Speed | Winter reverse mode

new

IP54

LED BUILT IN

85 CRI

DIMMABLE

CCT V

DC MOTOR

CE

2 YEAR

Extra Remote control 030152A.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/W.



6320/B/V

6320 | Metal body | Black ABS blades | Rod mounted | 6 Speed | Winter reverse mode

new

IP54

LED BUILT IN

85 CRI

DIMMABLE

CCT V

DC MOTOR

CE

2 YEAR

Extra Remote control 030152A.

Complete with 15cm & 30cm rod.

Optional 1m rod 030156/B.



Order Code	Colour	Light Colour	CCT (K)	LED Watts	Lumen (lm)	Beam Angle	FAN Watts	Input	Class		Notes
6320/W/V	White	CCT V	3000K-4000K-5500K	22W	2000lm	120°	32W	230V		1	Complete with remote control
6320/B/V	Black	CCT V	3000K-4000K-5500K	22W	2000lm	120°	32W	230V		1	Complete with remote control

one
LIGHT

Marketing

Pages 773-774

27

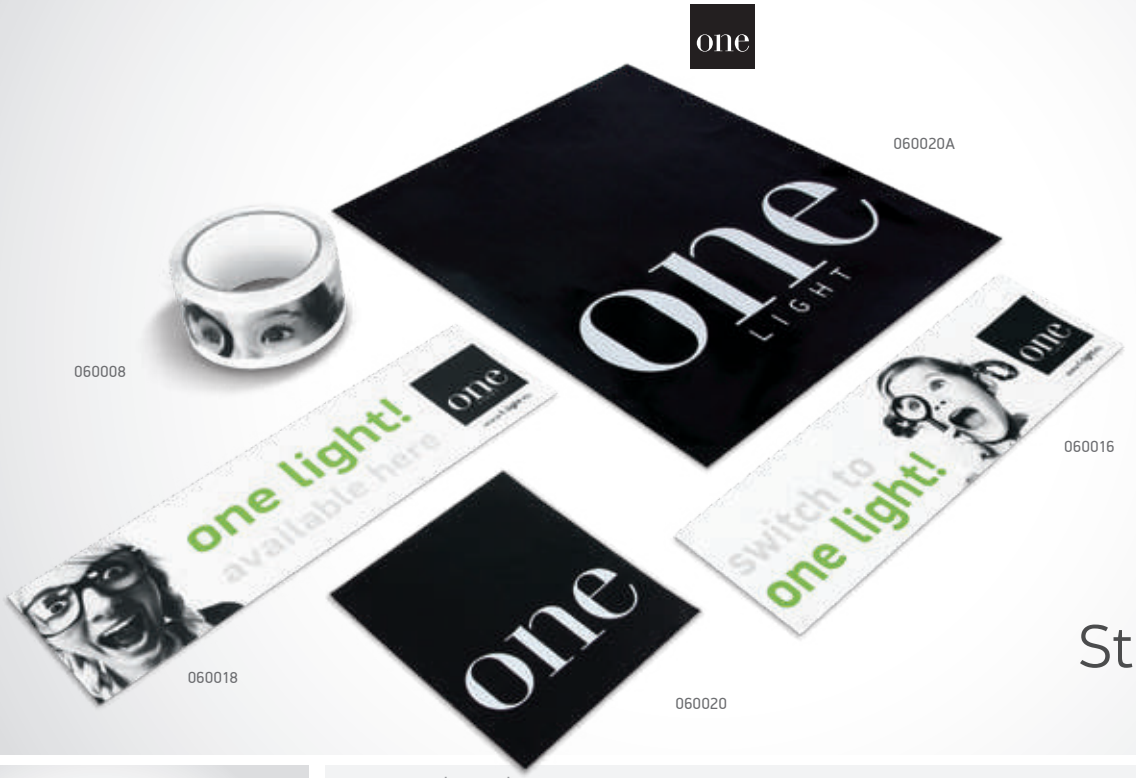

Stickers & Tape

060020 | one | Sticker

offer

120mm
140mm

060020A | one | Sticker

offer

290mm
340mm



060016 | switch to one light | Sticker

060018 | one light available here | Sticker

offer

300mm
90mm

060008 | Packing Tape

offer

4500mm
50mm

T-Shirts, Bags & Pads

060054 | ONE LIGHT Catalogue 2027

5

new

060010 | A5 Note Pad

offer



060014 | Large Plastic Bag

offer

060012 | Small Plastic Bag

offer

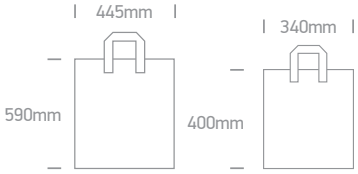

060026 | T-Shirt | SMALL

060027 | T-Shirt | MEDIUM

060028 | T-Shirt | LARGE

060029 | T-Shirt | XLARGE

offer

INDEX 2027

030152A 759-770
030152B 759
030152C 761
030156 759-770
030248 203, 204
050000B1 586
050000B2 586
050000B3 586
050000B4 586
050000B5 586
050000E1 586
050000E2 586
050000E3 586
050000E4 586
050000E5 586
050000E6 586
050012 657, 658
050012A 657
050017 133, 134, 135, 136
050042 73
050084 654, 655, 656
050086 109
050086A 109
050088 109
050088A 109
050090 335, 336
050098 31
050099 30
050100 110
050102 110
050104 55
050106 401
050106A 414
050106B 413, 414
050106C 413, 414
050106D 413, 414
050108 133, 134, 135, 136
050112 29, 361, 362, 499, 500
050122 211
050138A 465, 466
050138B 467, 468
050162 69
050170 342, 345, 347
050170C 345
050170D 345
050176 582
050178 74
050180C 752
050180E 752
050182 8, 42
050182R 8, 42
050182RA 8, 42
050182RB 8, 42
050206 405
050208 406
050210 633
050250 638
050280 56
050300A 243
050300AH 243
050300B 243, 244
050302 117
050378A 46, 151, 152
050378B 46, 151, 152, 407, 408
050378C 46, 151, 152, 407, 408
050380A 245, 247, 248
050380AH 245, 247, 248
050380B 245, 247
050380BH 245, 247
050380C 246
050380CH 246
050400A 666
050400B 666
050406A 425
050406B 425
050406C 425
050406D 426
050406E 426
050410 679
060008 773
060010 774
060012 774
060014 774
060016 773
060018 773
060020 773
060020A 773
060026 774
060027 774
060028 774
060029 774
060054 774
062002 179
0750A 243
0750B 243, 244
0770A 245
0770B 245
0770C 246
0800A 753
0800B 753
0800BA 753
0800C 753
0802 752
0802A 754
0802BA 754
0802C 754
0802D 754
0903F 751
0903M 751
0904F 751
0904M 751
0950G 752
0950GA 752
0950GB 752
0990 506
0992 506
0994 636
0996 636
0998 636
10101L 35
10101LA 35
10102H 65
10103B 36
10103BTR 77
10103C 36
10103E 38
10103FA 127
10103FA/../V 129
10103G1 3
10103G2 3
10103GP 3
10103GTR 3
10103H 51
10103J 49
10103LB 47
10103M 65
10103T 139
10103T/W/V 140
10105 4
10105A1 6
10105AD 13
10105ALG 9, 10
10105CJ 20
10105CM 5
10105D1 12
10105D2 12
10105D4 12
10105D8 14
10105D9 25
10105DG 11
10105E1 26
10105FD 44
10105GT1 27
10105GT2 27
10105GU 4
10105H 7
10105M 15, 16
10105MD 17
10105MR 29
10105R1 22
10105R2 23
10105R2P 24
10105RM 30
10105TG 11
10105TR 28
10105X 4
10105Y 26
10105YTR 32
10106DC 53
10106DH 149
10106P 71
10106PF 73
10106V 71
10106X 54
10106XTR 81
10107A 76
10107B 162
10107BT 78
10107CA 143
10107CA/../V 145
10107D 48
10107DB 67
10107DC 39
10107DF 74
10107DFV 74
10107DL 66
10107DX 50
10107ED 147
10107H 66
10107HA 75
10107J 49
10107JTR 49
10107K 55
10107M 63
10107MD 70
10107PA 68
10107PV 72
10107RA 47
10107T 140
10107UV 157
10107WD 63
10107WP 70
10107Z 46
10107Z/../V 151, 152
10108A 40
10108CF 166
10108D1 39
10108ED 147
10108FA 127
10108FA/../V 129
10108FD 154
10108H 64
10108J 75
10108R 39
10109D 155
10109F 21
10109FD 156
10110BX 163
10110CA 145
10110CE 141
10110DH 150
10110FD 43
10110G 166
10110H 52
10110HTR 82
10110P 71
10110TD 165
10110U 160
10112A 76
10112BTR 79
10112C 67
10112D 48
10112DX 50
10112ED 147
10112FA 127
10112FA/../V 129
10112G 168
10112GA 167
10112HA 42
10112K 56

10112P 68
10112R 69
10112RA 47
10112TD 41
10112TP 70
10112XTR 81
10112Z 46
10112Z/../V 151, 152
10113B 161
10113B/W/V 162
10113UV 157, 158
10114CE 141
10114DH 150
10115BX 163
10115CA 143
10115CA/../V 145
10115CF 166
10115D 48
10115FD 43, 44
10115G 166
10115T 140
10116FD 153, 154
10118B 161
10118DC 53
10118DX 50
10118FA 128
10118FA/../V 130
10118G 168
10118GA 167
10120BX 164
10120CA 144
10120CA/../V 146
10120CB 146
10120CE 141
10120DH 150
10120ED 148
10120FD 156
10120UV 157, 158
10120X 54
10120Z 46
10120Z/../V 151, 152
10122D 155
10122FD 154
10124T 139
10124T/W/V 140
10124U 160
10125B 161
10125B/W/V 162
10125BX 164
10125G 168
10125GA 167
10125TD 165
10130BX 164
10130CA 144
10130CA/../V 146
10130DH 150
10130ED 148
10130FA 128
10130FA/../V 130
10130U 160
10130UV 157, 158
10135G 168
10135GA 167
10140ED 148
10140F 131
10140G 168
10148PE 131
10160CA 144
11103A 85
11103B 105
11103M 120
11104K 110
11105 85
11105A1 97
11105ABG 94
11105ABGL 93
11105AC 91
11105C 87
11105CGU 88
11105D4 98
11105D8 97
11105DT 98
11105DTR 101
11105F 100
11105GU 86
11105M 95, 96
11105TG 98
11105TR 101
11105U 92
11105UA 92
11105UB 92
11105UTR 101
11106K 106
11106PK 114
11106T 115
11107B 107
11107BT 124
11107C 116
11107FD 111
11107K 110
11107P 114
11107RA 123
11107T 115
11107TTR 124
11107WD 113
11108LA 119
11109FA 100
11110E 171
11110TR 169
11111C 117
11112 108
11112B 118
11112E 112
11112H 109
11112P 114
11112RA 123
11112RB 123
11112T 124
11112TA 111
11113D 114
11113E 118
11115G 173, 174
11120E 171
11126F 170
11128G 173, 174
11207C 116
11207WD 113
12103G 357
12105AB 367
12105AC 367
12105AL 366
12105D1 366
12105E 366
12105E1 360
12105E2 360
12105E4 373
12105E6 373
12105F 358
12105H 359
12105K 358
12105L 358
12105M 361
12105MA 362
12105N 363
12105NA 364
12105T 365
12105TA 365
12105Y 368
12105YA 368
12106B 418
12106E 410
12106X 415
12107B 417
12107K 401
12107KA 401
12107R 414
12107V 403
12107VA 403
12108C 404
12108D 405
12108DB 405
12108FD 420
12108LA 396
12108T 402
12108X 404
12108XA 404
12109M 423
12110D 402
12110H 416
12110HA 409
12110HB 416
12110R 414
12110R/../V 413
12112A 411
12112D 421, 422
12112E 410
12112F 403
12112H 416
12112T 402
12112X 415
12112Z 407
12112Z/../V 408
12112ZA 409
12114E 410
12114M 423
12115D 402
12115F 412
12115G 395
12115HA 409
12116FD 420
12118R 414
12118R/../V 413
12120A 411
12120D 421, 422
12120F 412
12120M 423
12120X 415
12120Z 407
12120Z/../V 408
12120ZA 409
12122C 404
12122D 406
12124H 416
12125D 421, 422
12125R 414
12125R/../V 413
12128A 411
12130D 421, 422
12130Z 407
12134 367
12142 369
12144 369
12205NA 364
12205TA 365
12205YA 368
12207B 417
12208LA 396
12307B 417
12406B 418
12406C 419
12606C 419
12906B 418
12906C 419
20030 723
20032 196, 723
20034 724
20036 724
22000 721
22004 719
22004M 719
22004P 719
22006 721
22006A 721
22008 720
22008A 720
22008AB 720
22008MP 720
22008P 720
22014 719
22022 721

24002 759
36002 354
38010A 399
38010B 399
38012A 338
38012B 338
38100A 657, 658
38100B 657, 658
38100C 657, 658
38101A 228
38101B 228
38101C 228
38101D 228
38102A 228
38102B 228
38102C 228
38103 227
38104B 226
38105 227
38108B 226
38108N 575
38110 227
38110BD 573
38112C 572
38114B 225
38114B/V 226
38114EL 574
38114M 574
38114N 575
38114R 571
38114T 575
38115C 574
38115LB 660
38116P 574
38118C 572
38118E 649
38118K 570
38118LA 654
38118LC 655
38118M 651
38118N 569
38120D 571
38120L 336
38120M 652
38120N 653
38120P 647
38120R 571
38130LB 660
38135L 336
38136E 649
38136LA 654
38136LC 655
38140AU 346
38140M 652
38140ME 652
38140N 653
38140P 647
38145AR 349
38145AR/W/V 350
38145BR 353
38145LA 654
38145LC 655
38148N 337
38150A 343
38150A/../V 344
38150AR 349
38150B 341
38150B/../V 342
38150BR 353
38150BU 341
38150BU/../V 342
38150C 341
38150C/B/V 342
38150E 345
38150LB 660
38150M 652
38150N 653
38150P 647
38151A 343
38151A/../V 344
38152R 351
38152R/W/V 352
38152RC 351
38152RC/W/V 352
38152RL 351
38158E 649
38158M 651
38160A 347
38160A/../V 348
38161A 347
38161A/../V 348
38218E 650
38220P 648
38225M 335
38236E 650
38236LC 656
38236M 651
38240P 648
38245LC 656
38248L 336
38248M 335
38250M 335
38250P 648
38258E 650
38280 659
40001A 275
40001AL 281, 282
40002A 275
40002AL 281, 282
40002C 275
40003A 275
40003AL 281, 282
40003R 279
41002 280
41002A 280
41004A 277
41004AL 283
41004B 279
41008A 277
41008AL 283
41008B 279
41010A 277
41010AL 283
41012A 278
41012AL 284
41012B 279
41016A 278
41016AL 284
41016B 279
41018A 278
41018AL 284
41020 277
41022A 278
41024A 278
41026R 276, 281, 282
41030 280
41032 276, 281, 282
41034R 279
42001 287
42001A 285
42001ATR 291
42001B 286
42001P 319
42001PA 319
42001R 290
42001RB 289
42001TR 292
42002 287
42002A 285
42002ATR 291
42002B 286
42002P 319
42002PA 319
42002R 290
42002RB 289
42002TR 292
42003 287
42003P 319
42003PA 319
42004A 294
42004B 294
42004C 294
42004PA 316
42004PB 316
42004PC 317
42004PD 317
42004PE 317
42004PF 318
42004PG 317
42004PH 318
42004PJ 318
42004PK 318
42004PL 318
42004PM 316
42004PN 316
42004PP 316
42004PR 317
42006BX 294
42012A 287
42012AA 285
42012AATR 291
42012AB 286
42012AR 290
42012ARB 289
42012ATR 292
42012B 287
42012BA 285
42012BB 286
42012BR 290
42012BRB 289
42012BTR 292
42012C 287
42012D 288
42012E 288
42022 293
42022A 293
42022B 293
42026 294
42026A 285, 286
42032 293
42032A 293
42100A 295
42100AA 295
42100AAL 296
42100AL 296
42100B 295
42100BA 295
42100BAL 296
42100BL 296
42100E 297
42100EA 297
42100EL 297
42100PA 320
42100PAL 320
42100PB 320
42100PBL 320
42100PC 320
42100PCL 320
42102A 298
42102AL 298
42102B 298
42102BL 298
42104B 301
42104BL 301
42106A 299
42106AL 299
42106B 299
42106BL 299
42108 305
42108A 305
42108AL 306
42108L 306
42110 307
42110L 308
42112AA 300
42112AAL 300
42112BA 300
42112BAL 300
42112PA 321
42112PAL 322

42112PB 321
42112PBL 322
42112PC 321
42112PCL 322
42114A 309
42114AL 310
42114B 309
42114BL 310
42114C 309
42114CL 310
42116C 309
42118 305
42118L 306
42120B 301
42122A 305
42122AL 306
42124AA 302
42124BA 302
42126AA 313
42126BA 313
42128A 303
42128B 303
42128C 303
42130A 311
42130B 311
42130BL 312
42132 311
42132L 312
42134 304
42134A 304
42136 313
42138 307
42138L 308
42140 307
42140L 308
42142 311
42142L 312
42144 307
42144L 308
42146 314
42146L 314
43001F 323
43002F 323
43004FA 324
43004FB 324
43004FF 324
43004FG 324
43004FJ 324
43004FK 324
43004FL 324
43004FM 323
43006FA 323
43006FC 323
43100FA 325
43100FB 325
43100FC 325
43100FD 325
43102FA 326
43102FB 326
43102FC 326
43106FA 328
43106FB 328
43108FA 328
43108FB 328
43110F 329
43112F 329
43116F 327
43118F 327
43118FA 327
43120F 327
43122F 327
43126FA 330
43126FB 330
43128FA 330
50006B 58
50012H 52
50012HTR 82
50102B 59
50103ATR 80
50103H 51
50105M 18
50105MA 19
50105R1 22
50105RM 31
50105TG 11
50106B 57
50107B 61
50108A 40
50110CE 142
50110H 52
50110HTR 82
50110UV 159
50114CE 142
50115UV 159
50116FA 132
50120CE 142
50122D 138
50122FA 132
50125UV 159
50130B 138
50130FA 132
50130UV 159
50140B 134
50140BAU 133
50140BR 135
50140BRU 135
50140BU 134
50140BW 136
50140F 134
50140FA 133
50202B 59
50207B 61
50302B 60
50306B 57
50307B 61
50406B 57
50406C 62
50502B 60
50506B 58
50507B 61
50902B 60
50906C 62
51010TR 102
51012H 122
51024H 122
51100TR 169
51105 89
51105ABG 94
51105GA 90
51105TA 99
51105TG 99
51106M 120
51111C 117
51112H 109
51130 172
51205ABG 94
51205N 99
51211C 117
51212E 112
51230 172
51406B 121
51506B 121
60056 375
60106 573
60106A 573
60118 558
60132 549
60162 552
6017 375
60178B 553
6017A 375
60208 576
60208A 576
60208C 577, 578
60208D 577, 578
6030 375
61000 520
61000A 520
61046 557
61050A 515
61050B 515
61066 333
61066T 333
61082 517
61082A 516
61082B 517
61084 521
61086 539
61086A 540
61088 521
61090 519
61092 520
61094 519
61098 522
61100 518
61102 518
61104 522
61106 519
61108 334
61110 334
61110A 334
61116 550
61116A 558
61118 523
61118A 523
61132A 564
61132B 564
61136 756
61138 756
62002A 476
62002B 476
62002BD 476
62002C 476
62002CD 476
62002D 476
62006 463
62006A 463
62006B 463
62006BD 463
62006C 464
62006CD 464
62006D 464
62018AF 469
62020AU 465
62020BU 465
62020CU 465
62020DU 466
62020EU 466
62020FU 466
62020HU 467
62020JU 467
62020KU 467
62020LU 467
62020MU 468
62020PU 468
62024C 477
62026A 461
62026B 462
62026B/V 461
62026C 462
62026C/V 461
62026D 462
62026D/V 461
62030F 469
62038F 469
62115F 471
62116F 137
62116FA 137
62118D 478
62120 524
62120A 524
62122F 472
62125D 478
62130AF 472
62130F 471
62130L 483
62130N 479
62132N 480
62132N/../V 479
62132NA 486

62134N 481
62140BFU 340
62140BRU 340
62140F 471
62140RE 339
62140RF 339
62142N 480
62142N/../V 479
62142NA 486
62142NB 544
62144N 482
62144NB 533
62144NB/../V 534
62146 473
62146A 473
62148A 545
62148B 545
62148L 484
62150BFU 340
62150BRU 340
62150D 478
62154 477
62156C 525
62156D 525
62160 474
62160A 474
62160FB 475
62166B 553
62170A 551
62170B 551
62172B 548
62172C 548
62180NB 544
62182 485
62182A 485
62184B 554
6300 759
6300A 760
63016A 511, 512
6302 763, 764
63020 510
63022 511, 512
63022A 511, 512
63022B 511, 512
63028 639
63028A 639
63028B 639
6302C 763, 764
6304 763, 764
63040 509
63042 509
63044 509
63046 529
63046A 529
63048 530
63050 530
63054A 541
63054C 541
63056 542
63058 543
6306 763, 764
63062 536
63066 537
63066A 536
63068 537
63068A 536
63076A 535
63076C 535
63076D 535
63076E 535
6308D 769
6308L 767, 768
6310 765, 766
63100L 665
63100N 664
63100NA 661
63100NB 662
63105M 499
63105MA 500
63105N 501
63108A 502
63108AT 266
63108B 502
6310C 765, 766
63110C 546
63112 546
63114 531
63116A 550
63122 504
63122B 504
63124 503
63124C 503
63126 503
63126A 503
6312D 769
6312DC 769
6312L 768
6312LC 767, 768
63134P 549
63140 504
63140B 504
63142A 505
63144A 532
63144B 532
63146A 507
63146B 507
63146C 508
63146D 508
6314D 769
6314DC 769
6314L 768
6314LC 768
63150 526
63150A 526
63150B 526
63150C 526
63150L 665
63150N 664
63150NA 661
63150NB 662
63150NL 663
63152A 527
63152B 527
63152C 527
63154A 538
63154B 538
63154C 538
63154D 538
63156 531
6316 761
63166P 553
63174C 547
6320 770
63200L 665
63200N 664
63200NA 661
63200NB 662
6322C 762
63240NL 663
65004A 397
65004B 397
65004C 398
65004D 398
65004E 398
65018T 262
65024T 261
65024TA 262
65025T 262
65026T 261
65028AT 264
65028BT 264
65028CT 264
65105BT 269
65105CT 270
65105DT 269
65105E 374
65105EA 374
65105GT 271
65105N 371, 372
65105NA 566
65105NAT 267
65105NB 370
65105NBA 370, 566
65105NT 268
65108AT 255, 256
65108T 255, 256
65111AT 272
65144 564
65146 563
65146A 563
65147 563
65147A 563
65148A 528
65148B 528
65168T 263
65170AT 263
65170BT 263
65172AT 265
65172BT 265
65205E 374
65205N 371, 372
65305N 371, 372
65306BT 240
65405N 371, 372
65406BT 240
65505N 371, 372
65506BT 240
65518T 272
65519T 271
65520T 271
65522T 271
65524T 255, 256
65606AT 249, 250
65606BT 249, 250
65606CT 249, 250
65606DT 249, 250
65611NT 241, 242
65612NT 241, 242
65614NT 241, 242
65634BT 253
65634DT 253
65642AT 247, 248
65642BT 247, 248
65642CT 247, 248
65644T 254
65646T 255, 256
65650AT 259, 260
65650BT 259, 260
65650CT 259, 260
65652T 254
65656AT 251, 252
65656BT 251, 252
65656CT 251
65656DT 251, 252
65660AT 243
65660BT 243
65660BTL 244
65660BTT 244
65662AT 257, 258
65662BT 257, 258
65664AT 265
65664BT 265
65668T 239
65670AT 245
65670BT 245
65670CT 246
65670CTL 246
65670CTT 246
65738 561
65738A 562
65740A 565
65746 559
65746A 559
65746B 560
65746R 559
65746RA 559
65748 436
67034 630
67076 434
67076A 434

67094 623
67098 623
67100 624
67102 624
67130 383
67130C 381
67130D 385
67130E 383
67130F 386
67132A 389
67132C 387
67132D 389
67138 429
67138A 429
67138C 424
67138D 424
67138E 427
67138EL 430
67138F 428
67138L 430
67142A 377
67142B 377
67142C 387
67142D 379
67142F 378
67142G 378
67142H 380
67142K 380
67176 455
67196A 616
67196B 616
67196BG 615
67196C 616
67198AG 613
67198G 613
67200G 614
67202G 614
67204 391
67204B 391
67204E 621
67204G 621
67208 392
67208B 392
67210 392
67216 391
67218 496
67218E 496, 679
67218R 496, 679
67220A 495
67220B 495
67220E 495
67280AN 493
67280ANE 679
67280E 492
67280EA 492
67280N 493
67282AN 493
67282ANE 679
67282E 491
67282EA 491
67282N 493
67328 390
67340A 445
67358 630
67359 452
67359A 453
67359B 454
67359C 453
67360 452
67360A 453
67362 490
67362A 490
67362C 438
67363 490
67363A 490
67366 488
67366E 679
67368 488
67370 488
67374 435
67374A 435
67376 444
67376A 444
67378A 443
67380 424
67384 489
67384A 489
67386A 449
67386C 449
67388B 450
67388C 450
67390 494
67392 438
67394 441
67396 449
67396A 449
67398 446
67398A 446
67398C 446
67400A 382
67400B 382
67400D 388
67400E 388
67402 470
67406 635
67406A 635
67406B 635
67406C 635
67406D 635
67408 622
67410 634
67410A 634
67412 444
67414 451
67417 451
67418 451
67420 390
67420B 390
67422 448
67422A 448
67426 384
67426A 384
67426B 386
67426C 386
67426D 385
67430A 451
67440 433
67440A 433
67442 456
67442B 456
67444C 456
67450 447
67450A 447
67452 487
67454 458
67456 612
67458 612
67460A 628
67460B 628
67462 637
67464G 613
67466A 400
67466B 400
67466C 400
67470 627
67470A 627
67472 442
67472A 442
67474A 437
67478 457
67480A 431
67480B 431
67482 612
67484 457
67488A 619
67488B 619
67488C 619
67490 629
67490A 629
67492 436
67492P 436
67494 626
67494A 626
67496 622
67498 494
67502B 455
67504 632
67504A 632
67506 631
67506A 631
67508A 626
67508B 626
67510 633
67510A 633
67510B 633
67512 448
67514 618
67516C 424
67518 376
67520 638
67520A 638
67524A 432
67524B 432
67526A1 439
67526A2 439
67526A3 439
67526B1 440
67526B2 440
67526B3 440
67530B 637
67532 447
67534A 625
67534B 625
67534C 625
67536A 378
67536B 378
67538A 620
67538B 620
67538C 620
67540A 425
67540B 425
67540C 425
67540D 426
67540E 426
68000B 586
68000E 586
68004 584
68004A 584
68006N 582
68006N/BOX 582
68007 581
68030 585
68032 585
68062 590
68064 590
68066 590
68068 587
68068/../V 588
68068A 587
68068A/../V 588
68068B 588
68068C 587
68068C/../V 588
68070 584
68072A 589
68072C 589
68074 583
68074A 583
68074B 583
68076 589
68076A 589
69006 608
69006G 607
69015A 592
69015B 592
69015C 592
69016 593
69016A 593
69016AG 594
69016B 593

69016BG 594
69016G 594
69028A 595
69040 601
69042 595
69042A 591
69042B 591
69042M 595
69044 591
69046G 607
69050 601
69052 596
69052A 596
69054 603
69054A 603
69056A 597
69056B 597
69056C 597
69058A 606
69058B 606
69058C 606
69060 602
69062 605
69064A 642
69064B 642
69064C 642
69066 643
69066A 643
69066B 644
69066M 643
69068A 599
69068B 599
69068C 599
69068CH 599
69070A 598
69070B 598
69070C 598
69072 604
69074A 604
69074B 604
69074C 604
69076A 600
69076B 600
69076C 600
69076D 600
70038 755
70044 755
70105 674
7010P 611
70110 674
70112 673
70118A 666
70118B 666
70118C 666
70118D 666
7012 611
7028CB 667
7028CC 667
7028CD 667
7028CE 667
7028CF 668
7028CH 668
7046 617
7047 617
7052 618
7052B 618
7055A 670
7055A/RGBW 669
7055B 670
7055B/RGB 669
7055B/RGBW 669
7056A 672
7058A 671
7058R 671
7068 611
7070 611
7072 640
7072A 640
7101AL 729
7103ALG 727
7103ALGD 728
7106ALG 727
7106ALGD 728
7107ALG 727
7201G 729
7301CG 732
7303CG 732
7304GE 729
7305EG 731
7305EGD 731
7306CBG 732
7306CG 732
7306CG/BL 729
7306CGA 733
7306CGD 732
7306CHG 733
7306DG 734
7306DGD 734
7306G 730
7306GC 734
7306GCD 734
7306GD 730
7306GDV 736
7306GZ 733
7307BG 729
7307G/V 730
7307G/W/10 733
7307M 735
7307MA 735
7310H 737
7313M 735
7315G 738
7315GB 738
7315GD 738
7811 234
7811E 234
7811F 234
7820 179
7820/BL 197
7820A 198
7820B 201
7820C 201
7820V 190
7820W 180
7820W/BL 197
7820WL 189
7822 179, 181, 190
7823 178
7824 179, 181, 190
7825 191
7826 180, 189
7827 184, 200
7827A 188, 200
7828 180, 189
7829 181
7829A 181
7829AW 182
7830 199
7830W 200
7832 199
7833 178
7834 199
7835 183
7835/DEW 196
7835P 183, 191
7835V 190
7835W 184
7837 183, 191
7838M 205, 209, 210
7839 185
7839W 187
7840 223
7840A 224
7840B 224
7840D 224
7841 234
7841A 234
7841AF 234
7841B 234
7841BF 234
7841F 234
7842 223
7843 178
7843E 178
7844 185
7844/A 195
7844B 185
7844C 185
7844E 185
7844L 189
7844LW 189
7844P 185
7844W 187
7845 192
7846 186
7846/DEW 196
7846/RGB 199
7846/RGBW 199
7846B 186
7846C 186
7846E 188
7846H 186
7846P 186
7846RB 199
7846RC 199
7846RP 199
7846W 188
7846WA 188
7846WB 188
7846WC 188
7846WE 188
7846WP 188
7848 177
7850 229
7850C 229
7850E 229
7850F 229
7850L 229
7850P 229
7860 229
7860C 229
7860E 229
7860F 229
7860L 229
7860P 229
7860R 229
7862 230
7862C 230
7862E 230
7862F 230
7862L 230
7862P 230
7864 231
7864C 231
7864E 231
7864F 231
7864P 231
7866 236
7866F 236
7868 235
7868E 235
7868F 235
7868P 235
7870 191
7872 232
7872C 232
7872E 232
7872P 232
7875 191
7880 193
7882 193
7884 193
7885 193
7887 192
7887A 194
7887B 194
7890 202
7890E 202
7890F 202
7890FL 202

7900 207
7900C 205, 209, 210, 211
7900P 205, 209, 210, 211, 212
7900R 205, 209, 210, 211
7900TR 217
7901 207
7901A 233
7901AATR 233
7901ATR 233
7901BATR 233
7901R 213
7901TR 206, 217
7902 205, 207
7902R 206, 213
7903 203
7903R 204
7903TR 204
7904 205, 208
7904R 214
7904TR 206, 217
7905 208
7906 212
7906D 212
7906R 215
7906TR 217
7908 219
7908A 219
7909TR 218
7910 210
7910A 211
7910AR 216
7910R 206, 216
7912 205, 209
7912A 209
7912R 206, 215
7914R 222
7915R 222
7918 222
7920 221
7922 220
7940 201
7940A 201
7940B 201
89001 682
89002 678
89002A 686
89002B 678
89002C 678
89004 689
89004A 689
89004AT 690
89004T 690
89005A 683
89005B 684
89006AT 696
89006P 689
89006PA 689
89006PC 689
89007AL 697
89007T 690
89008 691
89008A 693
89008AT 696
89009 685
89009L 715
89009UT 695
89010AT 690
89015 691
89015A 693
89015AL 697
89015AT 696
89015C 692
89015CT 696
89015L 697
89015T 696
89015V 701
89015W 700
89016UT 695
89020 691
89020C 692
89024UT 695
89026AL 698
89028AM 699
89028M 699
89030A 693
89030C 692
89030UT 695
89030V 701
89030VL 707
89030W 700
89040AT 696
89040L 716
89040VT 703
89044L 698
89048 694
89048T 694
89050LL 715
89050TLD 716
89050VT 703
89060 694
89060VL 707
89060VN 705
89075V 701
89075VL 707
89075VT 703
89075W 700
89090VL 710
89100L 722
89100LP 722
89100V 702
89100VL 707
89100VLL 709
89100VLT 708
89100VN 705
89100VND 706
89100VP 711
89100VT 704
89102L 722
89104LT 722
89150V 702
89150VL 707
89150VLL 709
89150VLT 708
89150VN 705
89150VP 711
89150VPL 712
89150VT 704
89200V 702
89200VL 710
89200VN 705
89200VND 706
89200VP 711
89200VT 704
89200X 713
89200XN 714
89240VL 708
89240VLL 709
89240VPL 712
89240XL 713
89240XR 714
89300VP 711
89300VT 704
89302 722
89320V 702
89320X 713
89350VN 705
89350XN 714
89404 680
89404A 680
89408 680
89412 677
89414 680
89416 681
9007LA 745
9009L 743
9009L/V 744
9016LA 745
9018L 743
9018L/V 744
9018LA 745
9022L 743
9022L/V 744
9F07L 741
9G03R 748
9G03RAD 747
9G04RAD 747
9G06RD 747
9G08E 746
9G09/RGBW 739
9G09/V/E 740
9G09T 739
9G10B 740
9G80N 742
9T05RD 747

Find your ONE Light distributor

Visit our website at www.1-light.eu, click on Distributors, select region and country.

Europe | Middle East | Americas | Africa | Asia | Oceania

one LIGHT

DISTRIBUTORS

ONE Light specializes in supplying technical lighting to retailers, wholesalers and distributor partners all over the world. ONE Light is represented in more than 65 countries. Click on your country to find your ONE Light dealer. Feel free to contact us in case you are interested in distributing our products.

106 Locations 65 Countries

HEADQUARTERS

CYPRUS
ONE LIGHT LIMITED
www.1-light.eu / one@1-light.eu
T. 0035722450833

UK
ONE-LIGHT (UK) LIMITED
www.1-lightuk.com / info@one-lightuk.com
T. 00448445561515

one
LIGHT

Please note:

Prices are subject to change without notification. ONE Light may change product specifications without notifying customers. ONE Light does not accept any responsibility for mistakes in this catalogue, we strongly advise customers to contact us to confirm specifications. Fitting sizes in catalogue may vary from actual fitting dimensions. Always check the actual fitting before cutting holes. ONE Light may discontinue any item from this catalogue without prior notice. No images or information may be copied or reproduced without written permission from ONE Light.

one
LIGHT

www.1-light.eu

5 291889 092728